TALON
Meter Mounting Equipment



The Yanow Companies

Selection and Application Guide

Meter Mounting Equipment

For use in New England States (CT, NH, ME, RI, VT, MA)

www.talonmetering.com

Meter Mounting Equipment

Table of Contents

Represented by:
The Yanow Companies
220 East Ashland Street
Brockton, MA 02302
Tel: 508-894-8900
Email: sales@bnyanow.com
www.bnyanow.com

Service	Rating	Positions	Terminals	Page
Air Conditioning Disconnects	-	-	-	2
Spa Panels	-	-	-	3
1 Phase, 3 Wire 600V AC Medium Duty	125A	1	4	4
1 Phase, 3 Wire 600V AC	200A	1	4	5
1 Phase, 3 Wire 600V AC Medium Duty, Lever Bypass	125A	1	5	6
1 Phase, 3 Wire 600V AC Medium Duty, Lever Bypass	200A	1	5	7
1 or 3 Phase, 3 Wire 600V AC Heavy Duty, Lever Bypass	200A	1	4 & 5	8
3 Phase, 4 Wire 600V AC, Lever Bypass	125/200A	1	7	9
3 Phase, 3 & 4 Wire 600V AC Heavy Duty, Lever Bypass	320A	1	4 & 7	10
Transformer Rated, Plunger Bypass	20A	1	8 & 13	11
Transformer Rated	20A	1	6, 8 & 13	12
Mobile Home Meter Pedestal, 1 Phase, 240V AC	200A	-	4	13
Mobile Home Meter Pedestal, 1 Phase, 240V AC, Lever Bypass	200A	-	5	14
Ringless Metered Powerhead / Meter-Loadcenter Combination	200A	1	4	15
Ringless Vertical, No Bypass	100A/Pos.	2 & 3	4	16
Ringless Horizontal Multi-Position	100A/Pos.	2-6	4	17
Ringless Horizontal Multi-Position with Lever Bypass	100A/Pos.	2-6	5	18
Ringless Multi-Position with Owner's Meter Lever Bypass	125A/Pos.	3-5	5	19
Ringless Horizontal Multi-Position, No Bypass	100 & 200A/Pos.	2-6	4	20
Ringless Horizontal Multi-Position with Lever Bypass	200A/Pos.	2-6	4, 5 & 7	21
Ring & Ringless Multi-Position	100/200A	2	4	22
Ringless Meter Loadcenter Combination	100-200A	1	4	23
Ringless Meter Breaker Combination, Lever Bypass	100-200A	1	5	24
Ringless Meter Breaker Combination, Lever Bypass	100/200A	1	7	25
Ringless Meter Breaker / Loadcenter Combination, Lever Bypass	320A	1	4 & 5	26
Cold Sequence Meter Mains	200 & 400A	1	7	27
Current Transformer Cabinet	-	-	4	28
Condominium Meter Paks, 120/240V AC, 1 Phase, 3 Wire, Ring Type	125 & 200A	2-6	4	29
Condominium Meter Paks, 120/240V AC, 1 Phase, 3 Wire, Ringless	125 & 200A	2-6	5	30
Condominium Meter Paks, 120/240V AC, 1 Phase, 3 Wire, Ringless	125 & 200A	2-6	5 & 7	31
TL Series Temporary Power Outlet Panels				32-35
Connector Lugs	-	-	-	36
Accessories	-	-	-	37
Repair Parts and Cold Sequence Meter Mains	-	-	-	38
Product Q & A	-	-	-	39
Meter Mounting Device Applications				40
Utility Approval Reference				41-50

Utility specifications may vary. Consult utility prior to installation.

Air Conditioning Disconnects

Fused and Non-fused

Features:

Flexibility
- 30-60 amperes
- 240 volts A.C.
- Padlock provisions
- Horsepower rated
- 10,000 A.I.C.
- New models available with internal GFCI receptacle
- Removable door
- Ample wiring space

Rugged Durability
- Noryl® thermoplastic and powder coated G90 steel enclosures are corrosion resistant and extremely durable giving long maintenance free service
- Copper conductors
- Raised mounting embosses

Steel AC Disconnects

Ampere rating	Disconnect type	Catalog Number	Horse power rating	Dimensions (inches) H	W	D
30	Fused pullout	LF2030	3	7.3	5.0	2.1
60	Fused pullout	LF2060	10	8.0	5.0	2.1
60	Non-fused pullout	LN2060	10	7.3	5.0	2.1
60	Non-automatic switch	LNAS2060	10	7.3	5.0	2.1



Plastic AC Disconnects

Ampere rating	Disconnect type	Catalog Number	Horse power rating	Dimensions (inches) H	W	D
30	Fused pullout	LF2030PL	3	8.0	5.3	3.1
60	Fused pullout	LF2060PL	10	8.0	5.3	3.1
60	Non-fused pullout	LN2060PL	10	7.3	5.0	2.1
60	Non-fused pullout	LN2060PLX	10	8.0	6.0	5.8



Steel AC Disconnects with 15 Amp GFCI Receptacle

Ampere rating	Disconnect type	Catalog Number	Horse power rating	Dimensions (inches) H	W	D
30	Fused pullout	LF2030GFCI	3	9.0	6.1	5.1
60	Fused pullout	LF2060GFCI	10	9.0	6.1	5.1
60	Non-fused pullout	LN2060GFCI	10	7.1	5.8	5.1
60	Non-automatic switch	LNAS2060GFCI	10	7.1	5.8	5.1



Wire Range Table

	Copper		Aluminum	
Connector	Solid	Stranded	Solid	Stranded
Line	#14-8	#14-3	#12-8	#12-3
Load	#14-8	#14-3	#12-8	#12-3
Neutral	#12-8	#12-2	#12-8	#12-2
Equip. grnd.	#12-8	#12-2	#12-8	#12-2

UL® LISTED

Spa Panels

For use as spa/hot tub service disconnect

Features:

- UL Listed
- Factory installed, 2-pole 50A or 60A GFCI breaker for 240V ground fault protection
- NEMA Type 3R outdoor enclosure
- 2 extra spaces (4 circuits manimum) for additional circuit breakers
- 125 Amp rated interior
- Factory installed 5 position ground bar
- Closure plate included
- Compact enclosure size
- Convenient standard package of 1
- Uses reliable Siemens circuit breakers

2-Pole GFCI Breaker	Dimensions (inches)			Catalog Number
	H	W	D	
50A	12.3	6.0	4.5	LGSPA50
60A	12.3	6.0	4.5	LGSPA60




dead front



enclosure



hub cover plate included

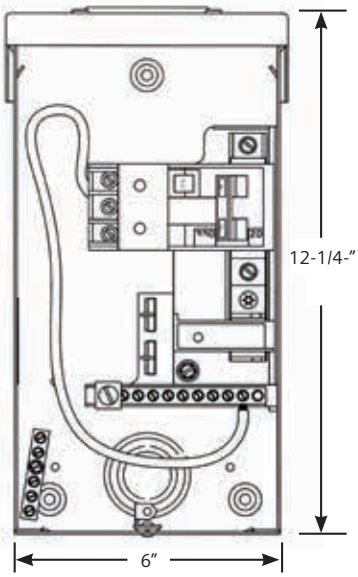

125A Ringless Meter Mounting Equipment

4 Jaw for 1 phase, 3 wire


4 Terminal for 1 Phase, 3 Wire 600V AC

Service	Catalog Number	Hub Provisions	Bypass	Dimensions (in.)			Connectors	Milbank Equivalent
				W	H	D		
OH/UG	UAT111-0G	RX Opening	None	8.0	11.7	3.6	#14-2/0	U7487-RL-TG
OH	UAT111-BG	1.25" Hub Installed	None	8.0	11.7	3.6	#14-2/0	U7487-YL-TG
UG	UAT111-XG	RX Cl. Plate	None	8.0	11.7	3.6	#14-2/0	U7487-O-TG

Hubs: Please see accessories on page 37.
5th Terminal: Order catalog number H659-0121 for 9 o'clock position.
Connectors: Aluminum connectors, tin plated.
Ground: Units supplied with a quad ground.



UAT111-0G

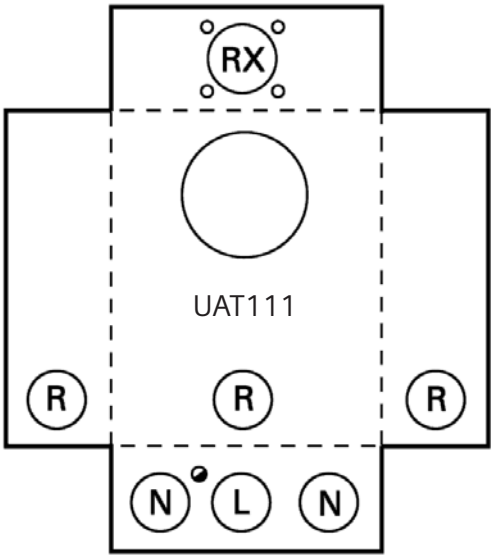

Knockouts (inches):	
◑:	1/4
L:	1/2, 3/4,1,1-1/4,1-1/2
N:	3/4,1,1-1/4,1-1/2, 2
R:	1,1-1/4,1-1/2, 2
RX:	∅2.750 HUB OP

200A Ringless Meter Mounting Equipment

4 Jaw for 1 phase, 3 wire

200 Amp Ringless
4 Terminal for 1 Phase, 3 Wire 600V AC

Service	Catalog Number	Hub Provisions	Bypass	Dimensions (in.)			Connectors	Milbank Equivalent
				W	H	D		
OH	UAT317-0G	RX Opening	None	8.0	14.8	4.5	#6-350 kcmil	U7021-RL-TG
OH/UG	UAT417-XG	RX Cl. Plate	None	11.0	14.5	4.5	#6-350 kcmil	U7040-XL-TG
UG	UAT417-PG	Blank	None	11.0	14.5	4.5	#6-350 kcmil	U7040-O-TG

200 Amp Ringless
4 Terminal for 1 Phase, 3 Wire 600V AC


Service	Catalog Number	Hub Provisions	Bypass	Dimensions (in.)			Connectors	Milbank Equivalent
				W	H	D		
UG (LH)	UAS877-PG	Blank	None	13.0	14.0	5.1	#6-350 kcmil	U1980-O
UG (RH)	UAS817-PG	Blank	None	13.0	14.0	5.1	#6-350 kcmil	U4413-O

200 Amp Ringless, Side Wired, Line Side Studs
4 Terminal for 1 Phase, 3 Wire 600V AC

Service	Catalog Number	Hub Provisions	Bypass	Dimensions (in.)			Connectors		Milbank Equivalent
				W	H	D	Line	Load	
UG	UAS27A-PG	Blank	None	13.0	19.0	5.1	3/8"-16 Studs	#6-350 kcmil	U5777-O

A-Base Meter Enclosures
Plywood Back, 1 and 2 Position

Catalog Number	No. of Positions	Dimensions (in.)			Service Type
		L	W	H	
LG110CW	1	26	15	11	O/U
LG210CW	2	30	28	11	O/U





Hubs: Please see accessories on page 37.
5th Terminal: Order catalog number H659-0121 for 9 o'clock position.
Connectors: Aluminum connectors, tin plated.
Ground: units supplied with a quad ground.



UAT317-0G



UAT417-0G



UAS877-PG











Knockouts (inches):	
◑:	1/4
A:	1/2
B:	1/2, 3/4
L	1/2, 3/4, 1, 1-1/4, 1-1/2
S:	1,1-1/4,1-1/2, 2, 2-1/2
AC:	1/4, 1/2
AD:	1-1/4, 1-1/2, 2, 2-1/2, 3
RX:	∅2.750 HUB OP

Utility specifications may vary. Consult utility prior to installation.

125A Ringless Meter Mounting Equipment

5 Jaw, Medium Duty Lever Bypass

125 Amp Ringless
5 Terminal for 1 Phase, 3 Wire 600V AC Medium Duty

Service	Catalog Number	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
				W	H	D		
OH	48205-01NU	#6 - 2/0	Lever	10.0	17.0	5.2	RX Opening	U2272-RL-5T9-BL
OH/UG	48405-02NU	#6 - 2/0	Lever	13.0	19.0	5.2	RX Cl. Plate	U2860-XL-5T9-QG


Hubs: Please see accessories on page 37.
5th Terminal: Factory installed in 9 o'clock position.
Connectors: Aluminum connectors, tin plated.
Bypass: Non-jaw clamping lever bypass, type MQ.
Ground: Units supplied with a quad ground.




48205-01NU



48405-02NU

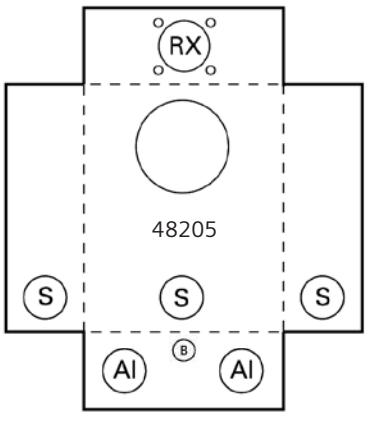

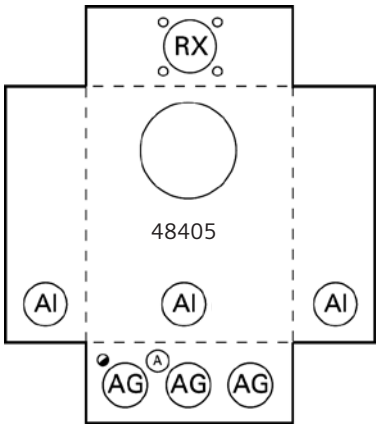

Knockouts (inches):	
◑:	1/4
A	1/2
B:	1/2, 3/4
S:	1,1-1/4,1-1/2, 2, 2-1/2
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3
AI:	1,1-1/4,1-1/2, 2, 2-1/2, 3
RX:	∅2.750 HUB OP

200A Ringless Meter Mounting Equipment

5 Jaw, Medium Duty Lever Bypass

200 Amp Ringless
5 Terminal for 1 Phase, 3 Wire 600V AC Medium Duty

Service	Catalog Number	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
				W	H	D		
OH	40205-01NU	#6 - 350 kcmil	Lever	10.0	18.0	5.2	RX Opening	U9318-RL
OH/UG	40605-02NU	#6 - 350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	U9319-XL


Hubs: Please see accessories on page 37.
5th Terminal: Factory installed in 9 o'clock position.
Connectors: Aluminum connectors, tin plated.
Bypass: Non-jaw clamping lever bypass, type MQ.
Ground: Units supplied with a quad ground.




40205-01NU



40605-02NU

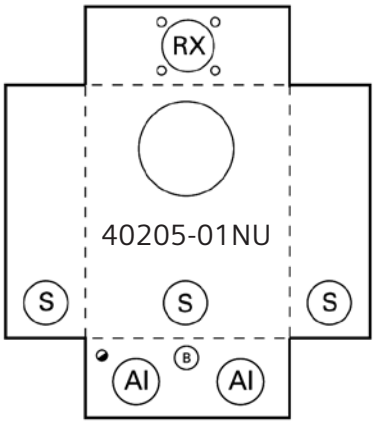

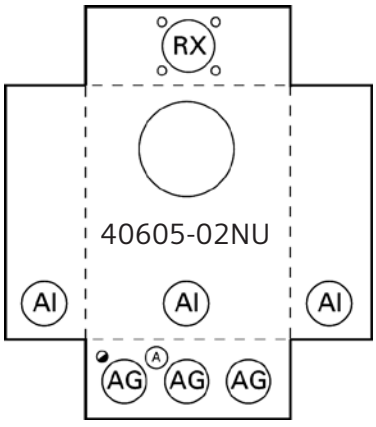

Knockouts (inches):	
◑:	1/4
A:	1/2
B:	1/2, 3/4
S:	1,1-1/4,1-1/2, 2, 2-1/2
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2,3
AI:	1,1-1/4,1-1/2, 2, 2-1/2, 3
RX:	∅2.750 HUB OP

200A Ringless Meter Mounting Equipment

4 & 5 Jaw, Heavy Duty Lever Bypass

200 Amp Ringless
4 Terminal for 1 Phase, 3 Wire 600V AC Heavy Duty

Service	Catalog Number	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
				W	H	D		
OH	40804-01NU	#6 - 350 kcmil	Lever	10.0	18.0	5.2	RX Opening	U9800-RRL-QG-BL-NE
OH/UG	40404-02QG	#6 - 350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	U9801-RXL-QG

Hubs: Please see accessories on page 37.
5th Terminal: Order kit number H35815-2 for 9 o'clock.
Connectors: Aluminum connectors, tin plated.
Bypass: Jaw clamping lever bypass, type HQ.
Ground: Units supplied with a ground.

200 Amp Ringless, Side Wired
4 Terminal for 1 Phase, 3 Wire 600V AC Heavy Duty

Service	Catalog Number	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
				W	H	D		
UG	42104-02QG	#6 - 350 kcmil	Lever	16.0	20.0	5.0	RX Cl. Plate	U3924-XL
UG	48804-02NU (1)	#6 - 350 kcmil	Lever	16.0	22.0	5.2	RX Cl. Plate	U4721-O-BL

1) Device is off-set design, no bussing from left to right side.
Hubs: Please see accessories on page 37.
5th Terminal: order kit number H35815-2 for 9 o'clock.
Connectors: Aluminum connectors, tin plated.
Bypass: Jaw clamping lever bypass, type HQ.
Ground: Units supplied with a ground.

200 Amp Ringless
5 Terminal for 1 or 3 Phase, 3 Wire 600V AC Heavy Duty

Service	Catalog Number	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
				W	H	D		
OH	41505-02QG	#6 - 350 kcmil	Lever	10.0	18.0	5.2	RX Cl. Plate	U9550-RRL-QG
OH/UG	40405-0BNU	#6 - 350 kcmil	Lever	13.0	19.0	5.2	RX Opening	––
OH/UG	41605-02QG	#6 - 350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	U9551-RXL-QG

Hubs: Please see accessories on page 37.
5th Terminal: Order kit number H35815-2 for 9 o'clock.
Connectors: Aluminum connectors, tin plated.
Bypass: Jaw clamping lever bypass, type HQ.
Ground: Units supplied with a ground.



41505-02QG




41605-02QG





48804-02NU




42104-02QG









Knockouts (inches):	
◑:	1/4
A:	1/2
B:	1/2, 3/4
S:	1,1-1/4,1-1/2, 2, 2-1/2
AC:	1/4, 1/2
AD:	1-1/4, 1-1/2, 2, 2-1/2, 3
AF:	1, 1-1/2, 2, 2-1/2,3
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2,3
AI:	1,1-1/4,1-1/2, 2, 2-1/2, 3
EE:	2, 2-1/2, 3
RX:	∅2.750 HUB OP

125/200A Ringless Meter Mounting Equipment

7 Jaw, Medium & Heavy Duty Lever Bypass

125 Amp Ringless
7 Terminal for 3 Phase, 4 Wire 600V AC Medium Duty

Service	Catalog Number	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
				W	H	D		
OH	48207-01NU	#6 - 2/0	Lever	10.0	18.0	5.2	RX Opening	U7573-RL

Hubs: Please see accessories on page 37.
Connectors: Aluminum connectors, tin plated.
Bypass: Non-jaw clamping lever bypass, type MQ.
Ground: Units supplied with a quad ground.

200 Amp Ringless, Side Wired
7 Terminal for 3 Phase, 4 Wire 600V AC Heavy Duty

Service	Catalog Number	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
				W	H	D		
UG	48807-02NU (1)	#6 - 350 kcmil	Lever	16.0	22.0	5.2	RX Cl. Plate	U4910-O-BL

1) Device is off-set design, no bussing from left to right side.

200 Amp Ringless
7 Terminal for 3 Phase, 4 Wire 600V AC Heavy Duty

Service	Catalog Number	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
				W	H	D		
OH	40007-01NU	#6 - 350 kcmil	Lever	10.0	18.0	5.2	RX Cl. Plate	U9700-RRL-QG-BL
OH/UG	40407-02QG	#6 - 350 kcmil	Lever	13.0	19.0	5.2	RX Cl. Plate	U9701-RXL-QG

Hubs: Please see accessories on page 37.
Connectors: Aluminum connectors, tin plated.
Bypass: Jaw clamping lever bypass, type HQ.
Ground: Units supplied with a quad ground.




40007-01NU





48207-01NU




40407-02QG









Knockouts (inches):	
◑:	1/4
A:	1/2
B:	1/2, 3/4
S:	1,1-1/4,1-1/2, 2, 2-1/2
AD:	1-1/4, 1-1/2, 2, 2-1/2, 3
AF:	1, 1-1/2, 2, 2-1/2,3
AG:	3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2,3
AI:	1,1-1/4,1-1/2, 2, 2-1/2, 3
RX:	∅2.750 HUB OP

Utility specifications may vary. Consult utility prior to installation.

320A Ringless Meter Mounting Equipment

4 & 7 Jaw, Heavy Duty Lever Bypass

320 Amp Ringless (400 Amp Max)
4 Terminal for 1 Phase, 3 Wire 600V AC Heavy Duty

Service	Catalog Number	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
				W	H	D		
OH/UG	48704-02	3/8" - 16 Studs	Lever	20.0	34.0	6.1	HD Cl. Plate	U2448-X
OH/UG	49604-02NU (1)	3/8" - 16 Studs	Lever	20.0	34.0	6.1	HD Cl. Plate	U4778-X-BL

320 Amp Ringless (400 Amp Max)
7 Terminal for 3 Phase, 4 Wire 600V AC Heavy Duty

Service	Catalog Number	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
				W	H	D		
OH/UG	48707-02	3/8" - 16 Studs	Lever	20.0	34.0	6.1	HD Cl. Plate	U2594-X
OH/UG	49607-02NU (1)	3/8" - 16 Studs	Lever	20.0	34.0	6.1	HD Cl. Plate	U4911-X-BL

1) Device is off-set design, no bussing from left to right side.
Hubs: Please see accessories on page 37.
5th Terminal: Order kit number H35815-2 for 9 o'clock for the 48704 & 49604.

Bypass: Jaw clamping lever bypass, type HQ.
Ground: Units supplied with a ground connection.

Connector Kits (order 2 kits per socket for line & load connections)

L&G Kit #	Milbank Equivalent	Wire Range	Fits Catalog Numbers:
LK11350	K1539	up to (1) 350 kcmil per phase	48704 & 49604
LK11600	K1540	up to (1) 600 kcmil per phase	48704 & 49604
LK12350	K1350	up to (2) 350 kcmil per phase	48704 & 49604
LK31600	K3441	up to (1) 600 kcmil per phase	48707 & 49607
LK32350	K3442	up to (2) 350 kcmil per phase	48707 & 49607




49604-02NU




49607-02NU



48707-02

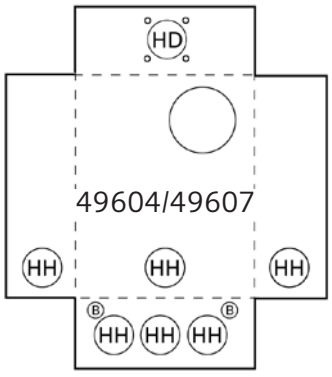

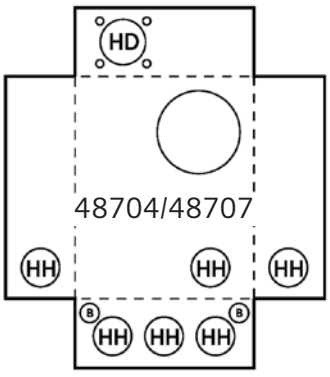

Knockouts (inches):	
B:	1/2, 3/4
HD:	∅4.281 HUB OP
HH:	2-1/2, 3, 3-1/2, 4

20A Ringless Meter Mounting Equipment

Transformer Rated, Plunger Bypass, 8 & 13 Jaw


20 Amp, Transformer Rated, Plunger Bypass①
8 Terminal for 5S Meters

No. of Term.	Meter Form	Catalog Number	Connectors	Dimensions (in.)			Hub Opening	Cover Type	Bypass	Milbank Equivalent
				W	H	D				
8	5S	9837-7100	# 14 - # 4	14.0	8.0	4.4	RX Cl. Plate	Ringless	Plunger	NA
8	5S	9837-7110	# 14 - # 4	14.0	8.0	4.4	RX Cl. Plate	Ring	Plunger	UC7544-RL


20 Amp, Transformer Rated, Plunger Bypass①
13 Terminal for 6, 8, 9S, 10S Meters

No. of Term.	Meter Form	Catalog Number	Connectors	Dimensions (in.)			Hub Opening	Cover Type	Bypass	Milbank Equivalent
				W	H	D				
13	6, 8, 9S, 10S	9837-7200	# 14 - # 4	14.0	8.0	4.4	RX Cl. Plate	Ringless	Plunger	NA
13	6, 8, 9S, 10S	9837-7210	# 14 - # 4	14.0	8.0	4.4	RX Cl. Plate	Ring	Plunger	UC7545-RL


Hubs: Please see accessories on page 37.
① Bypass: Plunger bypass closes when meter is removed (automatic).

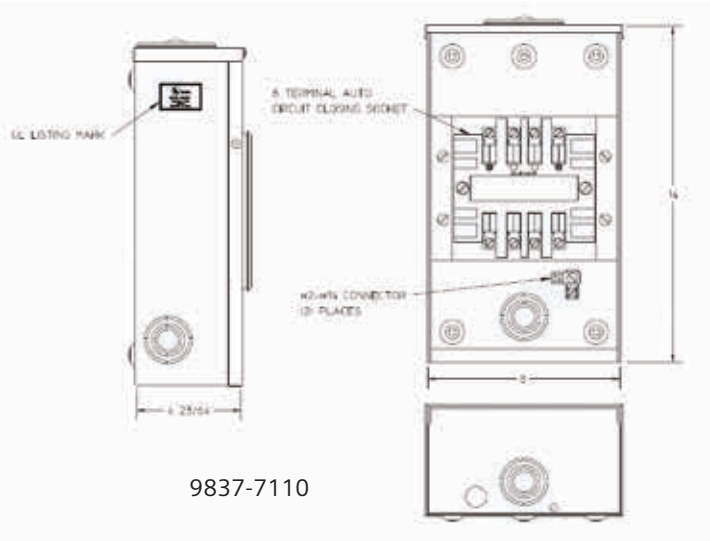

9837-7110

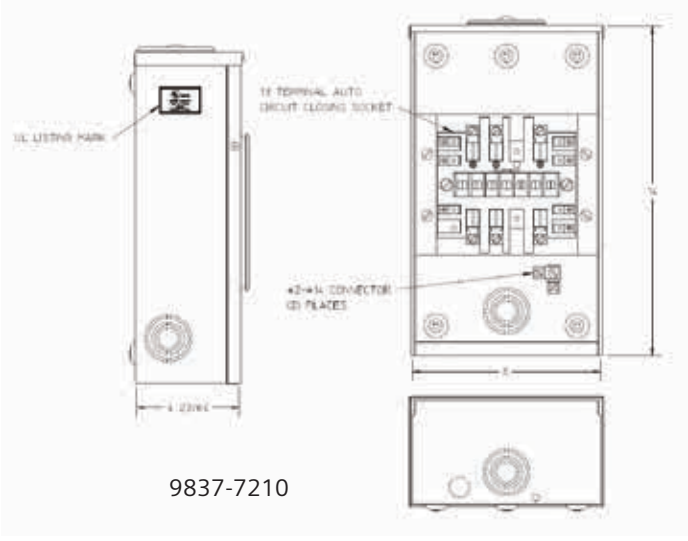

9837-7210

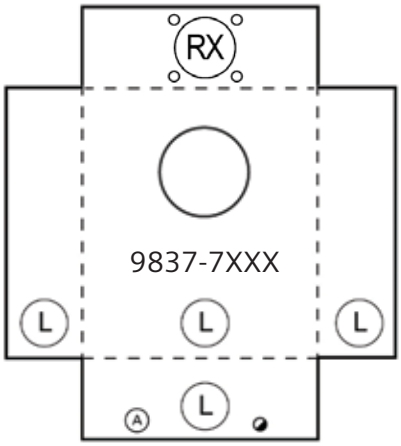

Knockouts (inches):	
◑:	1/4
A:	1/2
L:	1/2, 3/4,1,1-1/4,1-1/2

Utility specifications may vary. Consult utility prior to installation.

20A Ringless Meter Mounting Equipment

Transformer Rated, 6, 8 & 13 Jaw

20 Amp, Transformer Rated
Pre-wired for Northeast Utilities Specification, 1 Piece Ringless Cover, Test Switch Installed & Wired

No. of Term.	Catalog No.	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
				W	H	D		
6	9837-0901	#14- #4	None	12.0	20.0	4.4	RX Cl. Plate	UC7478-O-81-NOE
8	9837-0902	#14- #4	None	12.0	20.0	4.4	RX Cl. Plate	UC7444-O-141-NOE
13	9837-0903	#14- #4	None	12.0	20.0	4.4	RX Cl. Plate	UC7445-O-311-NOE

20 Amp, Transformer Rated
For use with test switch, 2 Piece Ringless Cover, Test Switch Provision ONLY- not included

No. of Term.	Catalog No.	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
				W	H	D		
6	9837-8203	#14- #4	None	12.0	20.0	4.4	RX Cl. Plate	UC7532-XL
8	9837-8403	#14- #4	None	12.0	20.0	4.4	RX Cl. Plate	UC7448-XL
13	9837-8503	#14- #4	None	12.0	20.0	4.4	RX Cl. Plate	UC7449-XL

20 Amp, Transformer Rated
Pre-wired for NSTAR Specification, 2 Piece Ringless Cover, Test Switch Installed & Wired

No. of Term.	Catalog No.	Connectors	Bypass	Dimensions (in.)			Hub Provisions	Milbank Equivalent
				W	H	D		
6	9837-0904	#14- #4	None	12.0	20.0	4.4	RX Cl. Plate	UC4964-O-WC-21-NST
8	9837-0905	#14- #4	None	12.0	20.0	4.4	RX Cl. Plate	UC4965-O-WC-21-NST
13	9837-0906	#14- #4	None	12.0	20.0	4.4	RX Cl. Plate	UC4966-O-WC-21-NST


Hubs: Please see accessories on page 37.



9837-0903



9837-8503

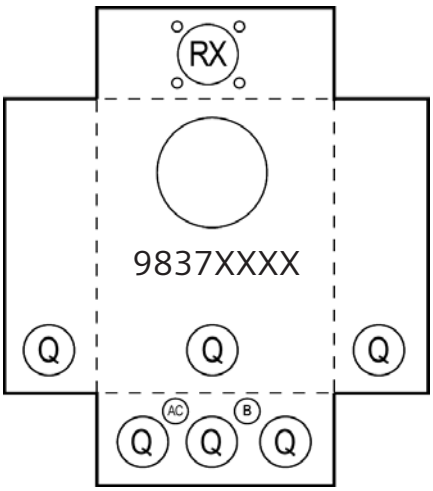

Knockouts (inches):	
B:	1/2, 3/4
Q:	1, 1-1/4, 1-1/2
AC:	1/4, 1/2
RX:	∅2.750 HUB OP

200A Mobile Home Meter Pedestal

Ring & Ringless, No Bypass, 4 and 5 Jaw

200 Amp Mobile Home Meter Pedestal
Pad or Earth Mount, Ring or Ringless Design, 4 Jaw for 1 Phase 240V AC

Continuous Duty Amps Per Position	Catalog Number	Cover Type	Line Connectors (installed)	Dimensions (in.)			Milbank Equivalent
				H	W	D	
200	MP0406B1200R	Ringless	(2) #6-350 kcmil	55.00	10.00	4.00	none
	MP0606L1200R	Ringless	(2) #6-350 kcmil	55.00	10.00	4.00	U3730-O
	MP0606L1200	Ring	(2) #6-350 kcmil	55.00	10.00	4.00	none


Breakers: Units will accept up to (3) 2 pole breakers or (6) 1 pole breakers - Siemens type QP or Murray type MP for up to 125amps and Siemens type QN for 200amp.
Filler Plates: Un-used openings that have had the factory twist-outs removed can use part the ECQF3 filler plate.
Required Accessories:
Direct Burial Kit: Use catalog number MPEXT. This lengthens the device to 84", 90", or 96" depending on adjustment of the stabilizer foot.
Pad Mount Kit: Use catalog number MPFLANGE. This kit bolts to the bottom of the MPEXT and will add 11" in length.
MP0606: Accomodates (3) 2 pole breakers or (6) 1 pole breakers types Siemens QP/Murray MP-T (125amp max) and types Siemens QN/Murray MPD (150-200amp).
MP0406: Siemens type QN 200amp breaker factory installed. Additional space for 4 one pole or 2 two pole breakers types Siemens QP/Murray MP-T.
Branch circuits run in parallel to 200amp main breaker.



MP0606L1200R
(Front)



MP0606L1200R
(Reverse)

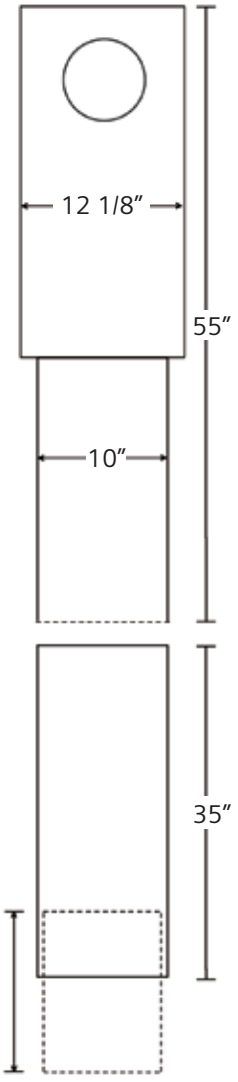

MPEXT

200A Mobile Home Meter Pedestal

Heavy Duty Lever Bypass, 5 Jaw

200 Amp Mobile Home Lever Bypass Meter Pedestal
Pad or Earth Mount, Ringless, 5 Jaw for 1 Phase, 240V AC

Continuous Duty Amps Per Position	Catalog Number	Cover Type	Line Connectors (installed)	Dimensions (in.)			Milbank Equivalent
				H	W	D	
200	MP0406B1200RJL	Ringless	(2) #6-350 kcmil	55.00	10.00	4.00	none
200	MP0606L1200RJL	Ringless	(2) #6-350 kcmil	55.00	10.00	4.00	U4322-O-BL


Breakers: Units will accept up to (3) 2 pole breakers or (6) 1 pole breakers - Siemens type QP or Murray type MP for up to 125amps and Siemens type QN for 200amp.
Filler Plates: Un-used openings that have had the factory twist-outs removed can use part the ECQF3 filler plate.
Required Accessories:
Direct Burial Kit: Use catalog number MPEXT. This lengthens the device to 84", 90", or 96" depending on adjustment of the stabilizer foot.
Pad Mount Kit: Use catalog number MPFLANGE. This kit bolts to the bottom of the MPEXT and will add 11" in length.
MP0606: accomodates (3) 2 pole breakers or (6) 1 pole breakers types Siemens QP/Murray MP-T (125amp max) and types Siemens QN/Murray MPD (150-200amp).
MP0406: Siemens type QN 200amp breaker factory installed. Additional space for 4 one pole or 2 two pole breakers types Siemens QP/Murray MP-T.
Branch circuits run in parallel to 200amp main breaker.



MP0606L1200RJL
(Front)



MP0606L1200RJL
(Reverse)

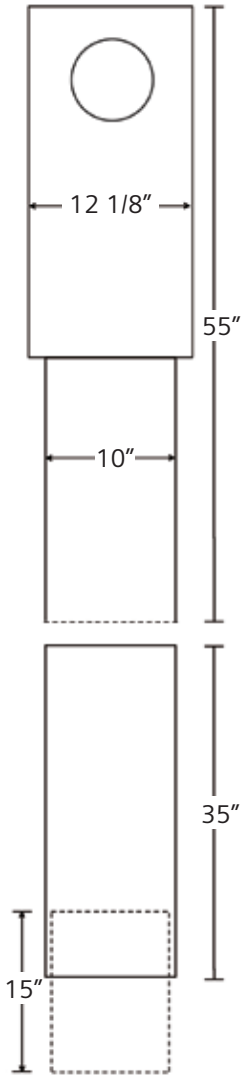

MPEXT

200A Ringless Meter Loadcenter Combination

No Bypass, 4 Jaw


200 Amp Ringless Meter-Loadcenter Combination
4 Terminal for 1 Phase, 3 Wire 600V AC for mobile home applications

Service	Catalog Number	Connectors		Dimensions (in.)			Hub Provisions	Milbank Equivalent
		Line	Load	W	H	D		
OH/UG	LG0816B1200RCT	#6-350 kcmil	Blank	14.0	32.0	5.0	RX Cl. Plate	U5168-XTL-200
O/U	LG0408B1200RT	#6-350 kcmil	Blank	14.0	30.0	5.0	RX Cl. Plate	N/A
O/U	LG0606L1200R	#6-350 kcmil	Blank	14.0	27.0	5.0	RX Cl. Plate	U5024-XL
O/U	LG0606L1200RA	#6-350 kcmil	Blank	14.0	27.0	5.0	RX Cl. Plate	UAP5024-XL


Hubs: Please see accessories on page 37.
Breakers: Units will accept up to (8) 2 pole breakers or (16) 1 pole breakers - Talon type QP for up to 125amps and Talon type QN for 200amp.
Filler Plates: Un-used openings that have had the factory twist-outs removed can use part the ECQF3 filler plate.
Feed thru lugs: Includes #6 - 350 KCMIL feed thru lugs.
Main Breaker: Factory installed.
5th Terminal: Use Kit #EC5J2 for 9 o'clock.



LG0816B1200RCT

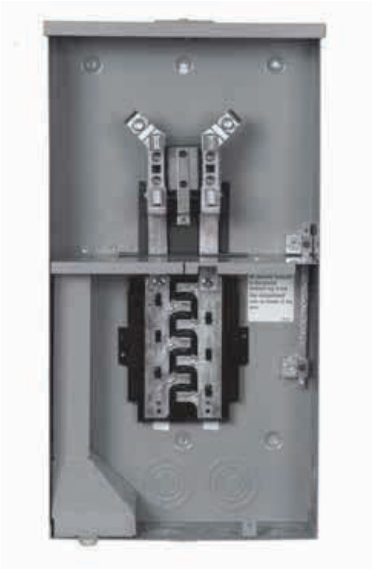

LG0606L1200R

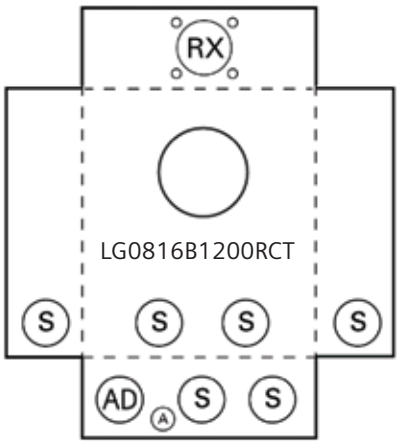

Knockouts (inches):	
◑:	1/4
A:	1/2
R:	1,1-1/4,1-1/2, 2
S:	1,1-1/4,1-1/2, 2, 2-1/2
AD:	1-1/4, 1-1/2, 2, 2-1/2, 3

100A/Position Ringless Meter Mounting Equipment

Vertical, No Bypass, 4 Jaw


100 Amp / Position Ringless Vertical Multi-Position
4 Terminal for 1 Phase, 3 Wire 600V AC


No. of Pos.	Catalog No.	Hub Provisions	Connectors		Bypass	Dimensions (in.)			Service	Milbank Equivalent
			Line	Load		W	H	D		
2	UA2B11-XG	RX Cl. Plate	#6-250 kcmil	#6- 2/0	none	8.0	25.6	4.4	OH/UG	U2692-XL
3	UA3B11-XG	RX Cl. Plate	#6-250 kcmil	#6- 2/0	none	8.0	35.9	4.4	OH/UG	U2693-XL

Hubs: Please see accessories on page 37.
Connectors: Aluminum connectors, tin plated.
Ground: Units supplied with a ground lug.
5th Terminal: Use Kit #RX112FJ for 9 o'clock.




UA2B11-XG

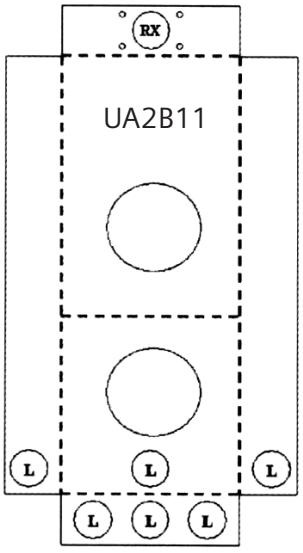

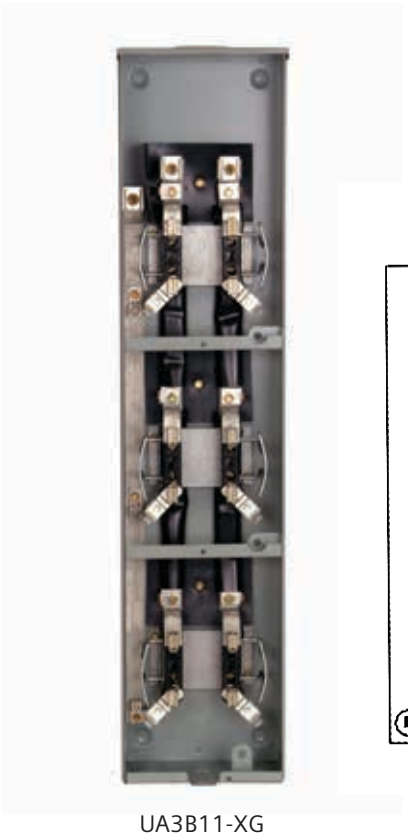

UA3B11-XG

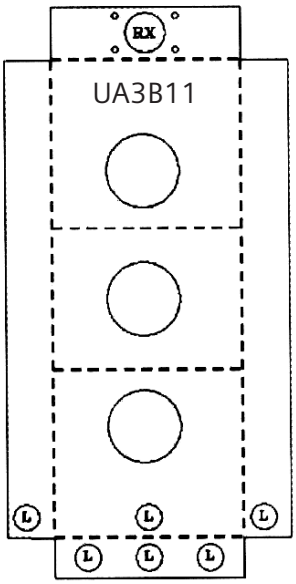

Knockouts (inches):	
◑:	1/4
L:	1/2, 3/4,1,1-1/4,1-1/2
RX:	∅2.750 HUB OP

100A/Position Meter Mounting Equipment

Ringless Horizontal, No Bypass, 4 Jaw


100 Amp / Position Ringless Horizontal Multi-Position
4 Terminal for 1 Phase, 3 Wire 600V AC, End Feed

No. of Pos.	Catalog Number	Hub Provisions	Connectors		Bypass	Dimensions (in.)			Service	Milbank Equivalent
			Line	Load		W	H	D		
2	UA2411-XG	RX Cl. Plate	#6-250 kcmil	#6- 2/0	none	24.2	18.1	5.4	OH/UG	U8212-XL
3	UA3411-XG	RX Cl. Plate	#6-250 kcmil	#6- 2/0	none	34.4	18.1	5.4	OH/UG	U8213-XL
4	UA4411-XG	RX Cl. Plate	#6-250 kcmil	#6- 2/0	none	40.5	18.1	5.4	OH/UG	U8214-XL
5	UA5411-XG	RX Cl. Plate	#6-250 kcmil	#6- 2/0	none	48.6	18.1	5.4	OH/UG	U8215-XL
6	UA6411-XG	RX Cl. Plate	#6-350 kcmil	#6- 2/0	none	56.8	18.1	5.4	OH/UG	U8216-XL


100 Amp / Position Ringless Horizontal Multi-Position, with 2” Hub Installed
4 Terminal for 1 Phase, 3 Wire 600V AC, End Feed


No. of Pos.	Catalog Number	Hub Provisions	Connectors		Bypass	Dimensions (in.)			Service	Milbank Equivalent
			Line	Load		W	H	D		
2	UA2411-DG	2" Hub Installed	#6-250 kcmil	#6- 2/0	none	20.2	14.1	5.4	OH	U7362-DL
3	UA3411-DG	2" Hub Installed	#6-250 kcmil	#6- 2/0	none	28.3	14.1	5.4	OH	U7363-DL
4	UA4411-DG	2" Hub Installed	#6-250 kcmil	#6- 2/0	none	36.5	14.1	5.4	OH	U7364-DL
5	UA5411-DG	2" Hub Installed	#6-250 kcmil	#6- 2/0	none	44.6	14.1	5.4	OH	U7365-DL
6	UA6411-DG	2" Hub Installed	#6-350 kcmil	#6- 2/0	none	52.8	14.1	5.4	OH	U7366-DL


Hubs: Please see accessories on page 37 for hubs where needed.
Connectors: Aluminum connectors, tin plated.
Ground: Units supplied with a ground lug.
5th Terminal: Order kit number H659-0121 for 9 o'clock.

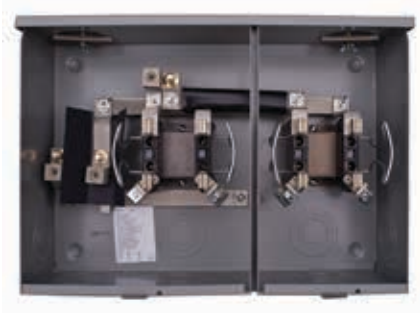



UA2411–XG

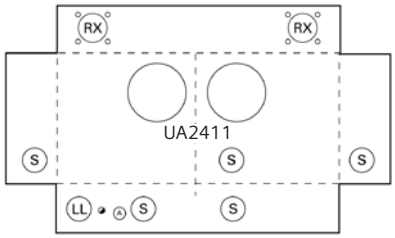

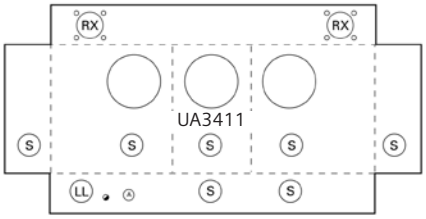

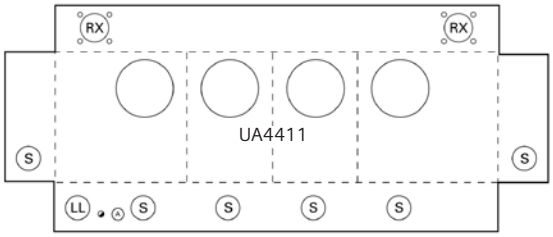

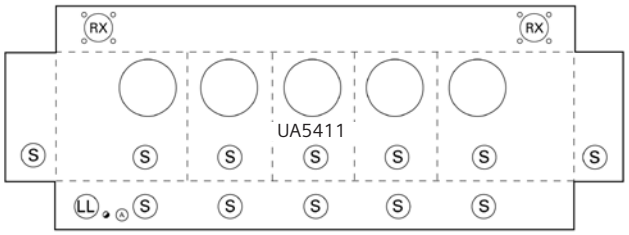

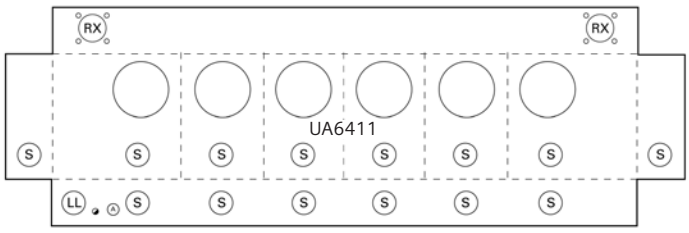

Knockouts (inches):	
◑:	1/4
A:	1/2
S:	1,1-1/4,1-1/2, 2, 2-1/2
RX:	∅2.750 HUB OP

Utility specifications may vary. Consult utility prior to installation.

100A/Position Meter Mounting Equipment

Ringless, Horizontal,Medium Duty Lever Bypass, 5 Jaw


100 Amp / Position Ringless Horizontal Multi-Position with lever bypass
5 Terminal for 1 Phase, 3 Wire 600V AC Medium Duty


No. of Pos.	Catalog Number	Hub Provisions	Connectors		Bypass	Dimensions (in.)			Service	Milbank Equivalent
			Line	Load		W	H	D		
2	484052-023NU	HD Cl. Plate	#4-500 kcmil	#6- 2/0	Lever	27.2	17.1	5.3	OH/UG	U2752-X-5T9
3	484053-023NU	HD Cl. Plate	#4-500 kcmil	#6- 2/0	Lever	36.2	17.1	5.3	OH/UG	U2753-X-5T9
4	484054-223NU	(2) HD Cl. Plates	(2) #4-500 kcmil	#6- 2/0	Lever	50.5	17.1	5.3	OH/UG	U2754-X-5T9
5	484055-223NU	(2) HD Cl. Plates	(2) #4-500 kcmil	#6- 2/0	Lever	59.5	17.1	5.3	OH/UG	U2755-X-5T9
6	484056-223NU	(2) HD Cl. Plates	(2) #4-500 kcmil	#6- 2/0	Lever	68.8	17.1	5.3	OH/UG	U2756-X-5T9


Hubs: Please see accessories on page 37.
Connectors: Aluminum connectors, tin plated, Factory Installed.
Bypass: Non-jaw clamping lever bypass, type MQ.
5th Terminal: Factory installed in 9 o'clock position.





484053-023NU





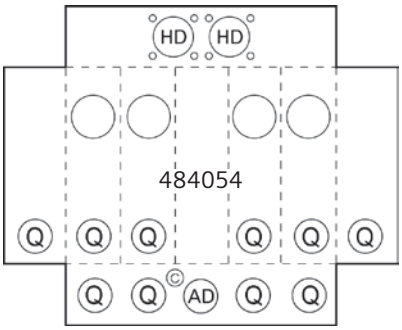

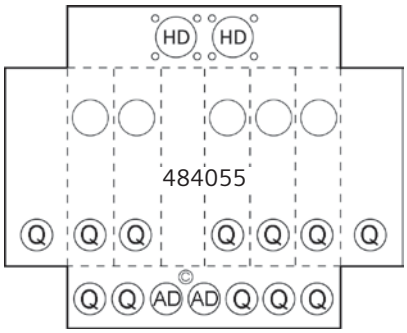

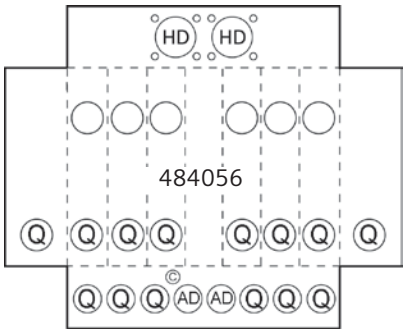

Knockouts (inches):	
C:	1/2, 3/4, 1
Q:	1, 1-1/4,1-1/2
AD:	1-1/4, 1-1/2, 2, 2-1/2, 3
HD:	∅4.281 HUB OP

125A/Position Meter Mounting Equipment

Ringless Horizontal, Owner's meter lever bypass, 4 Jaw

125 Amp / Position Ringless Multi-Position with owner's meter lever bypass
5 Terminal for 1 Phase, 3 Wire 600V AC Medium Duty


No. of Pos.	Catalog Number	Hub Provisions	Connectors			Bypass	Dimensions (in.)			Service	Milbank Equivalent
			Line	Load	Load- Bypass		W	H	D		
3	UA3X11-ZG	RX Cl. Plate	#6-250 kcmil	#6- 2/0	#6-350 kcmil	(1) Lever	34.0	14.0	4.0	OH/UG	U3763-XL
4	UA4X11-ZG	RX Cl. Plate	#6-350 kcmil	#6- 2/0	#6-350 kcmil	(1) Lever	42.0	14.0	4.0	OH/UG	U3764-XL
5	UA5X11-ZG	RX Cl. Plate	#6-350 kcmil	#6- 2/0	#6-350 kcmil	(1) Lever	50.0	16.0	4.0	OH/UG	U3765-XL

Hubs: Please see accessories on page 37.
Connectors: Aluminum connectors, tin plated.
Bypass: Non-jaw clamping lever bypass, type MQ , on far right meter position only. All other positions do not have a bypass.
5th Terminal: Order part number H659-0121 for no bypass positions and H35815-2 for the bypass position (9 o'clock).



UA3X11-XG

Knockouts (inches):	
A:	1/2
Q:	1, 1-1/4, 1-1/2
EE:	2, 2-1/2, 3
RX:	∅2.750 HUB OP

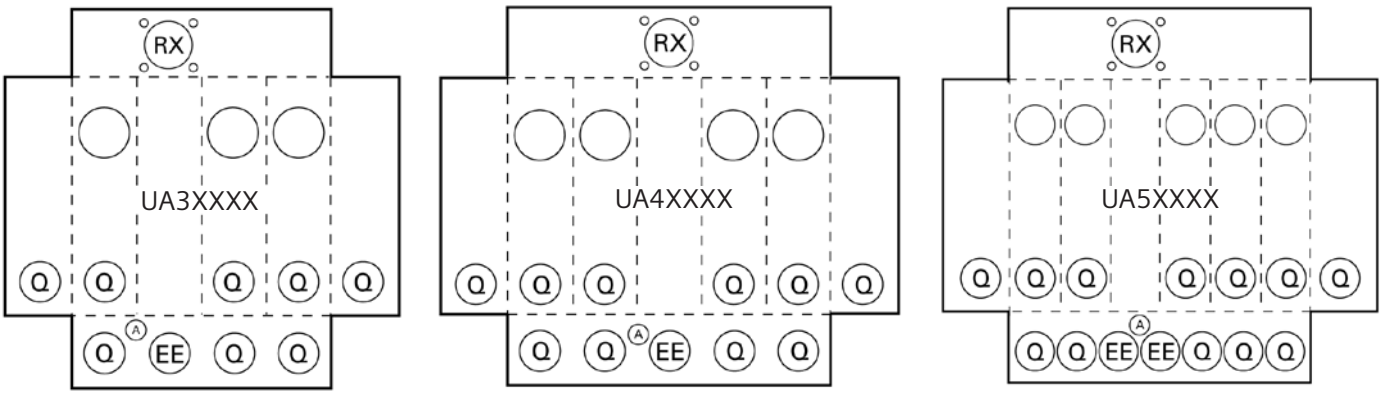

100/200A/Position Meter Mounting Equipment

Ringless Horizontal , No Bypass, 4 Jaw

100 Amp / Position Ringless Horizontal Multi-Position
4 Terminal for 1 Phase, 3 Wire 600V AC, Center Feed


No. of Pos.	Catalog Number	Hub Provisions	Connectors		Bypass	Dimensions (in.)			Service	Milbank Equivalent
			Line	Load		W	H	D		
2	UA2311-0G	RX Hub Opening	#6-350 kcmil	#4-2/0	none	24.0	12.0	4.5	OH/UG	
3	UA3311-0G	RX Hub Opening	#6-350 kcmil	#4-2/0	none	32.0	12.0	4.5	OH/UG	
4	UA4311-0G	RX Hub Opening	#6-350 kcmil	#4-2/0	none	40.0	12.0	4.5	OH/UG	

200 Amp / Position Ringless Horizontal Multi-Position
4 Terminal for 1 Phase, 3 Wire 600V AC, Center Feed

No. of Pos.	Catalog Number	Hub Provisions	Connectors		Bypass	Dimensions (in.)			Service	Milbank Equivalent
			Line	Load		W	H	D		
2	UA2717-YG	HD Hub Opening	1/0-600 kcmil	#6-350 kcmil	none	24.0	14.5	5.1	OH/UG	U1252-X-K1
3	UA3717-YG	HD Hub Opening	1/0-600 kcmil	#6-350 kcmil	none	32.0	14.5	5.1	OH/UG	U1253-X-K3
4	UA4719-YG	HD Hub Opening	1/0-600 kcmil	#6-350 kcmil	none	43.0	14.5	5.1	OH/UG	U1254-X-K3
5	UA5719-KG	(2) HD Hub Openings	(2) 1/0-600 kcmil	#6-350 kcmil	none	51.0	14.5	5.1	OH/UG	U1255-X-K4
6	UA6719-KG	(2) HD Hub Openings	(2) 1/0-600 kcmil	#6-350 kcmil	none	59.0	14.5	5.1	OH/UG	U1256-X-K4


Hubs: Please see accessories on page 37 for hubs where needed.
Connectors: Aluminum connectors, tin plated.

Ground: Units supplied with a ground lug.
5th Terminal: Order kit number H659-0121 for 9 o'clock.

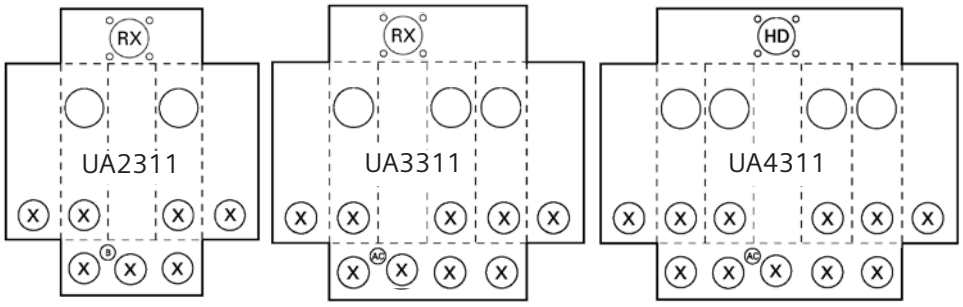




UA2311

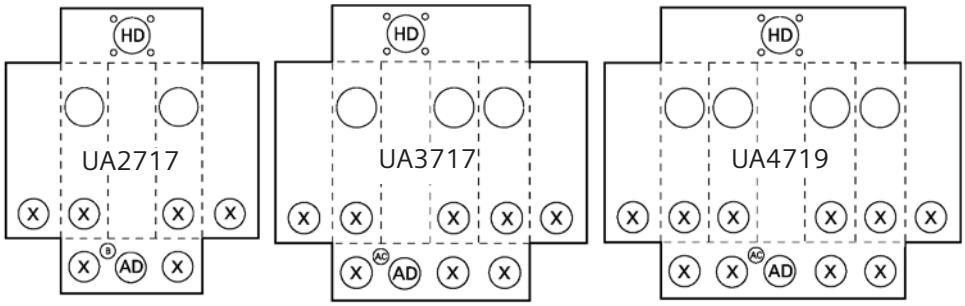



UA2717-YG

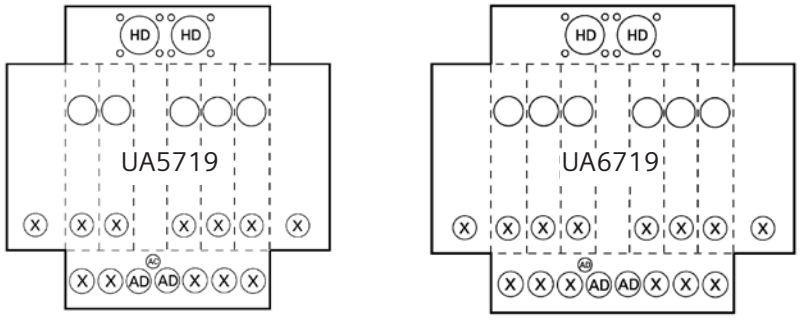

Knockouts (inches):	
B:	1/2, 3/4
X:	1-1/4,1-1/2, 2, 2-1/2
AC:	1/4, 1/2
AD:	1-1/4, 1-1/2, 2, 2-1/2, 3
HD:	∅4.281 HUB OP
RX:	∅2.750 HUB OP

200A/Position Meter Mounting Equipment

Ringless Horizontal, Heavy Duty Lever Bypass, 5 & 7 Jaw


200 Amp / Position Ringless Horizontal Multi-Position with lever bypass
4 & 5 Terminal for 1 Phase, 3 Wire 600V AC Heavy Duty, Center Feed

No. of Pos.	Catalog Number	Hub Provisions	Connectors		Bypass	Dimensions (in.)			Service	Milbank Equivalent
			Line	Load		W	H	D		
2	404052-023NU	HD Cl. Plate	1/0-500 kcmil	#6-350 kcmil	Lever	32.8	23.2	6.0	OH/UG	U2872-XT-5T9
3	404053-023NU	HD Cl. Plate	1/0-500 kcmil	#6-350 kcmil	Lever	43.9	23.2	6.0	OH/UG	U2873-XT-5T9
4	404054-223NU	(2) HD Cl. Plates	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	61.0	23.2	6.0	OH/UG	U2874-XT-5T9
5	404055-223NU	(2) HD Cl. Plates	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	72.1	23.2	6.0	OH/UG	U2875-XT-5T9
6	404056-223NU	(2) HD Cl. Plates	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	83.2	23.2	6.0	OH/UG	U2876-XT-5T9

200 Amp / Position Ringless Horizontal Multi-Position with lever bypass
7 Terminal for 3 Phase, 4 Wire 600V AC Heavy Duty, Center Feed

No. of Pos.	Catalog Number	Hub Provisions	Connectors		Bypass	Dimensions (in.)			Service	Milbank Equivalent
			Line	Load		W	H	D		
2	404072-023NU	HD Cl. Plate	1/0-500 kcmil	#6-350 kcmil	Lever	32.8	23.2	6.0	OH/UG	U2732-XT
3	404073-023NU	HD Cl. Plate	1/0-500 kcmil	#6-350 kcmil	Lever	43.9	23.2	6.0	OH/UG	U2733-XT
4	404074-223NU	(2) HD Cl. Plates	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	61.0	23.2	6.0	OH/UG	U2734-XT
5	404075-223NU	(2) HD Cl. Plates	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	72.1	23.2	6.0	OH/UG	U2735-XT
6	404076-223NU	(2) HD Cl. Plates	(2) 1/0-500 kcmil	#6-350 kcmil	Lever	83.2	23.2	6.0	OH/UG	U2736-XT


Hubs: Please see accessories on page 37.
Connectors: Factory installed. Please see chart above for wire ranges.
Bypass: Jaw clamping lever bypass, type HQ.
5th Terminal: The fifth terminal is factory installed in the 9 o'clock position for 40405X catalog numbers.

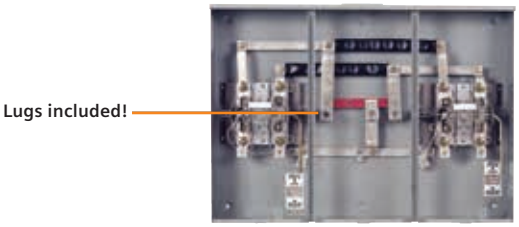



404052-023NU





404073-023NU











Knockouts (inches):	
B:	1/2, 3/4
X:	1-1/4,1-1/2, 2, 2-1/2
AC:	1/4, 1/2
AD:	1-1/4, 1-1/2, 2, 2-1/2, 3
HD:	∅4.281 HUB OP

Utility specifications may vary. Consult utility prior to installation.


100/200A/Position Meter Mounting Equipment

Ring & Ringless, No Bypass, 4 Jaw


100/200 Amp / Position Ring & Ringless Multi-Position
4 Terminal for 1 Phase, 3 Wire 600V AC, Horizontal & Vertical

Type	Catalog No.	Hub Provisions	Connectors			Bypass	Dimensions (in.)			Service	Milbank Equivalent
			Line	Load-100amp	Load-200amp		W	H	D		
Vertical/Ring Type	UA2B2B-PG	Blank	#8-350 kcmil	#8-2/0	#8-350 kcmil	None	11.0	26.0	4.9	UG	U1780-O
Horizontal/ Ringless	UA2D1B-XG	HD Cl. Plate	#8-350 kcmil	#8-2/0	#8-250 kcmil	None	20.2	14.1	5.4	OH/UG	U2601-XL
Vertical/ Ringless	UA2B11-XG	RX Cl. Plate	#8-350 kcmil	#8-2/0	n/a	None	8.0	26.0	4.5	OH	U2264-XL


Hubs: Please see accessories on page 37.
Connectors: Aluminum connectors, tin plated.
Ground: Units supplied with a ground lug.
5th Terminal: Order kit number H659-0121 for 9 o'clock.
Sealing Ring: The UA2B2B is furnished with a snap-type sealing ring.

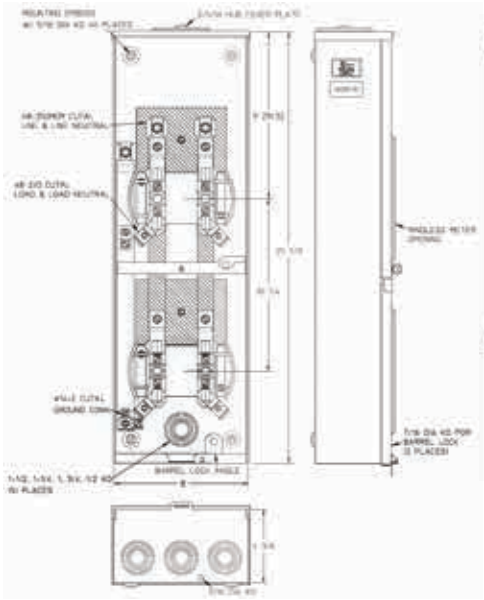

UA2B11-XG

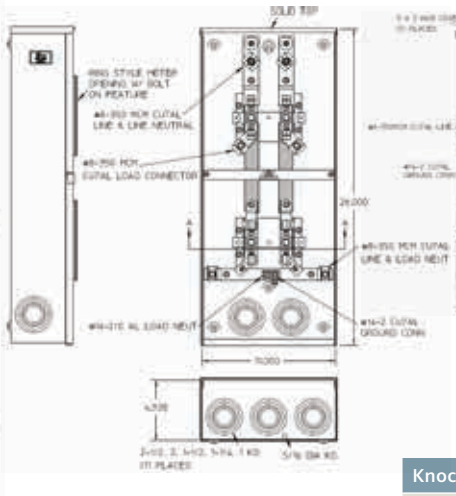



UA2B2B-PG

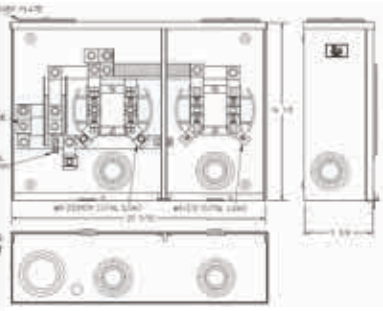


UA2D1B-XG

Knockouts (inches):	
◑:	1/4
A:	1/2
L:	1/2, 3/4, 1, 1-1/4, 1-1/2
S:	1,1-1/4,1-1/2, 2, 2-1/2
EE:	2, 2-1/2, 3

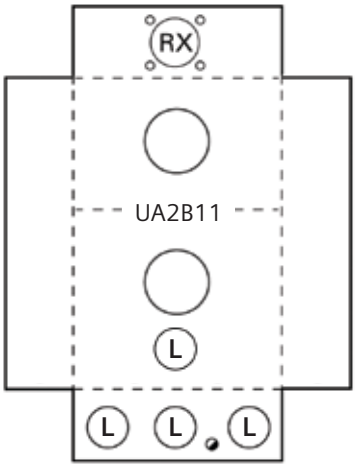

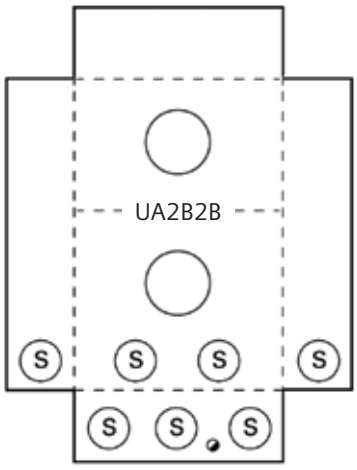

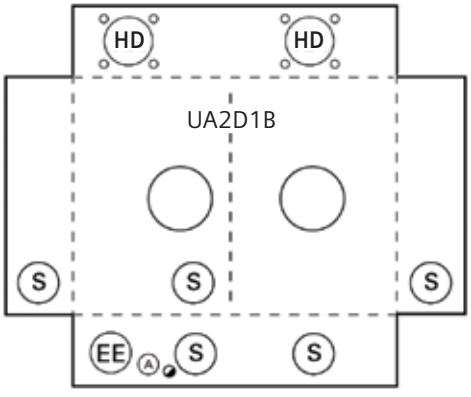

100/200A Meter-Loadcenter Combination

Ringless, No bypass, 4 Jaw

100-200 Amp Ringless Meter-Loadcenter Combination
4 Terminal for 1 Phase, 3 Wire 240V AC

Amps	Service	Catalog Number	Hub Provisions	Bypass	Connectors		Dimensions (in.)			Milbank Equivalent
					Line	Load	W	H	D	
100	OH/UG	UAB111-100	RX Cl. Plate	None	#14-2/0	#4-1/0	10.9	20.8	4.4	U3499-XL-100
125	OH/UG	UAB111-XG	RX Cl. Plate	None	#14-2/0	Blank	10.9	20.8	4.4	U3499-XL
150	OH/UG	UAB417-150	RX Cl. Plate	None	#6-350 kcmil	#1-300 kcmil	11.6	27.8	5.2	U3990-XL-150
200	OH/UG	UAB417-200	RX Cl. Plate	None	#6-350 kcmil	#1-300 kcmil	11.6	27.8	5.2	U3990-XL-200
200	OH/UG	UAB417-XPG	RX Cl. Plate	None	#6-350 kcmil	Blank	11.6	27.8	5.2	U3990-XL
200	UG	UAB877-200	Blank	None	#6-350 kcmil	#1-300 kcmil	13.2	25.2	5.2	U3798-O-200
200	UG	UAB877-PG	Blank	None	#6-350 kcmil	Blank	13.2	25.2	5.2	NA

Hubs: Please see accessories on page 37.
5th Terminal: order kit number EC5J2 for 9 o'clock.
Ground Lugs: All catalog numbers come with (2) ground lugs.

UAB111:
-UAB111-100 has a factory installed, Siemens catalog number Q2100.
-UAB111-XG has provisions for a field installed Siemens type QP or Murray type MP-T breaker.

UAB417:
-UAB417-150/200 has a factory installed, Siemens catalog number QN2200.
-UAB417-XPG has provisions for a field installed Siemens type QN or Murray type MPD breaker.
-All UAB417 catalog numbers will also accept 100-125amp Siemens type QP or Murray type MP-T breakers.

UAB877:
-UAB877-200 has a factory installed, Siemens catalog number QN2200.
-UAB877-PG has provisions for a field installed Siemens type QN or Murray type MPD breaker.
-All UAB877 catalog numbers will also accept 100-125amp Siemens type QP or Murray type MP-T breakers.
-UAB877 also an equal to Milbank U5757. Remove line side lugs for line side stud connections.



UAB111-XG





UAB417-XPG




UAB877-PG

Knockouts (inches):	
◑:	1/4
A:	1/2
B:	1/2, 3/4
N:	3/4,1,1-1/4,1-1/2, 2
S:	1,1-1/4,1-1/2, 2, 2-1/2
AD:	1-1/4, 1-1/2, 2, 2-1/2, 3
AI:	1,1-1/4,1-1/2, 2, 2-1/2, 3







100 /200A Meter-Breaker Combination

Ringless, Lever Bypass, 5 Jaw

100-200 Amp Ringless Meter-Breaker Combination
5 Terminal for 1 Phase, 3 Wire 240V AC

Amps	Service	Catalog Number	Hub Provisions	Bypass	Connectors		Dimensions (in.)			Milbank Equivalent
					Line	Load	W	H	D	
100	OH/UG	MM0303B1100RLC	RX Cl. Plate	Lever	#6 - 2/0	#4-1/0	14.0	27.0	4.9	U3741-XL-100-BL
125	OH/UG	MM0303L1125RLC	RX Cl. Plate	Lever	#6 - 2/0	Blank	14.0	27.0	4.9	NA
200	OH/UG	MM0303B1200RLC	RX Cl. Plate	Lever	#6-350 kcmil	#1-300 kcmil	16.0	36.2	4.9	U5140-RXL-200-BL
200	OH/UG	MM0303L1200RLC	RX Cl. Plate	Lever	#6-350 kcmil	Blank	16.0	36.2	4.9	NA


Hubs: Please see accessories on page 37.
5th Terminal: Factory installed at the 9 o'clock position.
Ground Lugs: All catalog numbers come with (2) ground lugs.


MM0303B1100RLC:
-Factory installed breaker, Siemens catalog number Q2100.
-non-jaw clamping lever bypass, type MQ.

MM0303L1125RLC
-provisions for a field installed Siemens type QP or Murray type MP-T breaker, 125amp maximum.
-non-jaw clamping lever bypass, type MQ.

MM0303B1200RLC:
-Factory installed breaker, Siemens catalog number QN2200.
-jaw clamping lever bypass, type HQ.

MM0303L1200RLC
-Will accept 100-125amp Siemens type QP/Murray type MP-T OR 150-200amp Siemens type QN/Murray type MPD breakers.
-Jaw clamping lever bypass, type HQ.







MM0303B1200RLC

Knockouts (inches):	
◑:	1/4
A:	1/2
R:	1,1-1/4,1-1/2, 2
S:	1, 1-1/4, 1-1/2, 2, 2-1/2

100/200A Meter-Breaker Combination

Ringless, Lever Bypass, 7 Jaw

100-200 Amp Ringless Meter-Breaker Combination
7 Terminal for 3 Phase, 4 Wire 240V AC

Amps	Service	Catalog Number	Hub Provisions	Bypass	Connectors		Dimensions (in.)			Milbank Equivalent
					Line	Load	W	H	D	
100	OH/UG	MM0303B3100RLC	RX Cl. Plate	Lever	#6 - 2/0	#4-1/0	13.3	26.3	5.1	U3771-XL-100-BL
100	OH/UG	MM0303L3100RLC	RX Cl. Plate	Lever	#6 - 2/0	Blank	13.3	26.3	5.1	NA
200	OH/UG	MM0303B3200RLC	RX Cl. Plate	Lever	#6-350 kcmil	#1-300 kcmil	16.0	36.2	4.9	U5750-RXL-200-BL

Hubs: Please see accessories on page 37.
Ground Lugs: All catalog numbers come with (2) ground lugs.


MM0303B3100RLC:
-Factory installed breaker, Siemens catalog number Q3100.
-non-jaw clamping lever bypass, type MQ.


MM0303L3100RLC
-provisions for a field installed Siemens type QP or Murray type MP-T breaker, 100amp maximum.
-non-jaw clamping lever bypass, type MQ.

MM0303B1200RLC:
-Factory installed breaker, Siemens catalog number QJ23B200.
-Jaw clamping lever bypass, type HQ.



MM0303B3200RLC

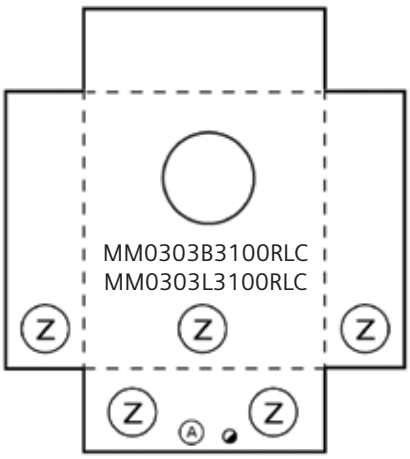

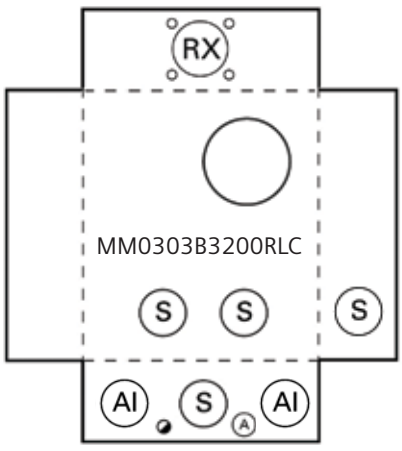

Knockouts (inches):	
◑:	1/4
A:	1/2
S:	1, 1-1/4, 1-1/2, 2, 2-1/2
Z:	1-1/2, 2, 2-1/2
AI:	1, 1-1/4, 1-1/2, 2, 2-1/2, 3

320A Meter-Breaker/Loadcenter Combination

Ringless, 4 & 5 Jaw

320 Amp Ringless Meter Breaker / Loadcenter Combination
4 Terminal for 1 Phase, 3 Wire 240V AC

Amps	Service	Catalog Number	Hub Provisions	Bypass	Connectors			Dimensions (in.)			Milbank Equivalent
					Line	Load	Load-Subfeed	W	H	D	
320	OH/UG	LG0404L1400RLM	HD Cl. Plate	Lever	#1-600 or (2) 1/0-250	Blank	NA	27.0	29.0	6.0	none
320	OH/UG	LG0816B1400RLT	HD Cl. Plate	Lever	#1-600 or (2) 1/0-250	#1-300 kcmil	#6-350 kcmil	27.0	29.0	6.0	none

Hubs: Please see accessories on page 37.
Ground Lugs: All catalog numbers come with (2) ground lugs.
5th Terminal: Factory installed at the 9 o'clock position on devices ending in RLM or RLTM. Use part number H35815-2 for other devices (9 o'clock position).

LG0404L1400RLM
-Field installed breakers, breaker types Siemens QN / Murray MPD / Talon LN.
-Jaw clamping lever bypass, type HQ.
-5th jaw factory installed.


LG0816B1400RLT
-8 space 16 circuit main breaker load center with feed thru lugs included.
-Provision for field installed breaker, breaker types Siemens QN / Murray MPD / Talon LN.
-Jaw clamping lever bypass, type HQ.



LG0404L1400RLM



LG0816B1400RLT

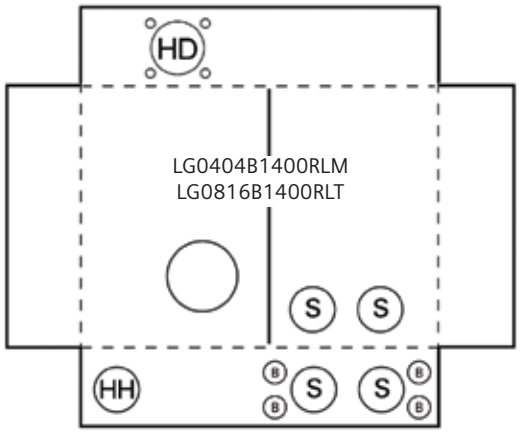

Knockouts (inches):	
B:	1/2, 3/4
S:	1,1-1/4,1-1/2, 2, 2-1/2
HD:	∅4.281 HUB OP
HH:	2-1/2, 3, 3-1/2, 4

Cold Sequence Meter Mains

200-400 Amp, Ringless, 3 Phase, 7 Jaw

200A

Catalog Number	Service	Connectors		Disconnect	AIC	Milbank Equivaent
		Line	Load			
LG0303CS3200R	OH	#1/0-350 kcmil	#6-350	200A CB	-	U5767-X-200-CB-BL
LG0303CS3200RD	UG	#1/0-350 kcmil	#6-350	200A CB	-	U5787-O-200-CB

400A

Catalog Number	Service	Connectors		Disconnect	AIC	Milbank Equivaent
		Line	Load			
LG0303CS3400R	OH	(2) #3/0-500 kcmil	(2) #3/0-500 kcmil	400A CB	10K	U5796-X-400-CB-BL
LG0303CS3400RD	UG	(2) #3/0-500 kcmil	(2) #3/0-500 kcmil	400A CB	10K	U5799-O-400-CB-BL



LG0303CS3200RD



LG0303CS3400RD


Utility specifications may vary. Consult utility prior to installation.

Current Transformer Cabinet

Current Transformer Cabinet
Single/Three Phase


Amperage Rating	Catalog Number	Hub Provisions	Connectors	Dimensions (in.)			Millbank Equivalent
				W	H	D	
400-800	LG123636CTS2	Blank	3 lugs per phase	36	36	12	S-1855-0
800-1200	LG124848CTS2	Blank	5 lugs per phase	48	48	12	S-1856-0

Devices are 2 door and include stainless steel handles. All devices are NEMA type 3R rated.
Lugs:
#2-600 kcmil

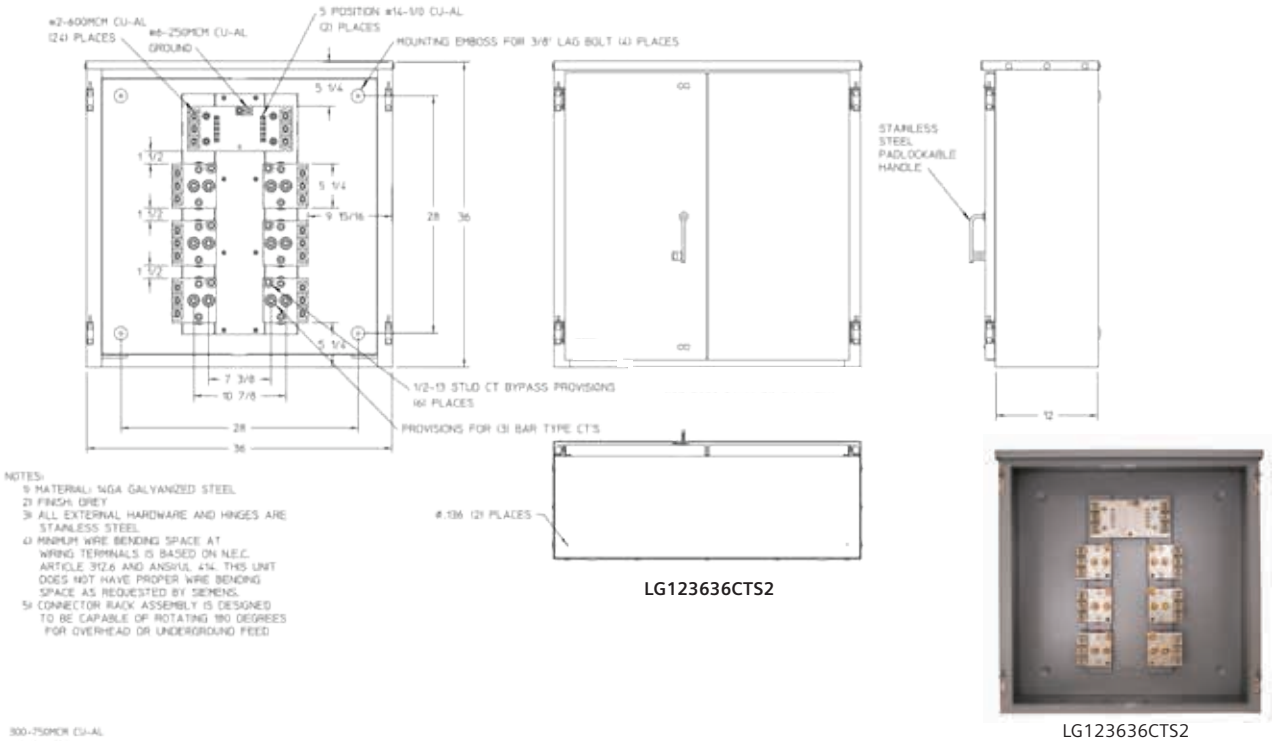

LG123636CTS2

LG123636CTS2

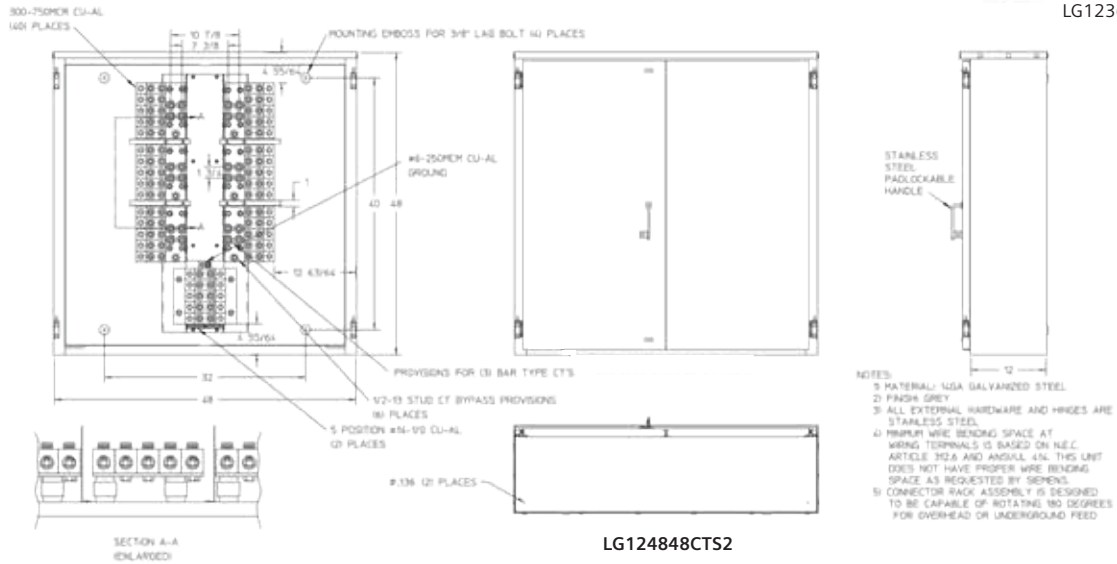


LG124848CTS2


125 & 200 Amp Condominium Meter Paks

120/240V AC, 1 Phase, 3 Wire, Ring Type, 4 Jaw

Continuous Duty Amps Per Pos.	Meter Pos. Per Pak	Vertical or Rectangular	Catalog Number	Dimensions (in.)			Hub Provisions	Main Bus Rating	Line Connectors (Factory Installed)	Milbank Equivalent
				H	W	D				
125	2	Vertical	WTG2211	26.20	13.79	5.81	HD Cl. Plate	200amps	#6-300 kcmil	
	3	Vertical	WTG3311	38.69	25.42	7.56	(2) HD Cl. Plate	300amps	#2-600 kcmil	
	4	Vertical	WTG4411	47.69	25.42	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	
	5	Rectangular	WTG4511	38.69	38.94	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	
	6	Rectangular	WTG4611	38.69	38.94	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	
	4	Vertical	WTG5411	47.69	26.47	7.56	(2) HD Cl. Plate	500amps	(2) #2-600 kcmil	
	5	Rectangular	WTG6511	38.69	40.00	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	
	6	Rectangular	WTG6611	38.69	40.00	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	
200	2	Vertical	WTG4212	29.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	
	3	Vertical	WTG4312	38.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	
	4	Vertical	WTG4412	47.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	
	4	Vertical	WTG6412	47.69	34.41	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	
	5	Rectangular	WTG6512	38.69	46.22	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	
	6	Rectangular	WTG6612	38.69	46.22	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	
	6	Rectangular	WTG8612	38.69	51.03	7.56	(2) HD Cl. Plate	800amps	(2) 1/0-750 kcmil or (4) 1/0-250 or (4) 1/0-3/0	

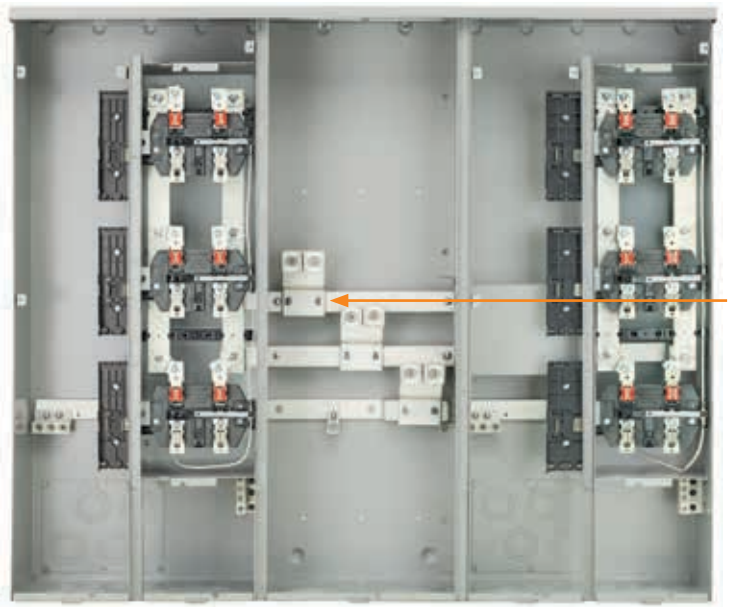

WTG6612

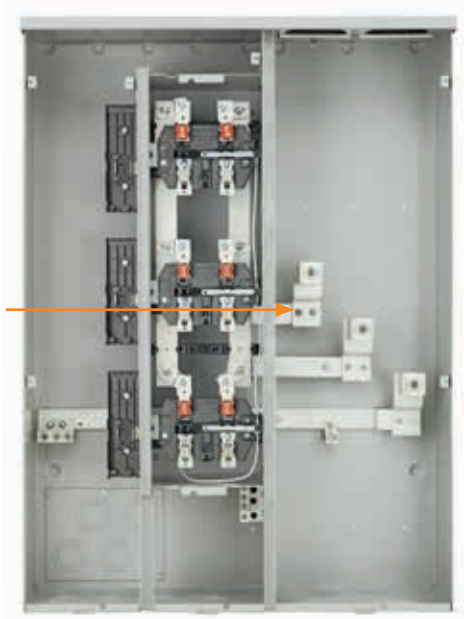

WTG3311


Service: Devices are rated for overhead and underground feed.
Hubs: Please see accessories on page 37.
Connectors: Included, see chart above.
Breakers: 125amp: use Siemens QP, Murray MP, or Talon LQ 200amp: use Siemens QS.

125 & 200 Amp Condominium Meter Paks

120/240V AC, 1 Phase, 3 Wire, Ringless, 5 Jaw


				Dimensions (in.)						
Continuous Duty Amps Per Pos.	Meter Pos. Per Pak	Vertical or Rectangular	Catalog Number	H	W	D	Hub Provisions	Main Bus Rating	Line Connectors (Factory Installed)	Milbank Equivalent①
125	2	Vertical	WTG2211RJ	26.20	13.79	5.81	HD Cl. Plate	200amps	#6-300 kcmil	U2852-X
	3	Vertical	WTG3311RJ	38.69	25.42	7.56	(2) HD Cl. Plate	300amps	#2-600 kcmil	U2853-X
	4	Vertical	WTG4411RJ	47.69	25.42	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2854-X
	5	Rectangular	WTG4511RJ	38.69	38.94	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2855-X
	6	Rectangular	WTG4611RJ	38.69	38.94	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2856-X
	5	Rectangular	WTG6511RJ	38.69	40.00	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	None
	6	Rectangular	WTG6611RJ	38.69	40.00	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	None
200	2	Vertical	WTG4212RJ	29.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2862-X
	3	Vertical	WTG4312RJ	38.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2863-X
	4	Vertical	WTG4412RJ	47.69	28.53	7.56	(2) HD Cl. Plate	400amps	(1) 1/0-750 kcmil or (2) 1/0-250 kcmil	U2864-X
	4	Vertical	WTG6412RJ	47.69	34.41	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	None
	5	Rectangular	WTG6512RJ	38.69	46.22	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	U2865-X
	6	Rectangular	WTG6612RJ	38.69	46.22	7.56	(2) HD Cl. Plate	600amps	(2) #2-600 kcmil	None
	6	Rectangular	WTG8612RJ	38.69	51.04	7.56	(2) HD Cl. Plate	800amps	(2) 1/0-750 kcmil or (4) 1/0-250 or (4) 1/0-3/0	U2866-X

① Milbank equivalents do not come equipped with line side lugs.

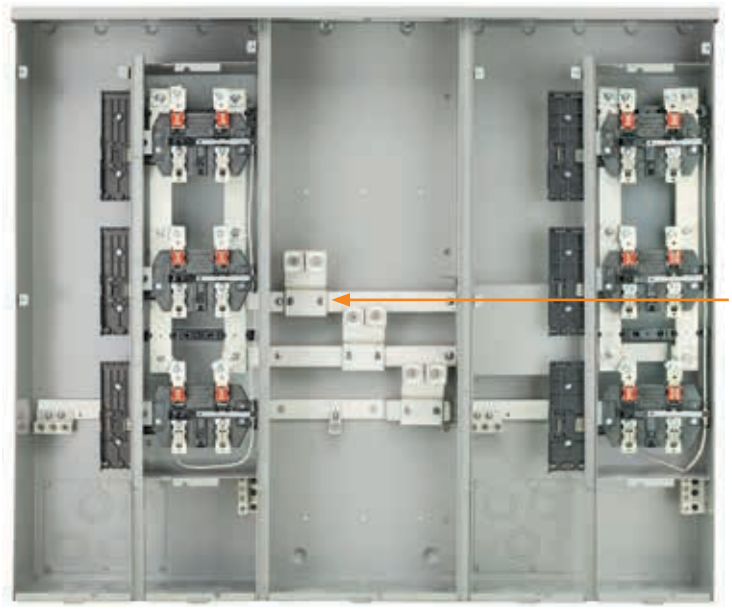

WTG6612RJ

Lugs factory installed

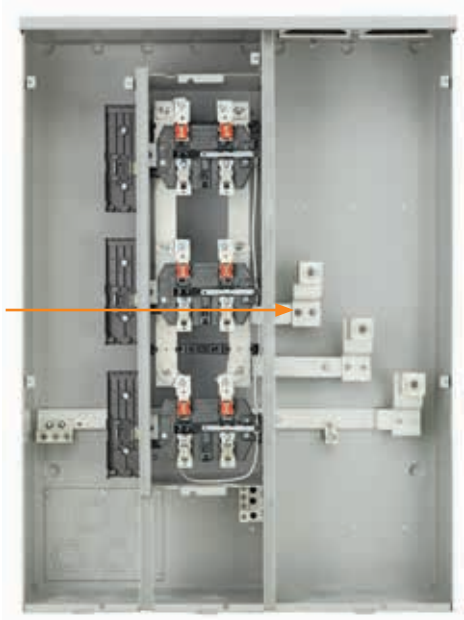

WTG3311RJ

Service: Devices are rated for overhead and underground feed.
Hubs: Please see accessories on page 37.
Connectors: Included, see chart above.
Breakers: 125amp: use Siemens QP, Murray MP, or Talon LQ 200amp: use Siemens QS.
5th Terminal: Included.

125 & 200 Amp Condominium Meter Paks

120/240V AC, 1 Phase, 3 Wire, Ringless, 5th or 7th Jaw, Lever Bypass

120/240V AC, 1 Phase, 3 Wire, Ringless, 5th or 7th Jaw, Lever Bypass

Continuous Duty Amps Per Pos.	Meter Pos. Per Pak	Vertical or Rectangular	Catalog Number	Dimensions (in.)			Hub Provisions	Main Bus Rating	Line Connectors (Order Lugs From Table Below)	Milbank Equivalent
				H	W	D				
200	2	Vertical	WTGL4212RJ	36.75	33.50	9.00	(2) HD Cl. Plate	400amps	3/8" Studs	U4372-XT-5T9
	3	Vertical	WTGL4312RJ	49.75	33.50	9.00	(2) HD Cl. Plate	400amps	3/8" Studs	U4373-XT-5T9
	4	Vertical	WTGL4412RJ	62.75	33.50	9.00	(2) HD Cl. Plate	400amps	3/8" Studs	U4374-XT-5T9
	5	Rectangular	WTGL6512RJ	49.75	53.38	9.00	(2) HD Cl. Plate	600amps	3/8" Studs	U4375-XT-5T9
	6	Rectangular	WTGL6612RJ	49.75	53.38	9.00	(2) HD Cl. Plate	600amps	3/8" Studs	U4363-XT-5T9

Accepts small 125 Amp & larger 200 Amp breakers

Mounting rail included!



WTGL4412RJ

Service: Devices are rated for overhead and underground feed.
Hubs: Please see accessories on page 37.
Breakers: 125amp: use Siemens QP, Murray MP, or Talon LQ.
200 Amp: use Siemens QS.
5th Terminal: Factory installed at the 9 o'clock position.
Bypass: Jaw clamping lever bypass, type HQ.
Connector Kits (order 1 kit for line connections).

Connector Kits (order 1 kit for line connections)

L&G Kit #	Milbank Equivalent	Wire Range	Fits Catalog Numbers:
LK11600	K1540	up to (1) 600 kcmil per phase	All TGLXXXXRJ
LK12350	K1350	up to (2) 350 kcmil per phase	All TGLXXXXRJ
LK31600	K3441	up to (1) 600 kcmil per phase	All TGLXXXXRJ
LK32350	K3442	up to (2) 350 kcmil per phase	All TGLXXXXRJ

TL Series Temporary Power Outlet Panels

Metered Devices

Surface Mount Type



Features

- 125 ampere rating (125A MLO, 100A MB)
- 350 kcmil line side lugs
- Ring or ringless style covers
- Horn or lever bypass options
- Top and bottom feed options
- Factory installed light kit
- Factory installed photocell
- Stainless steel latch and hasp
- Easy to open and close receptacle cover
- Pole-mounted water and CATV/phone kits
- High quality Siemens loadcenter interior and breakers

Pedestal Mount Types



Features

- 125 ampere rating (125A MLO, 100A MB)
- Ring or ringless style covers
- Single and back-to-back configurations
- 350 kcmil loopfeed lugs (back connected)
- Horn bypass option
- Direct burial and pad mount options
- Factory installed light kit
- Factory installed photocell
- Stainless steel latch and hasp
- Easy to open and close receptacle cover
- Pole-mounted water and CATV/phone kits
- High quality Siemens loadcenter interior and breakers



TL Series Temporary Power Outlet Panels

Un-Metered Devices



Features

- 125 ampere rating (125A MLO, 100A MB)
- Loop feed models available
- Factory installed light kit
- Factory installed photocell
- Easy to open and close receptacle cover
- Slim design for 2 receptacle devices (7" wide)
- High quality Siemens loadcenter interior and breakers





Pad Mount Direct Burial

Features

- 125 ampere rating (125A MLO, 100A MB)
- 350 kcmil loopfeed lugs (back connected)
- Single or back-to-back configurations
- Direct burial or pad mount options
- Factory installed light kit
- Factory installed photocell
- Easy to open and close receptacle cover
- Externally attached water and CATV/phone kits
- High quality Siemens loadcenter interior and breakers





Pedestal Mount Flange Kit

TL Series Temporary Power Outlet Panels

Build Your Own Catalog Numbering System

Follow the table below to configure a custom catalog number. Contact your local Talon agent or Siemens sales office for price and lead time. User assumes all responsibility for selecting proper configuration.

①	①	①②	③		①	①	– ⑤	
T								
Talon Temporary Power	Main Type	Receptacles (3 max)			Meter/Bypass	Enclosure Type		Custom Options⑦

Main Type

L	Main Lugs, 125A
D	Main Breaker, 100A

Receptacles (3 max)

1		14-50R	125/250V	50A
1F		Designates GFCI Circuit Breaker Protection		
2		14-30R	125/250V	30A
2F		Designates GFCI Circuit Breaker Protection		
3		TT30R	125V	30A
3F		Designates GFCI Circuit Breaker Protection		
4		L6-30R	250V	30A
4F		Designates GFCI Circuit Breaker Protection		
5		6-20R	250V	20A
5F		Designates GFCI Circuit Breaker Protection		
6		L5-20R	125V	20A
6F		Designates GFCI Circuit Breaker Protection		
7		5-20R2GFI	125V	20A
7X		Designates non-weather-resistant GFCI receptacle		
8		5-20R2	125V	20A
8F		Designates GFCI Circuit Breaker Protection		
8G		Designates weather resistant receptacle with GFCI Circuit Breaker Protection		
9		L-530R	125V	30A
9F		Designates GFCI Circuit Breaker Protection		

Meter/Bypass

U	Unmetered
R	Ringless, No Bypass
N	Ring, No Bypass
L*	Ringless, Lever Bypass
H	Ringless, Horn Bypass

*Lever bypass available only in surface mount, topfeed configurations

Enclosure Type

S	Surface mount, un-metered
S2④	Surface mount, un-metered, loop feed lugs
T	surface mount, top feed-metered
B	surface mount, bottom feed-metered
P	Direct burial pedestal
M	Pad mount pedestal
2P	Direct burial pedestal, double-sided
2M	Pad mount pedestal, double sided

Custom Options⑦

L⑥	Light kit factory installed
LP⑧	Light kit with photocell factory installed
X⑨	Alternate receptacle configuration on double-sided pedestal
Cx	Custom color configuration
F	Florida Meter Group Approved

① Required fields.
② A minimum of 1 receptacle must be selected. A maximum of 3 receptacles, with up to 125amps total, may be selected. UL does not allow field installation of receptacle kits.
③ Two receptacle devices ship in a 7" wide enclosure and are wired with a 4 circuit interior. Depending on the receptacle configuration selected an additional circuit may or may not be available
④ Enclosure includes same loop feed lugs as the pedestal devices. Enclosure is larger. Please see knockout diagrams for details.
⑤ Dash is only present if one of the options listed after the dash is needed.
⑥ Light kits are installed by the factory and require either a 120V GFCI breaker or 5-20RGFI receptacle to power the light fixture.
⑦ Cable TV, phone, & water accessories are purchased separately and are not configured as part of the device.
⑧ Photocell is factory wired and is mounted internally. 120V AC photocell only.
⑨ "X" designates alternate receptacle configuration on each side. Contact sales office for pricing.

Custom Color Guidelines:

- "Cx" designates custom color. Contact sales office for color code to insert into part number to replace the "x" in this designation.
- Additional charges apply and depend on the color needed.
- Custom color matching available: Customer must signoff on painted sample prior to production of order.
- Order cancellations will involve a fee after custom paint is ordered.

Example: Catalog Number: TL1F37NT-LP

Given specifications:

- 125A Main Lugs
- 50A, 125/250V receptacle with GFCI circuit breaker
- 30A, 125V receptacle with a standard circuit breaker
- 20A, 125V GFCI weather resistant receptacle
- Ring type meter at the top
- Pedestal mount device
- Light option with photocell

Step 1
Start with the power receptacle product line prefix identifier and choose the main type: **(TL)**

Step 2
Choose the first receptacle and its circuit breaker type: **(1F)**

Step 3
Choose the second receptacle and its circuit breaker type: **(3)**

Step 4
Choose the third receptacle and its circuit breaker type: **(7)**

Step 5
Choose utility meter & bypass type required: **(N)**

Step 6
Choose enclosure type: **(T)**

Step 7
Add dash and select light option with photocell: **(-LP)**

INSTALLER RESPONSIBLE FOR ENSURING UTILITY AND LOCAL CODE ACCEPTANCE

Utility specifications may vary. Consult utility prior to installation.

TL Series Temporary Power Outlet Panels

Most common items –See previous page to build your own catalog number

New Catalog Number	Mains Type	Enclosure Type	Meter Provision	Receptacle #1②	Receptacle #2②	Receptacle #3②	Options
Surface Mount, Un-Metered							
TL17US①	125A Main Lug	Surface Mount	Un-Metered	14-50R	5-20R2 GFI W.R.	N/A	N/A
TL37US①	125A Main Lug	Surface Mount	Un-Metered	TT30R	5-20R2 GFI W.R.	N/A	N/A
TL77US①	125A Main Lug	Surface Mount	Un-Metered	5-20RGFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL137US①	125A Main Lug	Surface Mount	Un-Metered	14-50R	TT30R	5-20R2 GFI W.R.	N/A
TL577US①	125A Main Lug	Surface Mount	Un-Metered	6-20R	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL1F7US	125A Main Lug	Surface Mount	Un-Metered	14-50R, GFCI Brkr	5-20R2 GFI W.R.	N/A	N/A
TL1F3F7US	125A Main Lug	Surface Mount	Un-Metered	14-50R, GFCI Brkr	TT30R, GFCI Brkr	5-20R2 GFI W.R.	N/A
TL5F8G8GUS	125A Main Lug	Surface Mount	Un-Metered	6-20R, GFCI Brkr	5-20R2, GFCI Brkr, W.R.	5-20R2, GFCI Brkr, W.R.	N/A
TL1F3F7US2	125A Main Lug	Surface Mount	Un-Metered	14-50R, GFCI Brkr	TT30R, GFCI Brkr	5-20R2 GFI W.R.	Loop Feed Lugs
Surface Mount, Metered							
TL77NT①	125A Main Lug	Top Feed	Metered- Ring	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL77NB①	125A Main Lug	Bottom Feed	Metered- Ring	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL77RT①	125A Main Lug	Top Feed	Metered- Ringless	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL77RB①	125A Main Lug	Bottom Feed	Metered- Ringless	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A	N/A
TL137RT①	125A Main Lug	Top Feed	Metered- Ringless	14-50R	TT30R	5-20R2 GFI W.R.	N/A
TL577NT	125A Main Lug	Top Feed	Metered- Ring	6-20R	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL1F77NT	125A Main Lug	Top Feed	Metered- Ring	14-50R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL1F77RB	125A Main Lug	Bottom Feed	Metered- Ringless	14-50R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL5F77NT	125A Main Lug	Top Feed	Metered- Ring	6-20R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL5F77RT	125A Main Lug	Top Feed	Metered- Ringless	6-20R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
TL5F77RB	125A Main Lug	Bottom Feed	Metered- Ringless	6-20R, GFCI Brkr	5-20R2 GFI W.R.	5-20R2 GFI W.R.	N/A
Pedestal Mount, Metered & Un-Metered							
TL137UP	125A Main Lug	Burial Pedestal	Un-Metered	14-50R	TT30R	5-20R2 GFI W.R.	N/A
TL137NP	125A Main Lug	Burial Pedestal	Metered-Ring	14-50R	TT30R	5-20R2 GFI W.R.	N/A
TL1F3F7UP	125A Main Lug	Burial Pedestal	Un-Metered	14-50R, GFCI Brkr	TT30R, GFCI Brkr	5-20R2 GFI W.R.	N/A
TL138GUP	125A Main Lug	Burial Pedestal	Un-Metered	14-50R	TT30R	5-20R2, GFCI Brkr, W.R.	N/A
TL137UP-LP	125A Main Lug	Burial Pedestal	Un-Metered	14-50R	TT30R	5-20R2 GFI W.R.	Light & Photocell
TL137U2P	125A Main Lug	Burial Pedestal-Double Sided	Un-Metered	14-50R	TT30R	5-20R2 GFI W.R.	N/A

Special Accessories

Catalog Number	Description	Notes
TLAWATER③	Water Connection Accessory	Accessories are intended to mount on each side of a direct burial or pad mount pedestal. These accessories can be used independently provided they are mounted on a flat surface. Mounting these accessories to round poles is not recommended.
TLATVP	Television & Phone Connection Accessory	
TLALFB	Loopfeed Replacement Block	Includes (1) assembly. Replacement only.
TLA0816LG	Replacement interior for 10" wide devices	Replacement Only
TLAMS200	TL Series Meter Socket	Replacement Only
TLABULB	TL Series Light Bulb	Replacement Only
TLAPC120V	TL Series Photocell	Replacement Only

① Stocked item. Status subject to change without notice.
② NEMA receptacle configurations listed.
③ Accessory consists of trough only. User must install pipe and water connection point.



Connector Lugs

Pressure type lugs for Talon's stud type meter mounting devices are made of 6061-T6 aluminum to provide high strength and high conductivity. All lugs are tin-plated to ensure low contact resistance and to reduce corrosion.

Allen or hex head pressure screws are furnished to provide excellent conductor spread for maximum binding action with the lug. All Talon lugs are listed with Underwriters Laboratories.

H55890-1 #6-350 KCMIL — **3/8" Stud**



H37892 #4-500 KCMIL — **1/2" Stud**



H56476 #3/0-800 KCMIL — **1/2" Stud**



H60162 (1) #4-600 KCMIL — **1/2" Stud**



H58022 (2) #6-250 KCMIL — **3/8" Stud**



H56732 (2) #4-350 KCMIL — **1/2" Stud**



H56732-1 (2) #4-350 KCMIL — **1/2" Stud**



H56732-2 (2) #4-350 KCMIL — **3/8" Stud**




H56732-M (2) #4-500 KCMIL — **1/2" Stud**



Connector Kits (order 2 kits per socket for line & load connections)

L&G Kit #	Milbank Equivalent	Wire Range
LK11350	K1539	up to (1) 350 kcmil per phase
LK11600	K1540	up to (1) 600 kcmil per phase
LK12350	K1350	up to (2) 350 kcmil per phase
LK31600	K3441	up to (1) 600 kcmil per phase
LK32350	K3442	up to (2) 350 kcmil per phase



Pressure lug connectors for meter mounting devices

Anti-rotation feature	Conductor size	Stud opening	Pressure screw head	Dimensions* (inches) L	W	H	Catalog number
No	#6-350 KCMIL	13/32"	5/16" Allen	2-1/4	1-1/8	1-1/4	H55890-1
No	(2) #6-250 KCMIL	13/32"	5/16" Allen	2-3/16	1-5/8	1-3/16	H58022
No	#4-500 KCMIL	9/16"	3/8" Allen	2-13/16	1-1/2	1-9/16	H37892
Yes	(1) #4-600 KCMIL	9/16"	1/2" Allen	2-13/16	1-3/8	1-13/16	H60162
	or (2) #1/0-250 KCMIL						
Yes	#3/0-800 KCMIL	9/16"	1/2" Allen	3-1/4	1-5/16	1-13/16	H56476
Yes	(2) #4-350 KCMIL	9/16"	5/16" Allen	2-7/8	1-59/64	1-1/4	H56732
No	(2) #4-350 KCMIL	9/16"	5/16" Allen	2-7/8	1-59/64	1-1/4	H56732-1
No	(2) #4-350 KCMIL	13/32"	5/16" Allen	2-7/8	1-59/64	1-1/4	H56732-2
Yes	(2) #4-500 KCMIL	9/16"	3/8" Allen	2-13/16	2-5/32	1-13/16	H56732-M

* Dimensions do not include height of pressure screw with conductor installed.

Accessories

Removable Hub Kits



Removable hub



Cover plate



	Conduit Size (inches)	Catalog Number
	RX type hubs small	
	1	H38596-2
	1-1/4	H38597-2
	1-1/2	H38598-2
	2	H38599-2
	2-1/2	H38600-2
	Cover plate - steel	H38595-1
	Cover plate - aluminum	H38595-2
	HD Type Hubs Large	
	3	H56856-2
	3-1/2	H56857-2
	4	H56858-2
	Cover plate - steel	H56933
	Cover plate - aluminum	H56933-1
	Large to small adaptor	
	Steel HD to RX	H9747-1113
	Aluminum HD to RX	H9747-1112

Circuit Breakers

Description	Amps	Catalog Number
1-Pole 120V	15	L115
1-Pole 120V	20	L120
2-Pole 120/240V	20	L220
2-Pole 120/240V	30	L230
2-Pole 120/240V	40	L240
2-Pole 120/240V	50	L250
2-Pole 120/240V	60	L260
2-Pole 120/240V	100	L2100
2-Pole 120/240V	125	L2125

Meter Combo Breakers

	Description	Amperage	Catalog Number
	2-Pole 120/240V	200	LN2200R
	2-Pole 120/240V	150	LN2150R

Accessories -Misc.














	Description	Catalog Number
	Insulated 5th terminal kit	H659-0120
	Meter-loadcenter 5th terminal kit	EC5J2
	Grounded 5th terminal kit	H659-0121
	5th jaw kit - 9:00	RX112FFJ
	For devices UA2B11-XG, UA3b11-XG	
	HQ 5th terminal kit - 9:00 w/o wire	H35815-2
	HQ 5th terminal kit - 9:00 w/ wire	H35815-3
	HQSW 5th teminal kit - 9:00 w/ 9" lead *For use with side wired devices only.	H35815-5*
	Black plastic meter opening cover	H39968
	Clear plastic meter opening cover (with plug-in feet)	H659-0162
	HQ isolated neutral kit **Includes neutral and isolation block	H64685-1**
	Insulated Jumper	H36479
	Lug Kit (2/0 - #4) Meter Combos	ECLK1-2

Sealing rings

	Description	Catalog Number
	Stainless Steel Snap Type	**H54602**
	Stainless Steel Screw Type	**H9738-8002**

Repair Parts

Catalog Number	Block Assembly	Neutral Assembly	Connector Screw Assembly	Neutral Screw Assembly
UAT111-0G	500-5800H	500-5000H-2	67908-1 (screw only)	65000001 (complete lug asm.)
UAT111-BG				
UAT111-XG				
UAT317-0G	501-5830-2	5007593-2	200007 (nut) & 64542-3 (screw)	200009-1 (nut & screw)
UAT417-XG				
UAT417-PG				
UAS877-PG	5007933 (left) 5007934 (right)	5007859-2	Load side use: 200009-1 (nut & screw) Line side use: 200007 (nut) & 64542-3 (screw)	200009-1 (nut & screw)
UAS817-PG	5007868 (left) 5007867 (right)			
UAS27A-PG	5008264-6 (left) 5008265-6 (right)	5007958-3	Line side use: 200007 (nut) & 64542-3 (screw)	none
48205-01NU	88511-1	500-5000H-2	65000001 (complete lug asm.)	500-5000H-2 (complete Neutral asm.)
48405-02NU		64556-31A-AL	65000001 (complete lug asm.)	65000001 (complete lug asm.)
40205-01NU	88521-1	64556-3A-AL	200009-3 (nut / screw asm.)	200009-3 (nut / screw asm.)
40605-02NU				
200A HQ Heavy Duty Lever Bypass	Varies	Varies	200009-3 (nut / screw asm.)	200009-1 (nut / screw asm.)

Note:
1) Above parts must be ordered by the distributor using catalog number TYZ:RESIMETERING. Include the part numbers above as a reference on the purchase order.
2) Some parts are only available as an assembly. Dissasemble and use parts as needed.

Product Q & A

Q. How can I find a missing "lug" for a (Catalog No._____) meter socket?

A. If the socket is a residential type, the customer usually needs the nut/screw assembly that clamps the wire into place in a lay-in style connector. There are different types of nut/screws. You will need to determine the catalog number of the device, and if it is to be used on the line side, load side or neutral. With a commercial device, the customer may look for a ground lug or mechanical lug for a stud type meter socket. In these cases the customer should contact a technical support person, or refer to the specification sheet for the correct lug.

The customer may mistake the number, that is stamped on the part, (e.g. "6T0350") as the catalog number. This is actually the wire size that is stamped into the nut/screw assembly for a HQ style device. "6 TO 350" refers to the wire size range of the connector.

Q. How can I find a replacement insulator, block, or porcelain/ceramic insulator?

A. First, determine the catalog number of the device. After the device has been identified you can then inquire if it is "left hand or right hand", and if it is used on a side wired device or a multi-position gang socket. On standard residential sockets, the right and left hand blocks are identical, and are mounted in a mirror image of each other.

Q. Are Talon meter sockets UL listed?

A. Talon offers all of its product lines with the UL listing.





Q. What label information can be found on the inside of the meter socket?

A. Every Talon meter socket has a white information label, approximately 2-1/2" x 4" in size. It is located on the upper left hand inside wall of the enclosure. This label contains the following information: Catalog Number, Socket Type (UAT4, HQ-7U etc.), Number of Terminals (jaws), Continuous/Maximum Amperage, Voltage Rating, Service (single phase or three phase), Short Circuit Withstand Rating, Other UL Information, Included lay-in connector sizes or recommended lugs if stud type, Conduit Hub Kit Options and Accessories, where the device is manufactured and the date it was manufactured.

Q. How do I find the production date code for a Talon meter socket?

A. The date code is printed towards the center of the bottom of the interior label. The date code will specify the month and year the socket was manufactured.

Meter Mounting Device Applications

Electrical service	Service type	Meter form	Socket type	Standard socket Catalog number
1-phase 	Self-contained, 3 wire	2S	4 jaw 100A	AT-1
			4 jaw 200A	AT-3, AT-4, MQ-4, HQ-4
		2SE	4 jaw 320A	HQ-4S, HQ-4D
	Self-contained, bolt-in	2K	K4-400/480A	K-4, K-4UT
	Transformer-rated, 2 wire	3S!	5 jaw 20A	HQ-6T, HQ-6TS, PTS-6
	Transformer-rated, 3 wire	4S!	6 jaw 20A	HQ-6T, HQ-6TS
3-phase, 3 wire or network 	Self-contained	12S	5 jaw 100A	MQ-5, HQ-5
		12S	5 jaw 200A	MQ-5, HQ-5
		12SE	5 jaw 320A	HQ-5SWT, HQ-5D
	Self contained bolt-in	12K	K-5 480/600A	K-5
	Transformer-rated	5S	8 jaw 20A	HQ-8T, HQ-8TS, PTS-8
3-phase, 4 wire  Wye  or Delta	Self-contained	14S	7 jaw 100/200/320A	MQ-7, HW-7
		15S		
		16S		
	Self-contained, bolt-in	14K	K-7 480/600A	K-7, K-7T
		15K		
		16K		
	Transformer-rated	6S	13 jaw 20A	HQ-13T, HQ-13TS, PTS-13
		8S		
		9S		

Utility Approval Reference

Pg.	Amps	Term	5th term	Pos	Talon Number	A NEU...	B UI...	C Nat. Grid	D UNITIL...	E NSTAR	F CMP...	G BHE	H MPSCO	I NHEC	J PSNH	K CVPS
4	125	4	avail	1	UAT111-0G		O/U		O/U	O/U	O/U	O/U	O/U		O/U	O/U
4	125	4	avail	1	UAT111-BG		OH	OH	OH	OH	OH	OH	OH		3	OH
4	125	4	avail	1	UAT111-XG		O/U	OH	O/U		OH	OH	2		3	O/U
5	200	4	avail	1	UAT317-0G		OH	OH	OH	OH	O/U	O/U	O/U		O/U	O/U
5	200	4	avail	1	UAT417-XG		O/U	OH	O/U		O/U		2		O/U	O/U
5	200	4	avail	1	UAT417-PG		UG		UG			UG	2		3	
5	200	4	avail	1	UAS877-PG		UG	UG	UG	UG	UG	UG	UG		UG	UG
5	200	4	avail	1	UAS817-PG		UG		UG		UG	UG	UG			
5	200	4	avail	1	UAS27-PG				UG		UG	2	2		3	UG
6	125	5	9:00	1	48205-01NU	OH	OH				OH		2		3	OH
6	125	5	9:00	1	48405-02NU	OH	O/U				O/U		2			O/U
7	200	5	9:00	1	40205-01NU		OH				OH		OH			OH
7	200	5	9:00	1	40605-02NU						OH		2		3	
8	200	4	avail	1	40804-01NU	OH	OH	OH			OH		2		3	OH
8	200	4	avail	1	40404-02QG		OH	OH			O/U		2		3	O/U
8	200	4	avail	1	42104-02QG		O/U				O/U		2		3	O/U
8	200	4	avail	1	48804-02NU	O/U	O/U				O/U		2		3	O/U
8	200	5	9:00	1	41505-02QG		OH				OH		2		3	OH
8	200	5	9:00	1	40405-0BNU	O/U	O/U	OH			OH		2		3	O/U
8	200	5	9:00	1	41605-02QG		OH	O/U			OH		2		3	O/U
9	125	7	6:00	1	48207-01NU		OH				OH				3	OH
9	200	7	6:00	1	48807-02NU	O/U	OH				O/U	O/U	2		3	O/U
9	200	7	6:00	1	40007-01NU	OH	OH	OH	OH	OH	OH	OH	OH		3	OH
9	200	7	6:00	1	40407-02QG			OH			O/U	O/U	2		3	
10	320	4	avail	1	48704-02		O/U	O/U	O/U		O/U	O/U	2		3	O/U
10	320	4	avail	1	49604-02NU	O/U	O/U		O/U		O/U	O/U	2		3	O/U
10	320	7	6:00	1	48707-02			O/U	O/U		O/U	O/U	O/U		3	O/U
10	320	7	6:00	1	49607-02NU	O/U	O/U	O/U	O/U		O/U	O/U	2		3	O/U

Key		
OH	=	Overhead feed only
UG	=	Underground feed only
O/U	=	Overhead (or) underground feed approved
P	=	Approval pending utility review/documentation

A) Northeast Utilities
B) United Illuminating
C) National Grid
D) UNITIL
E) NSTAR Electric
F) Central Maine Power
G) Bangor Hydro Electric
H) Maine Public Service Co.
I) New Hampshire Electric Coop
J) Public Service New Hampshire
K) Central Vermont Public Service

*Utility specifications vary. Consult utility prior to installation.

Utility specifications may vary. Consult utility prior to installation.

Utility Approval Reference

Milbank Number	Talon Number	Ring vs. RL	OH/ UG/ O/U	Lugs max kcmil	BPS	Brl Lock	Description
U7487-RL-TG	UAT111-0G	RL	O/U	2/0	no	no	135A 4J RGLS 1POS NO BPS MS OH/UG
U7487-YL-TG	UAT111-BG	RL	O/U	2/0	no	no	135A 4J RGLS 1POS NO BPS MS OH 1.25"HUB
U7487-O-TG	UAT111-XG	RL	O/U	2/0	no	no	135A 4J RGLS 1POS NO BPS MS OH/UG CL PL.
U7021-RL-TG	UAT317-0G	RL	OH	350	no	no	200A 4J RGLS 1POS NO BPS MS OH
U7040-XL-TG	UAT417-XG	RL	O/U	350	no	no	200A 4J RGLS 1POS NO BPS MS OH/UG
U7040-O-TG	UAT417-PG	RL	UG	350	no	no	200A 4J RGLS 1POS NO BPS MS UG ONLY
U1980-O	UAS877-PG	RL	UG	350	no	no	200A 4J RGLS 1POS NO BPS MS UG-SW
U4413-O	UAS817-PG	RL	UG	350	no	no	200A 4J RGLS 1POS NO BPS MS UG-SW
U5777-O	UAS27A-PG	RL	UG	350	no	no	200A 4J RGLS 1POS NO BPS MS UG-SW STUDS
U2272-RL-5T9-BL	48205-01NU	RL	OH	2/0	Lever-MQ	yes	125A 5J RGLS 1POS MD LVR MS OH 9:00
U2860-XL-5T9-QG	48405-02NU	RL	O/U	2/0	Lever-MQ	yes	125A 5J RGLS 1POS MD LVR MS OH/UG 9:00
U9318-RL	40205-01NU	RL	OH	350	Lever-MQ	yes	200A 5J RGLS 1POS MD LVR MS OH 9:00
U9319-XL	40605-02NU	RL	O/U	350	Lever-MQ	yes	200A 5J RGLS 1POS MD LVR MS OH/UG 9:00
U9800-RRL-QG-BL-NE	40804-01NU	RL	OH	350	Lever	yes	200A 4J RGLS 1POS LVRBPS MS OH BL
U9801-RXL-QG	40404-02QG	RL	O/U	350	Lever	no	200A 4J RGLS 1POS LVRBPS MS OH/UG 2GRD
U3924-XL	42104-02QG	RL	UG	350	Lever	no	200A 4J RGLS 1POS LVRBPS MS UG-SW
U4721-O-BL	48804-02NU	RL	UG	350	Lever	yes	200A 4J RGLS 1POS LVRBPS MS OH/UG OFFSET
U9550-RRL-QG	41505-02QG	RL	OH	350	Lever	no	200A 5J RGLS 1POS LVRBPS MS OH 6:00
n/a	40405-0BNU	RL	O/U	350	Lever	yes	200A 5J RGLS 1POS LVRBPS MS OH/UG 7/16BL
U9551-RXL-QG	41605-02QG	RL	O/U	350	Lever	no	200A 5J RGLS 1POS LVRBPS MS OH/UG 6:00
U7573-RL	48207-01NU	RL	OH	2/0	Lever-MQ	yes	125A 7J RGLS 1POS MD LVR MS OH
U4910-O-BL	48807-02NU	RL	UG	350	Lever	yes	200A 7J RGLS 1POS LVRBPS MS OH/UG 7/16BL
U9700-RRL-QG-BL	40007-01NU	RL	OH	350	Lever	yes	200A 7J RGLS 1POS LVRBPS MS OH 7/16BL
U9701-RXL-QG	40407-02QG	RL	O/U	350	Lever	no	200A 7J RGLS 1POS LVRBPS MS OH/UG 2 GRD
U2448-X	48704-02	RL	O/U	3/8-stud	Lever	no	HQ4SSW ST CP /W RISER
U4778-X-BL	49604-02NU	RL	O/U	3/8-stud	Lever	yes	320A 4J RGLS 1POS LVRBPS MS OH/UG BL
U2594-X	48707-02	RL	O/U	3/8-stud	Lever	yes	320A 7J RGLS 1POS LVRBPS MS OH/UG-SW
U4911-X-BL	49607-02NU	RL	O/U	3/8-stud	Lever	yes	320A 7J RGLS 1POS LVRBPS MS OH/UG BL

① Studs included. Lugs must be purchased separately.

② Bangor Hydro Electric is in process of merging with Maine Public Service Co. Requirements are being reviewed - These items are in process for review/approval.

③ PSNH allows customer owned meter mounting devices provided they meet UL requirements and are approved by the "Company's Meter and Service Supervisor" prior to installation. These devices meet requirements for the appropriate application. It is the customer's responsibility to select and install the appropriate device.

Utility Approval Reference

Pg.	Amps	Term	5th term	Pos	Talon Number	A NEU...	B UI...	C Nat. Grid	D UNITIL...	E NSTAR	F CMP...	G BHE	H MPSCO	I NHEC	J PSNH	K CVPS
11	20	8	na	1	9837-7100											
11	20	8	na	1	9837-7110											
11	20	13	na	1	9837-7200											
11	20	13	na	1	9837-7210											
12	20	6	na	1	9837-0901	O/U										
12	20	8	na	1	9837-0902	O/U										
12	20	13	na	1	9837-0903	O/U										
12	20	6	na	1	9837-8203		O/U				O/U		2			
12	20	8	na	1	9837-8403						O/U		2			
12	20	13	na	1	9837-8503		O/U				O/U		2			
12	20	6	na	1	9837-0904					O/U						
12	20	8	na	1	9837-0905					O/U						
12	20	13	na	1	9837-0906					O/U						
13	200	4	na	1	MP0406B1200R				UG		UG	2	2		3	
13	200	4	na	1	MP0606L1200R				UG		UG	2	2		3	UG
13	200	4	na	1	MP0606L1200										3	
14	200	5	9:00	1	MP0406B1200RJL	UG	UG	UG	UG				2		3	
14	200	5	9:00	1	MP0606L1200RJL	UG	UG	UG	UG		UG		2		3	UG
15	200	4	9:00	1	LG0816B1200RCT			OH	O/U		O/U	2	2		3	
15	200	4	9:00	1	LG0408B1200RT											
15	200	4	9:00	1	LG0606L1200R											
15	200	4	9:00	1	LG0606L1200RA											
16	100	4	avail	2	UA2B11-XG			OH	OH		OH	2	2		3	OH
16	100	4	avail	3	UA3B11-XG			OH	OH		OH	2	2		3	OH
17	100	4	avail	2	UA2411-XG			OH	O/U	O/U	OH	O/U	O/U		3	O/U
17	100	4	avail	3	UA3411-XG			OH	O/U	O/U	OH	O/U	O/U		3	O/U
17	100	4	avail	4	UA4411-XG			OH	O/U	O/U	OH	O/U	O/U		3	O/U
17	100	4	avail	5	UA5411-XG			OH	O/U	O/U	OH	O/U	O/U		3	O/U
17	100	4	avail	6	UA6411-XG			OH	O/U	O/U	OH	O/U	O/U		3	O/U
17	100	4	avail	2	UA2411-DG			OH	O/U	O/U	OH	2	2		3	
17	100	4	avail	3	UA3411-DG			OH	O/U	O/U	OH	2	2		3	

Key		
OH	=	Overhead feed only
UG	=	Underground feed only
O/U	=	Overhead (or) underground feed approved
P	=	Approval pending utility review/documentation

*Utility specifications vary. Consult utility prior to installation.

A) Northeast Utilities
B) United Illuminating
C) National Grid
D) UNITIL
E) NSTAR Electric
F) Central Maine Power
G) Bangor Hydro Electric
H) Maine Public Service Co.
I) New Hampshire Electric Coop
J) Public Service New Hampshire
K) Central Vermont Public Service

Utility specifications may vary. Consult utility prior to installation.

Utility Approval Reference

Milbank Number	Talon Number	Ring vs. RL	OH/ UG/ O/U	Lugs max kcmil	BPS	Brl Lock	Description
n/a	9837-7100	RL	O/U	#4	Pluger	no	8J RGLS PLGRBPS CT SKT CVRPLATE STEEL
UC7544-RL	9837-7110	Ring	O/U	#4	Plunger	no	8J RING PLGRBPS CT SKT CVRPLATE STEEL
n/a	9837-7200	RL	O/U	#4	Plunger	no	13J RGLS PLGRBPS CT SKT CVRPLATE STEEL
UC7545-RL	9837-7210	Ring	O/U	#4	Plunger	no	13J RING PLGRBPS CT SKT CVRPLATE STEEL
UC7478-O-81-NOE	9837-0901	RL	O/U	#4	none	yes	6J RGLS S0LCVR CT SKT PW-NORTHEAST UTIL
UC7444-O-141-NOE	9837-0902	RL	O/U	#4	none	yes	8J RGLS SOLCVR CT SKT PW-NORTHEAST UTIL
UC7445-O-311-NOE	9837-0903	RL	O/U	#4	none	yes	13J RGLS SOLCVR CT SKT PW-NORTHEAST UTIL
UC7532-XL	9837-8203	RL	O/U	#4	none	no	PTS-6, H/O W/CP STL, S/C RINGLESS
UC7448-XL	9837-8403	RL	O/U	#4	none	no	PTS-8 MTG DEV
UC7449-XL	9837-8503	RL	O/U	#4	none	no	PTS-13, STEEL, S/C RINGLESS, HO W/
UC4964-O-WC-21-NST	9837-0904	RL	O/U	#4	none	yes	6J RGLS SPLCVR CT SKT PW-N-STAR
UC4965-O-WC-21-NST	9837-0905	RL	O/U	#4	none	yes	8J RGLS SPLCVR CT SKT PW-N-STAR
UC4966-O-WC-21-NST	9837-0906	RL	O/U	#4	none	yes	13J RGLS SPLCVR CT SKT PW-N-STAR
n/a	MP0406B1200R	RL	UG	350	none	yes	200A 4SP/6CIR METER PED W/QN2200
U3730-O	MP0606L1200R	RL	UG	350	none	yes	MTR PED 200A 4J 06/06 NO BPS RGLS
n/a	MP0606L1200	Ring	UG	350	none	no	MTR PED 200A 4J 06/06 NO BPS RING
n/a	MP0406B1200RJL	RL	UG	350	Lever	yes	MTR PED 200A 5J 04/06 LVR BPS RGLSMTR PE
U4322-O-BL	MP0606L1200RJL	RL	UG	350	Lever	yes	MTR PED 200A 5J 06/06 LVR BPS RGLS
U5168-XTL-200	LG0816B1200RCT	RL	OH/UG	350	none	no	METER COMBO L/C 200A 8CKT W/SUBFEED LUGS
N/A	LG0408B1200RT	RL	O/U	350	none	no	TALON METER COMBO L/C 200A 8CKT W/SUBFEE
N/A	LG0606L1200R	RL	O/U	350	none	no	TALON METER COMBO LC 200A 6/6 CKT
N/A	LG0606L1200RA	RL	O/U	350	none	no	TALON METER COMBO LC 200A 6/6 CKT
U2692-XL	UA2B11-XG	RL	O/U	250	none	yes	100A 4J RGLS 2POS NO BPS MS OH VERTICAL
U2693-XL	UA3B11-XG	RL	O/U	250	none	yes	100A 4J RGLS 3POS NO BPS MS OH VERTICAL
U8212-XL	UA2411-XG	RL	O/U	250	none	no	100A 4J RGLS 2POS NO BPS MS OH/UG E.FED
U8213-XL	UA3411-XG	RL	O/U	250	none	no	100A 4J RGLS 3POS NO BPS MS OH/UG E.FED
U8214-XL	UA4411-XG	RL	O/U	250	none	no	100A 4J RGLS 4POS NO BPS MS OH/UG E.FED
U8215-XL	UA5411-XG	RL	O/U	250	none	no	100A 4J RGLS 5POS NO BPS MS OH/UG E.FEED
U8216-XL	UA6411-XG	RL	O/U	250	none	no	100A 4J RGLS 6POS NO BPS MS OH/UG E.FEED
U7362-DL	UA2411-DG	RL	O/U	250	none	no	100A 4J RGLS 2POS NO BPS MS OH END FEED
U7363-DL	UA3411-DG	RL	O/U	250	none	no	100A 4J RGLS 3POS NO BPS MS OH END FEED

① Studs included. Lugs must be purchased separately.

② Bangor Hydro Electric is in process of merging with Maine Public Service Co.Requirements are being reviewed - These items are in process for review approval.

③ PSNH allows customer owned meter mounting devices provided they meet UL requirements and are approved by the "Company's Meter and Service Supervisor" prior to installation. These devices meet requirements for the appropriate application. It is the customer's responsibility to select and install the appropriate device.

Utility Approval Reference

Pg.	Amps	Term	5th term	Pos	Talon Number	A NEU...	B UI...	C Nat. Grid	D UNITIL...	E NSTAR	F CMP...	G BHE	H MPSCO	I NHEC	J PSNH	K CVPS
17	100	4	avail	4	UA4411-DG			OH	O/U	O/U	OH	2	2		3	
17	100	4	avail	6	UA6411-DG			OH	O/U	O/U	OH	2	2		3	
18	100	5	9:00	2	484052-023NU	O/U	O/U				O/U		2			O/U
18	100	5	9:00	3	484053-023NU	O/U	O/U				O/U		2			O/U
18	100	5	9:00	4	484054-223NU	O/U	O/U				O/U		2			O/U
18	100	5	9:00	5	484055-223NU	O/U	O/U				O/U		2			O/U
18	100	5	9:00	6	484056-223NU	O/U	O/U				O/U		2			O/U
19	125	5	avail	3	UA3X11-ZG		UG				O/U		2			O/U
19	125	5	avail	4	UA4X11-ZG		UG				O/U		2			O/U
19	125	5	avail	5	UA5X11-ZG		UG				O/U		2			O/U
20	200	4	avail	2	UA2717-YG			O/U	O/U	O/U	O/U	O/U	O/U			O/U
20	200	4	avail	3	UA3717-YG			O/U	O/U	O/U	O/U	O/U	O/U			O/U
20	200	4	avail	4	UA4719-YG			O/U	O/U	O/U	O/U	O/U	O/U			O/U
20	200	4	avail	5	UA5719-KG			O/U	O/U	O/U	O/U	O/U	O/U			O/U
20	200	4	avail	6	UA6719-KG			O/U	O/U	O/U	O/U	O/U	O/U			O/U
20	100	4	avail	2	UA2311-0G			O/U	O/U		O/U	2	O/U			O/U
20	100	4	avail	3	UA3311-0G			O/U	O/U		O/U	2	O/U			O/U
20	100	4	avail	4	UA4311-0G			O/U	O/U		O/U	2	O/U			O/U
21	200	5	9:00	2	404052-023NU	O/U	O/U	O/U			O/U		O/U			O/U
21	200	5	9:00	3	404053-023NU	O/U	O/U	O/U			O/U		O/U			O/U
21	200	5	9:00	4	404054-223NU	O/U	O/U	O/U			O/U		O/U			O/U
21	200	5	9:00	5	404055-223NU	O/U	O/U	O/U			O/U		O/U			O/U
21	200	5	9:00	6	404056-223NU	O/U	O/U	O/U			O/U		O/U			O/U
21	200	7	6:00	2	404072-023NU	O/U	O/U	O/U			O/U	2	O/U			O/U
21	200	7	6:00	3	404073-023NU	O/U	O/U	O/U			O/U	2	O/U			O/U
21	200	7	6:00	4	404074-223NU	O/U	O/U	O/U			O/U	2	O/U			O/U
21	200	7	6:00	5	404075-223NU	O/U	O/U	O/U			O/U	2	O/U			O/U
21	200	7	6:00	6	404076-223NU	O/U	O/U	O/U			O/U	2	O/U			O/U
22	100/200	4	avail	2	UA2B2B-PG										3	

Key		
OH	=	Overhead feed only
UG	=	Underground feed only
O/U	=	Overhead (or) underground feed approved
P	=	Approval pending utility review/documentation

*Utility specifications vary. Consult utility prior to installation.

A) Northeast Utilities
B) United Illuminating
C) National Grid
D) UNITIL
E) NSTAR Electric
F) Central Maine Power
G) Bangor Hydro Electric
H) Maine Public Service Co.
I) New Hampshire Electric Coop
J) Public Service New Hampshire
K) Central Vermont Public Service

Utility specifications may vary. Consult utility prior to installation.

Utility Approval Reference

Milbank Number	Talon Number	Ring vs. RL	OH/ UG/ O/U	Lugs max kcmil	BPS	Brl Lock	Description
U7364-DL	UA4411-DG	RL	O/U	250	none	no	100A 4J RGLS 4POS NO BPS MS OH END FEED
U7365-DL	UA6411-DG	RL	O/U	250	none	no	100A 4J RGLS 6POS NO BPS MS OH END FEED
U2752-X-5T9	484052-023NU	RL	O/U	2/0	Lever-MQ	yes	125A 5J RGLS 2POS MD LVR MS OH/UG BL
U2753-X-5T9	484053-023NU	RL	O/U	2/0	Lever-MQ	yes	125A 5J RGLS 3POS MD LVR MS OH/UG BL
U2754-X-5T9	484054-223NU	RL	O/U	2/0	Lever-MQ	yes	125A 5J RGLS 4POS MD LVR MS OH/UG BL
U2755-X-5T9	484055-223NU	RL	O/U	2/0	Lever-MQ	yes	125A 5J RGLS 5POS MD LVR MS OH/UG BL
U2756-X-5T9	484056-223NU	RL	O/U	2/0	Lever-MQ	yes	125A 5J RGLS 6POS MD LVR MS OH/UG BL
U3763-XL	UA3X11-ZG	RL	O/U	350	1-Lever-MQ	no	100A 4J RGLS 4POS 2-NO BPS/1LVRBPS SKT
U3764-XL	UA4X11-ZG	RL	O/U	350	1-Lever-MQ	no	100A 4J RGLS 4POS 3-NO BPS/1LVRBPS SKT
U3765-XL	UA5X11-ZG	RL	O/U	350	1-Lever-MQ	no	100A 4J RGLS 4POS 4-NO BPS/1LVRBPS SKT
U1252-X-K1	UA2717-YG	RL	O/U	350	none	yes	200A 4J RGLS 2POS NO BPS MS OH/UG
U1253-X-K3	UA3717-YG	RL	O/U	350	none	yes	200A 4J RGLS 3POS NO BPS MS OH/UG ST ENC
U1254-X-K3	UA4719-YG	RL	O/U	350	none	yes	200A 4J RGLS 4POS NO BPS MS OH/UG ST ENC
U1255-X-K4	UA5719-KG	RL	O/U	350	none	yes	200A 4J RGLS 5POS NO BPS MS OH/UG ST ENC
U1256-X-K4	UA6719-KG	RL	O/U	350	none	yes	200A 4J RGLS 6POS NO BPS MS OH/UG ST ENC
n/a	UA2311-0G	RL	O/U	2/0	none	yes	100A 4J RGLS 2POS NO BPS MS OH/UG
n/a	UA3311-0G	RL	O/U	2/0	none	yes	100A 4J RGLS 3POS NO BPS MS OH/UG
n/a	UA4311-0G	RL	O/U	2/0	none	yes	100A 4J RGLS 4POS NO BPS MS OH/UG
U2872-XT-5T9	404052-023NU	RL	O/U	350	Lever	yes	200A 5J RGLS 2POS LVRBPS MS OH/UG B.L.
U2873-XT-5T9	404053-023NU	RL	O/U	350	Lever	yes	200A 5J RGLS 3POS LVRBPS MS OH/UG B.L.
U2874-XT-5T9	404054-223NU	RL	O/U	350	Lever	yes	200A 5J RGLS 4POS LVRBPS MS OH/UG B.L.
U2875-XT-5T9	404055-223NU	RL	O/U	350	Lever	yes	200A 5J RGLS 5POS LVRBPS MS OH/UG B.L.
U2876-XT-5T9	404056-223NU	RL	O/U	350	Lever	yes	200A 5J RGLS 6POS LVRBPS MS OH/UG B.L.
U2732-XT	404072-023NU	RL	O/U	350	Lever	yes	200A 7J RGLS 2POS LVRBPS MS OH/UG B.L.
U2733-XT	404073-023NU	RL	O/U	350	Lever	yes	200A 7J RGLS 3POS LVRBPS MS OH/UG B.L.
U2734-XT	404074-223NU	RL	O/U	350	Lever	yes	200A 7J RGLS 4POS LVRBPS MS OH/UG B.L.
U2735-XT	404075-223NU	RL	O/U	350	Lever	yes	200A 7J RGLS 5POS LVRBPS MS OH/UG B.L.
U2736-XT	404076-223NU	RL	O/U	350	Lever	yes	200A 7J RGLS 6POS LVRBPS MS OH/UG B.L.
U1780-O	UA2B2B-PG	Ring	UG	2/0	none	no	100A/200A 4J RING 2POS MS OH VERTICAL

① Studs included. Lugs must be purchased separately.

② Bangor Hydro Electric is in process of merging with Maine Public Service Co.Requirements are being reviewed - These items are in process for review/approval.

③ PSNH allows customer owned meter mounting devices provided they meet UL requirements and are approved by the "Company's Meter and Service Supervisor" prior to installation. These devices meet requirements for the appropriate application. It is the customer's responsibility to select and install the appropriate device.

Utility Approval Reference

Pg.	Amps	Term	5th term	Pos	Talon Number	A NEU...	B UI...	C Nat. Grid	D UNITIL...	E NSTAR	F CMP...	G BHE	H MPSCO	I NHEC	J PSNH	K CVPS
23	100	4	avail	1	UAB111-100			OH	O/U		O/U	O/U	2		3	O/U
23	125	4	avail	1	UAB111-XG		O/U		O/U		O/U	2	2		3	O/U
23	150	4	avail	1	UAB417-150			OH	OH		OH	OH	2		3	OH
23	200	4	avail	1	UAB417-200			OH	OH		OH	2	2		3	OH
23	200	4	avail	1	UAB417-XPG		O/U	O/U	OH		O/U	2	2		3	OH
23	200	4	avail	1	UAB877-200				UG		UG	UG	2		3	UG
23	200	4	avail	1	UAB877-PG		UG	UG	UG		UG	2	UG		3	UG
24	100	5	9:00	1	MM0202B1100RLC	OH	O/U				O/U		2		3	O/U
24	125	5	9:00	1	MM0202L1125RLC	OH	O/U				O/U		2		3	O/U
24	200	5	9:00	1	MM0202B1200RLC	O/U	O/U				O/U	O/U	2		3	O/U
24	200	5	9:00	1	MM0202L1200RLC	O/U	O/U				O/U	2	2		3	O/U
25	100	7	6:00	1	MM0303B3100RLC		O/U				O/U				3	O/U
25	100	7	6:00	1	MM0303L3100RLC		O/U				O/U				3	O/U
25	200	7	6:00	1	MM0303B3200RLC	O/U	O/U				O/U	2	2		3	O/U
26	320	4	9:00	1	LG0404B1400RLT	O/U	O/U		O/U	O/U	O/U	O/U	2		3	
26	320	4	9:00	1	LG0404L1400RLM	O/U	O/U		O/U	O/U	O/U	O/U	2		3	
27	200	7	na	1	LG0303CS3200R	OH										
27	200	7	na	1	LG0303CS3200RD	UG										
27	400	7	na	1	LG0303CS3400R	OH										
27	400	7	na	1	LG0303CS3400RD	UG										
28	400-800	na	na	na	LG123636CTS2	O/U			O/U	O/U	O/U				3	O/U
28	800-1200	na	na	na	LG124848CTS2				O/U	O/U	O/U				3	O/U
29	125	4	na	2	WTG2211	O/U		UG	UG	UG	UG	2	2		UG	
29	125	4	na	3	WTG3311	O/U		O/U	O/U	O/U	O/U	2	2		O/U	
29	125	4	na	4	WTG4411	O/U		O/U	O/U	O/U	O/U	2	2		O/U	
29	125	4	na	5	WTG4511	O/U		O/U	O/U	O/U	O/U	2	2		O/U	
29	125	4	na	6	WTG4611	O/U		O/U	O/U	O/U	O/U	2	2		O/U	
29	125	4	na	4	WTG5411	UG		O/U	O/U	O/U	O/U	2	2		O/U	
29	125	4	na	5	WTG6511	UG		O/U	O/U	O/U	O/U	2	2		O/U	

Key		
OH	=	Overhead feed only
UG	=	Underground feed only
O/U	=	Overhead (or) underground feed approved
P	=	Approval pending utility review/documentation

*Utility specifications vary. Consult utility prior to installation.

A) Northeast Utilities
B) United Illuminating
C) National Grid
D) UNITIL
E) NSTAR Electric
F) Central Maine Power
G) Bangor Hydro Electric
H) Maine Public Service Co.
I) New Hampshire Electric Coop
J) Public Service New Hampshire
K) Central Vermont Public Service

Utility specifications may vary. Consult utility prior to installation.

Utility Approval Reference

Milbank Number	Talon Number	Ring vs. RL	OH/ UG/ O/U	Lugs max kcmil	BPS	Brl Lock	Description
U3499-XL-100	UAB111-100	RL	O/U	2/0	none	no	MM 100A 4J 1BRKR NO BPS RGLS
U3499-XL	UAB111-XG	RL	O/U	2/0	none	no	METER MAIN 125A - Talon
U3990-XL-150	UAB417-150	RL	O/U	350	none	no	MM 150A 4J 1BRKR OH/UG NO BPS RGLS
U3990-XL-200	UAB417-200	RL	O/U	350	none	no	MM 200A 4J 1BRKR NO BPS RGLS
U3990-XL	UAB417-XPG	RL	O/U	350	none	no	UAB4 RESIDENTIAL ST 200A TROUGH
U3798-O-200	UAB877-200	RL	UG	350	none	no	MM 200A 1BRKR 4J UG-SW NO BPS RGLS
n/a	UAB877-PG	RL	UG	350	none	no	Talon 200A 4J RGLS NO BPS MTRMAIN UG
U3741-XL-100-BL	MM0202B1100RLC	RL	O/U	2/0	Lever-MQ	yes	MM 100A 5J 1BRKR OH/UG LVRBPS RGLS
n/a	MM0202L1125RLC	RL	O/U	2/0	Lever-MQ	yes	125A RGLS LVR BPS ML OH/UG
U5140-RXL-200-BL	MM0202B1200RLC	RL	O/U	350	Lever	yes	MM 200A 5J 1BRKR OH/UG LVRPBS RGLS
n/a	MM0202L1200RLC	RL	O/U	350	Lever	yes	200A RGLS LVR BPS ML OH/UG-XCEL/LIPA/NEU
U3771-XL-100-BL	MM0303B3100RLC	RL	O/U	2/0	Lever-MQ	yes	MM 100A 4J 1BRKR OH/UG LVRBPS RGLS
n/a	MM0303L3100RLC	RL	O/U	2/0	Lever-MQ	yes	MM 100A 4J 1BRKR OH/UG LVRBPS RGLS
U5750-RXL-200-BL	MM0303B3200RLC	RL	O/U	350	Lever	yes	200A RGLS LVR BPS 3P MTR MAIN OH/UG
n/a	LG0404B1400RLT	RL	O/U	600	Lever	yes	MM 400A 4J 2BRKR OH/UG LVR BPS RGLS
n/a	LG0404L1400RLM	RL	O/U	600	Lever	yes	M/M COMBO 400A 4 CKT TW MN PLUGIN
U5767-X-200-CB-BL	LG0303CS3200R	RL	OH	350	Lever	no	COLD SEQUENCE METER MAIN
U5787-O-200-CB	LG0303CS3200RD	RL	UG	350	Lever	no	COLD SEQUENCE METER MAIN
U5796-X-400-CB-BL	LG0303CS3400R	RL	OH	500	Lever	no	COLD SEQUENCE METER MAIN
U5799-O-400-CB-BL	LG0303CS3400RD	RL	UG	500	Lever	no	COLD SEQUENCE METER MAIN
S1855-O	LG123636CTS2	na	na	na	na	no	36 X 36 X 12 STEEL CT ENCLOSURE
S1856-O	LG124848CTS2	na	na	na	na	no	48 X 48 X 12 STEEL CT ENCLOSURE
n/a	WTG2211	Ring	O/U	300	none	yes	200A 4J 125A/2POS RING SIEMENSPAK NO BPS
n/a	WTG3311	Ring	O/U	600	none	yes	300A 4J 125A/3POS RING SIEMENSPAK NO BPS
n/a	WTG4411	Ring	O/U	750	none	yes	400A 4J 125A/4POS RING SIEMENSPAK NO BPS
n/a	WTG4511	Ring	O/U	750	none	yes	400A 4J 125A/5POS RING SIEMENSPAK NO BPS
n/a	WTG4611	Ring	O/U	750	none	yes	400A 4J 125A/6POS RING SIEMENSPAK NO BPS
n/a	WTG5411	Ring	O/U	750	none	yes	500A 4J 125A/4POS RING SIEMENSPAK NO BPS
n/a	WTG6511	Ring	O/U	600	none	yes	600A 4J 125A/5POS RING SIEMENSPAK NO BPS

① Studs included. Lugs must be purchased separately.

② Bangor Hydro Electric is in process of merging with Maine Public Service Co.Requirements are being reviewed - These items are in process for review/approval.

③ PSNH allows customer owned meter mounting devices provided they meet UL requirements and are approved by the "Company's Meter and Service Supervisor" prior to installation. These devices meet requirements for the appropriate application. It is the customer's responsibility to select and install the appropriate device.

Utility Approval Reference

Pg.	Amps	Term	5th term	Pos	Talon Number	A NEU...	B UI...	C Nat. Grid	D UNITIL...	E NSTAR	F CMP...	G BHE	H MPSCO	I NHEC	J PSNH	K CVPS
29	125	4	na	6	WTG6611	UG		O/U	O/U	O/U	O/U	2	2		O/U	
29	200	4	na	2	WTG4212	O/U		O/U	O/U	O/U	O/U	2	2		O/U	
29	200	4	na	3	WTG4312	O/U		O/U	O/U	O/U	O/U	2	2		O/U	
29	200	4	na	4	WTG6412	UG		O/U	O/U	O/U	O/U	2	2		O/U	
29	200	4	na	5	WTG6512	UG		O/U	O/U	O/U	O/U	2	2		O/U	
29	200	4	na	6	WTG6612	UG		O/U	O/U	O/U	O/U	2	2		O/U	
29	200	4	na	6	WTG8612	UG		O/U	O/U	O/U	O/U	2	2		O/U	
30	125	5	9:00	2	WTG2211RJ	O/U		UG	UG	UG	UG	2	2		UG	
30	125	5	9:00	3	WTG3311RJ	O/U		O/U	O/U	O/U	O/U	2	2		O/U	
30	125	5	9:00	4	WTG4411RJ	O/U		O/U	O/U	O/U	O/U	2	2		O/U	
30	125	5	9:00	5	WTG4511RJ	O/U		O/U	O/U	O/U	O/U	2	2		O/U	
30	125	5	9:00	6	WTG4611RJ	O/U		O/U	O/U	O/U	O/U	2	2		O/U	
30	125	5	9:00	5	WTG6511RJ	UG		O/U	O/U	O/U	O/U	2	2		O/U	
30	125	5	9:00	6	WTG6611RJ	UG		O/U	O/U	O/U	O/U	2	2		O/U	
30	200	5	9:00	2	WTG4212RJ	O/U		O/U	O/U	O/U	O/U	2	2		O/U	
30	200	5	9:00	3	WTG4312RJ	O/U		O/U	O/U	O/U	O/U	2	2		O/U	
30	200	5	9:00	4	WTG4412RJ	O/U		O/U	O/U	O/U	O/U	2	2		O/U	
30	200	5	9:00	4	WTG6412RJ	UG		O/U	O/U	O/U	O/U	2	2		O/U	
30	200	5	9:00	5	WTG6512RJ	UG		O/U	O/U	O/U	O/U	2	2		O/U	
30	200	5	9:00	6	WTG6612RJ	UG		O/U	O/U	O/U	O/U	2	2		O/U	
30	200	5	9:00	6	WTG8412RJ	UG		O/U	O/U	O/U	O/U	2	2		O/U	
31	200	5	9:00	2	WTGL4212RJ	O/U	O/U				O/U		2		3	
31	200	5	9:00	3	WTGL4312RJ	O/U	O/U				O/U		2		3	
31	200	5	9:00	4	WTGL4412RJ	O/U	O/U				O/U		2		3	
31	200	5	9:00	5	WTGL6512RJ	UG	O/U				O/U		2		3	
31	200	5	9:00	6	WTGL6612RJ	UG	O/U				O/U		2		3	
n/a	200	4	na	1	MC0606L1200RN			OH	OH		OH	2	2		3	
n/a	320	4	9:00	1	MC0816B1400RLTM	O/U	O/U		O/U		O/U	2	2		3	
n/a	320	4	avail	1	MM0404L1400SDL				UG	O/U	O/U	2	2		3	
n/a	320	4	avail	1	MC0816B1400SDL				UG		UG	O/U	2		3	

Key		
OH	=	Overhead feed only
UG	=	Underground feed only
O/U	=	Overhead (or) underground feed approved
P	=	Approval pending utility review/documentation

*Utility specifications vary. Consult utility prior to installation.

A) Northeast Utilities
B) United Illuminating
C) National Grid
D) UNITIL
E) NSTAR Electric
F) Central Maine Power
G) Bangor Hydro Electric
H) Maine Public Service Co.
I) New Hampshire Electric Coop
J) Public Service New Hampshire
K) Central Vermont Public Service

Utility specifications may vary. Consult utility prior to installation.

Utility Approval Reference

Milbank Number	Talon Number	Ring vs. RL	OH/ UG/ O/U	Lugs max kcmil	BPS	Brl Lock	Description
n/a	WTG6611	Ring	O/U	600	none	yes	600A 4J 125A/6POS RING SIEMENSPAK NO BPS
n/a	WTG4212	Ring	O/U	750	none	yes	400A 4J 200A/2POS RING SIEMENSPAK NO BPS
n/a	WTG4312	Ring	O/U	750	none	yes	400A 4J 200A/3POS RING SIEMENSPAK NO BPS
n/a	WTG6412	Ring	O/U	600	none	yes	600A 4J 200A/4POS RING SIEMENSPAK NO BPS
n/a	WTG6512	Ring	O/U	600	none	yes	600A 4J 200A/5POS RING SIEMENSPAK NO BPS
n/a	WTG6612	Ring	O/U	600	none	yes	600A 4J 200A/6POS RING SIEMENSPAK NO BPS
n/a	WTG8612	Ring	O/U	750	none	yes	800A 4J 200A/6POS RING SIEMENSPAK NO BPS
U2852-X	WTG2211RJ	RL	O/U	300	none	yes	200A 5J 125A/2POS RGLS SIEMENSPAK NO BPS
U2853-X	WTG3311RJ	RL	O/U	600	none	yes	300A 5J 125A/3POS RGLS SIEMENSPAK NO BPS
U2854-X	WTG4411RJ	RL	O/U	750	none	yes	400A 5J 125A/4POS RGLS SIEMENSPAK NO BPS
U2855-X	WTG4511RJ	RL	O/U	750	none	yes	400A 5J 125A/5POS RGLS SIEMENSPAK NO BPS
U2856-X	WTG4611RJ	RL	O/U	750	none	yes	400A 5J 125A/6POS RGLS SIEMENSPAK NO BPS
n/a	WTG6511RJ	RL	O/U	600	none	yes	600A 5J 125A/5POS RGLS SIEMENSPAK NO BPS
n/a	WTG6611RJ	RL	O/U	600	none	yes	600A 5J 125A/6POS RGLS SIEMENSPAK NO BPS
n/a	WTG4212RJ	RL	O/U	750	none	yes	400A 5J 200A/2POS RGLS SIEMENSPAK NO BPS
n/a	WTG4312RJ	RL	O/U	750	none	yes	400A 5J 200A/3POS RGLS SIEMENSPAK NO BPS
n/a	WTG4412RJ	RL	O/U	750	none	yes	400A 5J 200A/4POS RGLS SIEMENSPAK NO BPS
n/a	WTG6412RJ	RL	O/U	600	none	yes	600A 5J 200A/4POS RGLS SIEMENSPAK NO BPS
n/a	WTG6512RJ	RL	O/U	600	none	yes	600A 5J 200A/5POS RGLS SIEMENSPAK NO BPS
n/a	WTG6612RJ	RL	O/U	600	none	yes	600A 5J 200A/6POS RGLS SIEMENSPAK NO BPS
n/a	WTG8412RJ	RL	O/U	750	none	yes	800A 5J 200A/6POS RGLS SIEMENSPAK NO BPS
U4372-XT-5T9	WTGL4212RJ	RL	O/U	3/8-stud	Lever	yes	400A 5J 200A/2POS RGLS Talon PAK LVRBPS
U4373-XT-5T9	WTGL4312RJ	RL	O/U	3/8-stud	Lever	yes	400A 5J 200A/3POS RGLS Talon PAK LVRBPS
U4374-XT-5T9	WTGL4412RJ	RL	O/U	3/8-stud	Lever	yes	400A 5J 200A/4POS RGLS Talon PAK LVRBPS
U4375-XT-5T9	WTGL6512RJ	RL	O/U	3/8-stud	Lever	yes	600A 5J 200A/5POS RGLS Talon PAK LVRBPS
U4376-XT-5T9	WTGL6612RJ	RL	O/U	3/8-stud	Lever	yes	600A 5J 200A/6POS RGLS Talon PAK LVRBPS
U3784-RL	MC0606L1200RN	RL	OH	350	none	no	MTR COMBO, 06/06, MAIN LUG, RNGLS, OH ON
U5891-X-2/200-BL	MC0816B1400RLTM	RL	O/U	600	Lever	yes	400A 4J RGLS 8S/16C MTRCMB OH/UG SF PROV
n/a	MM0404L1400SDL	RL	UG	1/2-stud	Lever	no	MC 04/04 UG 400A LVR BYPASS
U4031-O-2/200	MC0816B1400SDL	RL	UG	1/2-stud	Lever	no	MC 08/16 UG 400A LVR BYPASS

① Studs included. Lugs must be purchased separately.

② Bangor Hydro Electric is in process of merging with Maine Public Service Co.Requirements are being reviewed - These items are in process for review/approval.

③ PSNH allows customer owned meter mounting devices provided they meet UL requirements and are approved by the "Company's Meter and Service Supervisor" prior to installation. These devices meet requirements for the appropriate application. It is the customer's responsibility to select and install the appropriate device.



Represented by:
The Yanow Companies
220 East Ashland Street
Brockton, MA 02302
Tel: 508-894-8900
Email: sales@bnyanow.com
www.bnyanow.com

Talon Meter Mounting Devices
Siemens Industry, Inc.
5400 Triangle Parkway
Norcross, GA 30092

Subject to change without prior notice
Order No.: RPSA-LG031-0417
All rights reserved
Printed in USA
© 2017 Siemens Industry, Inc.

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.