

MILBANK®
ENERGY AT WORK

MEG

Approved Products

Meter Equipment Group





Milbank Manufacturing is the premier manufacturer of metering equipment, enclosures, and Power Distribution & Controls in the United States.

Milbank Overview

Energy At Work Since 1927

Milbank designs and manufactures electrical solutions that move and manage power for the residential, commercial, industrial, utility and transportation sectors. With nearly a century of expertise in electrical engineering design and manufacturing, Milbank's portfolio includes metering equipment, enclosures and power distribution and controls equipment. Founded in 1927, Milbank is a family-owned, American manufacturer headquartered in Kansas City, Mo. For more information, please visit milbankworks.com.



Metering

Milbank has been a market leader in electrical metering equipment, setting the standard in quality, for 95 years and counting. There are hundreds of available configurations, including a range of sizes as well as various knockout, terminals and bypass options. Products also have a variety of selections for hubs, locks and connectors. Milbank has the socket you need with thousands of active products to meet your utility's requirements.



Enclosures

Milbank's line of enclosures include commercial junction boxes, panel mount enclosures, transformer cabinets, wireways and troughs. Enclosures are designed to meet or exceed industry standards. Each one is constructed with high-quality materials and built with superior craftsmanship. Each unit is engineered to protect controls and equipment from dust, dirt and other harmful elements, based on various NEMA ratings.



Power Distribution & Controls

Milbank doesn't just build empty enclosures. We design and deliver complete power distribution solutions. Our custom power distribution and control equipment is engineered and built to your exact specifications. Milbank systems are an attractive, secure, easy to install, and cost-effective option. These units can replace unsightly or insufficient strut and backboard structures when underground remote site power distribution and control equipment is required.

MILBANK® ENERGY AT WORK

MEG APPROVED

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Table of Contents

Air Conditioner Disconnects

30-60 Amps AC Disconnects 5
60 Amps AC Disconnect with 20 Amps GFCI Receptacle 6
Hot Tub Disconnects 7

Single Position Sockets

125 Amps, 4-5 Terminals, Ringless 8
200 Amps, 4-5 Terminals, Ringless 9
200 Amps, 4-5 Terminals, Lever Bypass, Ringless 10
200 Amps, 7 Terminals, Lever Bypass, Ringless 11
320 Amps, 4 Terminals, Lever Bypass, Ringless 12
320 Amps, 5 Terminals, Lever Bypass, Ringless 13
320 Amps, 7 Terminals, Lever Bypass, Ringless 14
600 Amps (480A Continuous), 7 Terminals, Bolt-in Bypass, Ringless 15-16

Meter Mains

60 Amps, 4-5 Terminals, Ringless, Disconnect Combo 17
100-200 Amps, 4 Terminals, Ringless 18
100-200 Amps, 4 Terminals, with Emergency Disconnect 19
100-200 Amps, 4 Terminals, with Load Center, Ringless 20
320 Amps, 4 Terminals, With and Without Load Center, Ringless 21
320 Amps, 4 Terminals, with Load Center, Ringless 22
400 Amps, 4-7 Terminals, Ringless 23

Multi-Position

100 Amps, 4 Terminals, Ringless 24
150 Amps, 4 Terminals, Ringless 25
200 Amps, 4 Terminals, Ringless 26
200 Amps, 5 Terminals, Ringless, Heavy Duty Lever Bypass 27
200 Amps, 7 Terminals, Ringless, Heavy Duty Lever Bypass 28

Multi-Position Meter Mains

125-200 Amps, 4 Terminals, Ringless 29-30

Temporary Power

125-200 Amps, 4 Terminals, Ringless 31

Pedestals

100–200 Amps, 4 Terminals, Meter Main with Load Center Pedestal 32-34

Miscellaneous

Replacement Parts and Accessories 35-39
Power Distribution & Controls 40-49
Reference Information 50-53


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MEG APPROVED

MILBANK ENERGY AT WORK

Catalog Number Logic

How Our Product Catalog Numbers are Derived

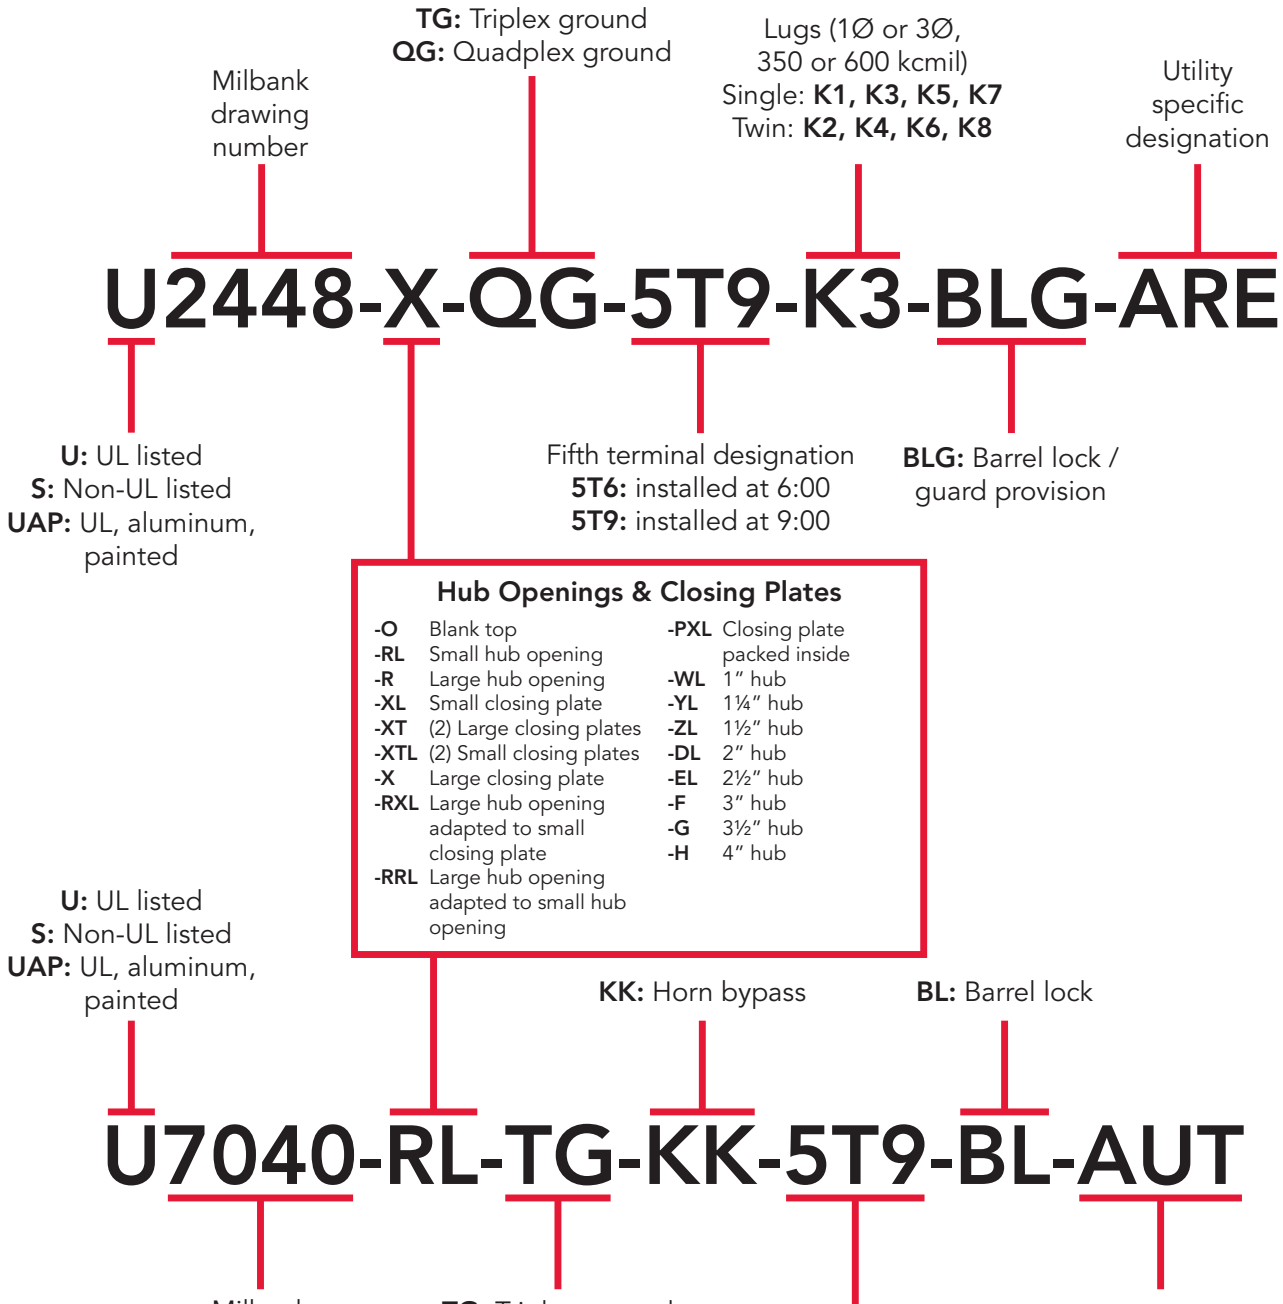

MILBANK
ENERGY AT WORK

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Air Conditioner Disconnects

30-60 Amps | Fusible and Non-Fusible



U3802



U3812



U3832

Milbank's air conditioner disconnect features a removable hinged cover for easy installation. Our compact design meets NEC wiring space requirements and also complies with NEC Article 440-14. To ensure safe working conditions, our disconnect pullers can be removed and reinstalled in the OFF position. Additionally, padlock provisions are included on the front cover. Like other Milbank products, our enclosure is constructed of G90U galvanized steel and electrostatically finished with an attractive, light gray baked powder coating.
Our epoxy/polyester resin blend provides a durable and fade-resistant finish.

30–60 Amps | Air Conditioner Disconnects | 1Ø 240V

Catalog Number	Amps	Type	Max H.P.	Weight (lbs.)	Line/Load Wire Range		Ground Wire Range CU/AL	Dimensions			Wire Rating	
					CU	AL		D"	W"	H"	CU °C	AL °C
U3802	60	Non-Fusible	10	3.25	#14-#2	#12-#2	#14-4	2 ½	5	7 ½	60°/75°	60°/75°
U3812	60	Non-Auto	10	3.25	#14-#2	#12-#2	#14-4	2 ½	5	7 ½	60°/75°	60°/75°
U3832	30	Fusible	3	2.5	#14-#3	#14-#3	#14-3	2 ⅛	5	7	60°/75°	60°/75°
U3862	60	Fusible	10	3.3	#14-#3	#14-#3	#14-3	2 ⅛	5	9	60°/75°	60°/75°

Notes

- UL-Listed as Enclosed Pullout Switch
- NEMA 3R
- Weather-resistant
- One-inch concentric knockouts

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MILBANK®
ENERGY AT WORK

Air Conditioner Disconnects

60 Amps | With 20 Amps GFCI Receptacle



U3822-20GWR

Specifications

- Meets NEC #210.63 requirements
- UL-Listed as Power Outlet
- NEMA 3R weather-resistant
- In-use cover*
- Duplex ground connector
- One-inch concentric knockouts
- 1Ø, 240V
- 60 Amps, non-fused
- 20 Amps GFCI receptacle
- Reset/test button
- Meets NEC #406.8 requirements

60 Amps | 1Ø, 240V | Air Conditioner Disconnect with GFCI Receptacle

Catalog Number	Type	Max H.P.	Weight (lbs.)	Line/Load Wire Range		Ground Wire Range CU/AL	Dimensions			Wire Rating	
				CU	AL		D"	W"	H"	CU °C	AL °C
U3822-20GWR	Non-Fusible	10	6	#14-#2	#12-#2	#14-4	4⅘	5¼	7⅗	60°/75°	60°/75°

Notes

- **Disconnect Pullouts:** To ensure the safest conditions, Milbank disconnect pullouts are reversible so they may be reinstalled in the OFF position.
- **Padlock Provision:** All units are designed with a padlock provision on the cover for security.

***In-Use Cover:** Cover is rated as an in-use cover (cover may be closed with cords plugged into receptacle).

MILBANK
ENERGY AT WORK

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Hot Tub Disconnects

NEMA 3R Enclosures | NEC 2020 Compliant



U4881-O-50GB



U4881-O-60GB

Specifications

- 240V ground fault protection
- UL-Listed, NEMA 3R weather-resistant
- Two-pole, 50 or 60 Amps GFCI breaker protection
- Compact size
- Three- or four-wire installation
- 1Ø, 120/240V
- Standard package of 12
- 100 Amps overall rating
- Easy to install

100 Amps | Hot Tub Disconnect or Sub Panel Breaker Enclosure | NEMA 3R

Catalog Number	Breaker Amps	Type	Weight (lbs.)	Line/Load Wire Range		Ground Wire Range CU/AL	Dimensions		
				CU	AL		D"	W"	H"
U4881-O-50GB	50	Breaker	8	#14-1/0	#14-1/0	#14-1/0	3 ¾	7½	8½
U4881-O-60GB	60	Breaker	8	#14-1/0	#14-1/0	#14-1/0	3 ¾	7½	8½

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


MILBANK® ENERGY AT WORK

Single Position Sockets

125 Amps | 4-5 Terminals | Ringless | 600V



U8435-XL-TG-HSP

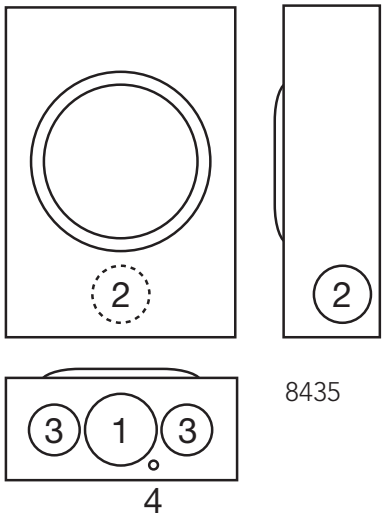

125 Amps | 4 Terminals | Ringless | C.P. Hub | Single Position | 1Ø3W

Catalog Number	Material	Service	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U8435-XL-TG-HSP	Steel	OH/UG	#6-2/0	#6-2/0	None	3 5/16	8	11 1/2	2	1 1/2	1 1/4	1/4
UAP8435-XL-TG-HSP	Aluminum	OH/UG	#6-2/0	#6-2/0	None	3 5/16	8	11 1/2	2	1 1/2	1 1/4	1/4

125 Amps | 5 Terminals | Ringless | C.P. Hub | Single Position | 1Ø3W

Catalog Number	Material	Service	Connectors CU/AL		Bypass	Dimensions			Knockouts			
			Line	Load		D"	W"	H"	1	2	3	4
U8435-XL-TG-5T-HSP	Steel	OH/UG	#6-2/0	#6-2/0	None	3 5/16	8	11 1/2	2	1 1/2	1 1/4	1/4
UAP8435-XL-TG-5T-HSP	Aluminum	OH/UG	#6-2/0	#6-2/0	None	3 5/16	8	11 1/2	2	1 1/2	1 1/4	1/4

Notes

- **Fifth Terminal:** For field-installed fifth terminal, order catalog number **5T8K2**.
- **Connectors:** Extruded aluminum connectors are tin-plated. Units are supplied with a triplex ground.
- **Hubs:** For proper hub selection, see hub suffix chart on Accessories page.

MILBANK ENERGY AT WORK

MEG APPROVED

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Single Position Sockets

200 Amps | 4-5 Terminals | Ringless | 600V



U7021-RL-TG-HSP




U3850-XL-TG-HSP-PL





U1980-O-HSP



U7040-O-TG-HSP







200 Amps | 4 Terminals | Ringless | No Bypass | Single Position | 1Ø3W

Catalog Number	Material	Service	Hub	Connectors CU/AL		Dimensions			Knockouts				
				Line	Load	D"	W"	H"	1	2	3	4	5
U7021-RL-TG-HSP	Steel	OH	H.O.	#6-350	#6-350	4⅛	8	15½	2½	¼,½	¼	—	—
UAP7021-RL-TG-HSP	Aluminum	OH	H.O.	#6-350	#6-350	4⅛	8	15½	2½	¼,½	¼	—	—
U3850-XL-TG-HSP-PL	Steel	OH/UG	C.P.	#6-350	#6-350	4½	13	15¼	3	2½	1½	¼,½	¼
U7040-XL-TG-HSP	Steel	OH/UG	C.P.	#6-350	#6-350	4⅛	11	14⁹⁄₁₆	2½	¼,½	¼	—	—
UAP7040-XL-TG-HSP	Aluminum	OH/UG	C.P.	#6-350	#6-350	4⅛	11	15½	2½	¼,½	¼	—	—
U7040-O-TG-HSP	Steel	UG	Blank	#6-350	#6-350	4⅛	11	14⁹⁄₁₆	2½	¼,½	¼	—	—
UAP7040-O-TG-HSP	Aluminum	UG	Blank	#6-350	#6-350	4⅛	11	15½	2½	¼,½	¼	—	—
U1980-O-HSP	Steel	UG	Blank	#6-350	#6-350	4½	13	15¼	3	2½	1½	¼,½	¼

200 Amps | 5 Terminals | Ringless | No Bypass | Single Position | 1Ø3W

Catalog Number	Material	Service	Hub	Connectors CU/AL		Dimensions			Knockouts				
				Line	Load	D"	W"	H"	1	2	3	4	5
U7040-XL-TG-5T-HSP	Steel	OH/UG	C.P.	#6-350	#6-350	4⅛	11	14⁹⁄₁₆	2½	¼,½	¼	—	—
UAP7040-XL-TG-5T-HSP	Aluminum	OH/UG	C.P.	#6-350	#6-350	4⅛	11	15½	2½	¼,½	¼	—	—
U1980-O-5T-HSP	Steel	UG	Blank	#6-350	#6-350	4½	13	15¼	3	2½	1½	¼,½	¼

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Fifth Terminal:** For field-installed fifth terminal, order catalog number **K5T**.
- **Connectors:** Extruded aluminum connectors are tin-plated. Units are supplied with a triplex ground.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MEG APPROVED

MILBANK ENERGY AT WORK

Single Position Lever Bypass

200 Amps | 4-5 Terminals | Lever Bypass | Ringless | 600V




U9801-X-QG-HSP





U9550-RRL-QG-HSP



U9551-X-QG-HSP







200 Amps | Ringless | Lever Bypass | Single Position | 1Ø3W

Catalog Number	Material	Terminals	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
						D"	W"	H"	1	2	3	4
U9801-X-QG-HSP	Steel	4	OH/UG	C.P.	#6-350	4⅞	13	19	3	2½	¼,½	¼
U9550-RRL-QG-HSP	Steel	5	OH	H.O.	#6-350	4⅞	10	18½	3	2½	¼,½	¼
U9551-X-QG-HSP	Steel	5	OH/UG	C.P.	#6-350	4⅞	13	19	3	2½	¼,½	¼
UAP9551-X-QG-HSP	Aluminum	5	OH/UG	C.P.	#6-350	4⅞	13	19	3	2½	¼,½	¼
U3296-X-HSP	Steel	5	OH/UG	C.P.	⅜"x16 Studs	4⅞	13	28¼	3	¼,½	¼	—
UAP3296-X-HSP	Aluminum	5	OH/UG	C.P.	⅜"x16 Studs	4⅞	13	28¼	3	¼,½	¼	—

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Lever Bypass:** The lever supplies clamping action and operates bypass device.
- **Fifth Terminal:** For field-installed fifth terminal on the **U9801**, order **K3866**.
- **Connectors:** Extruded aluminum connectors are tin-plated. For the **U3296-X** stud-type unit, order connector kits separately. Order two kits to cover both line and load side: **K1539** (350 kcmil) or **K1540** (600 kcmil). See Accessories page.

MILBANK ENERGY AT WORK

MEG APPROVED

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Single Position Lever Bypass

200 Amps | 7 Terminals | Lever Bypass | Ringless | 600V




U9700-RRL-QG-HSP




U9701-X-QG-HSP




U3306-X-HSP



9700



9701



3306

200 Amps | 7 Terminals | Ringless | Lever Bypass | Single Position | 3Ø4W

Catalog Number	Material	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U9700-RRL-QG-HSP	Steel	OH	H.O.	#6-350	4⅞	10	18½	3	2½	¾	¼,½
UAP9700-RRL-QG-HSP	Aluminum	OH	H.O.	#6-350	4⅞	10	18½	3	2½	¾	¼,½
U9701-X-QG-HSP	Steel	OH/UG	C.P.	#6-350	4⅞	13	19	3	2½	¼,½	¼
UAP9701-X-QG-HSP	Aluminum	OH/UG	C.P.	#6-350	4⅞	13	19	3	2½	¼,½	¼
U3306-X-HSP	Steel	OH/UG	C.P.	⅜" x 16 Studs	4⅞	13	28¼	3	¼,½	¼	—
UAP3306-X-HSP	Aluminum	OH/UG	C.P.	⅜" x 16 Studs	4⅞	13	28¼	3	¼,½	¼	—

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Lever Bypass:** The lever supplies clamping action and operates bypass device.
- **Isolated Neutral:** For field-installed isolated neutral for **U9701**, order **K1047.**
- **Connectors:** Extruded aluminum connectors are tin-plated. For the **U3306** stud-type unit, order connector kits separately. Order two kits to cover both line and load side: **K3082** (350 kcmil) or **K3441** (600 kcmil). See Accessories page.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MEG APPROVED

MILBANK ENERGY AT WORK

Single Position Lever Bypass

320 Amps | 4 Terminals | Lever Bypass | Ringless | 600V



U4363-X-HSP



U6273-X-HSP



U6272-X-HSP




U1129-O-K3L-K2L-HSP




U1797-O-K3L-K2L-HSP




U2124-O-HSP




4363

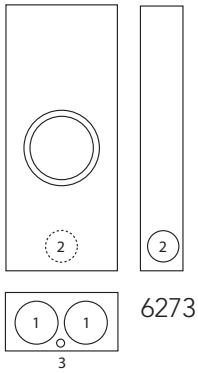


6273

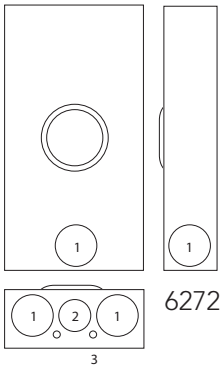


6272

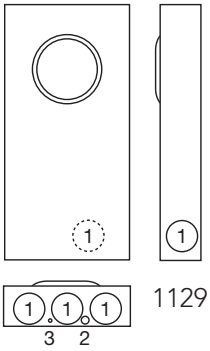

1129

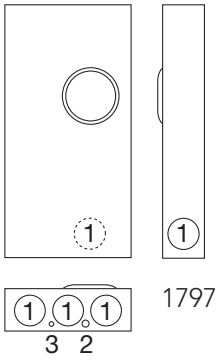

1797

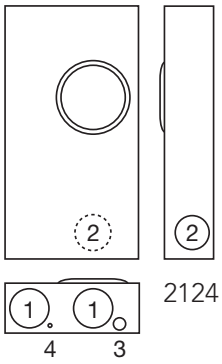

2124

320 Amps | 4 Terminals | Ringless | Lever Bypass | Single Position | 1Ø3W

Catalog Number	Material	Service	Hub	Connectors CU/AL		Dimensions			Knockouts			
				Line	Load	D"	W"	H"	1	2	3	4
U4363-X-HSP	Steel	OH	C.P.	⅜" x 16 Studs	⅜" x 16 Studs	4 27/32	13	28¼	3	½	¼	—
U6273-X-HSP	Steel	OH	C.P.	⅜" x 16 Studs	⅜" x 16 Studs	6	13	28¼	4	3	—	—
U6272-X-HSP	Steel	OH/UG	C.P.	⅜" x 16 Studs	⅜" x 16 Studs	6	16	28¼	4	3	—	—
UAP6272-X-HSP	Aluminum	OH/UG	C.P.	⅜" x 16 Studs	⅜" x 16 Studs	6	16	28¼	4	3	—	—
U1129-O-K3L-K2L-HSP	Steel	UG	Blank	(1) #4-600 or (2) 1/0-250	(2) #6-350	4⅞	15	30	3	½	¼	—
U1797-O-K3L-K2L-HSP	Steel	UG	Blank	(1) #4-600 or (2) 1/0-250	(2) #6-350	4 27/32	15	30	3	½	¼	—
U2124-O-HSP	Steel	UG	Blank	⅜" x 16 Studs	⅜" x 16 Studs	5¾	16	32	4	3½	1	¼
UAP2124-O-HSP	Aluminum	UG	Blank	⅜" x 16 Studs	⅜" x 16 Studs	5¾	16	32	4	3½	1	¼

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Lever Bypass:** The lever supplies clamping action and operates bypass device.
- **Connectors:** Extruded aluminum connectors are tin-plated. Order two connector kits to cover both line and load. See accessories page.


MILBANK ENERGY AT WORK

MEG APPROVED


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Lever Bypass Single Position

320 Amps | 5 Terminals | Lever Bypass | Ringless | 600V

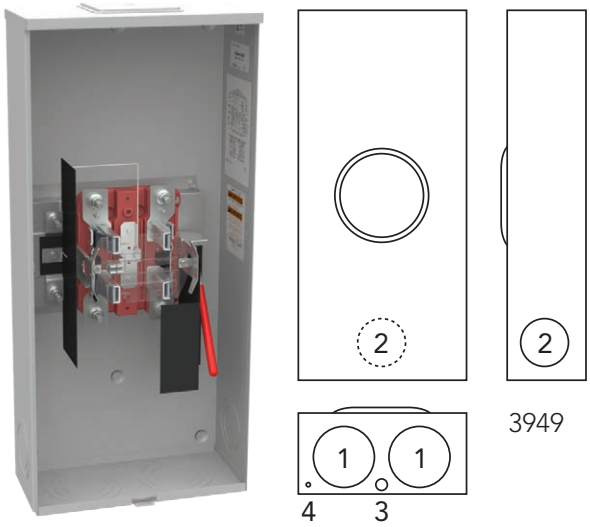

U3949-X-HSP

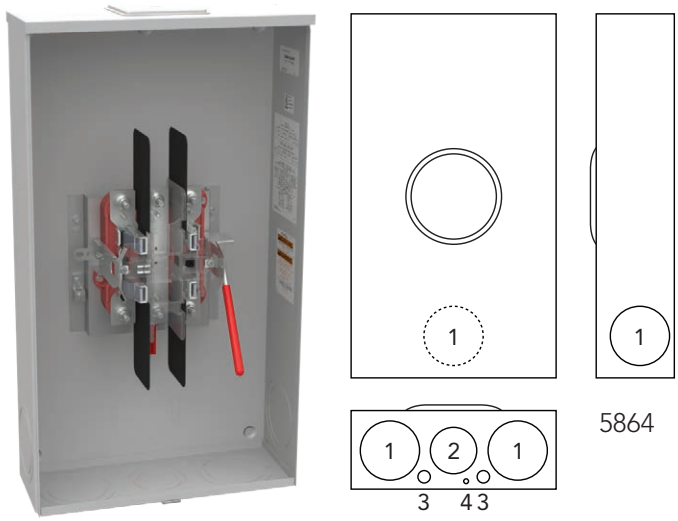

U5864-X-HSP

320 Amps | 5 Terminals | Ringless | Lever Bypass | Single Position | 1Ø3W

Catalog Number	Material	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U3949-X-HSP	Steel	OH	C.P.	⅜" x 16 Studs	6	13	28¼	4	3	¼,½	¼
UAP3949-X-HSP	Aluminum	OH	C.P.	⅜" x 16 Studs	6	13	28¼	4	3	¼,½	¼
U5864-X-HSP	Steel	OH/UG	C.P.	⅜" x 16 Studs	6	16	28¼	4	3	¼,½	¼
UAP5864-X-HSP	Aluminum	OH/UG	C.P.	⅜" x 16 Studs	6	16	28¼	4	3	¼,½	¼
U3313-X-HSP	Steel	OH/UG	C.P.	⅜" x 16 Studs	5¾	16	38¾	4	3½	¼,½	¼
UAP3313-X-HSP	Aluminum	OH/UG	C.P.	⅜" x 16 Studs	5¾	16	38¾	4	3½	¼,½	¼


Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Lever Bypass:** The lever supplies clamping action and operates bypass device.
- **Connectors:** Extruded aluminum connectors are tin-plated. Order two connector kits to cover both line and load. See accessories page.
- **U5864:** The **U5864** will not accept twin lugs (the **K1540L** connector will accept two conductors 1/0–250 max).


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Lever Bypass Single Position

320 Amps | 7 Terminals | Lever Bypass | Ringless | 600V

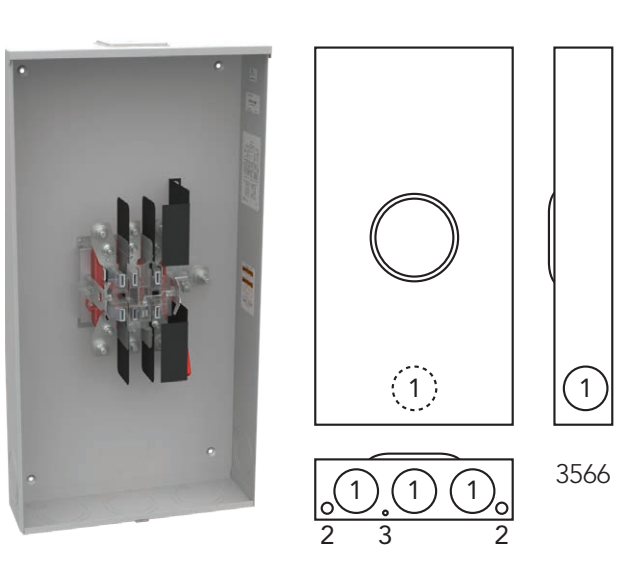

U3566-X-HSP

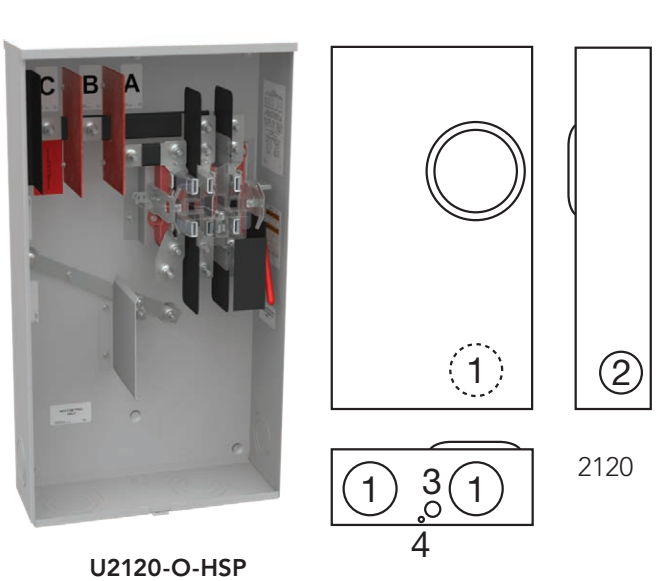

U2120-O-HSP

320 Amps | 7 Terminal | Ringless | Lever Bypass | Single Position | 3Ø4W

Catalog Number	Material	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U3566-X-HSP	Steel	OH/UG	C.P.	½" x 13 Studs	6	20¼	38¾	4	3	¼,½	¼
UAP3566-X-HSP	Aluminum	OH/UG	C.P.	½" x 13 Studs	6	20¼	38¾	4	3	¼,½	¼
U2120-O-HSP	Steel	UG	Blank	⅜" x 16 Studs	6½	17¾	31¾	4	3	1	¼

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Lever Bypass:** The lever supplies clamping action and operates bypass device.
- **Connectors:** Extruded aluminum connectors are tin-plated. Order two connector kits to cover both line and load. See accessories page.
- **U3566:** The **U3566** will accept an isolated neutral kit **K6024.**
- **U3566** and **UAP3566** 1/2" stud lug kits **K4223** two position #6-350 kcmil or **K4200** for a single wire #4-600 or (2) 1/0-250 kcmil.

MILBANK ENERGY AT WORK

MEG APPROVED


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Bolt-In Bypass Single Position

600 Amps (480A Cont.) | 7 Terminals | Ringless | FPL Approved Only



U4667-X-8528

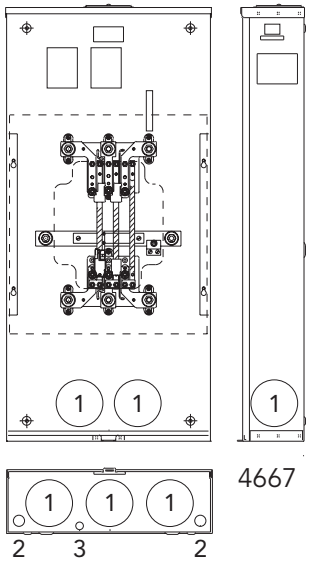

4667

600 Amps (480A Cont.) | 7 Terminals | Ringless | Bolt-In Bypass | Single Position | FPL Only

Catalog Number	Approved Utilities	Material	Hub	Ground Lug	Dimensions			Knockouts		
					D"	W"	H"	1	2	3
U4667-X-8528	FP&L	Steel	C.P.	1/0-2/0	6	20¼	43	4	½,¾	¼
UA4667-X-8529	FP&L	Aluminum	C.P.	1/0-2/0	6	20¼	43	4	½,¾	¼
U4667-XT-9526	FP&L	Steel	(2) C.P.	1/0-2/0	6	20¼	43	4	½,¾	¼
UA4667-XT-9527	FP&L	Aluminum	(2) C.P.	1/0-2/0	6	20¼	43	4	½,¾	¼

Notes

- **Hubs:** The **-X** unit is supplied with a large closing plate in the top. The **-XT** units are supplied with two large closing plates in the top. For proper hub selection, see the hub suffix chart on the accessories page.
- **Connectors:** The 4-terminal units require a total of five connectors. The 7-terminal units require a total of eight connectors. The 7-terminal units are supplied with two ground lugs. Order line and load connectors as extra. See chart on next page for ordering information.
- **Bolt-In Bypass:** These units offer a provision for a utility-supplied bolt-in bypass.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MEG APPROVED


MILBANK ENERGY AT WORK

Bolt-In Bypass Single Position

Connector Kits



Z703916-AC




Z703918-AC




Z703919-AC

Bolt-on type lugs for Milbank stud-type meter mounting devices are made of 6061-T6 aluminum to provide high strength and conductivity. All lugs are tin-plated to ensure low contact resistance and reduce corrosion. Allen or hex head pressure screws are furnished to provide conductor spread for maximum binding action with lug.



Z703921-AC



Z705420-AC



Z705456-AC



Z708145-AC

4 Terminals, 1Ø3W Connector Kits

Catalog Number	Wire Range	Type	Wire Entry
Z703917-AC	#6-350	Twin	Side
Z704693-AC	#2-500	Twin	Side
Z705456-AC	#6-350	Twin	Rear
Z705420-AC	#6-350	Quad	Rear

7 Terminals, 3Ø4W Connector Kits

Catalog Number	Wire Range	Type	Wire Entry
Z703916-AC	3/0-800	Single	Side
Z703921-AC	3/0-800	Single	Front
Z703918-AC	#4-350	Twin	Front
Z703919-AC	#6-350	Twin	Side
Z704693-AC	#2-500	Twin	Side
Z704694-AC	#4-500	Twin	Front
Z708145-AC	#6-250	Triple	Front

MILBANK® ENERGY AT WORK

MEG APPROVED


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Fused and Non-Fused Meter Disconnect Combo

60 Amps | 4-5 Terminals | Ringless | 120/240V



U6419

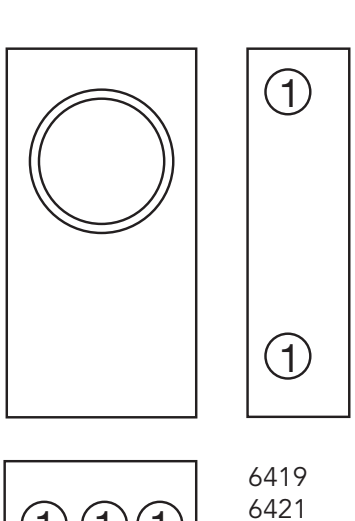

6419
6421
6542



U6542

60 Amps | 4 Terminals | Non-Fused | Ringless | Single Position | 1Ø3W

Catalog Number	Material	Service	Hub	Connectors CU/AL	Bypass	Dimensions			Knockouts	
						D"	W"	H"	1	2
U6419-XL-HSP	Steel	OH	C.P.	#6-350	None	4 19/32	8	16	1 1/4	1/4
UAP6419-XL-HSP	Aluminum	OH	C.P.	#6-350	None	4 19/32	8	16	1 1/4	1/4
USSP6419-O-HSP	Stainless Steel	OH/UG	Blank	#6-350	None	4 19/32	8	16	1 1/4	1/4
U6421-XL-HSP	Steel	OH/UG	C.P.	#6-350	Lever	4 27/32	10	19 3/8	1 1/4	1/4
UAP6421-O-HSP	Aluminum	OH/UG	Blank	#6-350	Lever	4 27/32	10	19 3/8	1 1/4	1/4
USSP6421-O-HSP	Stainless Steel	OH/UG	Blank	#6-350	Lever	4 27/32	10	19 3/8	1 1/4	1/4

60 Amps | 5 Terminals | Fused | Ringless | Lever Bypass | Single Position | 1Ø3W

Catalog Number	Material	Service	Hub	Connectors CU/AL	Dimensions			Knockouts		
					D"	W"	H"	1	2	3
U6542-RL-5T9-HSP	Steel	OH/UG	H.O.	#6-350	4 7/8	10	23 5/8	3	1 1/4	1/4
UAP6542-RL-5T9-HSP	Aluminum	OH/UG	H.O.	#6-350	4 7/8	10	23 5/8	3	1 1/4	1/4
USSP6542-O-5T9-HSP	Stainless Steel	OH/UG	Blank	#6-350	4 7/8	10	23 5/8	3	1 1/4	1/4


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MEG APPROVED

MILBANK ENERGY AT WORK

Meter Main

100-200 Amps | 4 Terminals | Ringless | 120/240V | NEC 2020 Compliant

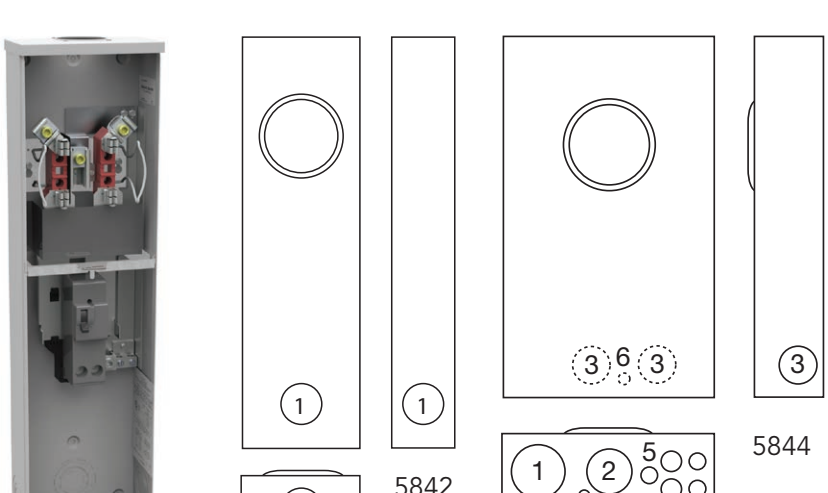

U5842-RL-150-HSP

100-200 Amps | 4 Terminals | Ringless | Meter Main | 1Ø3W

Catalog Number	Breaker Amps	Material	Service	Connectors CU/AL - Line		Dimensions			Knockouts					
				Line	Load	D"	W"	H"	1	2	3	4	5	6
U5842-RL-100-HSP	100	Steel	OH	#6-350	CB	4½	8	30	2	1¼	¼	—	—	—
U5844-RL-100-HSP*	100	Steel	OH/UG	#6-350	CB	4½	14	30	3	2½	2	1	¾	½
UAP5844-RL-100-HSP*	100	Aluminum	OH/UG	#6-350	CB	4½	14	30	3	2½	2	1	¾	½
U5842-RL-150-HSP	150	Steel	OH	#6-350	CB	4½	8	30	2	1¼	¼	—	—	—
U5844-RL-150-HSP*	150	Steel	OH/UG	#6-350	CB	4½	14	30	3	2½	2	1	¾	½
UAP5844-RL-150-HSP*	150	Aluminum	OH/UG	#6-350	CB	4½	14	30	3	2½	2	1	¾	½
U5842-RL-200-HSP	200	Steel	OH	#6-350	CB	4½	8	30	2	1¼	¼	—	—	—
U5844-RL-200-HSP*	200	Steel	OH/UG	#6-350	CB	4½	14	30	3	2½	2	1	¾	½
UAP5844-RL-200-HSP*	200	Aluminum	OH/UG	#6-350	CB	4½	14	30	3	2½	2	1	¾	½

Notes

- **Breakers:** 22KAIC main breakers factory-installed.
- **Fifth Terminal:** For field-installed fifth terminal, order K5T.

*Wireway: Provided with underground pull section wireway with removable cover.


MILBANK ENERGY AT WORK

MEG APPROVED


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Meter Mains with Emergency Disconnect

UL Listed | 100-200 Amps | NEC 2020 Compliant

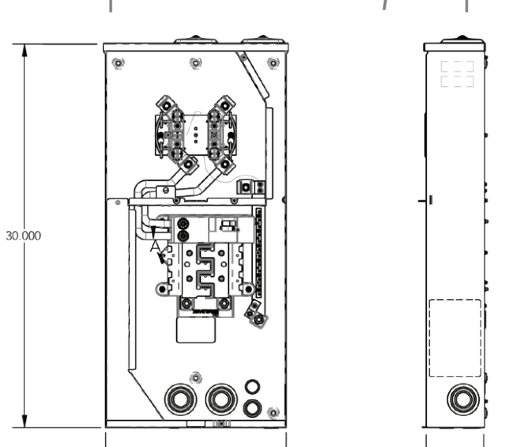

U5168 (-XTL Shown)

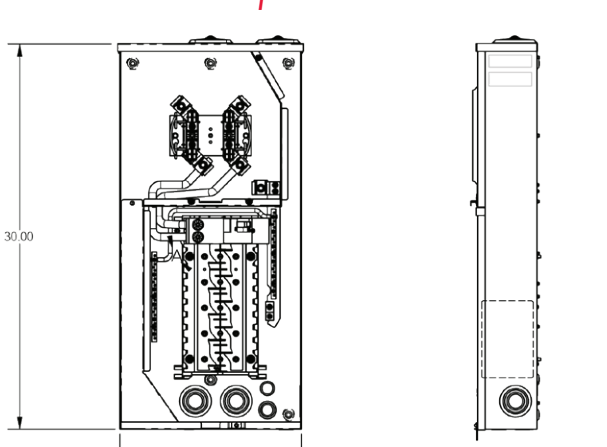

U5268 (-XTL Shown)

100-200 Amps | 4 Terminals | Meter Mains | Horn Bypass | Ringless | 1Ø3W

Catalog Number	Breaker Amps	Circuits	Service	Hub	Connectors CU/AL - Line	Dimensions		
						D"	W"	H"
U5168-XL-100-HSP	100	10	OH/UG	C.P.	#6-350	4½	14⅛	32
U5168-XTL-100-HSP	100	10	OH/UG	C.P.	#6-350	4½	14⅛	32
U5168-XL-125-HSP	125	8	OH/UG	C.P.	#6-350	4½	14⅛	32
U5168-XTL-125-HSP	125	8	OH/UG	C.P.	#6-350	4½	14⅛	32
U5168-XL-150-HSP	150	8	OH/UG	C.P.	#6-350	4½	14⅛	32
U5168-XTL-150-HSP	150	8	OH/UG	C.P.	#6-350	4½	14⅛	32
U5168-XL-200-HSP	200	20	OH/UG	C.P.	#6-350	4½	14⅛	32
U5168-XTL-200-HSP	200	20	OH/UG	C.P.	#6-350	4½	14⅛	32
U5268-XL-150-HSP	150	20	OH/UG	C.P.	#6-350	4½	14⅛	30
U5268-XTL-150-HSP	150	20	OH/UG	C.P.	#6-350	4½	14⅛	30
U5268-XL-200-HSP	200	20	OH/UG	C.P.	#6-350	4½	14⅛	30
U5268-XTL-200-HSP	200	20	OH/UG	C.P.	#6-350	4½	14⅛	30

Notes

- **Fifth Terminal:** For field-installable fifth terminal, order **K5T**.
- **Breakers:** Rated 22K AIC with **QN2200RH** main installed for **U5168**.
- **Sub Feed Lugs:** #6-350 sub feed lugs provided on 8 circuit interior. **Not available on 20 circuit interior.** Order K3701 if needed.
- **XTL-:** Two small hub closing plates.

Branch Breaker Chart

AIC Rating	Amps	Siemens	Cutler-Hammer	GE	Square D
10K	150-200	QNR	—	—	—
	≤ 125	QP	HQP, BR	THQL, THQL-GF (150A Only)	Homeline
22K	150-200	QNRH	—	—	—
	≤ 125	QPH	—	—	—


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MEG APPROVED

Meter Main with Load Center

100-200 Amps | 4 Terminals | Ringless | 120/240V | NEC 2020 Compliant



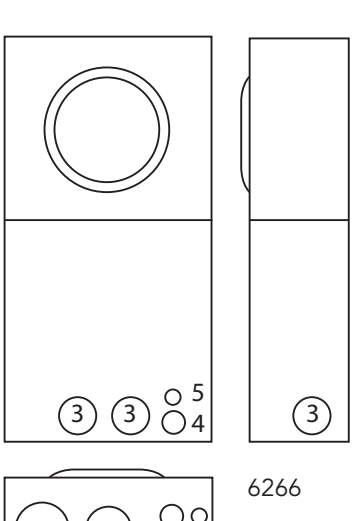

U6266-XTL-100-HSP

100-200 Amps | 4 Terminals | Ringless | OH/UG | Meter Main | 1Ø3W

Catalog Number	Breaker Amps	Material	Hub	Connectors CU/AL - Line	Dimensions			Knockouts					
					D"	W"	H"	1	2	3	4	5	6
U6266-XTL-100-HSP	100	Steel	(2) C.P.	#6-350	4½	14⅛	30	3	2½	2	½	¾	½
U6266-XTL-150-HSP	150	Steel	(2) C.P.	#6-350	4½	14⅛	30	3	2½	2	½	¾	½
U6266-XTL-200-HSP	200	Steel	(2) C.P.	#6-350	4½	14⅛	30	3	2½	2	½	¾	½

Notes

- **Hubs**: Supplied with two closing plates packed inside. Order hubs as a separate item. For proper hub selection, refer to the hub suffix chart on the accessories page.
- **Fifth Terminal:** For field-installed fifth terminal, order K5T.
- **Breakers:** 22KAIC main breakers factory-installed.
- **Main Breaker:** Also available with 100-150 Amps breakers, consult factory.
- **Sub Feed Lugs:** #6-350 sub-feed lugs provided on 10 circuit interior.
- See Accessories page for generator interlock kits.

Branch Breaker Chart

AIC Rating	Amps	Siemens	Cutler-Hammer	General Electric	Square D
10k	150-200	QNR	BR (150A only)	—	—
	≤ 125	QP	HQP, BR	THQL, THQL-GF	Homeline
22k	150-200	QNRH	—	—	—
	≤ 125	QPH	—	—	—

MILBANK ENERGY AT WORK

MEG APPROVED


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Meter Main and Meter Main w/ Load Center 2 1

320 Amps | 4 Terminals | Ringless | 120/240V | NEC 2020 Compliant



U6587

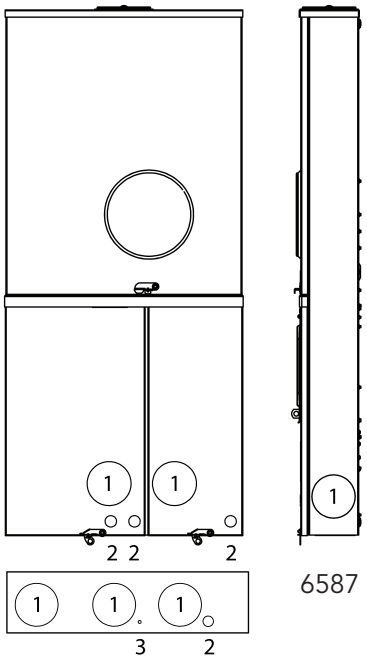

320 Amps | 4 Terminals | Ringless | Meter Main | 1Ø3W | Lever Bypass

Catalog Number	Material	Service	Hub	Connectors CU/AL - Line		Dimensions			Knockouts		
				Line	Load	D"	W"	H"	1	2	3
U6587-X-2/150-HSP	Steel	OH/UG	C.P.	⅜" x 16 Studs	CB	6	15	42½	4	2½	5⁄16
U6587-X-2/200-HSP	Steel	OH/UG	C.P.	⅜" x 16 Studs	CB	6	15	42½	4	2½	5⁄16

Notes

- **Short Circuit Current Withstand Rating:** 22K AIC standard.
- **Breakers:** Units come with main breakers.
- **Fifth Terminal:** For field-mounted fifth terminal order catalog number K3865.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MEG APPROVED

MILBANK ENERGY AT WORK

Meter Main With and Without Load Center


320 Amps | 4-5 Terminals | Ringless | 120/240V | NEC 2020 Compliant




U6601-X-2/200-5T9-HSP



UAP6602-X-2/200-5T9-MLK-HSP



6601



6602

320 Amps | 5 Terminals | Ringless | Meter Main | 1Ø3W | Lever Bypass

Catalog Number	Material	Service	Hub	Connectors CU/AL - Line		Dimensions			Knockouts			
				Line	Load	D"	W"	H"	1	2	3	4
U6601-X-2/200-5T9-HSP	Steel	OH/UG	C.P.	⅜" x 16 Studs	CB	6	34¼	35	4	2½	½	5/16
UAP6601-X-2/200-5T9-HSP	Aluminum	OH/UG	C.P.	⅜" x 16 Studs	CB	6	34¼	35	4	2½	½	5/16

320 Amps | 4-5 Terminals | Ringless | Meter Main w/ Load Center | 1Ø3W | Lever Bypass

Catalog Number	Material	Service	Hub	Connectors CU/AL - Line		Dimensions			Knockouts				
				Line	Load	D"	W"	H"	1	2	3	4	5
U6602-X-2/200-MLK-HSP	Steel	OH/UG	C.P.	⅜" x 16 Studs	CB	6	38	41	4	2½	¾	1	½
UAP6602-X-2/200-5T9-MLK-HSP	Aluminum	OH/UG	C.P.	⅜" x 16 Studs	CB	6	38	41	4	2½	¾	1	½

Notes

- **Short Circuit Current Withstand Rating:** 22K AIC standard.
- **Breakers:** Units come with main breakers.
- **Fifth Terminal:** For field-mounted fifth terminal order catalog number K3865.
- **U6602** and **UAP6602** have 8 additional circuits.
- **–MLK:** Feed through lug kit factory installed.

MILBANK ENERGY AT WORK


MEG APPROVED

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Meter Socket with Main

400 Amps | 4-7 Terminals | Ringless | 480V | NEC 2020 Compliant



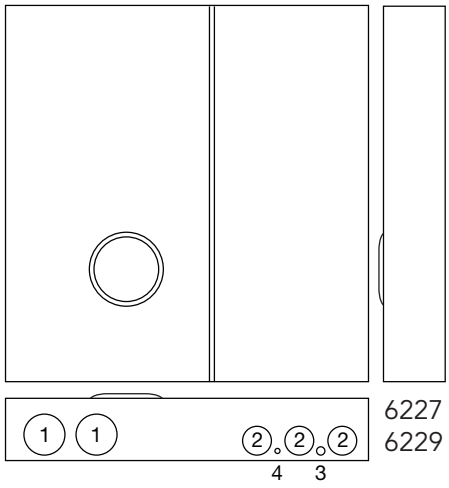

U6229-X-400-K7L

400 Amps Meter Main | 4 Terminals | 1Ø3W | Ringless | 480V

Catalog Number	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
			Line	D"	W"	H"	1	2	3	4
U6227-X-400-K3L-HSP	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼

400 Amps Meter Main | 7 Terminals | 3Ø4W | 480V

Catalog Number	Service	Hub	Connectors CU/AL	Dimensions			Knockouts			
			Line	D"	W"	H"	1	2	3	4
U6229-X-400-K7L-HSP	OH/UG	C.P.	#4-600kcmil or (2) 1/0 - 250	6	36¼	34	4	2½	½	¼

Specifications

- **AIC Rating:** **22K AIC at 240V** and 10K AIC at **480V.**
- **300 Amps Breaker:** 300 Amps breaker for **U6227** may only be installed from the factory (upon request).

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MEG APPROVED


MILBANK ENERGY AT WORK

Multi-Position Sockets


100 Amps | 4 Terminals | Ringless | 300V




U3492-XL-HSP




3492

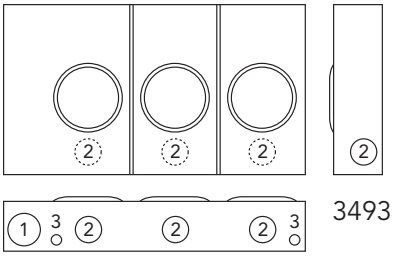


3493

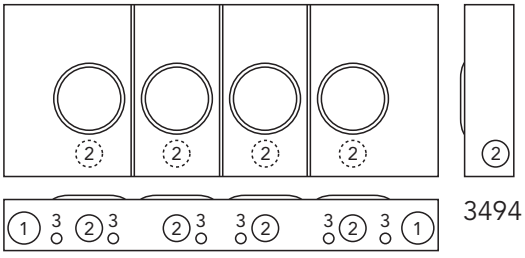

3494

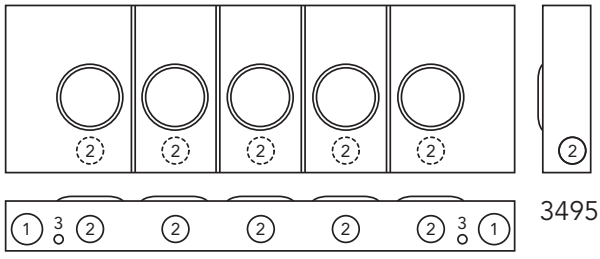

3495

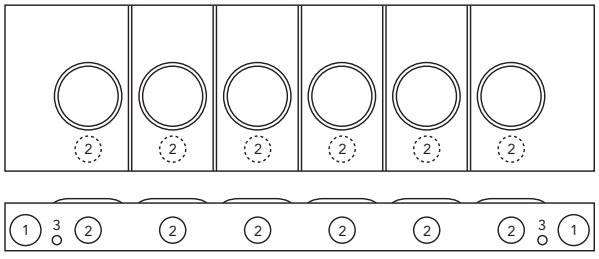

3496

100 Amps per Position | 4 Terminals | Ringless | Multi-Position | 1Ø3W

Catalog Number	Positions	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts		
			Line	Load		D"	W"	H"	1	2	3
U3492-XL-HSP	2	C.P.	#6-350	#6-2/0	None	4½	20 5/16	16	2½	2	¼,½
U3493-XL-HSP	3	C.P.	#6-350	#6-2/0	None	4½	28½	16	2½	2	¼,½
U3494-XL-HSP	4	C.P.	#6-350	#6-2/0	None	4½	40 11/16	16	2½	2	¼,½
U3495-XL-HSP	5	C.P.	#6-350	#6-2/0	None	4½	48⅞	16	2½	2	¼,½
U3496-XL-HSP	6	C.P.	#6-350	#6-2/0	None	4½	57 1/16	16	2½	2	¼,½

Notes

- **Hubs:** Units are supplied with closing plate at each end. For proper hub selection, see the hub suffix chart on the accessories page.
- **Fifth Terminal Kit:** For field-mounted fifth terminal, order catalog number **5T8K2** in the 6 o'clock position.
- **Connectors:** Extruded aluminum connectors are tin-plated. Bonding ground is furnished.
- **Bussing:** Units include 5/16" x 1 aluminum bussing.

MILBANK ENERGY AT WORK

MEG APPROVED


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


Multi-Position Sockets


150 Amps | 4 Terminals | Ringless | 300V





U1232-X-HSP

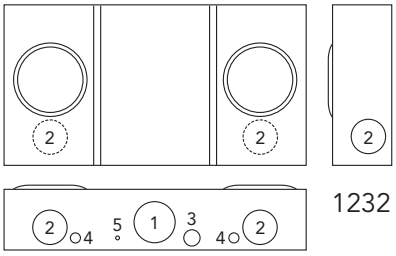

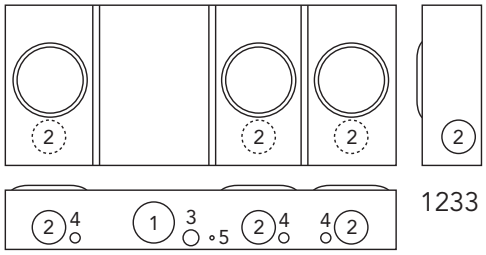

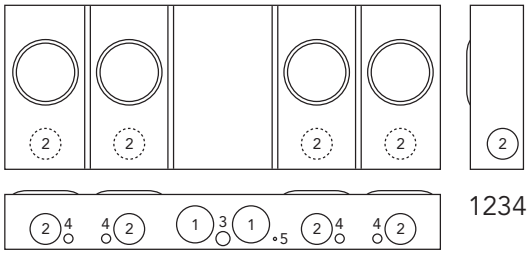

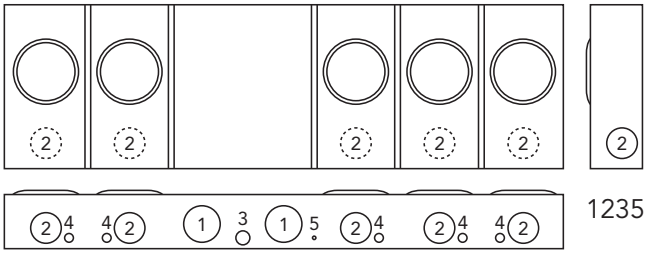

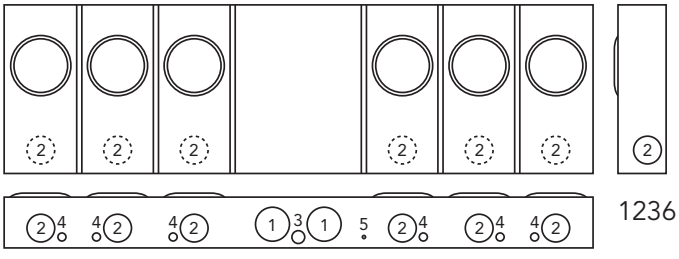

150 Amps per Position | 4 Terminals | Ringless | Multi-Position | 1Ø3W

Catalog Number	Positions	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts				
			Line	Load		D"	W"	H"	1	2	3	4	5
U1232-X-HSP	2	C.P.	Studs	#6-350	None	5⅛	26½	14	3	2½	1	½	¼
U1233-X-HSP	3	C.P.	Studs	#6-350	None	5⅛	34 11⁄16	14	3	2½	1	½	¼
U1234-X-HSP	4	C.P.	Studs	#6-350	None	5⅛	42⅞	16	3	2½	1	½	¼
U1235-X-HSP	5	C.P.	Studs	#6-350	None	5⅛	54⅞	16	3	2½	1	½	¼
U1236-X-HSP	6	C.P.	Studs	#6-350	None	5⅛	63 1⁄16	18	3	2½	1	½	¼

Notes

- **Hubs:** Units are supplied with closing plates. For proper hub selection, see the hub suffix chart on the accessories page.
- **Fifth Terminal Kit:** For field-mounted fifth terminal, order catalog number **K5T**.
- **Connectors:** Line wire section is supplied with ⅜"-16 studs with hex head nuts and captive Belleville washers. Order connector kits separately. One kit per unit. See Accessories page.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MEG APPROVED


MILBANK ENERGY AT WORK


Multi-Position Sockets


200 Amps | 4 Terminals | Ringless | 300V





U1252-X-HSP

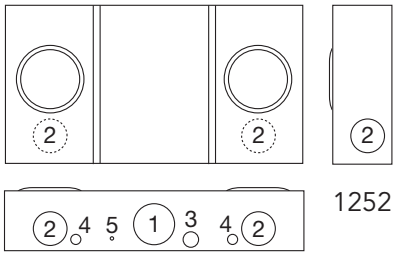

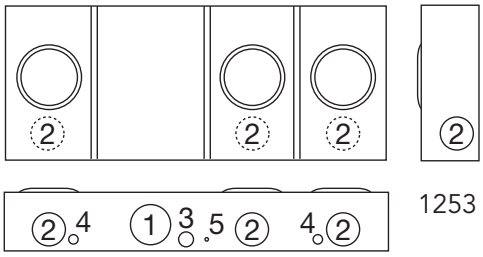

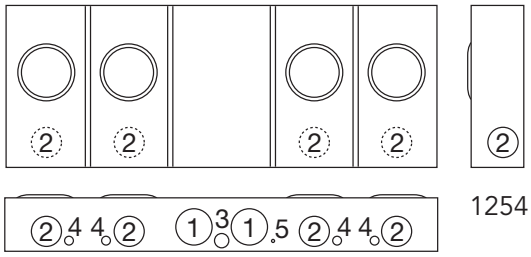

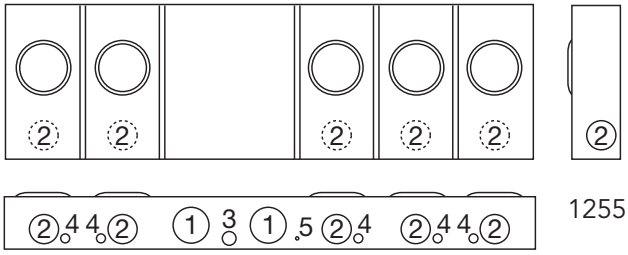

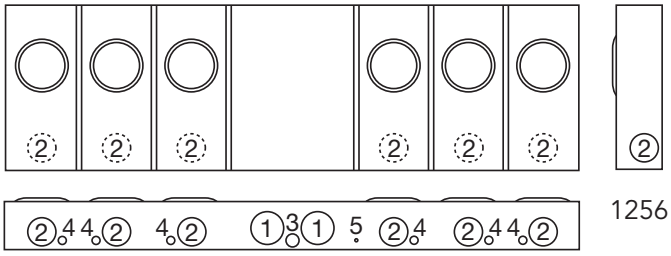

200 Amps per Position | 4 Terminals | Ringless | Multi-Position | 1Ø3W

Steel Catalog Number	Aluminum Catalog Number	Positions	Hub	Connectors CU/AL		Dimensions			Knockouts				
				Line	Load	D"	W"	H"	1	2	3	4	5
U1252-X-HSP	UAP1252-X-HSP	2	C.P.	Studs	#6-350	5⅛	26½	14	3	2½	1	½	¼
U1253-X-HSP	UAP1253-X-HSP	3	C.P.	Studs	#6-350	5⅛	34 11⁄16	14	3	2½	1	½	¼
U1254-X-HSP	UAP1254-X-HSP	4	C.P.	Studs	#6-350	5⅛	42⅞	16	3	2½	1	½	¼
U1255-X-HSP	UAP1255-X-HSP	5	C.P.	Studs	#6-350	5⅛	54⅞	16	3	2½	1	½	¼
U1256-X-HSP	UAP1256-X-HSP	6	C.P.	Studs	#6-350	5⅛	63 1⁄16	18	3	2½	1	½	¼

Notes

- **Hubs:** Units are supplied with closing plates. For proper hub selection, see the hub suffix chart on the accessories page.
- **Fifth Terminal Kit:** For field-mounted fifth terminal, order catalog number **K5T**.
- **Connectors:** Line wire section is supplied with ⅜"-16 studs with hex head nuts and captive Belleville washers. Order connector kits separately. One kit per unit. See Accessories page


MILBANK ENERGY AT WORK

MEG APPROVED


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

HD Lever Multi-Position Sockets

200 Amps | 5 Terminals | Ringless | 600V

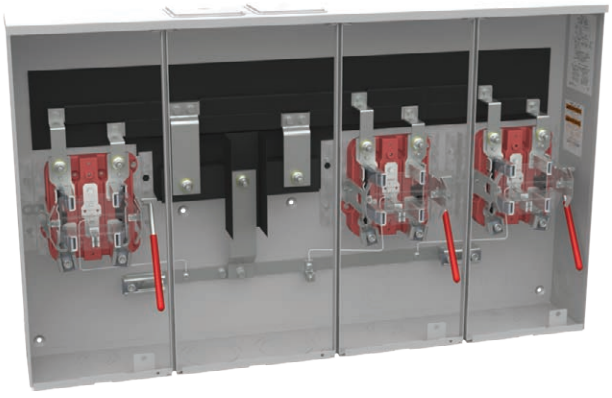

U2873-XT-HSP

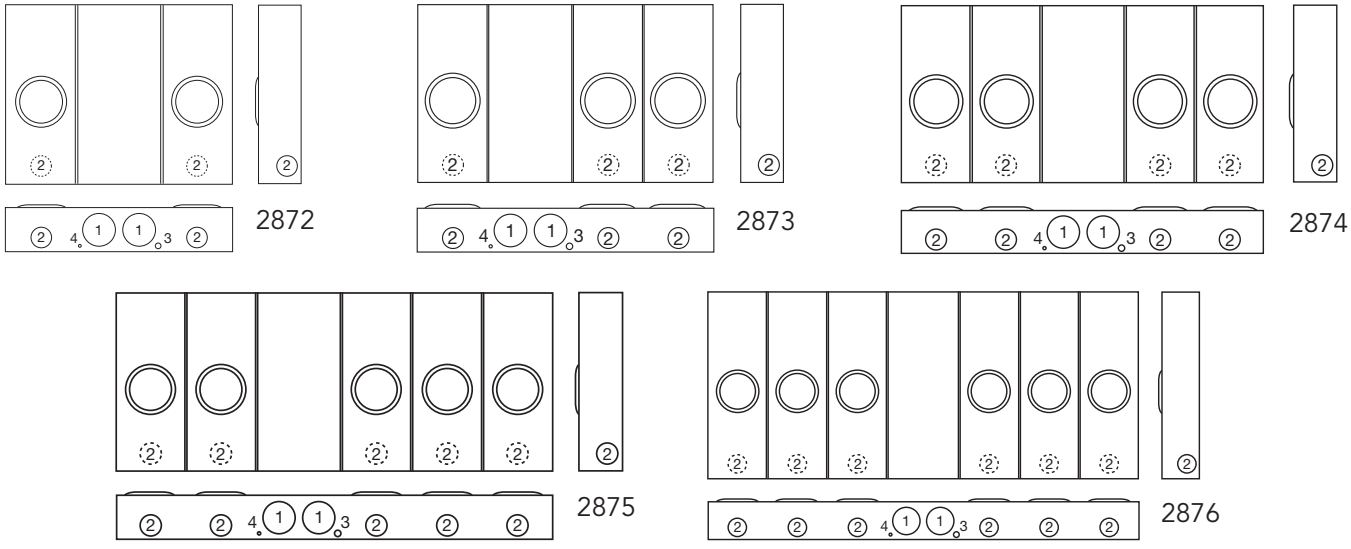

200 Amps per Position | 5 Terminals | Ringless | Lever Bypass | Multi-Position | 1Ø3W

Catalog Number	Positions	Hub	Connectors CU/AL		Dimensions			Knockouts			
			Line	Load	D"	W"	H"	1	2	3	4
U2872-XT-HSP	2	(2) C.P.	⅜"-16 Studs	#6-350	6	32⅛	25¼	4	2½	¼,½	¼
U2873-XT-HSP	3	(2) C.P.	⅜"-16 Studs	#6-350	6	42 3/16	25¼	4	2½	¼,½	¼
U2874-XT-HSP	4	(2) C.P.	⅜"-16 Studs	#6-350	6	52¼	25¼	4	2½	¼,½	¼
U2875-XT-HSP	5	(2) C.P.	⅜"-16 Studs	#6-350	6	62 5/16	25¼	4	2½	¼,½	¼
U2876-XT-HSP	6	(2) C.P.	⅜"-16 Studs	#6-350	6	72⅜	31¼	4	2½	¼,½	¼

Notes

- **Hubs:** Units are supplied with two closing plates. For proper hub selection, see the hub suffix chart on the accessories page.
- **Bypass:** The lever operates bypass device and supplies clamping action to meter spades.
- **Connectors:** For line side connector kits, order separately. Order one kit per unit. See Accessories page.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MEG APPROVED


MILBANK ENERGY AT WORK

HD Lever Multi-Position Sockets


200 Amps | 7 Terminals | Ringless | 600V




U2732-XT-HSP




2732

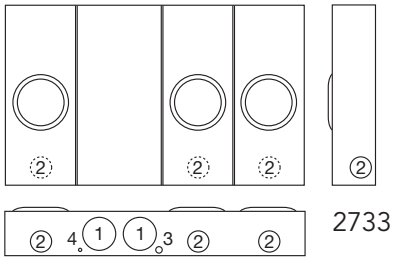


2733

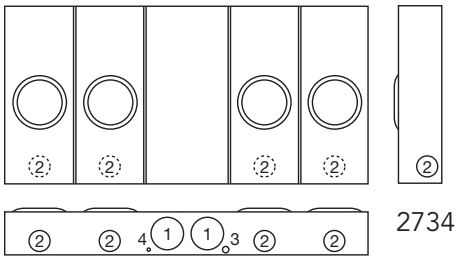

2734

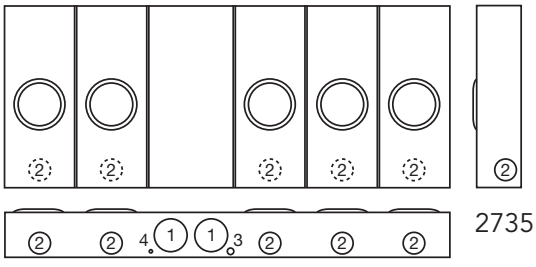

2735

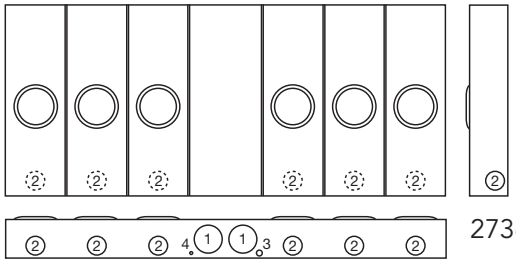

2736

200 Amps per Position | 7 Terminals | Ringless | Lever Bypass | Multi-Position | 3Ø4W

Catalog Number	Positions	Hub	Connectors CU/AL		Dimensions			Knockouts			
			Line	Load	D"	W"	H"	1	2	3	4
U2732-XT-HSP	2	(2) C.P.	⅜"-16 Studs	#6-350	6	32⅛	25¼	4	2½	¼,½	¼
U2733-XT-HSP	3	(2) C.P.	⅜"-16 Studs	#6-350	6	42 3/16	25¼	4	2½	¼,½	¼
U2734-XT-HSP	4	(2) C.P.	⅜"-16 Studs	#6-350	6	52¼	25¼	4	2½	¼,½	¼
U2735-XT-HSP	5	(2) C.P.	⅜"-16 Studs	#6-350	6	62 5/16	25¼	4	2½	¼,½	¼
U2736-XT-HSP	6	(2) C.P.	⅜"-16 Studs	#6-350	6	72⅜	31¼	4	2½	¼,½	¼

Notes

- **Hubs:** Units are supplied with two closing plates. For proper hub selection, see the hub suffix chart on the accessories page.
- **Bypass:** The lever operates bypass device and supplies clamping action to meter spades.
- **Connectors:** For line side connector kits, order separately. Order one kit per unit. See Accessories page.

MILBANK ENERGY AT WORK

MEG APPROVED

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Multi-Position Meter Mains

125-200 Amps | 4 Terminals | Ringless | 120/240 V | 22K AIC

NEC 2020 Compliant



U5882-X-HSP



U5884-X-HSP

Rating kAIC	Circuit Breaker 125A
10	SIEMENS: QP CUTLER-HAMMER: BR, HQP, QHP,QPGF SQUARE D: HOMELINE. GE: (50AMP.MAX.) THQL, THQL-GF
22	SIEMENS: QPH
	150-200 Amps
10	SIEMENS: QN
22	SIEMENS: QNH

125 Amps per Position | 4 Terminals | Multi-Position Meter Main | Ringless

Catalog Number	Amps	Positions	Service	Hub	Connectors CU/AL	Dimensions			Weight (lbs.)
					Line	D"	W"	H"	
U5902-X-HSP	125	2	OH/UG	C.P.	⅜" x 16 Studs	5⅛	26½	30	58
U5903-X-HSP	125	3	OH/UG	C.P.	⅜" x 16 Studs	5⅛	34⅝	30	88
U5904-X-HSP	125	4	OH/UG	C.P.	⅜" x 16 Studs	5⅛	42⅘	30	107
U5905-X-HSP	125	5	OH/UG	C.P.	⅜" x 16 Studs	5⅛	51 1/20	30	128
U5906-X-HSP	125	6	OH/UG	C.P.	⅜" x 16 Studs	5⅛	59 3/10	30	146

200 Amps per Position | 4 Terminals | Multi Position Meter Main | Ringless

Catalog Number	Amps	Positions	Service	Hub	Connectors CU/AL	Dimensions			Weight (lbs.)
					Line	D"	W"	H"	
U5882-X-HSP	200	2	OH/UG	C.P.	⅜" x 16 Studs	5⅛	26½	30	58
U5883-X-HSP	200	3	OH/UG	C.P.	⅜" x 16 Studs	5⅛	34⅝	30	88
U5884-X-HSP	200	4	OH/UG	C.P.	⅜" x 16 Studs	5⅛	42⅘	30	107
U5885-X-HSP	200	5	OH/UG	C.P.	⅜" x 16 Studs	5⅛	51 1/20	30	128
U5886-X-HSP	200	6	OH/UG	C.P.	⅜" x 16 Studs	5⅛	59 3/10	30	146

Notes

- **Knockouts:** See drawings on the next page.
- **Optional:** Factory-installed breakers are available - consult factory.
- **AIC Rating:** All models are rated 22K AIC when used with approved breakers rated at 22K.
- **Hub:** Units supplied with one closing plate. Order hubs separately, see Accessories page.
- **Fifth Terminal:** For field-installed fifth terminal, order K5T.
- **Connectors:** Socket is supplied with 3⁄8" - 16 hex head nuts with Belleville washers. For connector lug kits, order as extra from chart on the Accessories page. Separate lug kits are required for line and load.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


MEG APPROVED

MILBANK ENERGY AT WORK


Multi-Position Meter Mains

Dimensional Information


Knockouts				
1	2	3	4	5
3	2½	1	⅞	¼

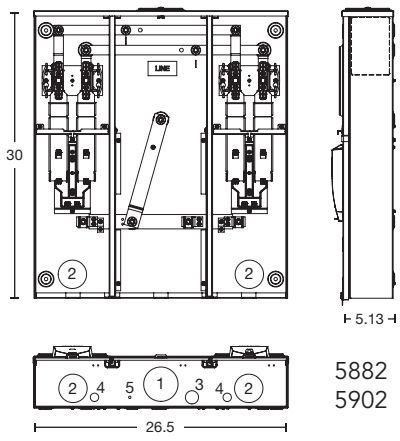


5882
5902

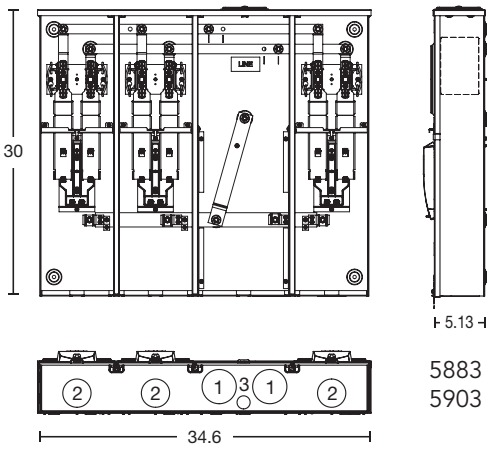


5883
5903

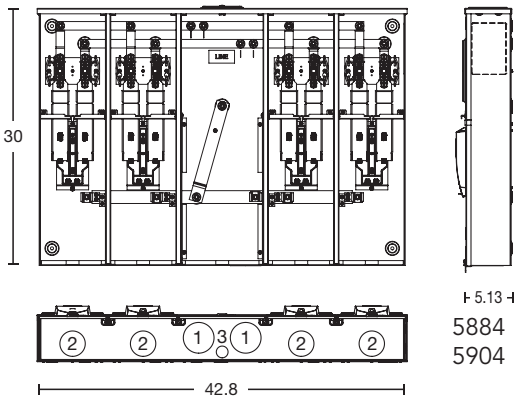

5884
5904

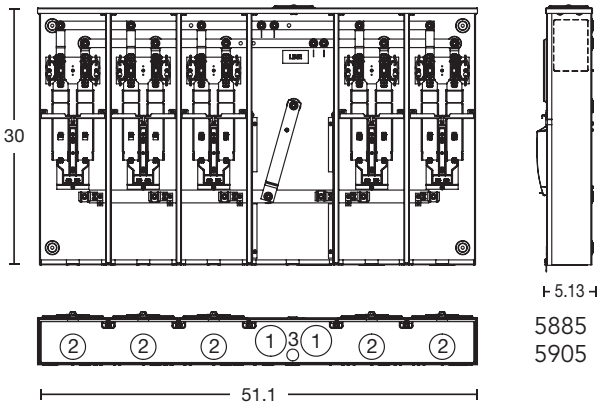

5885
5905

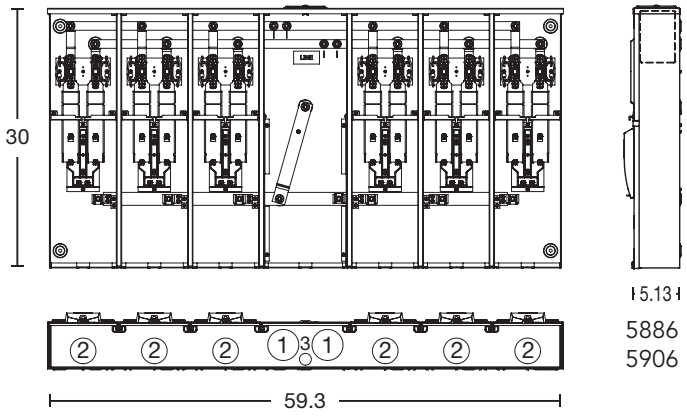

5886
5906


MILBANK ENERGY AT WORK

MEG APPROVED


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Temporary Power Outlet

125 Amps | 4 Terminals | Ringless | NEC 2020 Compliant

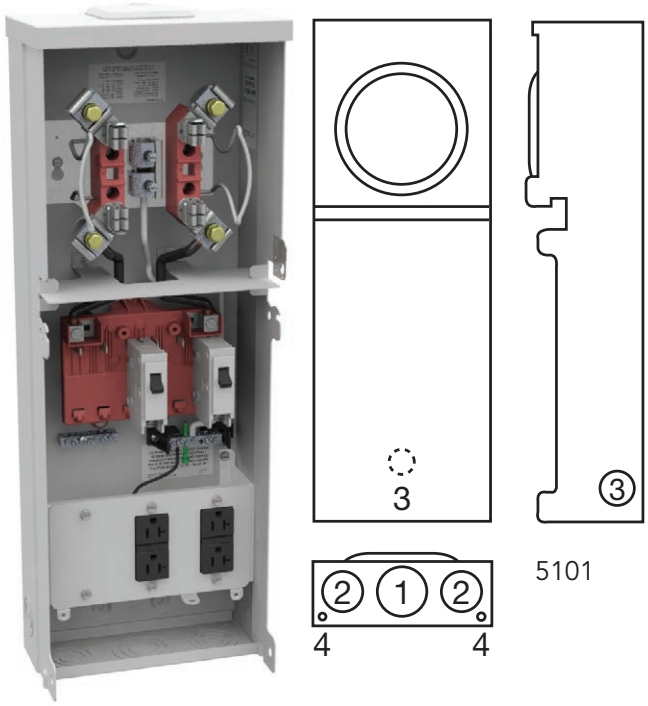

U5101-XL-100MB-11GR-HSP

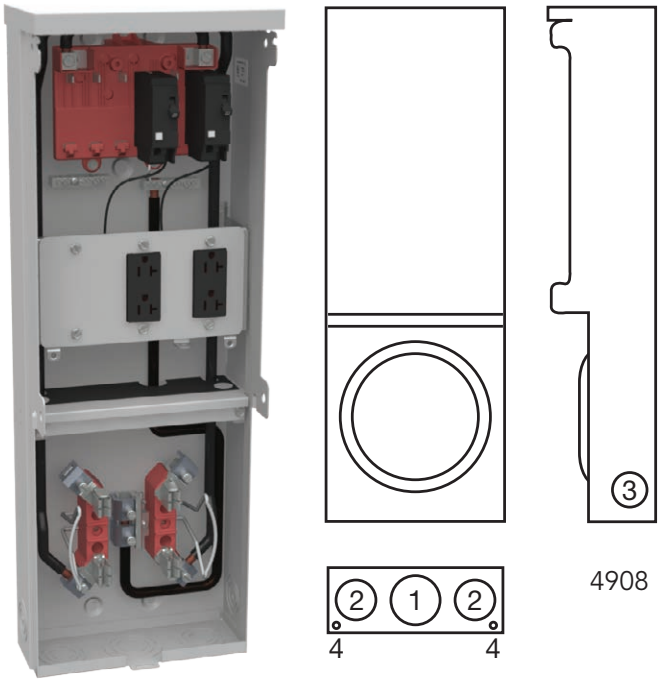

U4908-O-100MB-11GR-HSP

125 Amps | 4 Terminals | Metered Temporary Power Outlet | Ringless

Catalog Number	Amps	Service	Hub	Connector Size	Dimensions			Knockouts			
					D"	W"	H"	1	2	3	4
U5101-XL-100MB-11GR-HSP	125	OH	CP	#6-250 kcmil	5 3/16	8 1/4	25	2	1 1/4	1 1/4	1/4
U4908-O-100MB-11GR-HSP	125	UG	Blank	#6-2/0	5 3/16	8 1/4	25	1 1/2	1 1/2	1 1/4	1/4

Notes

- **Interior:** Six-circuit plated copper interior accepts standard plug-in type circuit breakers.
- **Receptacle Bridge:** Three-position self-grounded receptacle bridge accepts most standard NEMA receptacles with mounting plates.
- **Included Parts: U4908** and **U5101** come supplied with two 20 Amps one-pole breakers and two 20 Amps GFCI receptacles (prewired and installed).

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


MEG APPROVED


MILBANK ENERGY AT WORK


32 Meter Main with Load Center Pedestal

100–200 Amps | 4 Terminals | Ringless | 120/240V



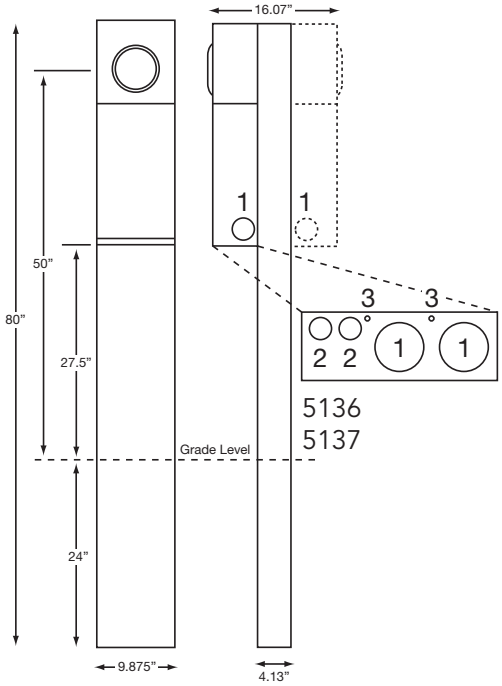

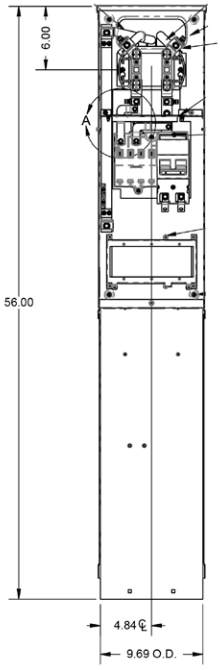

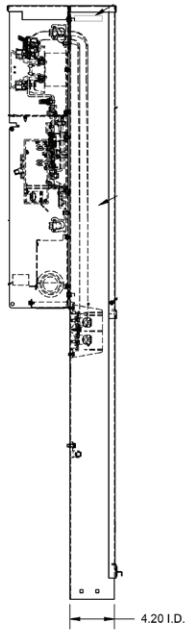


U5136-O-200S-FMG

5138
5139

Specifications

- UL-Listed File **E90945.**
- **K5415** stabilizer foot included with pedestal for field installation.
- 200 Amps maximum, 120/240 V, 1Ø3W.
- Ringless meter socket with stainless steel latch.
- Pedestals with factory-installed breakers are 22KAIC.
- NEMA 3R construction for durable outdoor use.
- ANSI 61 gray polyester powder coat finish.
- Wire terminations accept copper or aluminum conductors.
- Line and Neutral: (Two) #6-350 kcmil per phase, Line Ground: (4) #14-1/0.
- Load (CB): 2/0 to 300 kcmil per pole for 200 Amps breaker.
- Load neutral: (One) #6-350 kcmil.
- Load ground: (2) #14-1/0, (four) #14 – 6.

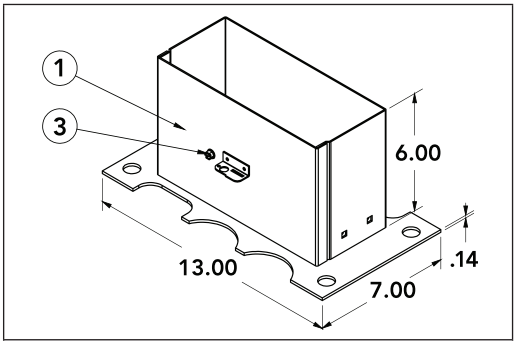

K5035 - Pad-mount

- Commercial grade, plug-in main circuit breaker. Available in 100, 125, 150 and 200 Amps. Type UQFPH-M.
- Four circuit plated copper interior accepts (2) two-pole or (4) one-pole standard plug-in type circuit breakers. Four branch circuits rated 125 Amps max. Acceptable manufacturers: Cutler-Hammer, GE, Siemens or Square D Homeline.
- **Pad-Mount Units:** Pad-mount pedestals are available. Order **U5138** (single meter) or **U5139** (double meter) prefix. **K5035** pad-mount kit required. Order separately.

MILBANK ENERGY AT WORK

MEG APPROVED

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Meter Main with Load Center Pedestal

100–200 Amps | 4 Terminals | Ringless | 120/240V

NEC 2020 Compliant

100–200 Amps | Meter Main with Load Center Pedestal | Ringless

Catalog Number	Powerheads	Amps	Main Breaker	Interior	Dimensions			Knockouts		
					D"	W"	H"	1	2	3
U5136-O-100S-FMG	Single	100	UQFP-M-100 (Series)	4 circuit	10¼	10	80	2	½,¾	¼
U5136-O-125S-FMG	Single	125	UQFP-M-125 (Series)	4 circuit	10¼	10	80	2	½,¾	¼
U5136-O-150S-FMG	Single	150	UQFP-M-150 (Series)	4 circuit	10¼	10	80	2	½,¾	¼
U5136-O-200S-FMG	Single	200	UQFP-M-200 (Series)	4 circuit	10¼	10	80	2	½,¾	¼
U5137-O-100S-FMG	Double	100	(2) UQFP-M-100 (Series)	4 circuit	16¼	10	80	2	½,¾	¼
U5137-O-125S-FMG	Double	125	(2) UQFP-M-125 (Series)	4 circuit	16¼	10	80	2	½,¾	¼
U5137-O-150S-FMG	Double	150	(2) UQFP-M-150 (Series)	4 circuit	16¼	10	80	2	½,¾	¼
U5137-O-200S-FMG	Double	200	(2) UQFP-M-200 (Series)	4 circuit	16¼	10	80	2	½,¾	¼

Notes

- **Fifth Terminal:** For field-installed fifth terminal, order **K5T**.
- **Receptacles:** Consult factory for installed receptacle assemblies.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


MEG APPROVED

MILBANK ENERGY AT WORK

34 Meter Main with Load Center Pedestal

100-200 Amps | 4 Terminals | Ringless | 120/240V | NEC 2020 Compliant



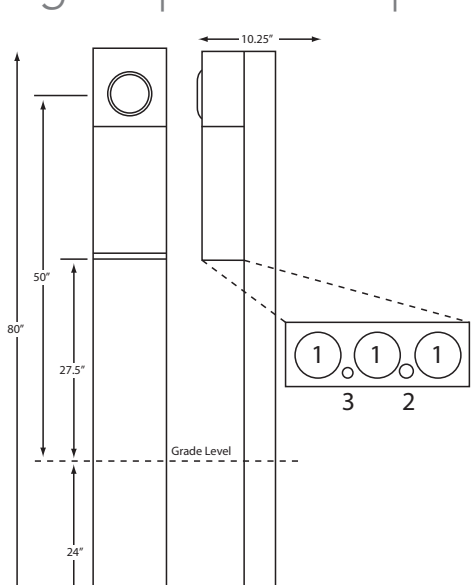

U6396-O-200-10GR-HSP

100 and 200 Amps | Meter Main with Load Center Pedestal | Ringless | UG Service

Catalog Number	Amp	Connectors CU/AL		Interior	Dimensions			Knockouts		
		Line	Load		D"	W"	H"	1	2	3
U6396-O-100-10GR-HSP	100	(2) #6-350 kcmil	(1) #6-350 kcmil	10 circuit	10¼	10	80	2	½	¼
U6396-O-200-10GR-HSP	200	(2) #6-350 kcmil	(1) #6-350 kcmil	8 circuit	10¼	10	80	2	½	¼

Specifications and Features

- UL-Listed.
- 200 Amps maximum, 120/240V, single phase, three-wire meter socket.
- Short circuit withstand rating of 22K AIC.
- NEMA 3R construction for durable outdoor use, one-piece post — lockable and sealable.
- Direct bury pedestal.
- Circuit breaker: available with 100 or 200 Amps main breaker.
- Eight-circuit load center with feed through lugs.
- Acceptable branch breaker manufacturers: Cutler-Hammer, GE, Siemens, or Square D Homeline.
- Milbank gray polyester powder coat finish.
- Wire terminations accept copper or aluminum conductors.
- Line and neutral: (2) #6-350 kcmil per phase.
- Line ground: (4) #14-1/0.
- Load neutral: (1) #6-350 kcmil.
- Load ground: (2) #14-1/0, (4) #14/6.
- 20 Amps GFCI receptacle and 20 Amps breaker factory-installed. Two receptacles factory-installed option available.
- Stainless steel hasps.
- Receptacles: Consult factory for installation of (2) 20 Amps GFCI receptacle assemblies.
- Field-installed fifth terminal kits.









MILBANK ENERGY AT WORK

MEG APPROVED

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Replacement Parts and Accessories

For U5136–U5139 Pedestals

		
K5935-41	**K5935-10GR**	**K5935-11GR**
		
K5935-36GR	**K5935-54**	**K5935-2/1450**
		
Z1115081 *Lug landing base*	**Z819294-SC** *With receptacle openings* **Z1139163** *Without receptacle openings*	**Z1102270** *Hinged cover*


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MILBANK®
ENERGY AT WORK

Replacement Parts and Accessories

For U5136–U5139 Pedestals

		
Q120 *20 Amps, one-pole circuit breaker*	**Q130** *30 Amps, one-pole circuit breaker*	**Q250** *50 Amps, two-pole circuit breaker*

		
Z708080-MO *20 Amps GFI receptacle NEMA 5-20GR*	**Z701776-MO** *30 Amps receptacle NEMA TT-30*	**Z708767-MO** *50 Amps receptacle NEMA 14-50R*

MILBANK
ENERGY AT WORK


Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Accessories


Hubs and Closing Plates



-RL
Small hub opening

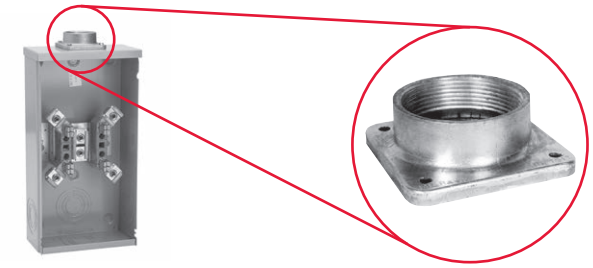

-WL	A7514	-YL	A7515	-ZL	A7516	-DL	A7517	-EL	A7518	-XL	A7551
1" Hub		1¼" Hub		1½" Hub		2" Hub		2½" Hub		Small closing plate	



-R
Large hub opening

-F	A8110	-G	A8111	-H	A8112	-X	A9064	-RRL	S8324
3" Hub		3½" Hub		4" Hub		Large closing plate		Large hub opening adapted to small hub opening	

Notes

- **Suffix:** Add to catalog number for factory installation of hub.
- **Packaging:** Individually packed units for field installation.
- **Abbreviations:** H.O. (hub opening), C.P. (closing plate).

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Accessories

Connector Kits, Closing Kits and Generator Interlock

Connector Kits — For Use with ⅜"-16 Stud-type Units Only





Single			Twin		
Suffix	**Part #**	**(3 per set) - 1Ø**	**Suffix**	**Part #**	**(3 per set) - 1Ø**
K1	**K1539**	6-350	K2	**K1350**	6-350
K3	**K1540**	4-600 or (2) 1/0-250*	K2L	**K1350L**	6-350 (non rotating)
K3L	**K1540L**	4-600 or (2) 1/0-250* (non rotating)	K4	**K1541**	4-600
Suffix	**Part #**	**(4 per set) - 3Ø**	**Suffix**	**Part #**	**(4 per set) - 3Ø**
K5	**K3082**	6-350	K6	**K3442**	6-350
K7	**K3441**	4-600 or (2) 1/0-250*	K8	**K3083**	4-600

*For (2) 1/0-250, conductors must be of same size.

Bypass Link





K8180 (sold in pairs)

Note

Consult factory for proper connector kits for studded meter sockets.

Closing Covers





Meter Closing Plate (Ring type/ringless)	Metal Closing Plate (For ringless Sockets)
6003 - Gray Plastic	**CP-21**
6116 - Clear Plastic	

Generator Interlock




K5815 - Large **QN** with small frame **Q**

K5820 - Large frame **QN** with large frame **QN**

K5830 - Small frame **Q** to small frame **Q**

Disconnect Sleeve




M5-144

Do not use with lever bypass sockets.

Anti-Inversion Clip

K4802

Isolated Neutral Kit



K1047

Consult factory for proper isolated neutral for meter sockets.


MILBANK
ENERGY AT WORK

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


Accessories

Fifth Terminal, Tap Connectors and Block Assemblies

Fifth Terminal

		
5T8K2 - 100-200 Amps "Plug-In"	**K5T** - 200 Amps (Block with square hole)	**K3865** - Heavy duty jaw clamping (**K3866** without neutral wire)

Tap Connectors (3 per set)

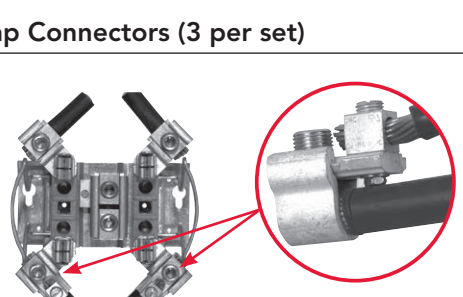	Replaces the load- or line-side slide-in nut assembly on Milbank 200 Amps sockets. Allows for a 100 Amps tap location in addition to the #6-350 kcmil load-side connector. **K5022** includes safety barrier extensions for applications over 300V. Three lugs per kit.
K4977-INT - Internal Hex	
K4977-EXT - External Hex	
K5022-INT - Internal Hex (set of four with barrier)	


Triplex Ground


K1190 For factory-installed triplex ground, add suffix -TG to catalog number.

100 Amps Blocks *(single sockets only)*


BL7474 - Block Assembly
BL7499 - Horn Bypass Block Assembly
Z904486-AO - Slotted Nut Assembly
Z903274-AO - Horn Bypass Nut Assembly
Z802965-AC - Neutral without Nut
Z901925-AC - Hex Nut Set Screw

200 Amps Blocks *(single sockets only)*


K4527 - Internal Hex Block Assembly (w/ meter support)
K4528 - External Hex Block Assembly (w/ meter support)
K4529 - Internal Hex Horn Bypass Block Assembly (w/ meter support)
K4530 - External Hex Horn Bypass Block Assembly (w/ meter support)
Z916265-AO - Internal Nut Assembly
Z916264-AO - External Nut Assembly
Z814898-AC - Neutral without Nut

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MILBANK
ENERGY AT WORK

Power Distribution & Controls

Attractive | Easy to Install | Secure | Cost-Effective

Milbank Power Distribution & Controls are an alternative to unsightly and inefficient strut and backboard structures. Power Distribution & Controls are an attractive, secure, easy-to-install and cost-effective solution for underground remote site power distribution. Cabinets are weather-resistant enclosures that can be crafted to suit any environment with various mounting options. Each individual unit features a utility pull section with an optional meter socket and a separate customer section with distribution and control equipment.



Strut and Backboard




Commercial Pedestal


UL Listed as Industrial Control Equipment (File E113855)


Standard Features

- NEMA 3R rain-resistant, vandal-resistant cabinet of polyurethane powder-coated steel (aluminum or stainless steel also available).
- UL-Listed as enclosed industrial control equipment (UL508A).
- Isolated lockable and sealable utility metering and lug landing sections.
- Lockable customer section for distribution and control equipment with internal deadfront.
- Print pocket inside customer section door contains wiring schematics and installation instructions.
- Load centers are UL-Listed for use with various manufacturers' circuit breakers.
- All stainless steel external hardware (screws, bolts, hinges, handles, hasps and sealing screws).











MILBANK
ENERGY AT WORK

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Power Distribution & Controls

Attractive | Easy to Install | Secure | Cost-Effective





Applications

These units are ideal for controlling and metering:

- Traffic signals and street lighting for municipalities.
- Power distribution for electric vehicle charging stations.
- Communication equipment such as cell towers and telephone vaults.
- Event power for fairgrounds, outdoor markets, portable offices, holiday lights, etc.
- Outdoor lighting for athletic fields, tennis and basketball courts, parking lots, landscaping and subdivision entrances.


Available Factory-Installed Options

- Meter sockets: ring-type or ringless, up to 400 Amps
- Main and branch breakers or T fuses
- Distribution: copper load centers and panelboards
- Clocks, timers and relays
- Photoelectric cells and controls
- Various power receptacles: pin and sleeve, twist-lock or straight blade
- Contactors: lighting, definite purpose, motor starters
- Surge protection and lightning arresters
- Generator inlets with interlocked breakers
- Push button controls
- Thermostat controls, fans and heating strips
- Power blocks and terminal blocks
- Steel, aluminum and plywood backboards
- Transformers
- Interlock devices for circuit breakers

Options

- Available in steel, aluminum (raw painted or anodized) or stainless steel construction with powder coated finish available in eight standard colors or special-ordered RAL colors.
- Available for applications up to 400 Amps, 120V, 208V, 240V, 277V, 480V - 1Ø or 3Ø.

Accessories

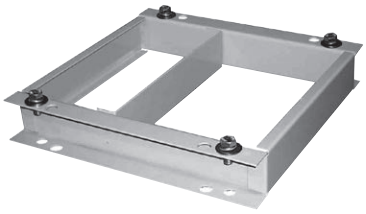

Pad-mount bases available for all pedestal sizes, inquire with your representative for details.



CP-ABK5/8
Anchor bolt kit (includes four 5⁄8 - 13 x 18" anchor bolts




105J
Fifth Terminals kit for use with ring type meter sockets



K3865
Fifth Terminals kit for use with ringless meter sockets



CP-TC7D
7-day time clock kit
CP-TC24H
24-hour time clock kit
CP-TCWIRE
Male 4-pin connector and wiring harness for use with time clocks other than above



CP-PE-HOA-3POS
HOA switch for field installation

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MILBANK
ENERGY AT WORK

Power Distribution & Controls

Main Load Center Commercial Pedestals | 1Ø3 Wire 120/240V or 208Y/120V

Application: Remote site service for multiple loads

Milbank Main Load Center Commercial Pedestals are designed to handle the vast majority of all requirements in a standard, stocked configuration.

- All units feature a load center with a plug-on, back-fed main breaker.
- Standard units are equipped with with a 16-circuit load center in the 100 Amps or 24-circuit load center in 200 Amps models.
- Sub-feed lugs to allow feeding an external panel.

If your application requires turning loads on based on "dusk-to-dawn" requirements, be sure to see the Milbank Switched Load Center Commercial Pedestal products on the following page.



Features

These units include everything required for remote site service:

- Expandable: load centers allow for future expansion without costly modifications.
- All units feature a 200 Amps meter socket with optional field-installable fifth terminals kit available.
- 22K Amps interrupting capacity (AIC) standard.
- Optional mounting base can be embedded in concrete for fast, easy installation.
- Separate sealable and lockable utility termination section.
- Separate sealable and lockable metering section.
- Separate sealable and lockable customer section with a load center for "always on" loads that include a main circuit breaker, 20 (125 or 200 Amps model) or 14 (100 Amps model) blank breaker spaces and a circuit directory to document configuration.

MILBANK
ENERGY AT WORK

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Switched Load Center Commercial Pedestals

1Ø3 wire 120/240V or 208Y/120V

Designed not only to provide power for various loads, but also to switch specific loads on and off under certain conditions. A photoelectric cell is used for these controlled loads, and an optional time clock is also available.



Ringless Lever Bypass shown

Features


These units include everything required for remote site service:

- Expandable: load centers allow for future expansion without costly modifications.
- All units feature a 200 Amps meter socket with optional field-installable fifth terminals kit available.
- 22K Amps interrupting capacity (AIC) standard.
- Optional mounting base can be embedded in concrete for fast, easy installation.
- Separate sealable and lockable utility termination section.
- Separate sealable and lockable metering section.
- Separate sealable and lockable customer section with a control circuit including PE receptacle, Lexan® window, glare shield, Hand-Off-Auto (HOA) switch, contractor controlling a 16-circuit load center for controlled loads, a pre-mounted DIN rail and pre-wired connector to add an optional "plug-and-play" time clock kit for PE on and TC off operation and a circuit directory to document configuration.
- A load center for "always on" loads that includes a main circuit breaker, a control power circuit breaker, a switched load center main breaker, nine (125 or 200 Amps model) or 11 (100 Amps model) blank breaker spaces and a circuit directory to document configuration.

Applications



Traffic Signals



Parking Lots



Highways



Athletic Field Lighting

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Power Distribution & Controls

400 Amps Commercial Pedestals



Designed to provide a weather- and vandal-resistant metered enclosure for various loads and distribution. Each pedestal has been designed to handle a wide range of applications using standard, stocked configurations including:

- Choice of a single main breaker or twin service disconnect breakers gives flexibility to the pedestal design.
- Optional distribution with feed-through lugs below the service disconnect breakers allows the pedestal to handle numerous applications.
- Typical applications include remote homes where the metering is best located at the curb side or other remote area. The pedestal can also provide power to a secondary residence, on-site business, workshop, irrigation, lighting, security or other secondary load.

Features

These units include everything required for remote service:

- Main circuit breaker or dual service disconnects.
- Expandable: load center units that allow for future expansion without costly modifications.
- Optional mounting base can be embedded in concrete for fast, easy installation.
- Separate sealable and lockable utility termination section with lug termination.
- Separate sealable and lockable metering section.
- Separate sealable and lockable customer section with a circuit directory and a print pocket to hold all documentation.
- Meter socket options include ring type with bypass studs, ringless with heavy-duty lever bypass, or K-type bolt-on.

Applications

Commercial Job Sites

Remote Site for Residential and Commercial Job Sites

MILBANK
ENERGY AT WORK

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Power Distribution & Controls

Surface-Mount Compact Design

Surface-Mounted

Originally developed for small cellular communications, the surface-mounted power distribution and controls offer the flexibility of larger Power Distribution & Controls products with a smaller footprint and several mounting options.



Features

- Mounting options allow for easy installation.
- Overhead and underground entry and exit, all in one unit.
- Meter and components in one enclosure.
- Custom component configurations and UL-listing covers all internal components on the UL508A and UL891.
- Can be mounted on multiple surfaces including:
    - Walls.
    - Poles (narrow profile will have minimal extension past sides).
    - H frames (strut).
- Multiple bypass options available.
- Monitoring options available.
- Optional powder coating in Milbank standard EC color or custom color.




Benefits

- Smaller footprint
- Flood resistant
- Eliminates need for connecting components
    - Wire-in/Wire-out


Applications



Communications Power Distribution



Lighting Control



Streetscape Power Distribution

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MILBANK
ENERGY AT WORK

Power Distribution & Controls

Battery Backup Commercial Pedestals



This product is specifically designed to provide battery backup power to a variety of loads and to conditionally switch specific loads on and off. It can use a photoelectric cell or time clock to control lighting circuits. Battery backup pedestals have options for both metered and unmetered power distribution. These pedestals are highly versatile and can handle the vast majority of today's backup power requirements. Its 19" rack design allows for easy adjustment of shelves to accommodate batteries, DC to AC inverters, transfer switches and other related equipment.

Features

- Works with 100 through 320 Amps meter sockets with the option of either a ring-type socket (conforms to EUSERC 308) with or without test/bypass blocks or a heavy-duty ringless socket with lever bypass.
- Separate sealable utility termination compartment.
- An isolated separate customer section with service disconnects, power distribution options and power control.
- 19" wide rack in customer compartment for easy layout of equipment.
- Includes trays to accommodate required batteries.
- Thermostat with cooling fan.
- Filtered louvers for heat rise flow through ventilation.
- Three-point door latch (key or padlockable).


Note

- May require customization based on regional requirements.

Applications



Camera and Security Locations



Parking Lots



Traffic Signals



Communications Power Distribution

Options

- Manual bypass switch
- Transfer switch for generator power backup
- Generator inlet receptacles 30 Amps through 200 Amps
- Pad-lockable provision for receptacles
- Police access door
- Metered load center distribution
- Unmetered load center distribution
- Photo electric controls (for street lighting)
- Time clocks
- HOA switches
- Contactors
- GFCI duplex receptacles
- Thermostat for heating control
- Heating pads or elements
- Roll out shelves for batteries
- Surge arresters and lighting arresters

MILBANK
ENERGY AT WORK

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Power Distribution & Controls

Power Transfer Commercial Pedestals





Power transfer commercial pedestals provide metered or unmetered AC power, distribution, surge suppression, mechanical interlock and standby generator receptacles — in one compact pedestal.

Features

- 120/240V 1Ø3W through 277/480V 3Ø4W ratings
- Metered or unmetered units
- Choice of EUSERC ring type or ringless meter sockets
- 60 Amps through 400 Amps ratings
- Pad-lockable, isolated utility compartments
- 20 Amps GFCI convenience receptacle
- Lockable recessed generator receptacle door
- Utility and generator indicator light options
- All stainless steel hardware
- Galvanized steel, aluminum or stainless steel cabinet options
- Custom designs available

Note

- May require customization based on regional requirements.

Applications

Traffic Signals

Pump and Lift Stations

Communications Power Distribution

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MILBANK® ENERGY AT WORK

Power Distribution & Controls

CT Metered Commercial Pedestals



Designed to be used where a smaller service package would be a better choice over larger switchgear equipment. These pedestals have amperage ratings of 400 to 800 Amps at voltages up through 480V three phase.

Features

- Available configurations up to 800 Amps.
- All utility equipment is isolated in separate padlockable and sealable compartments.
- Separate customer compartment designed to hold distribution and control equipment.
- Deadfront customer construction for enhanced safety measures.
- A mounting base option for various applications.
- Optional construction in steel, aluminum and stainless steel.

Note

- May require customization based on regional requirements.

Applications

Commercial And Industrial Control Systems

Pump and LIft Stations

Water Treatment Plants

Electric Vechicle Charging Stations

MILBANK
ENERGY AT WORK

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Power Distribution & Controls

Slimline Commercial Pedestals



The Slimline Commercial Pedestal provides a sleeker, smaller footprint with wireway access on the side of the unit, rather than the back. This allows maximum flexibility to install the pedestal anywhere physical space is at a premium.

Providing unmetered AC power, distribution, surge suppression, mechanical interlock and standby generator receptacle — all in a neat, compact pedestal.

Features

- Available for 100 or 200 Amps.
- Vandal-resistant, secure and attractive design.
- Customer compartment with distribution and control equipment with swing deadfront door, secured with both a hasp/latch and draw latch outer door.
- Utility metering compartment protected with a hinged hood, increasing resistance to meter vandalism.
- Slim design creates a smaller footprint.
- Wireway located on left side of pedestal for utility incoming wire, allowing pedestal to be mounted with back as close as 14" to walls or structures.
- Available in 12" and 20" widths and 50" and 63" (metered) and 43" (unmetered) heights. Includes a print pocket for plans and drawings.
- Voltage range is between 120V and 480V.
- Compatible with both ringless and ring type meter sockets, 4–7 terminals.
- Available in a wide range of colors, including, but not limited to, all ANSI powder-coated paint colors upon request.
- Pedestal mounting base option saves time and labor to install on a cement pad—no anchor bolts required.
- Powder-coated G90 galvanized steel or aluminum; raw, anodized or powder-coated, as well as stainless steel exterior options.









Notes

- May require customization based on regional requirements.
- Direct bury pedestals are only available for 12" pedestals. Constructed with 14-gauge steel.




With no need to coordinate, buy or wait for concrete, **direct bury pedestals** offer many advantages and can cut installation time down to less than an hour. Traditional direct bury pedestals can be awkward to transport and can only be used in a direct bury application. Milbank's modular design offers flexibility and convenience for distributors and contractors alike.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.


MILBANK®
ENERGY AT WORK

Watthour Meter Forms


Standard Forms | Transformer Rated or Self-Contained




2 and 3-WIRE FORMS
1S & 2S




2 and 3-WIRE FORMS
1S & 2S with bypass




2 -WIRE FORM 3S
5th Term. 9 o'clock




2-WIRE FORM 3S
with bypass




2-WIRE FORM 3S
5th Term. 6 o'clock




2-WIRE FORMS 3S
with bypass




2 ELEMENT 3-WIRE
NETWORK FORM 12S
5th Term. 9 o'clock




2 ELEMENT 3-WIRE
NETWORK FORM 12S
5th Term. 9 o'clock




2 ELEMENT 3-WIRE
NETWORK FORM 12S
5th Term. 6 o'clock




2 ELEMENT 3-WIRE
NETWORK FORM 12S
with bypass
5th Term. 6 o'clock




3-WIRE FORMS 4S




3-WIRE FORM 4S
with bypass




2 or 3 ELEMENT
3Ø4W Y or Δ
Y FORM 14S




2 or 3 ELEMENT
3Ø4W Y or Δ
with bypass




2 ELEMENT 3Ø4W Y or
ΔY FORM 7S Δ FORM 24S
with bypass




2 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 5S




2 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 5S with bypass



2 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 13S




2 or 3 ELEMENT
2Ø3W, 2Ø4W, 3Ø3W
FORM 13S with bypass




2 or 3 ELEMENT 3Ø4W
Y or ΔY FORM 9S
Δ FORM 8S


TR= Transformer Rated
SC= Self-Contained



2 or 3 ELEMENT
3Ø3W, Y or Δ
FORM 8S & 9S with bypass



2 ELEMENT
3Ø4W Y
FORM 6S



2 ELEMENT
3Ø4W Y FORM 6S
with bypass

MILBANK
ENERGY AT WORK

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Meter Forms

Reference Information

DIAGRAM A
1Ø2W with 1 P.T. and 1 C.T.
Single Stator Meter (2W1Ø) - Form 3S
5T Socket, Test Switch #TS04-0101

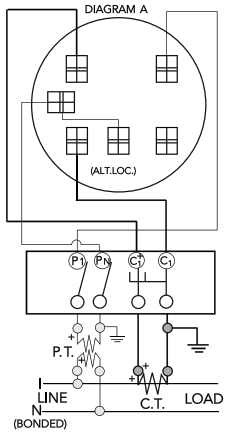


DIAGRAM B
1Ø3W with 1 C.T.
Single Stator Meter (2W1Ø) - Form 3S
5T Socket, Test Switch #TS04-0101

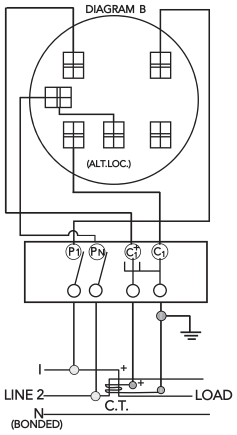


DIAGRAM C
1Ø3W with 2 C.T.'s
Single Stator Meter (3W1Ø) - Form 4S
6T Socket, Test Switch #TS07-0105

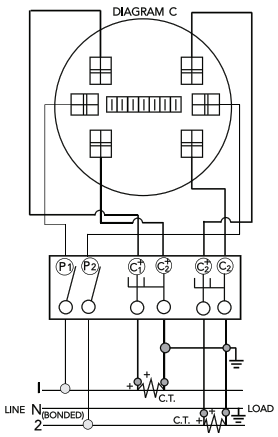


DIAGRAM D
1Ø3W or 3W Network with 2 C.T.'s
2 Stator Meter - Form 5S
8T Socket, Test Switch #TS07-0105

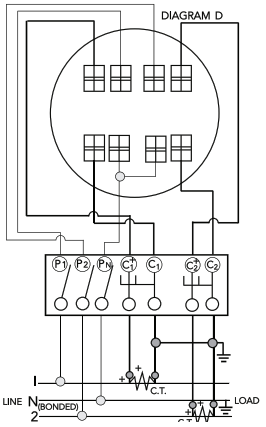


DIAGRAM E
3Ø3W "Δ" with 2 P.T.'s and 2 C.T.'s
2 Stator Meter - Form 5S
8T Socket, Test Switch #TS07-0105

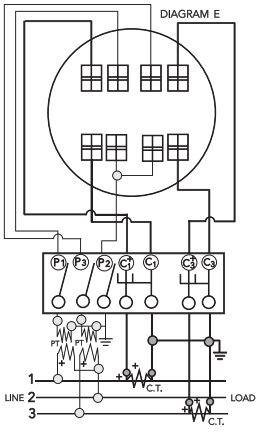


DIAGRAM F
3Ø3W "Δ" with 2 C.T.'s
2 Stator Meter - Form 5S
8T Socket, Test Switch #TS07-0105

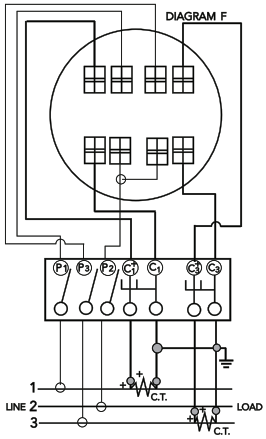


DIAGRAM G
3Ø4W "Y" with 3 C.T.'s
2 ½ Stator Meter - Form 6S
13T Socket, Test Switch #TS10-0109

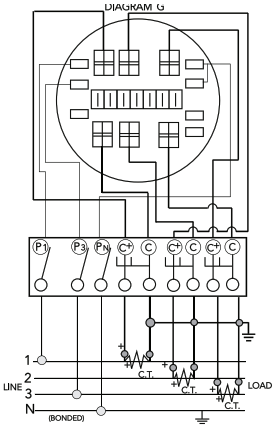


DIAGRAM H
3Ø4W "Y" with 2 P.T.'s and 3 C.T.'s
2 ½ Stator Meter - Form 6S
13T Socket, Test Switch #TS10-0109

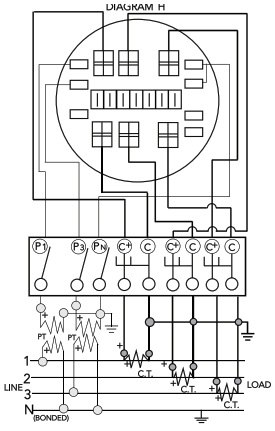


DIAGRAM I
3Ø4W "Y" or "Δ" with 3 C.T.'s
"Y" 3 Stator Meter - Form 9S
"Δ" 2 Stator Meter - Form 8S
13T Socket, Test Switch #TS10-0109


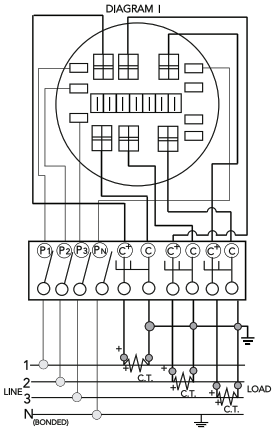


DIAGRAM J
3Ø4W "Y" with 3 P.T.'s and 3 C.T.'s
3 Stator Meter - Form 9S
13T Socket, Test Switch #TS10-0109

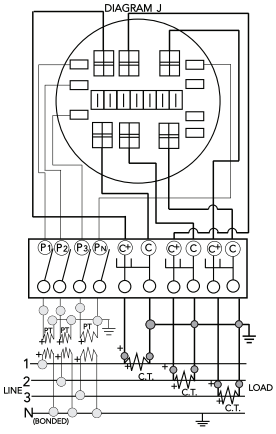

Prewiring

If standard factory prewiring is required, refer to wiring diagrams on this page. Determine appropriate diagram and send a copy with order. If custom factory prewiring is required, specify on order. Be sure to include meter socket catalog number, test switch make and catalog number, meter form number and provide a copy of your wiring diagram.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MILBANK®
ENERGY AT WORK

Energization of Electrical Equipment

Important Information for Installers

Important Note

In addition to national and local electrical codes, many utilities have specific requirements for metering equipment. Always consult the serving utility for their specifications and requirements prior to ordering or installing Milbank meter mounting equipment.

Before Energizing

1. Give equipment a thorough visual examination to determine that:
- a) no shipping or installation damage exists.
- b) proper clearances have been maintained.
- c) all connections have been made.
- d) equipment is clean and dry.

2. Make a thorough examination to:
- a) verify tightness of all bolted connections (see table below).
- b) manually operate all circuit breakers, switches, relays, etc.
- c) check rigidity of all mountings, bus bars and components.
- d) use test equipment to check continuity of circuitry and integrity of insulation.

3. All switches and circuit breakers should be in the OFF position.

4. Verify that manual meter bypass (if applicable) is in non-bypass position.

5. Install cover and/or close doors.

6. If installation is not being energized at this time, follow "after-energizing" steps listed below. These steps will secure the installation in case of accidental energization.

When Energizing

1. Use caution and follow established safety procedures:
- a) wear safety apparel.
- b) use safety equipment.
- c) take action to prevent injury to yourself and others in the event of failure of the installation.
- d) take action to prevent/decrease damage to property in the event of failure of the installation.
- e) if you are unsure how to safely energize the installation, get someone who is knowledgeable to do it.

After Energizing

1. Secure the installation:
- a) to prevent accidental contact with energized parts, cover all openings with approved filler devices.
- b) to prevent unauthorized access, secure all covers and/or doors with approved security devices.
- c) attach/post information to advise others of potential hazards associated with the installation.

Recommended Torque for General Applications*

Nominal Size	Joint Description		Head Type	Torque (Inch Lbs.)
	Screw	Nut		
10	Brass	Brass nut or extruded hole	All	20-25 inch lbs.
10	Steel	Copper or aluminum busbar ≤ 1/8"	All	25-30 inch lbs.
10	Steel	Steel nut or extruded hole; CU or AL busbar > 1/8"	All	30-35 inch lbs.
12	Steel	Aluminum extruded hole	All	30-35 inch lbs.
12	Steel	Steel nut or extruded hole	All	40-50 inch lbs.
1/4	Steel	Aluminum extruded hole	All	40-50 inch lbs.
1/4	Steel	Steel nut or extruded hole; CU or AL busbar	All	50-60 inch lbs.
5/16	Steel	Aluminum extruded hole	Hex	60-70 inch lbs.
5/16	Steel	Steel nut or extruded hole; CU or AL busbar	Hex	100-150 inch lbs.
3/8	Steel	Steel nut	Hex	150-200 inch lbs.
1/2	Steel	Steel nut	Hex	200-250 inch lbs.

* Interior labels typically indicate the required torque for wire connectors and studs, and should be referenced first.
CU: Copper
AL: Aluminum

MILBANK
ENERGY AT WORK

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Materials and Finishes

Reference Information

Materials

Steel Quality

The meter equipment listed in this catalog is made of galvanized steel (AISI* G90) to maximize weather resistance.
*American Iron and Steel Institute.

Steel Sheet

16-gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated. (AISI G90)
14-gauge, galvanized, sheet: 1 1/4 oz./ sq.ft. class zinc-coated.

Aluminum Extrusion

Wire-terminals: Alloy; 6061-T6, tin-plated for CU/AL wire.
Bus bar: Alloy; 6101-O and 6063-O

Aluminum Sheet

3000 series aluminum sheet, H14, or 5052 series aluminum sheet, H32. Where applicable thicknesses range from .064 – .125.

Copper Sheet and Bus

Electrolytic copper with tin plating in most applications.

Insulating Materials

- In most units, support bases for current-carrying components are molded from fiberglass reinforced high-strength, track resistant thermoset polyester molding compounds.
- Clear or black safety shields and polarity barriers are molded from high-strength, track resistant, polycarbonate molding compounds.
- Various sheet insulating materials, as appropriate for the application are utilized in the fabrication of flat, formed and punched component parts and barriers.

Finish

Process

Light gray state-of-the-art electrostatically applied powder paint offers a durable, non-fading finish. For further information concerning the chemical analysis of the weather-resistant finish, please contact your local Milbank Manufacturers' Representative.

Metal Fastners

Zinc-coated with a chromate dip.

Ratings and Compliance

All Milbank electrical enclosures in this catalog are rated NEMA 3R enclosure unless otherwise specified on individual product pages. All enclosures with a UL designation are constructed per the appropriate UL standard and may be installed per the National Electric Code. UL procedure files associated with the UL Standards are listed as follows: Meter Sockets (UL 414, File E30202), Test Switches (UL 414, File E62531), Power Outlets (UL 231, File E90945), Panelboards (UL 67, File E32628) and Pullout Switches (UL 1429, File E133062). Additional standards are utilized as applicable: Meter Sockets (ANSI C12.7), Test Switches (ANSI C12.9) and Panelboards (NEMA PB-1).

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MILBANK
ENERGY AT WORK

Index

Symbols

5T8K2 39
6003 38
6116 38

A

A7514 37
A7515 37
A7516 37
A7517 37
A7518 37
A7551 37
A8110 37
A8111 37
A8112 37
A9064 37

B

BL7474 39
BL7499 39

K

K5T 39
K1047 38
K1190 39
K1350 38
K1350L 38
K1539 38
K1540 38
K1540L 38
K1541 38
K3082 38
K3083 38
K3441 38
K3442 38
K3865 39
K3866 39
K4527 39
K4528 39
K4529 39
K4530 39
K4802 38
K4977-EXT 39
K4977-INT 39
K5022-INT 39
K5815 38
K5820 38
K5830 38
K5935-2/1450 35
K5935-10GR 35
K5935-11GR 35
K5935-36GR 35
K5935-41 35
K5935-54 35

M

M5-144 38

Q

Q120 36
Q130 36
Q250 36

S

S8324 37

U

U1129-O-K3L-K2L-HSP 12
U1232-X-HSP 25
U1233-X-HSP 25
U1234-X-HSP 25
U1235-X-HSP 25
U1236-X-HSP 25
U1252-X-HSP 26
U1253-X-HSP 26
U1254-X-HSP 26
U1255-X-HSP 26
U1256-X-HSP 26
U1797-O-K3L-K2L-HSP 12
U1980-O-5T-HSP 9
U1980-O-HSP 9
U2120-O-HSP 14
U2124-O-HSP 12
U2732-XT-HSP 28
U2733-XT-HSP 28
U2734-XT-HSP 28
U2735-XT-HSP 28
U2736-XT-HSP 28
U2872-XT-HSP 27
U2873-XT-HSP 27
U2874-XT-HSP 27
U2875-XT-HSP 27
U2876-XT-HSP 27
U3296-X-HSP 10
U3306-X-HSP 11
U3313-X-HSP 13
U3492-XL-HSP 24
U3493-XL-HSP 24
U3494-XL-HSP 24
U3495-XL-HSP 24
U3496-XL-HSP 24
U3566-X-HSP 14
U3802 5
U3812 5
U3822-20GWR 6
U3832 5
U3850-XL-TG-HSP-PL 9
U3862 5
U3949-X-HSP 13
U4363-X-HSP 12
U4667-X-8528 15
U4667-XT-9526 15
U4881-O-50GB 7
U4881-O-60GB 7
U4908-O-100MB-11GR-HSP 31
U5101-XL-100MB-11GR-HSP 31
U5136-O-100S-FMG 33
U5136-O-125S-FMG 33
U5136-O-150S-FMG 33
U5136-O-200S-FMG 33
U5137-O-100S-FMG 33
U5137-O-125S-FMG 33
U5137-O-150S-FMG 33
U5137-O-200S-FMG 33
U5168-XL-100-HSP 19
U5168-XL-125-HSP 19
U5168-XL-150-HSP 19
U5168-XL-200-HSP 19
U5168-XTL-100-HSP 19
U5168-XTL-125-HSP 19
U5168-XTL-150-HSP 19
U5168-XTL-200-HSP 19
U5268-XL-150-HSP 19
U5268-XL-200-HSP 19
U5268-XTL-150-HSP 19
U5268-XTL-200-HSP 19
U5842-RL-100-HSP 18
U5842-RL-150-HSP 18
U5842-RL-200-HSP 18
U5844-RL-100-HSP 18
U5844-RL-150-HSP 18
U5844-RL-200-HSP 18
U5864-X-HSP 13
U5882-X-HSP 29
U5883-X-HSP 29

MILBANK
ENERGY AT WORK

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Index

U5884-X-HSP 29
U5885-X-HSP 29
U5886-X-HSP 29
U5902-X-HSP 29
U5903-X-HSP 29
U5904-X-HSP 29
U5905-X-HSP 29
U5906-X-HSP 29
U6227-X-400-K3L-HSP 23
U6229-X-400-K7L-HSP 23
U6266-XTL-100-HSP 20
U6266-XTL-150-HSP 20
U6266-XTL-200-HSP 20
U6267-X-2/150-HSP 21
U6267-X-2/200-HSP 21
U6272-X-HSP 12
U6273-X-HSP 12
U6396-O-100-10GR-HSP 34
U6396-O-200-10GR-HSP 34
U6419-XL-HSP 17
U6421-XL-HSP 17
U6542-RL-5T9-HSP 17
U6601-X-2/200-5T9-HSP 22
U6602-X-2/200-MLK-HSP 22
U7021-RL-TG-HSP 9
U7040-O-TG-HSP 9
U7040-XL-TG-5T-HSP 9
U7040-XL-TG-HSP 9
U8435-XL-TG-5T-HSP 8
U8435-XL-TG-HSP 8
U9550-RRL-QG-HSP 10
U9551-X-QG-HSP 10
U9700-RRL-QG-HSP 11
U9701-X-QG-HSP 11
U9801-X-QG-HSP 10
UA4667-X-8529 15
UA4667-XT-9527 15
UAP1252-X-HSP 26
UAP1253-X-HSP 26
UAP1254-X-HSP 26
UAP1255-X-HSP 26
UAP1256-X-HSP 26
UAP2124-O-HSP 12
UAP3296-X-HSP 10
UAP3306-X-HSP 11
UAP3313-X-HSP 13
UAP3566-X-HSP 14
UAP3949-X-HSP 13
UAP5844-RL-100-HSP 18
UAP5844-RL-150-HSP 18
UAP5844-RL-200-HSP 18
UAP5864-X-HSP 13
UAP6272-X-HSP 12
UAP6419-XL-HSP 17
UAP6421-O-HSP 17
UAP6542-RL-5T9-HSP 17
UAP6601-X-2/200-5T9-HSP 22
UAP6602-X-2/200-5T9-MLK-HSP 22
UAP7021-RL-TG-HSP 9
UAP7040-O-TG-HSP 9
UAP7040-XL-TG-5T-HSP 9
UAP7040-XL-TG-HSP 9
UAP8435-XL-TG-5T-HSP 8
UAP8435-XL-TG-HSP 8
UAP9551-X-QG-HSP 10
UAP9700-RRL-QG-HSP 11
UAP9701-X-QG-HSP 11
USSP6419-O-HSP 17
USSP6421-O-HSP 17
USSP6542-O-5T9-HSP 17

Z

Z701776-MO 36
Z703916-AC 16
Z703917-AC 16
Z703918-AC 16
Z703919-AC 16
Z703921-AC 16
Z704693-AC 16
Z704694-AC 16
Z705420-AC 16
Z705456-AC 16
Z708080-MO 36
Z708145-AC 16
Z708767-MO 36
Z802965-AC 39
Z814898-AC 39
Z819294-SC 35
Z901925-AC 39
Z903274-AO 39
Z904486-AO 39
Z916264-AO 39
Z916265-AO 39
Z1102270 35
Z1115081 35
Z1139163 35

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Notes

MILBANK
ENERGY AT WORK

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Notes

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MILBANK®
ENERGY AT WORK

Notes

MILBANK
ENERGY AT WORK

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Notes

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

MILBANK®
ENERGY AT WORK

Notes

MILBANK
ENERGY AT WORK

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.



Milbank Manufacturing | 4801 Deramus Ave., Kansas City, MO 64120 | 877.483.5314
milbankworks.com | @milbankworks