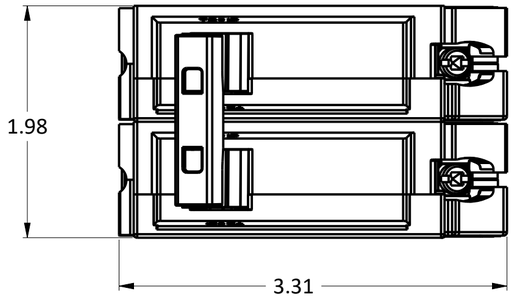
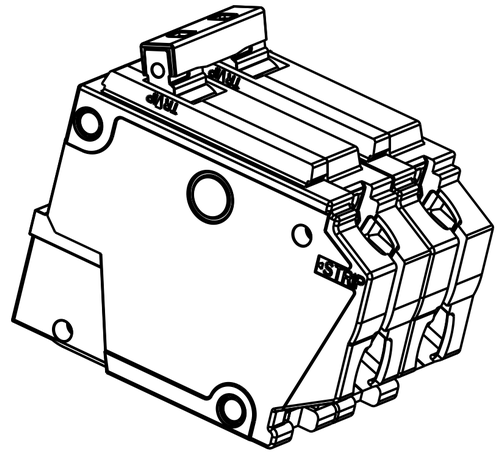
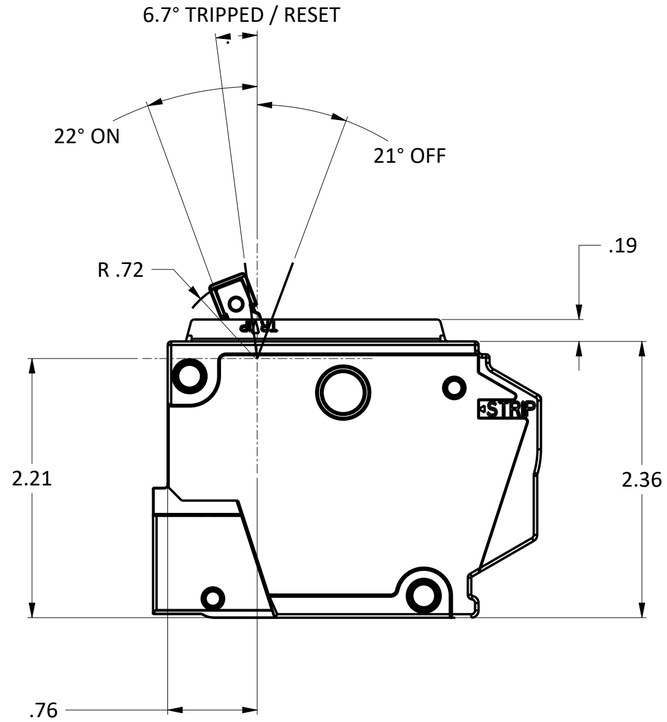
3D Model is the Master Document of Record
Article or Material Must Conform to REACH Procedure S1900000 Sec.14
Article or Material Must Conform to ROHS Procedure S1900000 Sec.13
Part Must Conform to S1900000 Sec.4 Toxicity Procedure
Geometric Dimensioning & Tolerancing as per ASME Y14.5-2009







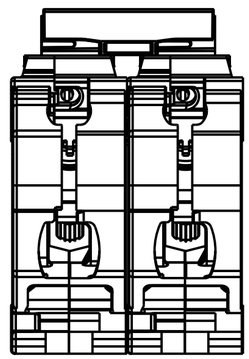


ABB PROPRIETARY AND CONFIDENTIAL INFORMATION
The information contained in the document has to be kept strictly confidential.
Any unauthorized use, reproduction, distribution or disclosure to third parties is strictly forbidden.
ABB reserves all rights regarding intellectual property Rights.
Copyright 2021 ABB. All rights reserved

Third Angle Projection

CRITICAL TO QUALITY CHARARCTERISTICS		ABB		
AMBIENT OPERATING TEMPERATURE 40°	FREQUENCY 50/60 Hz	TITLE PLUG-IN 2 POLE 120/240V		
TORQUE RATINGS 14-12 AWG 20 LB-IN, 10 AWG 30 LB-IN, 8-4 AWG 40 LB-IN, 6-1/0 45 LB-IN		UNITS INCHES	PRODUCT LINE Q-LINE PLUG-IN	
TERMINATION INSULATION RATING 60° / 75°C		SIZE C	SHEET 1 OF 2	REV A
WIRE RANGE 14 AWG - 1/0 AWG	PIGTAIL LENGTH N/A	SCALE 1:1	DOCUMENT NUMBER 1TQC1433E0016	
CERTIFICATIONS UL Listed & cUL Listed		DATE MODIFIED 12/16/2025		

UNLESS OTHERWISE SPECIFIED
TOLERANCE ON:
1 PL DECIMALS ± 0.1
2 PL DECIMALS ± 0.02
3 PL DECIMALS ± 0.005
ANGLES ± 1.0°

us_3rd_c.frm

3D Model is the Master Document of Record
Article or Material Must Conform to REACH Procedure SI900000 Sec.14
Article or Material Must Conform to ROHS Procedure SI900000 Sec.13
Part Must Conform to SI900000 Sec.4 Toxicity Procedure
Geometric Dimensioning & Tolerancing as per ASME Y14.5-2009

CATALOG NUMBER	AMPERE RATING	VOLTAGE	LINE CONNECTION	INTERRUPTION RATING	Additional Attributes
THQL2115	15	120/240V	Plug-in	10kAIC	
THQL2120	20	120/240V	Plug-in	10kAIC	
THQL2125	25	120/240V	Plug-in	10kAIC	
THQL2130	30	120/240V	Plug-in	10kAIC	
THQL2135	35	120/240V	Plug-in	10kAIC	
THQL2140	40	120/240V	Plug-in	10kAIC	
THQL2145	45	120/240V	Plug-in	10kAIC	
THQL2150	50	120/240V	Plug-in	10kAIC	
THQL2160	60	120/240V	Plug-in	10kAIC	
THQL2170	70	120/240V	Plug-in	10kAIC	
THQL2180	80	120/240V	Plug-in	10kAIC	
THQL2190	90	120/240V	Plug-in	10kAIC	
THQL21100	100	120/240V	Plug-in	10kAIC	
THQL21110	110	120/240V	Plug-in	10kAIC	
THQL21125	125	120/240V	Plug-in	10kAIC	
THHQL2115	15	120/240V	Plug-in	22kAIC	
THHQL2120	20	120/240V	Plug-in	22kAIC	
THHQL2125	25	120/240V	Plug-in	22kAIC	
THHQL2130	30	120/240V	Plug-in	22kAIC	
THHQL2135	35	120/240V	Plug-in	22kAIC	
THHQL2140	40	120/240V	Plug-in	22kAIC	
THHQL2145	45	120/240V	Plug-in	22kAIC	
THHQL2150	50	120/240V	Plug-in	22kAIC	
THHQL2160	60	120/240V	Plug-in	22kAIC	
THHQL2170	70	120/240V	Plug-in	22kAIC	
THHQL2180	80	120/240V	Plug-in	22kAIC	
THHQL2190	90	120/240V	Plug-in	22kAIC	
THHQL21100	100	120/240V	Plug-in	22kAIC	
THHQL21110	110	120/240V	Plug-in	22kAIC	
THHQL21125	125	120/240V	Plug-in	22kAIC	
THHQL2140RM	40	120/240V	Plug-in	22kAIC	
THHQL2150RM	50	120/240V	Plug-in	22kAIC	
THHQL2160RM	60	120/240V	Plug-in	22kAIC	
THHQL2170RM	70	120/240V	Plug-in	22kAIC	
THHQL2180RM	80	120/240V	Plug-in	22kAIC	
THHQL2190RM	90	120/240V	Plug-in	22kAIC	
THHQL21100RM	100	120/240V	Plug-in	22kAIC	
THHQL21110RM	110	120/240V	Plug-in	22kAIC	
THHQL21125RM	125	120/240V	Plug-in	22kAIC	
TXQL2115	15	120/240V	Plug-in	65kAIC	
TXQL2120	20	120/240V	Plug-in	65kAIC	
TXQL2125	25	120/240V	Plug-in	65kAIC	
TXQL2130	30	120/240V	Plug-in	65kAIC	
TQL21Y60	60	120/240V	Plug-in	10kAIC	Molded Case Switch
TQL21Y100	100	120/240V	Plug-in	10kAIC	Molded Case Switch
THQL2115HID	15	120/240V	Plug-in	10kAIC	High Intesity Discharge
THQL2120HID	20	120/240V	Plug-in	10kAIC	High Intesity Discharge
THQL2125HID	25	120/240V	Plug-in	10kAIC	High Intesity Discharge
THQL2130HID	30	120/240V	Plug-in	10kAIC	High Intesity Discharge
THHQL2115HID	15	120/240V	Plug-in	22kAIC	High Intesity Discharge
THHQL2120HID	20	120/240V	Plug-in	22kAIC	High Intesity Discharge
THHQL2125HID	25	120/240V	Plug-in	22kAIC	High Intesity Discharge
THHQL2130HID	30	120/240V	Plug-in	22kAIC	High Intesity Discharge

ABB PROPRIETARY AND CONFIDENTIAL INFORMATION
The information contained in the document has to be kept strictly confidential.
Any unauthorized use, reproduction, distribution or disclosure to third parties is strictly forbidden.
ABB reserves all rights regarding intellectual property rights.
Copyright 2023 ABB. All rights reserved.

Third Angle Projection

UNLESS OTHERWISE SPECIFIED
TOLERANCE ON:
1 PL DECIMALS ± 0.1
2 PL DECIMALS ± 0.02
3 PL DECIMALS ± 0.005
ANGLES ± 1.0°

CRITICAL TO QUALITY CHARARCTERISTICS		ABB	
AMBIENT OPERATING TEMPERATURE 40°	FREQUENCY 50/60 Hz	TITLE PLUG-IN 2 POLE 120/240V	
TORQUE RATINGS 14-12 AWG 20 LB-IN, 10 AWG 30 LB-IN, 8-4 AWG 40 LB-IN, 6-1/0 45 LB-IN		UNITS INCHES	PRODUCT LINE Q-LINE PLUG-IN
TERMINATION INSULATION RATING 60° / 75° C		SIZE C	SHEET 2 OF 2 / REV A
WIRE RANGE 14 AWG - 1/0 AWG	PIGTAIL LENGTH N/A	SCALE 1:1	DOCUMENT NUMBER 1TQC1433E0016
CERTIFICATIONS UL Listed & cUL Listed		DATE MODIFIED 12/16/2025	