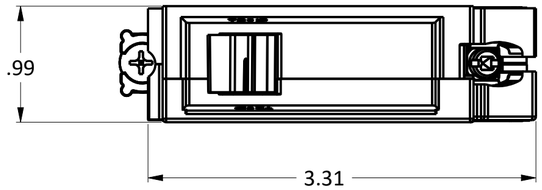
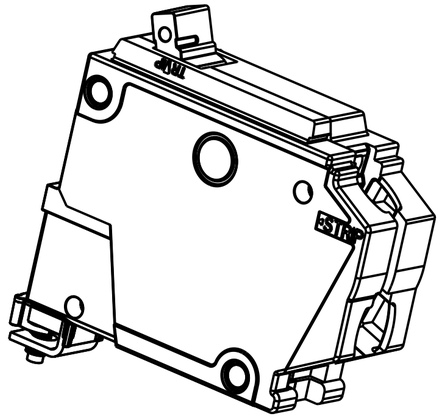
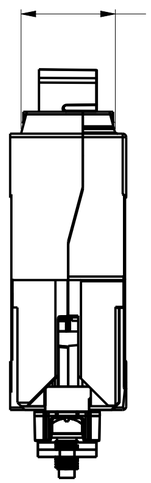
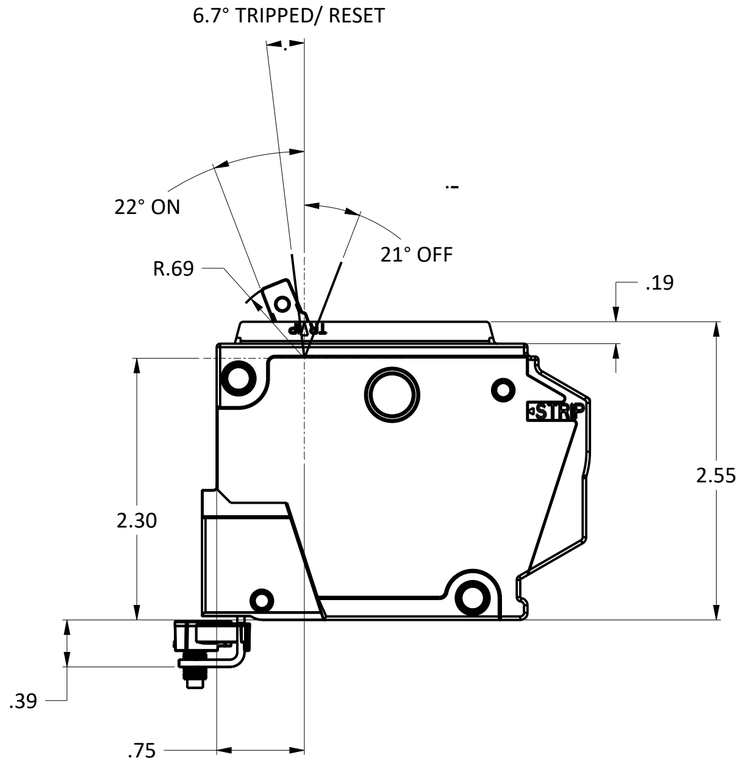
3D Model is the Master Document of Record
Article or Material Must Conform to REACH Procedure SI900000 Sec.14
Article or Material Must Conform to ROHS Procedure SI900000 Sec.13
Part Must Conform to SI900000 Sec.4 Toxicity Procedure
Geometric Dimensioning & Tolerancing as per ASME Y14.5-2009












ABB PROPRIETARY AND CONFIDENTIAL INFORMATION
The information contained in the document has to be kept strictly confidential.
Any unauthorized use, reproduction, distribution or disclosure to third parties is strictly forbidden.
ABB reserves all rights regarding intellectual property rights.
Copyright 2021 ABB. All rights reserved

Third Angle Projection

CRITICAL TO QUALITY CHARARCTERISTICS		ABB	
AMBIENT OPERATING TEMPERATURE 40°	FREQUENCY 50/60 Hz	TITLE BOLT-ON 1 POLE 120/240V	
TORQUE RATINGS 14-12 AWG 20 LB-IN, 10 AWG 30 LB-IN, 8-4 AWG 40 LB-IN, 6-1/0 45 LB-IN		UNITS INCHES	PRODUCT LINE Q-LINE BOLT-ON
TERMINATION INSULATION RATING 60° / 75° C		SIZE C	SHEET 1 OF 2 / REV A
WIRE RANGE 14 AWG - 1/0 AWG	PIGTAIL LENGTH N/A	SCALE 1:1	DOCUMENT NUMBER 1TQC1433E0009
CERTIFICATIONS UL Listed & cUL Listed		DATE MODIFIED 12/29/2025	

UNLESS OTHERWISE SPECIFIED
TOLERANCE ON:
1 PL DECIMALS ± 0.1
2 PL DECIMALS ± 0.02
3 PL DECIMALS ± 0.005
ANGLES ± 1.0°

us_3rd_c.frm

3D Model is the Master Document of Record
Article or Material Must Conform to REACH Procedure S1900000 Sec.14
Article or Material Must Conform to ROHS Procedure S1900000 Sec.13
Part Must Conform to S1900000 Sec.4 Toxicity Procedure
Geometric Dimensioning & Tolerancing as per ASME Y14.5-2009

CATALOG NUMBER	AMPERE RATING	VOLTAGE	LINE CONNECTION	INTERRUPTION RATING	Additional Attributes
THQB1115	15	120/240V	Bolt-on	10kAIC	
THQB1120	20	120/240V	Bolt-on	10kAIC	
THQB1125	25	120/240V	Bolt-on	10kAIC	
THQB1130	30	120/240V	Bolt-on	10kAIC	
THQB1135	35	120/240V	Bolt-on	10kAIC	
THQB1140	40	120/240V	Bolt-on	10kAIC	
THQB1145	45	120/240V	Bolt-on	10kAIC	
THQB1150	50	120/240V	Bolt-on	10kAIC	
THQB1160	60	120/240V	Bolt-on	10kAIC	
THQB1170	70	120/240V	Bolt-on	10kAIC	
THHQB1115	15	120/240V	Bolt-on	22kAIC	
THHQB1120	20	120/240V	Bolt-on	22kAIC	
THHQB1125	25	120/240V	Bolt-on	22kAIC	
THHQB1130	30	120/240V	Bolt-on	22kAIC	
THHQB1135	35	120/240V	Bolt-on	22kAIC	
THHQB1140	40	120/240V	Bolt-on	22kAIC	
THHQB1145	45	120/240V	Bolt-on	22kAIC	
THHQB1150	50	120/240V	Bolt-on	22kAIC	
THHQB1160	60	120/240V	Bolt-on	22kAIC	
THHQB1170	70	120/240V	Bolt-on	22kAIC	
TXQB1115	15	120/240V	Bolt-on	65kAIC	
TXQB1120	20	120/240V	Bolt-on	65kAIC	
TXQB1125	25	120/240V	Bolt-on	65kAIC	
TXQB1130	30	120/240V	Bolt-on	65kAIC	
THQB1115HID	15	120/240V	Bolt-on	10kAIC	High Intensity Discharge
THQB1120HID	20	120/240V	Bolt-on	10kAIC	High Intensity Discharge
THQB1125HID	25	120/240V	Bolt-on	10kAIC	High Intensity Discharge
THQB1130HID	30	120/240V	Bolt-on	10kAIC	High Intensity Discharge
THHQB1115HID	15	120/240V	Bolt-on	22kAIC	High Intensity Discharge
THHQB1120HID	20	120/240V	Bolt-on	22kAIC	High Intensity Discharge
THHQB1125HID	25	120/240V	Bolt-on	22kAIC	High Intensity Discharge
THHQB1130HID	30	120/240V	Bolt-on	22kAIC	High Intensity Discharge
THQB1115LM	15	120V	Bolt-on	10kAIC	Low Magnetic
THQB1120LM	20	120V	Bolt-on	10kAIC	Low Magnetic
THHQB1115LM	15	120/240V	Bolt-on	22kAIC	Low Magnetic
THHQB1120LM	20	120/240V	Bolt-on	22kAIC	Low Magnetic

ABB PROPRIETARY AND CONFIDENTIAL INFORMATION
The information contained in the document has to be kept strictly confidential.
Any unauthorized use, reproduction, distribution or disclosure to third parties is strictly forbidden.
ABB reserves all rights regarding intellectual property Rights.
Copyright 2021 ABB. All rights reserved!

Third Angle Projection

UNLESS OTHERWISE SPECIFIED
TOLERANCE ON:
1 PL DECIMALS ± 0.1
2 PL DECIMALS ± 0.02
3 PL DECIMALS ± 0.005
ANGLES ± 1.0°

CRITICAL TO QUALITY CHARARCTERISTICS

AMBIENT OPERATING TEMPERATURE 40°	FREQUENCY 50/60 Hz	TITLE BOLT-ON 1 POLE 120/240V	
TORQUE RATINGS 14-12 AWG 20 LB-IN, 10 AWG 30 LB-IN, 8-4 AWG 40 LB-IN, 6-1/0 45 LB-IN		UNITS INCHES	PRODUCT LINE Q-LINE BOLT-ON
TERMINATION INSULATION RATING 60° / 75°C		SIZE C	SHEET 2 OF 2 REV A
WIRE RANGE 14 AWG - 1/0 AWG	PIGTAIL LENGTH N/A	SCALE 1:1	DOCUMENT NUMBER 1TQC1433E0009
CERTIFICATIONS UL Listed & cUL Listed		DATE MODIFIED 12/29/2025	

us_3rd_c.frm