




From brackets to fasteners, our innovative, time-saving wall stud solutions get you out of the wall faster.





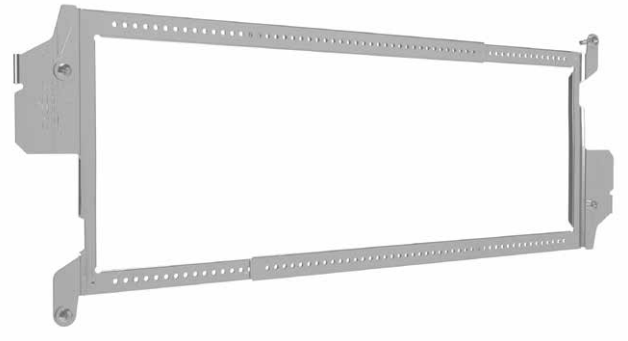

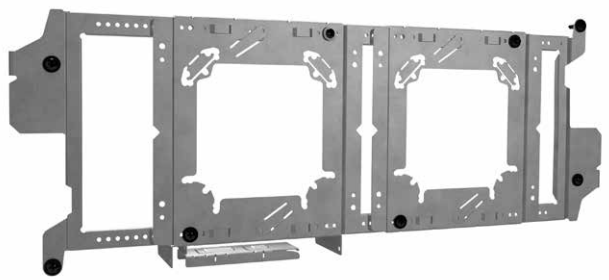

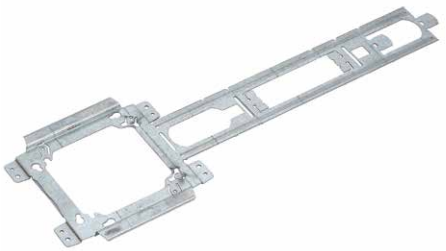
















Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.


Telescoping Bracket

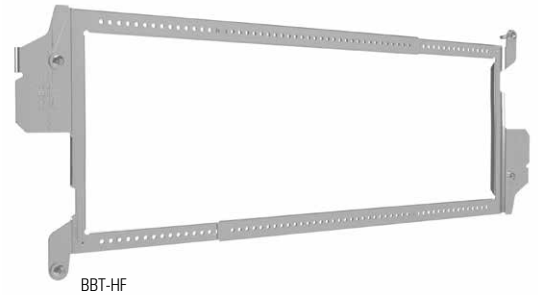

BBT-HF

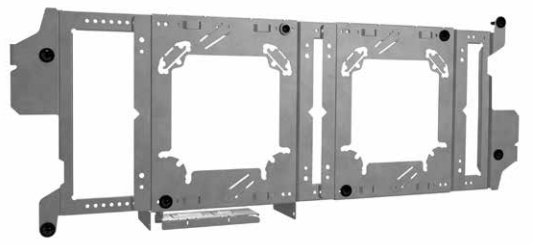

Telescoping bracket with BBA-4 and BBA added.

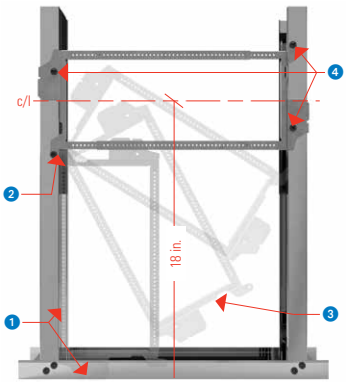

1. With bracket fully collasped, align next to stud with right side at the floor.
2. Install sheet metal screw into pivot point.
3. Rotate bracket around the installed screw at the pivot point.
4. Expand bracket, snap to stud and affix with screws. Center line will be 18" AFF.

With an auto-height adjustment, the rigid BBT-HF telescoping bracket is quick and easy to install. Simply slide the bracket to the width required and snap both ends of the bracket to the stud and secure with screws.

- Easily adjust to accommodate stud widths of 14½" thru 25"; a secure fit at all stud spacings.
- Bracket includes an auto height adjustment feature.
- Self-leveling when snapped onto stud; no need for additional leveling tools.
- Easy to identify center line on both sides of the bracket.
- Snap on feature works on 1¼" thru 1$^{3}/_{8}$" inch width studs.
- For studs wider than 1$^{3}/_{8}$" utilize the BBT-WF.
- Designed to mount boxes at the exact height on either side of the stud without overlap of adjacent brackets.
- Continuous hole pattern allows for positioning of the box mounting bracket anywhere along the length of the bracket.
- UL Listed for U.S. and Canada; CSA certified.


Patent pending (all parts).

UPC/Part number	Catalog #	Description	Stud spacing	Box Qty.
79903882319	**BBT-HF**	Telescoping box bracket	14½" - 25"	25
79903882766	**BBT-WF**	Telescoping box bracket for wide flange studs	14½" - 25"	25
79903885068	**BBT-16**	Telescoping box bracket	9¼" - 16½"	25

Ceiling Clips for BBT brackets


Can be used with BBT-WF. See above.

For complete ceiling clip information, see page 22.



Box Mounting Brackets

The BBA box mounting bracket and the BBA-4 box mounting bracket with support flange snap easily onto the BBT-HF telescoping bracket.



BBA front



BBA back



BBA-2 side



BBA-4 front



BBA-4 back



BBA-MG

- Marty Mouse™ ears retain the box when plaster ring is removed.
- Rabbit Ears™ to attach a plaster ring for data devices without using a box.
- Accepts 4", 4 $^{11}/_{16}$" and 5" square box sizes.
- Built-in, snap off back support extension for studs from 2.5" to 6" .
- Option to daisy chain brackets together in a stud cavity; two brackets mount to the same side of the stud.
- Works with standard or adjustable mud rings.
- Use with BBT-HF or directly to stud.
- UL Listed for U.S. and Canada; CSA certified.


Patent pending (all parts).

UPC/Part number	Catalog #	Description	Stud depth	Box Qty.
79903882321	**BBA**	Box mounting bracket	—	25
79903882767	**BBA-2**	Box mounting bracket with back side support	2½"	25
79903882320	**BBA-4**	Box mounting bracket with back side support	2½" - 6"	25
79903885084	**BBA-MG**	Box mounting bracket for multi-gang and 4 $^{11}/_{16}$" boxes	2½" - 3 $^{5}/_{8}$"	25

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Hands-free box brackets



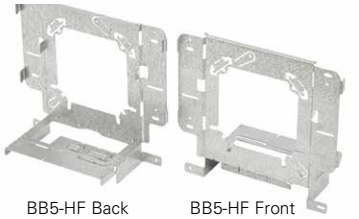

BB5-HF Back BB5-HF Front



- Hands-free - A simple push and the bracket holds itself on the stud until secured with a screw.
- Marty Mouse™ ear feature prevents the box from falling off of the bracket when mud ring is removed.
- Accepts 4" 4$^{11}/_{16}$", and 5" boxes.
- Built-in, snap-off back-side support extension for wall stud depths up to 6".
- Rabbit ear™ feature - attach a plaster ring for data devices without using a box.

UPC/Part number	Catalog number	Description	Stud depth	Box Qty.
79903880534	**BB5-HF**	Box mounting bracket	2½" - 6"	25

Patent pending




BB5 - Hands Free Boxes - both sides of stud.



BB5 - Hands Free Boxes - piggybacked.

Box Support Brackets

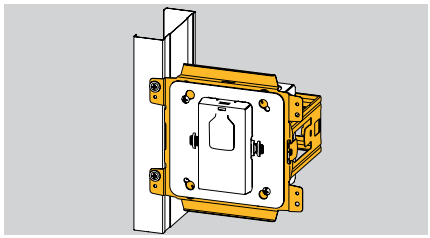

- Interlocking wrap-around design provides extra rigidity.
- Supports most standard 1-gang and 2-gang U.S. and Canadian boxes and/or plaster rings 4" SQ., 4$^{11}/_{16}$" SQ., and 5" SQ. on either side of the stud.
- Adjustable for varying stud depths (2½" to 6").
- Compatible with adjustable plaster rings.
- Integral mounting tabs for attaching plaster rings.
- Multiple brackets may be ganged together.
- Contact factory for prefabricated box assemblies.
- Finish: Pre-galvanized.





Can be used with BBFS-18 (floor stand) See page 19.



Bend For Various Depths

BB70



BB70E*
(Sold separately, must be used with BB70)




UPC/Part number	Catalog number	Metal stud size	Box Qty.
79903856399	**BB70**	2½" - 4"	50
79903856400	**BB70E***	5½" - 6"	50

* Must be used with BB70.

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Double-Sided Box Support Bracket with Marty-Mouse Ears

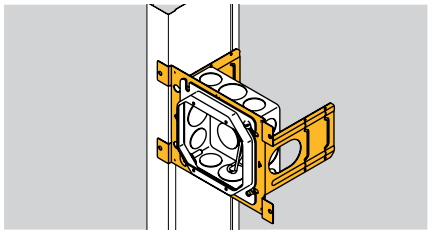




BB73

- Double-side box support, designed for prefabrication. Unit can be installed on either side of stud without repositioning box or devices.
- Patented Marty Mouse™ ears feature an innovative keyhole pattern to secure outlet box to bracket with or without the plaster ring.
- Wider box opening accommodates one or two gang adjustable plaster rings (AMR158 & AMR2).
- Enhanced far-side support stands up during drywall installation and out performs competitor brackets.
- Contact factory for prefabricated box assemblies.
- Finish: Pre-galvanized.

UPC/Part number	Catalog number	Stud size	Box Qty.
78205138645	**BB73**	3⅝", 2½"	50
78205138717	**BB74**	4", 3⅝", 2½"	50
78205138759	**BB76**	6", 5½", 3⅝", 2½"	25

1. Bracket is shipped with ear tabs in the open position




2. Insert box screws into open slots




3. When plaster ring is installed, the ear tabs are bent down into the closed position



4. With the tabs closed, the box remains secured to the bracket when the plaster ring is removed



Box Support Brackets

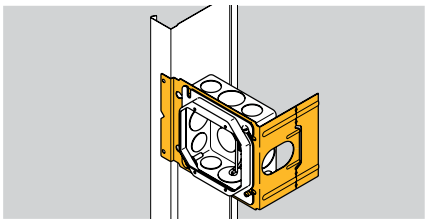


- Improved far-side support stands up during drywall installation.
- Supports 4" or 4$^{11}/_{16}$" square boxes.
- Brackets may be piggy-backed in series.
- Finish: Pre-Galvanized.
- Contact factory for pre-fab box assemblies.




BB4-23



BB4-4



BB4-23D




BB4-4D


UPC/Part number	Catalog number	Metal stud size	Box qty.
78101118190	**BB4-23**	3⅝", 2½"	100
78101118200	**w**	4", 3⅝", 2½"	100
78101118202	**BB4-6**	6", 5½", 3⅝", 2½"	100
79903848375	**BB4-23D**	3⅝", 2½"	50
79903848376	**BB4-4D**	4", 3⅝", 2½"	50
79903848377	**BB4-6D**	6", 5½", 3⅝", 2½"	50

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Telescoping Box Mounting Bracket

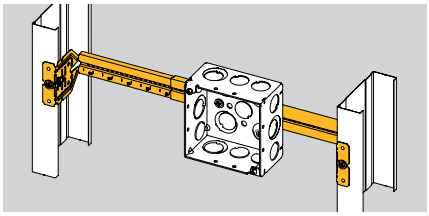



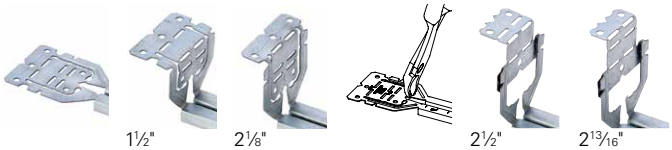


- Completely adjustable, fits a range of stud spacings.
- Mounts 1½", 2⅛", 2½", and 2¹³⁄₁₆" deep boxes.
- Increased rigidity through center groove design.
- Only two screws required to mount for 1½" and 2⅛" box depths.
- Pre-punched screw holes provide for easy box installation.
- Bar is marked with scale for stud spacing.
- Finish: Pre-galvanized.

UPC/Part number	Catalog number	Metal stud size	Box Qty.
79903863001	**BB2-16T**	11″ to 18″	50
79903863002	**BB2-24T**	15½″ to 26″	50

Patent pending.

Box Mounting Clip

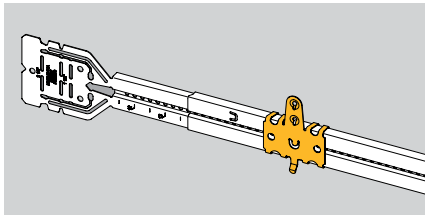



Read safety/installation instruction sheets in packages before use.


- Allows for prefabrication of the electrical box prior to installing the box onto the bracket.
- Tool-less, simply installs by snapping onto the bracket and requires no hardware to secure.
- Contact factory for prefabricated box assemblies.



BB2TSC

UPC/Part number	Catalog number	Stud spacing	Box Qty.
79903863003	**BB2TSC**	Box mounting clip	100

Patent pending

Box Mounting Accessories

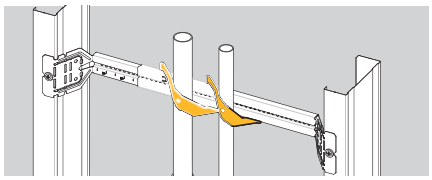

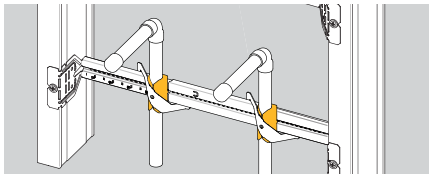


BB2TPC


BB2TCT

- Pipe/conduit clamps require no hardware to install and help provide support anywhere between the stud.
- Copper pipe insulator sleeves help provide protection of differing metals.


UPC/Part number	Catalog number	Description	Box Qty.
79903863004	**BB2TPC-038**	Pipe/conduit clamp ⅜″	100
79903863005	**BB2TPC-050**	Pipe/conduit clamp ½″	100
79903863006	**BB2TPC-075**	Pipe/conduit clamp ¾″	100
79903863007	**BB2TPC-100**	Pipe/conduit clamp 1″	100
79903863013	**BB2TCT-050**	Copper pipe insulator sleeve ½″	100
79903863015	**BB2TCT-075**	Copper pipe insulator sleeve ¾″	100
79903863016	**BB2TCT-100**	Copper pipe insulator sleeve 1″	100

Note: Secures to B-Line BB2-16T and BB2-24T telescoping brackets only.
For a standard 2⅛" deep box, the stud depth must be 3½" or greater.
For a shallow 1½" deep box, the stud depth must be 2½" or greater.

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Wall Studs

Open Box Mounting Bracket

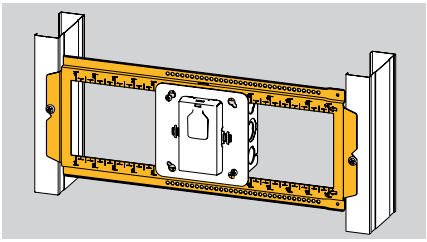

- Open box support allows for adjustability of box position between studs.
- Supports most U.S. and Canadian boxes and/or plaster rings 4" SQ., 4 11/16" SQ., 5" SQ., and multi-gang boxes.
- Fits up to 1½" wide studs 16" to 24" on center.
- Compatible with adjustable plaster rings.
- Field cut to adjust to non-standard stud spacings.
- Stamped markings at ¼", ½", and 1" increments to allow the installer to easily locate the desired box position.
- Contact factory for prefabricated box assemblies.
- Finish: Pre-galvanized.

Can be cut on a mark to make shorter length brackets.



Can be used with BBFS-18 (floor stand) See page 19.



UPC/Part number	Catalog number	Description	Box Qty.
79903856401	**BB7-16**	16″ stud spacing	25
79903856402	**BB7-24**	24″ stud spacing	25
79903859494	**BB7AP**	Alignment plate	100

BB7-24




BB7-16

BB7AP



Box Mounting Bracket

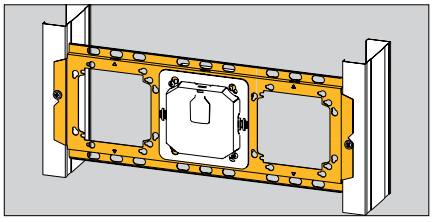

- Increased strength and rigidity to help withstand the stress of drywall installation.
- Supports most U.S. and Canadian boxes and plaster rings 4" SQ. and 4 11/16" SQ.
- Compatible with adjustable plaster rings.
- Contact factory for prefabricated box assemblies.
- Finish: Pre-galvanized.




BB8-24

UPC/Part number	Catalog number	Description	Box Qty.
78101102898	**BB8-16**	16″ stud spacing	25
78101102900	**BB8-24**	24″ stud spacing	25

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Box-to-Stud Fastener

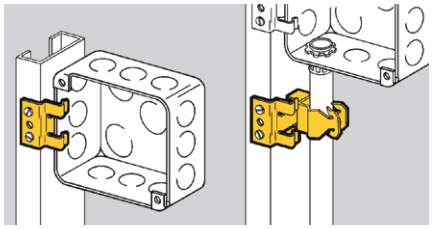



BB1

- Attaches with screws to metal studs.
- BB1 supports electrical box.

UPC/Part number	Catalog number	Description	Box Qty.
78101118145	**BB1**	Electrical box support clip	100

Guide-Rite Conduit-to-Stud Fastener



BG-6-B1

- Attaches with screws to metal studs.
- BG series features Guide-Rite™ design.

UPC/Part number	Catalog number	Conduit size EMT & rigid	Box Qty.
78101118420	**BG-6-B1** *	⅜"	100
78101118475	**BG-8-12-B1**	½", ¾"	100
78101118555	**BG-16-B1**	1"	100

* BG-6 will accept the following range Ø.420 - Ø.675:
14/2 thru 10/4 MC/AC cable and 5⁄16" or ⅜" flexible conduit

Push Type Conduit-to-Stud Fastener




BP-8-B1

- Attaches with screws to metal studs.
- BP series features push-type design.

UPC/Part number	Catalog number	Conduit size	Box Qty.
78101119245	**BP-8-B1**	½" EMT	100
78101119345	**BP-12-B1**	¾" EMT, ½" IMC/ Rigid	100
78101119440	**BP-16-B1**	1" EMT, ¾" IMC/ Rigid	100

Box-to-Stud Fastener

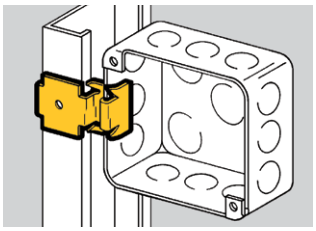




BB9

- Attaches electrical boxes (requiring plaster rings) to most metal studs.
- Box mounts flush to back of drywall.
- Simply installed with a hammer.

UPC/Part number	Catalog number	Description	Box Qty.
78101118270	**BB9**	Electrical box support	100

Adjustable Box Stabilizers

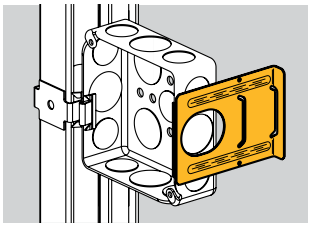



BB12

BB12-6


- Provides far-side support for electrical boxes in 2½" thru 6" studs.
- Cut outs facilitate bending to provide precise installation with greater stability.
- Easily snaps onto box side and is secured in place by plaster ring.

UPC/Part number	Catalog number	Metal stud size	Box Qty.
78101192876	**BB12**	2½" thru 4"	100
78101192879	**BB12-6**	6"	100

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Wall Studs

Box Stabilizer

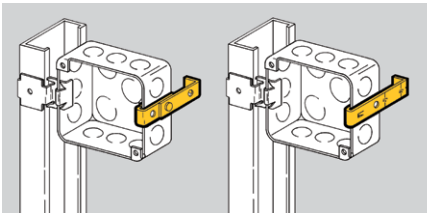

- Provides far-side support for electrical boxes.
- See BB12 Series (page 39) for a better solution.

UPC/Part number	Catalog number	Metal stud size	Box qty.
78101118320	**BF1-40**	2½"	100
78101118325	**BF1-56**	3½"	100
78101118330	**BF1-64**	4"	100
78101118335	**BF1-96**	6"	100




BF1-56



BF1-40

Guide-Rite Conduit-to-Stud Fastener

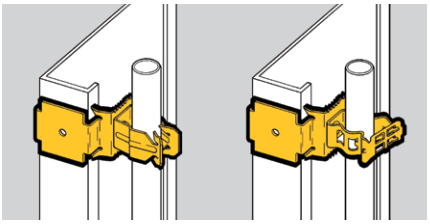

- Attaches conduit to most metal studs.
- BG Series features Guide-Rite™ design.

UPC/Part number	Catalog number	Conduit size EMT & rigid	Box qty.
78101118425	**BG-6-B5** *	⅜" or BX	100
78101118480	**BG-8-12-B5**	½", ¾"	100
78101118560	**BG-16-B5**	1"	100
78101118645	**BG-20-B5**	1¼"	50



BG-6-B5

* BG-6 will accept the following range Ø.420 - Ø.675:
14/2 thru 10/4 MC/AC cable and 5⁄16" or ⅜" flexible conduit

Push Type Conduit-to-Stud Fastener




BP-8-B5

- Attaches conduit to most metal studs.
- BP Series feature push-type design.

UPC/Part number	Catalog number	Conduit size	Box qty.
78101119250	**BP-8-B5**	½" EMT	100
78101119350	**BP-12-B5**	¾" EMT, ½" IMC, Rigid	100
78101119445	**BP-16-B5**	1" EMT, ¾" IMC, Rigid	100

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Retainer Leveler

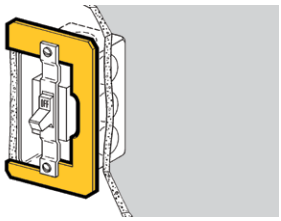




BB32


- Holds wiring device firmly in drywall.
- Can be used with switches, receptacles, GFCIs and decorator devices.
- Ideal for positioning devices in pre-fab installations.
- Finish: Pre-Galvanized.

UPC/Part number	Catalog number	Description	Box qty.
78101118215	**BB32**	Adds rigidity to oversize wall openings	100


Box Support







BB33




BB33L

- Attaches electrical boxes to finished drywall.
- Box is completely supported by drywall.
- Prevents box from pulling out of wall.
- Finish: Pre-Galvanized.

UPC/Part number	Catalog number	Description	Length A	Box qty.
78101101138	**BB33**	Box support	1½″	100
78101104936	**BB33L**	Long leg box support	2½″	100

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Box Mounting Bracket Accessories

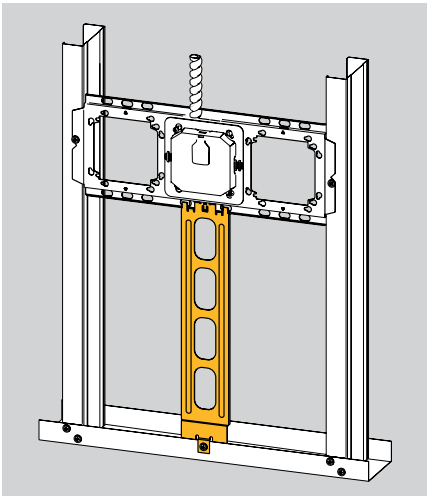



BBFS-18

- Bracket accessories require no tools to install.
- BBFS-18 floor stand ensures consistent box height and eliminates need to measure for proper install height.
- Can be used with BB7 (page 18) and BB8 (page 18) brackets.
- Finish: Pre-galvanized.


UPC/Part number	Catalog number	Description	Box Qty.
79903851597	**BBFS-18**	Floor stand	25


BBFS-18 Installed (Can be used with BB7 or BB8 brackets)





Floor-Mount Box Support

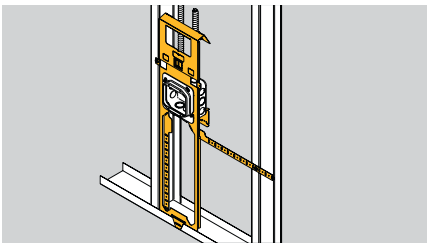

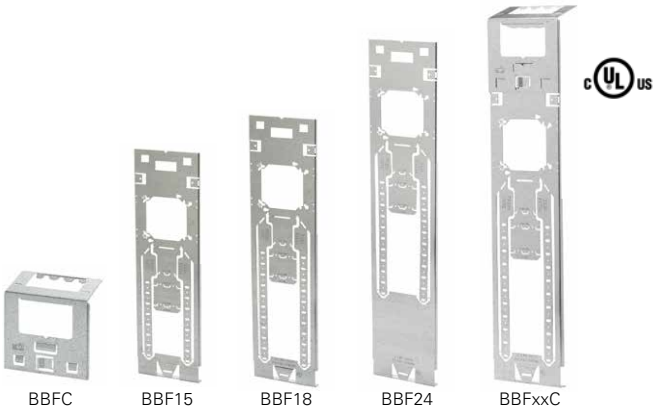


BBFC BBF15 BBF18 BBF24 BBFxxC


- BBF floorstand provides the most rigid support in the industry.
- Far-side support accommodates 6", 5½", 3⅝", and 2½" stud depths.
- Fold-out tab built-in to attach floor stand to stud if desired.
- Integral "wings" provide rigid support when floorstand is mounted between studs.
- Optional cable containment clip securely attaches to floorstand without hardware.
- Patented Marty Mouse™ ears enable boxes to be secured in place with or without the plaster rings.
- Finish: Pre-galvanized.
- Contact factory for prefabricated box assemblies.

UPC/Part number	Catalog number	Box center height	Box Qty.
78205152944	**BBF15**	15" Floorstand	25
78205152945	**BBF18**	18" Floorstand	
78205152946	**BBF24**	24" Floorstand	25
78205152947	**BBFC**	Cable containment clip	25
78205152948	**BBF15C**	15" Floorstand with cable containment clip	25
78205152949	**BBF18C**	18" Floorstand with cable containment clip	25
78205152950	**BBF24C**	24" Floorstand with cable containment clip	25

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Floor Mounted Box Support

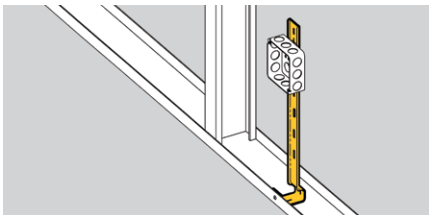


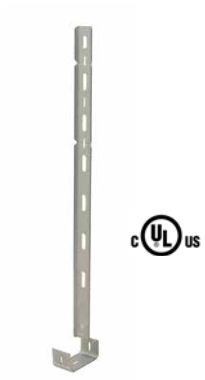

- See BBF series (page 19) for an alternative solution.
- Provides support for electrical box from floor track or concrete forms.
- 18" length with break-away feature for 12" or 16" box mounting.
- Finish: Pre-galvanized.

UPC/Part number	Catalog number	Description	Box Qty.
78101103623	**BB-18**	Floor mounted box support	50

Strut Mounting Brackets

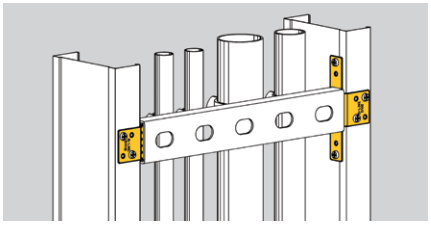




- Attaches 1 3/16" strut, 1½" lathers channel, ½" EMT or ¾" EMT to metal studs.
- Provides support for vertical runs of conduit.
- Finish: Pre-galvanized.

UPC/Part number	Catalog number	Description	Box Qty.
78101101658	**BMB1**	Strut mounting bracket	25 pr.

Uni-Mount Box Support/Cover Plate Mounting Bracket

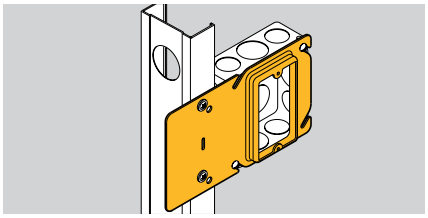



Single Gang BB40 Series




Double Gang BB45 Series

- Uni-Mount™ helps provide a secure support for 4" square boxes and features a built-in plaster ring.
- Rigid bracket design eliminates the need for far-side support.
- Enlarged viewing hole makes it easier to find mark lines on the stud.
- Gangable design accepts BB423 bracket to mount boxes on both sides of the stud.
- Contact factory for prefabricated box assemblies.
- Finish: Pre-galvanized.

UPC/Part number	Catalog number	Description	Box Qty.
78205122768	**BB40-08**	½" Raise	50
78205122771	**BB40-10**	⅝" Raise	50
78205122772	**BB40-12**	¾" Raise	50
78205122773	**BB45-08**	½" Raise	50
78205122774	**BB45-10**	⅝" Raise	50
78205122775	**BB45-12**	¾" Raise	50

Cover Plate Mounting Bracket

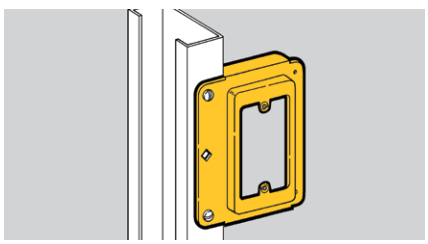




- Provides attachment base for low voltage outlets.
- Replaces electrical box in Class 2 low voltage installations.
- Can be piggy-backed.
- For ½" and ⅝" drywall applications.
- Finish: Pre-galvanized.

UPC/Part number	Catalog number	Description	Box Qty.
78101119873	**BB15**	Single gang stud bracket	50

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Conduit/Cable Supports

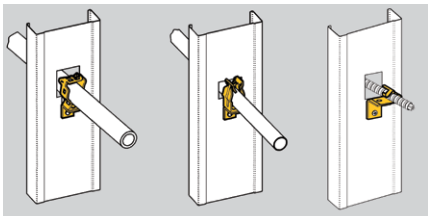



BX4-H7



BG-x-H7



BP-x-H7
(Not UL)




BX4M-H7
(Not UL)

- Supports horizontal runs of conduit, flexible conduit, MC or AC cable through metal studs.
- Attaches easily with a single sheet metal screw.
- Prevents conduit/cable rattling.

UPC/Part number	Catalog number	Conduit/cable size	Box Qty.
78101101228	**BG-6-H7***	⅜", MC, AC, or FMC	100
78101110238	**BG-8-12-H7**	½" or ¾" EMT	100
78101101227	**BP-8-H7**	½" EMT	100
78101101226	**BP-12-H7**	¾" EMT, ½" IMC, Rigid	100
78101101200	**BX4-H7**	MC, AC, or FMC	100
78101101205	**BX4M-H7**	MC, AC, or FMC	100

* BG-6 will accept the following range ∅.420 - ∅.675: 14/2 thru 10/4 MC/AC cable and 5⁄16" or ⅜" flexible conduit.

Flexible Conduit/Cable Fasteners

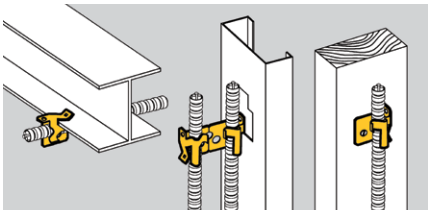



BX4



BX4M




BX4MD

- Attaches MC, AC, sizes 14/2 through 10/3 or ⅜" FMC to studs or flanges up to 3⁄16" thick.
- Snaps into place on metal stud openings or may be screwed to metal or wood studs.
- BX4M may be snapped in half to make two BX4's.
- Allows cables to be positioned a minimum of 1¼" from face of stud as required by NEC Article 300.4(D).

UPC/Part number	Catalog number	Description	Box Qty.
78101101079	**BX4**	Single runs	100
78101101080	**BX4M**	Double runs	100
78101101224	**BX4MD**	Up to 4 runs	100

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Cable Support

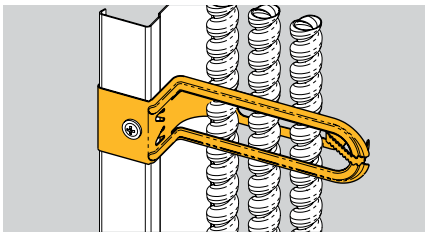



- One-piece design ensures cables are positioned 1¼" from the face of the stud.
- Push mounted for stud positioning.
- Securely attaches to stud using only 1 screw.
- Push mount design prevents part from twisting while installing screw.
- Supports more runs of MC cable than competition (up to 6 runs).
- Rigid product with stiffening ribs and more material than competitive offerings.
- Zip tie locking tab allows trouble-free securing of cables.
- Use BRC6M-1 for wider stud applications and for wood studs.

UPC/Part number	Catalog number	Stud size	Box Qty.
79903843761	**BRC6M**	1¼"	50
79903843762	**BRC6M-1**	All	50

Note: Canadian applications are limited to wood studs only. See cable capacity in bottom chart.



BRCJ


- Ensures cables are positioned 1¼" from the face of the stud.

UPC/Part number	Catalog number	Stud size	Box Qty.
79903862843	**BRCJ**	All	100

Cable type	Cable size	Cable capacity BRC6M	BRCJ
Non-metallic (NM)	14/2, 14/3, 12/2, 12/3, 10/2, 10/3, 8/2 w/grnd.	8	6
	8/3, 6/2 w/grnd.	6	4
Metal clad (MC)	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 w/grnd.	6	4
	10/3, 10/4 w/grnd.	5	4
Armored (AC)	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 w/grnd.	6	4
	10/3, 10/4 w/grnd.	5	4
Flexible conduit (BX)	5⁄16"	6	4
	3⁄8"	5	4

The quantity of cables shown in the chart is the maximum. Fewer cables can be supported. Diameters are based on data from a leading cable manufacturer (may vary slightly).Diameters of some NM cables refer to the widest dimension of a flat cable. NA = Not applicable.


Staple-Lok Multi-Purpose Cable Support

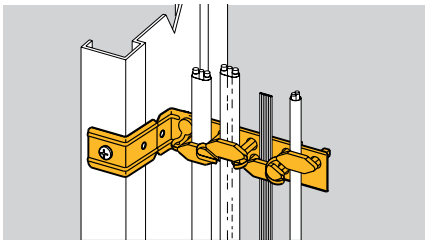



- Individual plastic staples grip cable and reduce slipping.
- Secures up through #10 type NM cable.
- Supports AC, MC or FMC cable up to ½" O.D.
- Staple-Lok™ break-apart feature allows installation on studs and furring strips.
- Allows cables to be positioned a minimum of 1¼" from face of stud as required by NEC Article 300.4(D).


UPC/Part number	Catalog number	Cable size	Box Qty.
78101103587	**BRC4**	Up to .500" O.D.	100

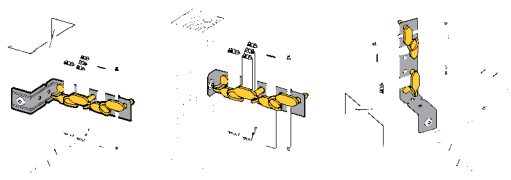

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Wall Studs

Conduit/Cable Supports

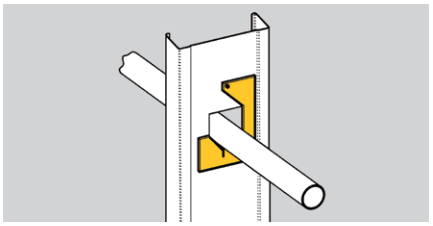




- Allows conduit, MC, AC, or FMC to be pulled through metal studs.
- Provides support for horizontal runs of conduit or cable through metal stud.
- Prevents rattling of conduit/cable.
- Finish: Pre-galvanized.

UPC/Part number	Catalog number	Conduit/cable size	Box Qty.
78101101657	**BX82**	Up to 1"	100

Cable Fasteners

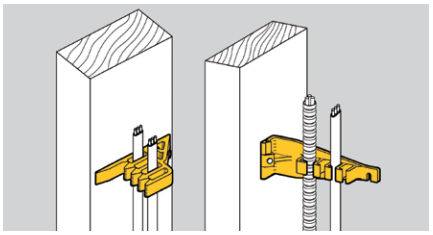



BRC1




BRC2

- Attaches Type NM cables to wood studs.
- Can be used to support computer, CATV, telephone, security and instrumentation cables.
- Provided with nail inserted.
- Allows cables to be positioned a minimum of 1¼" from face of stud as required by NEC Article 300.4(D).

UPC/Part number	Catalog number	Conduit/cable size	Box Qty.
78101102941	**BRC1**	Wood stud cable fastener	50
78101102942	**BRC2**	Furring strip cable fastener	50

Nail Plates for Wood Studs

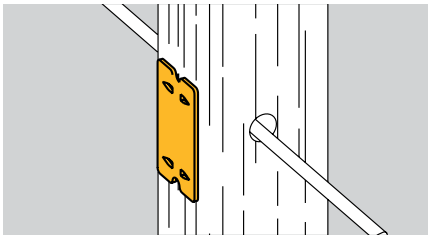




- Protects cable, plastic pipe and copper tubing from screw or nail penetration.
- Easily installed with a hammer.
- Complies with NEC Article 300-4.


UPC/Part number	Catalog number	Conduit/cable size	Box Qty.
78101104927	**BM3**	Nail plate	100

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Nail Plates for Metal Studs

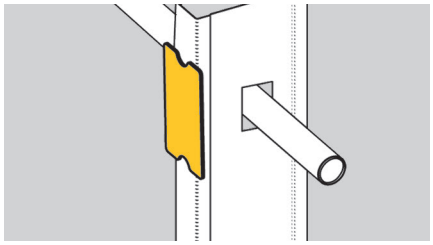


top



bottom


Just peel tape and stick to stud.

- Protects cable, plastic pipe and copper tubing from screw or nail penetration.
- Comes with industrial grade double stick tape on back for easy installation on stud.
- Complies with NEC Article 300-4.

UPC/Part number	Catalog number	Conduit/cable size	Box Qty.
78101126251	**BM3M**	Nail plate	100

Conduit Support

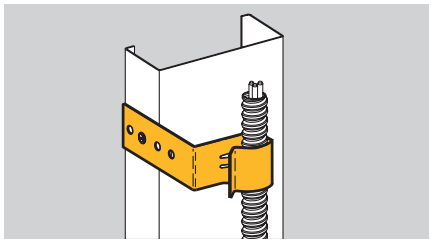



BB38


BB38D

- Larger capacity: Redesigned BB38D attaches ½" to 1" EMT or MC/AC or flexible conduit to metal or wood studs.
- BB38/ BB38D attaches MC/AC cable, ½" & ¾" EMT to metal or wood studs.
- Eliminates the need for offset bending of conduit.
- Aligns conduit with standard box knockouts.
- Allows cables to be positioned a min. of 1¼" from stud face, as required by NEC Article 300.4(D).

UPC/Part number	Catalog number	Box depth	Box Qty.
78101104265	**BB38**	1½"	100
78101195244	**BB38D**	2⅛"	100

Flexible Conduit/Cable Fasteners

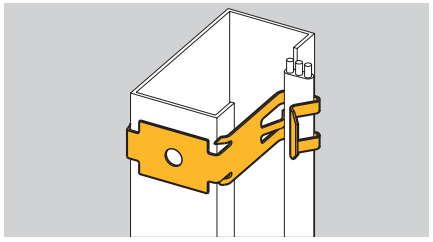




- Secures Romex®† sizes 14/2 w/ground thru 12/3 w/ground, MC/AC sizes 14/2 thru 12/3 to metal or wood studs.
- Allows cables to be positioned a minimum of 1¼" from face of stud as required by NEC Article 300.4(D).

UPC/Part number	Catalog number	Box depth	Box Qty.
78101119755	**BX5**	Secures flexible conduit or cable to metal or wood studs	100

† All other trademarks are property of their respective owners.

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Metal Stud Grommet

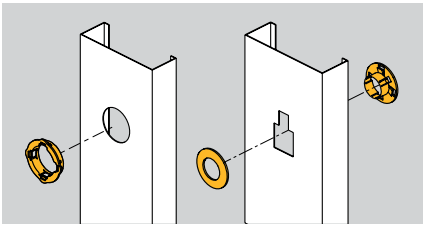



BM1 BM2

- BM1 snaps into standard 1 11/32" diameter holes in metal studs from 25 Ga. to 16 Ga.
- BM2 is shipped as one piece and easily separated for installation.
- Universal BM2 provides 360° protection. Fits all factory punched metal stud holes.
- Protects wire insulation in accordance with NEC Article 300.4(B) (1).

UPC/Part number	Catalog number	Description	Box Qty.
78101119100	**BM1**	Plastic grommet	100
78101119102	**BM1M**	Plastic grommet (bulk quantity)	1000
78101104926	**BM2**	Universal plastic grommet	100

Adjustable Plaster Rings



AMR2



AMR3



AMR0



AMR158

- Adjustable plaster ring can be used with 4" square, 2⅛" deep boxes and fits a range of drywall thicknesses.
- Plaster ring can be adjusted after sheet rock, mud, or tile is installed without removing the wiring devices.
- Helps reduce labor and requirements for multiple products of varying wall thicknesses.

UPC/Part number	Catalog number	Description	Depth	Box Qty.
11842340	**AMR158**	One device adjustable ring	⅝" - 1¼"	25
11838358	**AMR1**	One device adjustable ring	¾" - 1½"	25
11838370	**AMR2**	Two device adjustable ring	⅝" - 1½"	25
11842341	**AMR3**	Three device adjustable ring	¾" - 1½"	25
12164083	**AMR0**	Round device adjustable ring	¾" - 1½"	25

Mounting Screws



BWHS-9



BWHS-9D

UPC/Part number	Catalog number	Description	Box Qty.
78101101675	**BWHS-9**	#8 x 9/16" sheet metal screw	1000
78101104925	**BWHS-9D**	#8 x 9/16" self-drilling sheet metal screw	1000

Note: BWHS-9 & BWHS-9D can be used with all fasteners requiring attachment with sheet metal screws, except on BB2-16, BB2-16D, BB2-24 & BB2-24D which only BWHS-9 can be used.

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.