DIMI LIGHT

DIMI LIGHT



Shenzhen Dimi Lighting Co., Ltd

## Suitable Locations

- Offices
- Warehouse
- Garage
- Shopping Mall
- School
- Other commercial applications

## Product description

LED Linear strip is ideal for replacing traditional fluorescent lamp. It has multiple advantages.
Easy installation: surface, hanging or continuous row mount. Available in standard and high voltage.
0-10V dimming. Motion sensor and emergency battery for option. 130lmw or 160lmw for your choice.

## Advantage

- cETLus, DLC Premium, RoHs & CE
- Instant On
- Excellent 130/160 Lumens a watt
- Input voltage is AC100-277 V
- EZ Install
- 5 years warranty
- Mounts to almostany surface, multiple options
- High CRI
- Excellent Beam Angle 120 Degrees

Shenzhen Dimi Lighting Co., Ltd
Add:2nd Floor,Building 1,No.10, Shihuan Road,Shiyan Street,Bao'an District,Shenzhen 518108,China
Tel:+86 -755 2322 0134 Fax:+86 -755 2359 5319 Email:mike@dimilight.com

# LED Strips Light


Technical Details

| Product Number | Size | Power (W) | Dimensions | Color Temperature (K) | System LuminousFlux(lm) | SystemEfficacy (Lm/W) |
|---|---|---|---|---|---|---|
| DM-ST8FT64 | 8ft | 64 | 96" x2.72" x3.23" | 3000K-5000K | 8320 | 130 |

## Photometric Data

| | |
|---|---|
| Rated Power | 64W |
| Input Voltage | 100-277VAC |
| Lighting Source | LED SMD |
| Power Factor | >0.9 |
| Beam Angle | 120° |
| Lens | Frosted PC |
| Dimming Function | 0 - 10 V |
| Operating Temperature | -20°C to 40°C |
| IP Rating | Ip20 |

## Dimension

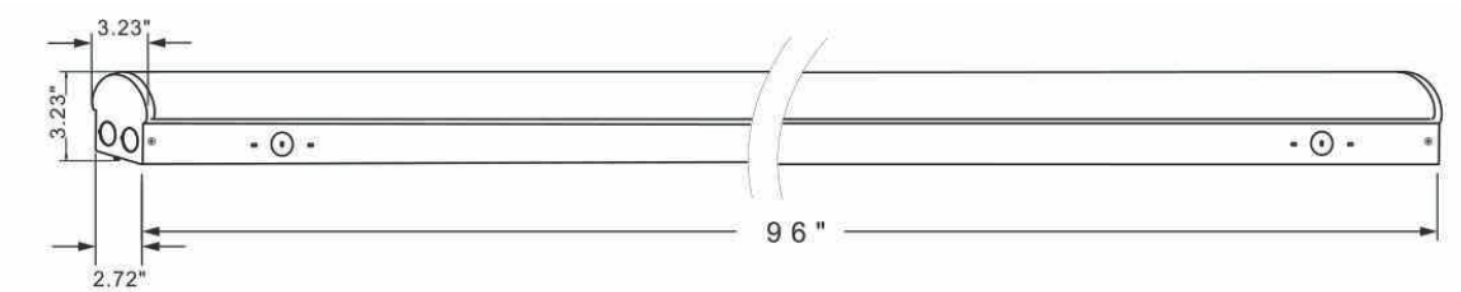





Standard

Optional


Shenzhen Dimi Lighting Co., Ltd
Add:2nd Floor,Building 1,No.10, Shihuan Road,Shiyan Street,Bao'an District,Shenzhen 518108,China
Tel:+86 -755 2322 0134 Fax:+86 -755 2359 5319 Email:mike@dimilight.com

## Mounting Option


### CHAININSTALLATION(OptionOne)



Step1 . Insert a chain on each hook and insert hooks into the installationholes




Step 2. Attach the chains to the ceiling and adjust till balanced and secured



Step 3 . Take wires from the shielded cables, connect AC wires and Dimming wires ( if needed)




Step 4. Wrap the wires with metal materials




Step 5. Optional seamless infinite splicing


### CHAININSTALLATION(OptionTwo)

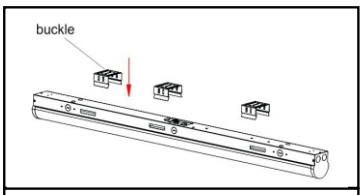



Step 1. Snap bucklesintothe lamp body

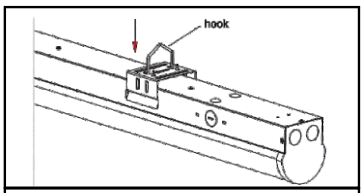



Step 2. Attach the hooks at the slottedholesofbuckles

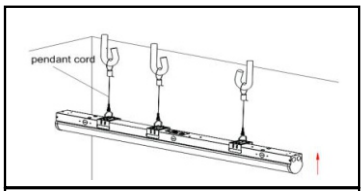



Step 3. Hook buckleswith pendant cord and suspend the light tothedesired height

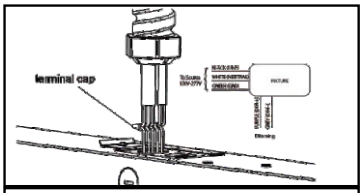



Step 4. Take wires from the terminal caps, connect AC wires and Dimming wires (if needed)

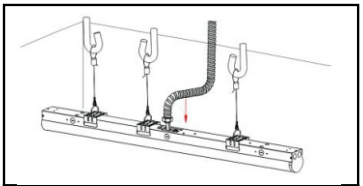

Step 5. Insert the terminalblocks and wires into the strip

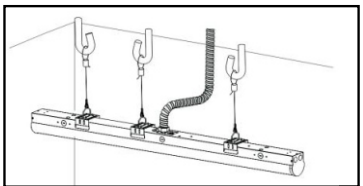


Step 6. Insert the wire terminaljoints to the wire entry

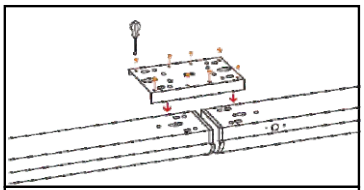


Step 5.Optional seamless infinite splicing


### SURFACEMOUNTED INSTALLATION

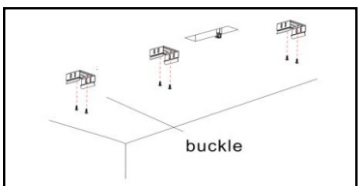



Step 1.Fix the buckles in parallel by screws with 37.5" distance between each buckle

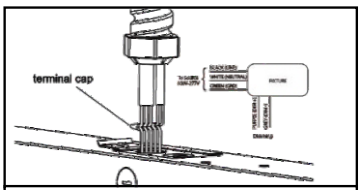


Step 2.Take wires from the terminal caps, connect AC wires and Dimming wires (if needed)

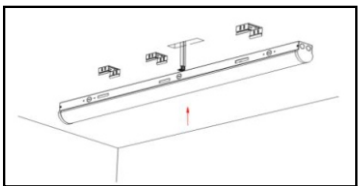

Step 3.Secure the strip with buckles

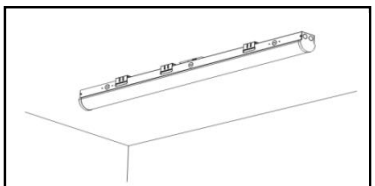


Step 4. Installation is completed

Shenzhen Dimi Lighting Co., Ltd

Add:2nd Floor,Building 1,No.10, Shihuan Road,Shiyan Street,Bao'an District,Shenzhen 518108,China

Tel:+86 -755 2322 0134 Fax:+86 -755 2359 5319 Email:mike@dimilight.com

## Package

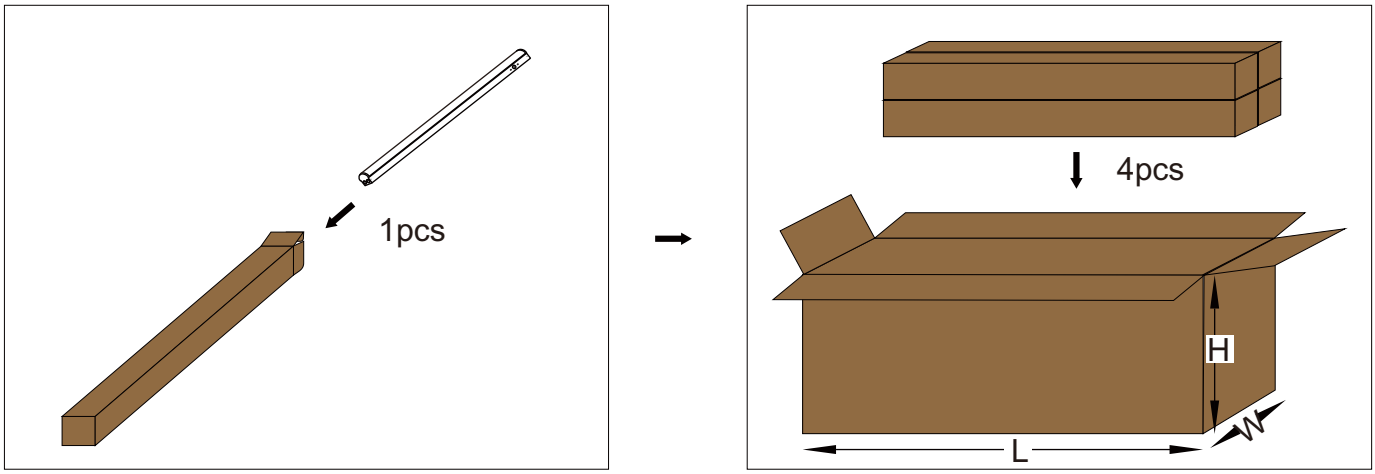


| Item | N. W. | L*W*H | Qty. | G. W. |
|---|---|---|---|---|
| DM-ST8FT40 | 33.33 lbs /CTN | 98.82”x7.48”x7.68” | 4 pcs/CTN | 41.58 lbs /CTN |

## Applications





