PRESENTING THE NEW


COBRA™



NEW IN THE FAMILY



Specifically designed
for small diameter cables.
(fire alarm, data, etc...)

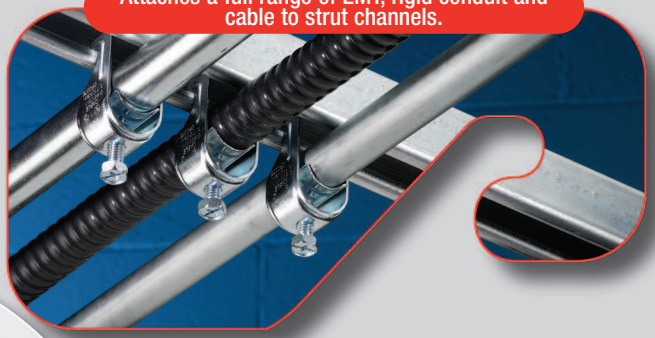

Attaches a full range of EMT, rigid conduit and cable to strut channels.



Multi-driver combination bolt head accepts a wrench, screwdriver or nut driver.



Remove cable or pipes easily without disturbing neighbouring clamps.

Superstrut® • Iberville® • T&B Cable Tray Systems

Thomas&Betts

ONE-PIECE CABLE AND PIPE CLAMP

COBRA™

FAST, ONE-HAND INSTALLATION



Hook clamp into strut channel and hand tighten. 1



Tighten bolt. 2

SIMPLE PRODUCT SELECTION, SOLID INSTALLATION

Clear markings on each clamp identify the catalogue number, min./max. outer cable diameters, EMT/Rigid trade sizes, CSA and UL stamps.

One size clamp works on **equal trade sizes for both EMT and rigid conduit**.

Works with **all depths of strut — 13/16" to 3-1/4"**.

Two hooks on the same side make the clamp easy to install and keep conduits and cable square with strut.

Rugged stirrup and wide saddle design holds securely with no damage to conduit or cable.

Suggested design load is 200 lb (1/4" to 2"); 350 lb (2-1/2" to 4"). Safety factor 4:1 (safety factor = ratio of ultimate load to the design load).

Heavy-duty 5/16" hex bolt with multi-driver head (Robertson square, Phillips cross-recess and slot) provides full range of installation options. Virtually any tool will work!

Bright zinc finish — clamps are electrogalvanized after fabrication for additional durability.

*CPC025 is UL tested on cable range 0.319 to 0.639 with some limitation on cable type.

ORDERING INFORMATION

	Catalogue No.	For EMT Trade Size in. (mm)	For Rigid Conduit Trade Size in. (mm)	Cable O.D. Range (in.)	Static Load Limit (lb) Safety Factor = 4	Quantity per Box
NEW	CPC025	1/4 (8)	1/4 (8)	0.312 - 0.600*	200	100
	CPC050	1/2 (16)	1/2 (16)	0.650 - 0.890	200	100
	CPC075	3/4 (21)	3/4 (21)	0.860 - 1.110	200	100
	CPC100	1 (27)	1 (27)	1.100 - 1.400	200	100
	CPC125	1-1/4 (35)	1-1/4 (35)	1.400 - 1.725	200	50
	CPC150	1-1/2 (41)	1-1/2 (41)	1.690 - 1.980	200	50
	CPC200	2 (53)	2 (53)	1.980 - 2.576	200	50
	CPC250	2-1/2 (63)	2-1/2 (63)	2.576 - 3.060	350	25
	CPC300	3 (78)	3 (78)	3.060 - 3.626	350	25
	CPC350	3-1/2 (91)	3-1/2 (91)	3.626 - 4.126	350	25
	CPC400	4 (103)	4 (103)	4.126 - 4.626	350	25

Standard material is commercial-grade, bright electrogalvanized steel. Stainless steel 316L is also available; add the suffix "SS6" to catalogue no. (i.e.: CPC050SS6). Stainless steel bolt head is hexagonal and slotted only. Not available in aluminum.

REGIONAL SALES OFFICES

www.tnb-canada.com

- Atlantic Region

Thomas & Betts Limited
106 Chain Lake Drive, Unit 2C
Halifax, Nova Scotia B3S 1A8
Tel.: (902) 450-1307
Toll Free: 1-877-862-4357
Fax: (902) 450-1309

- Quebec Region

Thomas & Betts Limited
7900 Taschereau Boulevard
Building D, Suite 108
Brossard, Quebec J4X 1C2
Tel.: (450) 466-1102
Toll Free: 1-800-465-1399
Fax: (450) 466-1163

- Ontario Region

Thomas & Betts Limited
2000 Argentia Road
Plaza 5, Suite 500
Mississauga, Ontario L5N 2R7
Tel.: (905) 858-1010
Toll Free: 1-877-291-7771
Fax: (905) 858-1080

- Western Region

Thomas & Betts Limited
6531-148th Street, #1
Surrey, British Columbia
V3S 3C5
Tel.: (604) 598-9811
Toll Free: 1-866-540-8220
Fax: (604) 598-9840

Thomas & Betts Limited
4836 Eleniak Road
Edmonton, Alberta T6B 2S1
Tel.: (780) 424-7092
Toll Free: 1-888-664-5666
Fax: (780) 424-7093
Toll Free: 1-866-424-4082

© Thomas & Betts Limited. All rights reserved.

Printed in Canada. 04/09/5000.
Order no. COBRASHEETBABY-E

Thomas&Betts