
LED FILAMENT LAMPS

B10 GLASS SERIES

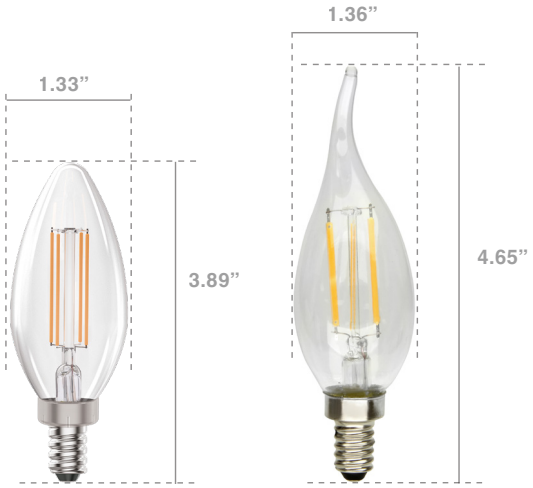

FEATURES:

- Wattage: 4W, replaces 40W Inc.
- Torpedo or Flame Tip shapes
- Lumens: 300 and 330 lumens
- Efficacy: 75lm/w and 82lm/w
- Volts: 120V
- Frequency: 60Hz
- CRI: 80
- Base: E12
- Power Factor: 0.70
- Dimmable down to 10%
- Operating temperature range: - 4° to 104°F
- 3 year standard warranty
- 15,000 hour life at L70 standards
- Suitable for damp locations
- Suitable for use in enclosed luminaires

APPLICATIONS

- Chandeliers
- Decorative lighting fixtures

WARRANTY:

3-year standard warranty
(further details available at www.maxlite.com/warranties)

MODEL SELECTION (Full list of order codes on pg. 2) | Typical order example: F4B10D27/3P

F4B10	D	
FAMILY	**DIMMABILITY**	**COLOR TEMPERATURE (CCT) & PACKAGE QUANTITY**
F4B10= 4 Watt, LED B10 Torpedo Filament Candle	**D=** Dimmable	**27=** 2700K, Single box **27/3P=** 2700K, 3-Pack **27/BP=** 2700K, Bulk Pack
F4BA10= 4 Watt, LED B10 Flame Tip Filament Candle		

NOTES:

1. See page 3 for a list of compatible dimmers.

SPECIFICATIONS:

ITEM	SPECIFICATION	F4B10D27	F4B10AD27
GENERAL PERFORMANCE	Watt (W)	4	
	Lumens Delivered (lm)	300	330
	Efficacy (lm/w)	75	82
	Equivalency	40W	
	CRI	80	
	Color Temperature	2700K	
	Lumen Maintenance (L70)	15,000 hours	
ELECTRICAL	Power Factor	≥0.70	
	Input Voltage	120V	
PHYSICAL	Operating Temperature	-4° F - 104° F	
	Base	E12	
APPLICATION	Environment	Dry, Damp	
	Certification	cULus Listed	
	Warranty	3 Year standard warranty	

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

ORDERING:

ORDER CODE	MODEL	WATTAGE	DELIVERED LUMENS	INCANDESCENT EQUIVALENCY	CRI	CCT (K)	DIMENSION (MOL" X W")	QTY IN CASE
14099267	F4B10D27	4	300	40W Inc.	80	2700K	3.78" x 1.38"	100pcs
14099268	F4B10D27/3P (3-PACK)							24pcs of 3-Packs
14099269	F4B10D27/BP (BULK PACK)							100pcs
102293	F4BA10D27		330				4.65" x 1.36"	48

COMPATIBLE DIMMERS:

MANUFACTURE	DIMMERS PART #
ADRONE	ADWR703HW4
AH	SDM/600
ALMOND	LUXDM600-12
COOPER	SAL06P-W-K
CTL	DM600-12-3/LED/WH
LEGRAND	HCL453PTC
LEVITON	6684
	603-6631-A
	6631-A
	6631-LA
	NO.6683
	IPI06-1LZ 600W
	IPE04-1LZ
	NO.6672
	NO.6631
	6681
LUTRON	D-600PH-DK
	CTCL-153P-WH
	S-600
	S-600PR-WH
	CT-103P-WH
	D-600R-IV
	D-600R-WH
	D-600RH-DK
	DV-600PH-WH
	DV-603PH-WH
	DV-603PR
	DVW-600PH-WH
	MAW-600H-AL
	S-10PH
	S-600-AL
	S-600-IV
	S-600H-WH
	S-603PGH-WH
	S-603PH-WH
	TGCL-153PH-WH
	DVCL-153PH
	DVWCL-153PH-WHC

MANUFACTURE	DIMMERS PART #
LUTRON	TG-600PH-WH
	AYCL-153P-WH
	MACL-153M-WH
	MACL-153MLH-WH
	S-600P-WH
	AYCL-153PH
	DV-600P-WH
	DVCL-153P-WH-3
	DVCL-253PH
	LECL-153PH-WH
	MACL-153MH-WH
	MSCL-OP153MH-WH
	SCL-153PH-WH
	TG-600PNLH-WH
	TG-603PGH-WH
	TGCL-153PH-WH
MAXXIMA	MEW-DM600