
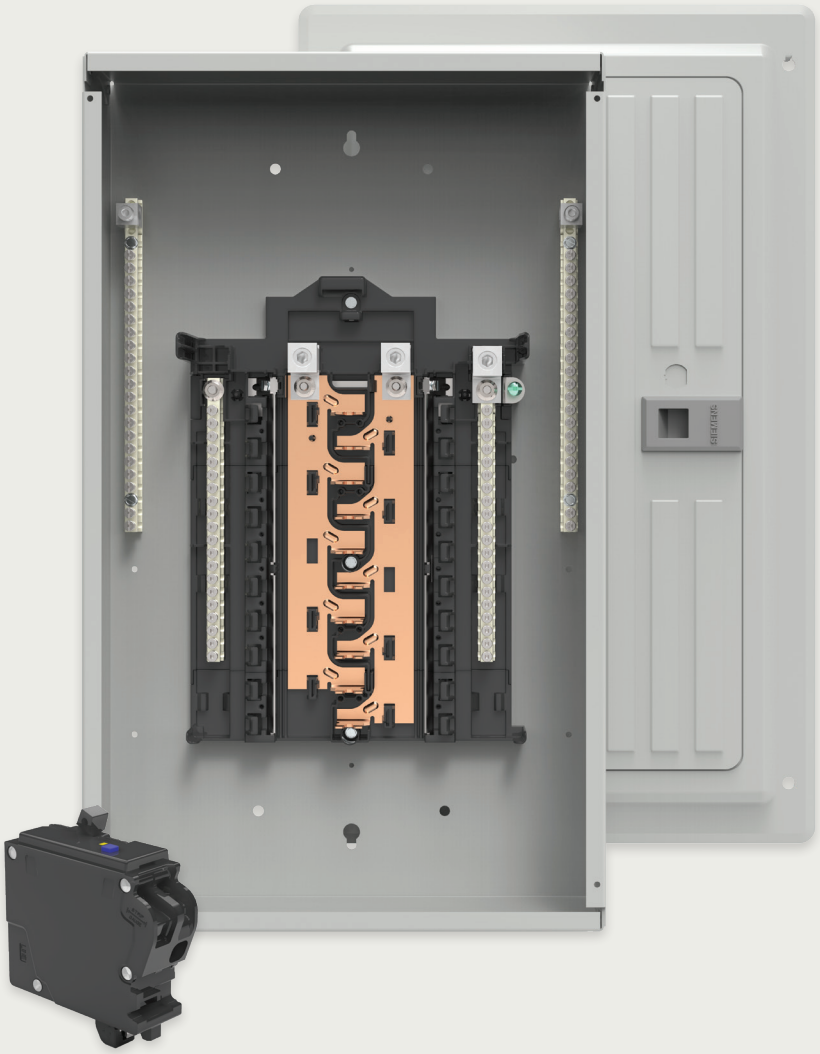


SIMPLE. SPACIOUS. SECURE.

Plug-on Neutral Load Centers and Electronic Breakers

Installs just like any other circuit breaker.
Now without the pigtail.
No new wiring practice or installation method required.
usa.siemens.com/loadcenters

SIEMENS

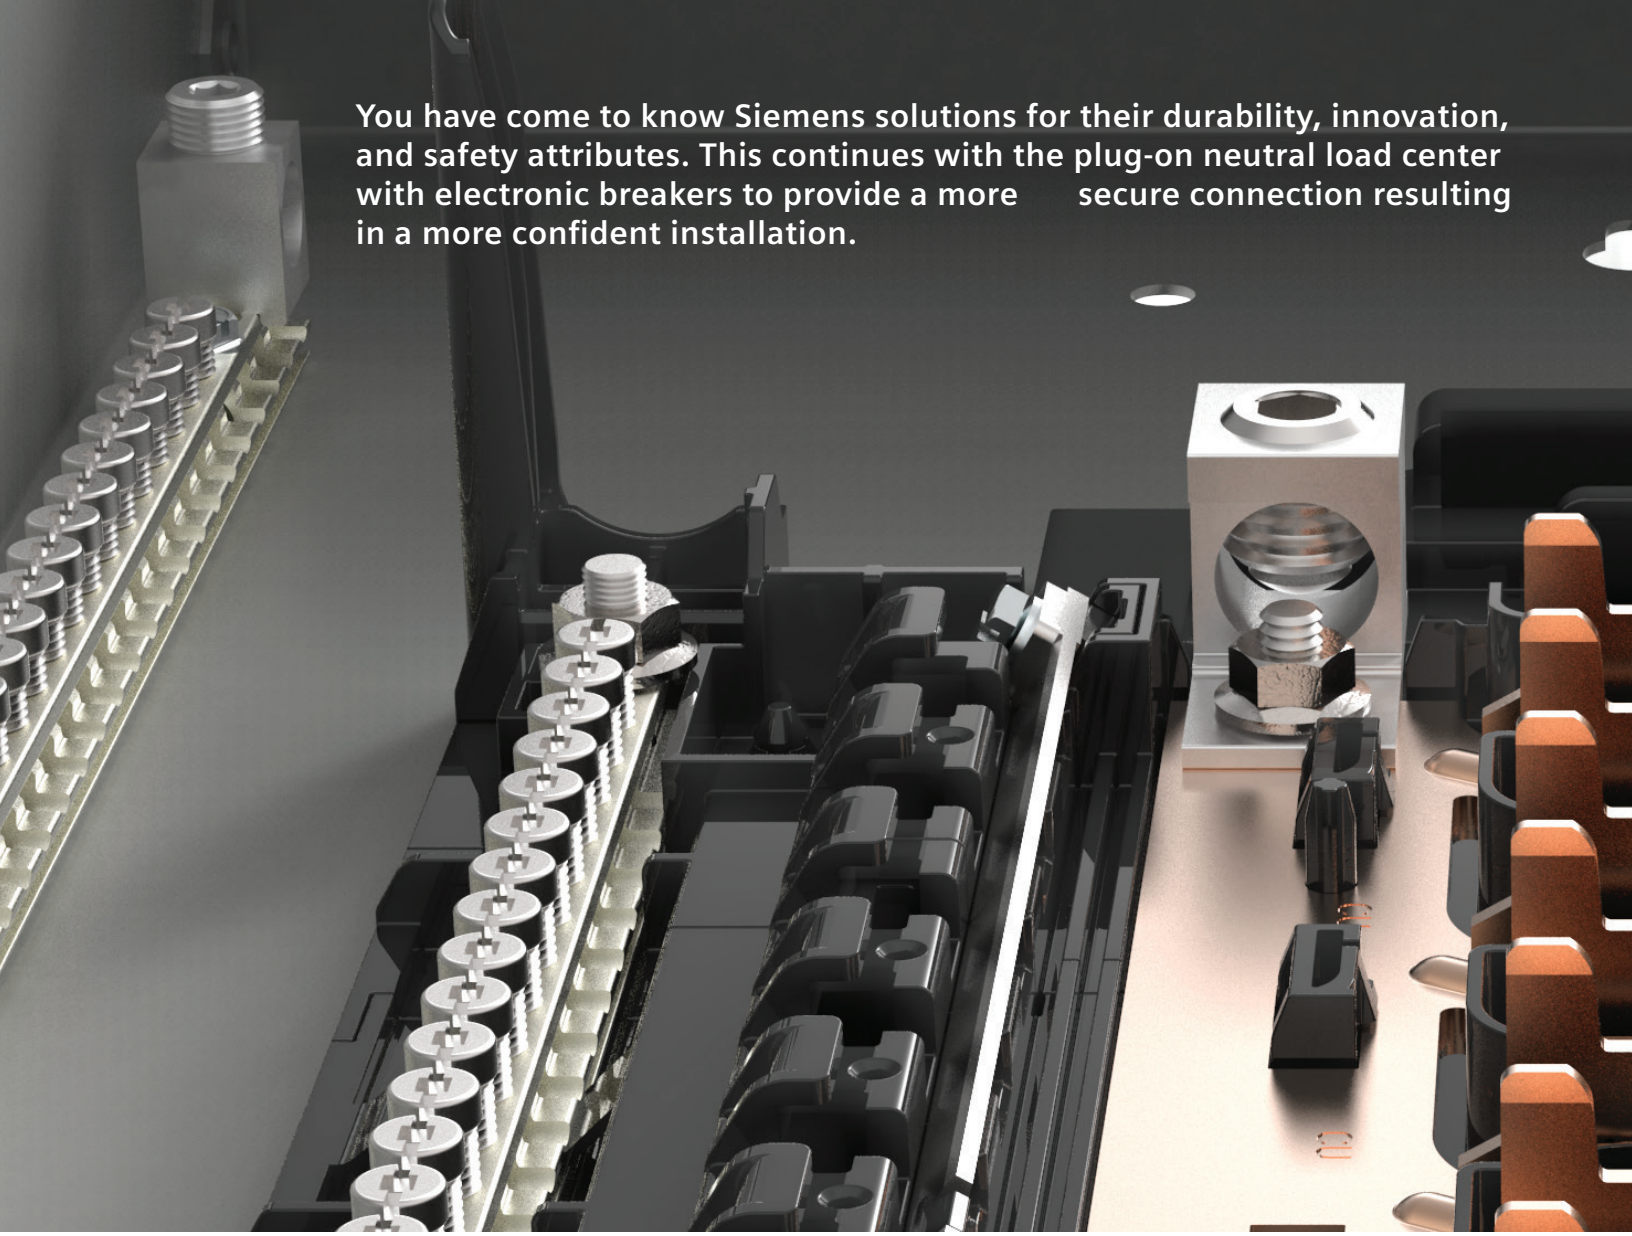

You have come to know Siemens solutions for their durability, innovation, and safety attributes. This continues with the plug-on neutral load center with electronic breakers to provide a more secure connection resulting in a more confident installation.

Simple.

- Quicker breaker installation
- Wiring made easier with the neutral lug removed on CAFCI breakers
- Same great features as PL and ES load centers

Spacious.

- Small electronic breaker footprint
- Design allows for neutral terminal accessibility
- Over 4 inches of wire bending space


Secure.

- Same reliable installation method
- Neutral clip is the same as line side
- Durable hook-rail

A Siemens Advantage

With an overall smaller electronic breaker footprint, the plug-on neutral load center still gives you over 4" of wire bending space, which allows for a simpler, cleaner, and faster path to a finished project.

The plug-on neutral load center has the same great features of the PL and ES line, plus an integrated neutral bus.①

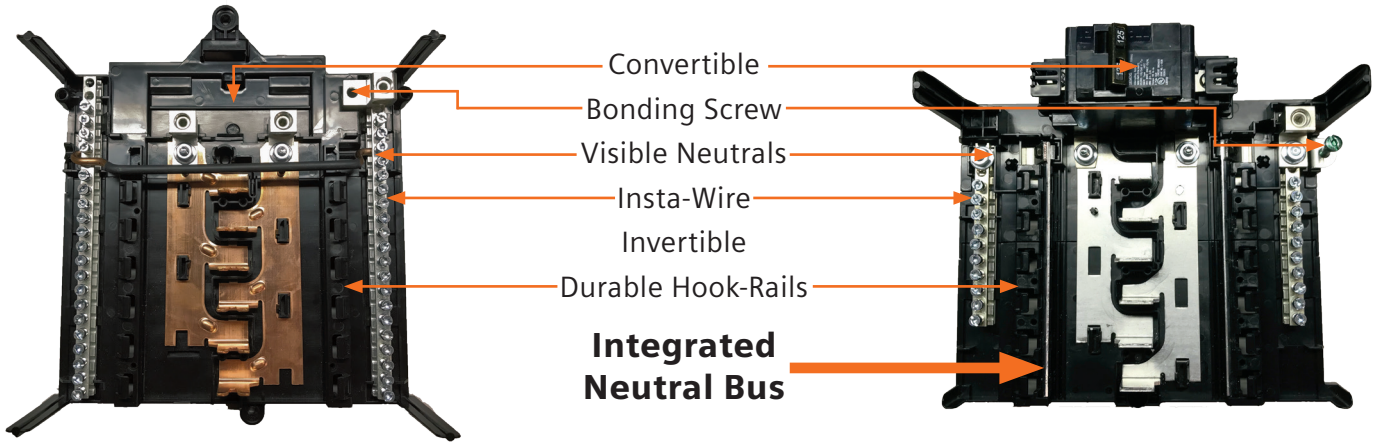

① PN panels are convertible and come with two ground bars. SN panels come with one ground bar.

Plug-on neutral breaker offering:

- 1 and 2-pole CAFCI
- 1-pole Dual Function (CAFCI/GFCI)
- 1-pole GFCI

Features:

- Load Lug(s) only on the CAFCI breakers
- LED indicators for troubleshooting
- Insta-Wire connectors

Technical Data:

- 10,000 AIC
- 120V
- UL Listed
- HACR and SWD rated

Combination Type AFCI	
1-pole	**QA115AFCN**
	QA120AFCN
2-pole	**Q215AFCN**
	Q220AFCN
Dual Function	
1-pole	**Q115DFN**
	Q120DFN
GFCI Class A 5mA	
1-pole	**QF115AN**
	QF120AN
	QF130AN

The new plug-on neutral load center is compatible with existing surge solutions including the QSA breaker, Boltshield QSPD internally mounted and Boltshield FSPD stand-alone units.



FSPD
Surge Protection Device



QSPD Circuit Breaker and
Surge Protection Device




CAFCI



Dual Function

CAFCI breakers now have a single lug only. The branch neutral conductor is returned to the neutral terminal bar. CAFCI breakers can be installed in the same manner as a thermal magnetic (standard) breaker. This allows the installer to land ground and neutral conductors before installing the breaker and power conductor.

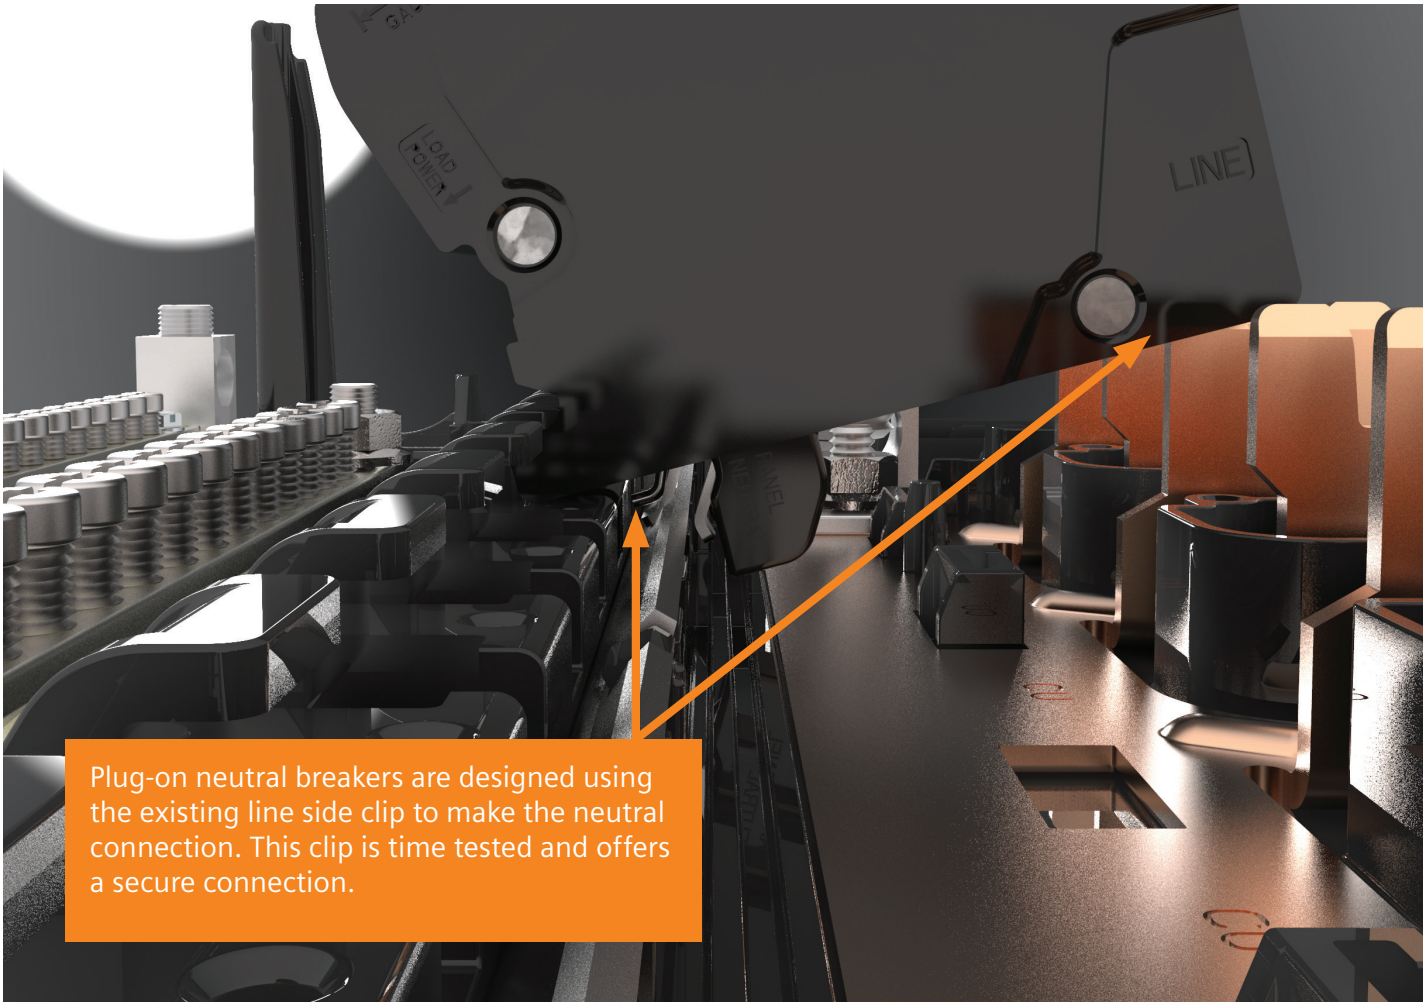

Plug-on neutral breakers are designed using the existing line side clip to make the neutral connection. This clip is time tested and offers a secure connection.

PN Series 1-phase Main Breaker/Convertible Plug-on Neutral Load Centers⑥

1-phase, 3-wire, 120/240 Volts AC

Main Breaker / Convertible Load Centers①
100-225 Amperes

Copper Bus
60/75°C Rated

			Indoor Enclosure - NEMA Type 1		Outdoor Enclosure - NEMA Type 3R	
Amp Rating	**No. of Spaces**	**No. of Circuits**	**Catalog Number**	**Enclosure Height (inches)②**	**Catalog Number**	**Enclosure Height (inches)③**
100	12	24	**PN1224B1100C**	18	**PNW1224B1100C**	21
100	16	32	**PN1632B1100C**	21	**PNW1632B1100C**	23
100	20	20	**PN2020B1100C**	21	**PNW2020B1100C**	27
100	20	40	**PN2040B1100C**	21	–	–
100	24	24	**PN2424B1100C**	24	–	–
100	30	30	**PN3030B1100C**	26	–	–
100	30	48	–	–	**PNW3048B1100C**	29
125	30	30	**PN3030B1125C**	26	–	–
125	30	48	–	–	**PNW3048B1125C**	29
150	8	16	–	–	**PNW0816B1150TC⑤**	23
150	20	40	**PN2040B1150C**	24	**PNW2040B1150C**	27
150	30	30	**PN3030B1150C**	30	–	–
150	30	48	–	–	**PNW3048B1150C**	35
200	8	16	–	–	**PNW0816B1200TC⑤**	23
200	20	40	**PN2040B1200C**	26	**PNW2040B1200C**	27
200	30	48	**PN3048B1200④**	30	–	–
200	30	48	**PN3048B1200C**	30	**PNW3048B1200C**	35
200	40	40	**PN4040B1200④**	36	–	–
200	40	40	**PN4040B1200C**	36	**PNW4040B1200C**	38
200	40	60	**PN4060B1200④**	36	–	–
200	40	60	**PN4060B1200C**	36	–	–
200	54	82	**PN5482B1200C**	42	–	–
225	42	64	**PN4264B1225C**	39	**PNW4264B1225C**	38
225	54	82	**PN5482B1225C**	43	–	–

① Factory installed 22KAIC main breaker. Suitable for use as service equipment.
② Indoor enclosures are 14 1/4" wide by 3 7/8" deep.
③ Outdoor enclosures are 14 1/2" wide by 4 1/4" deep.
④ Includes all PN series features with aluminum bus.
⑤ Feed-thru lugs.
⑥ Available (made to order) in white by adding "W" to the end of the catalog number.

PN Series 1-phase Main Lug/Convertible Plug-on Neutral Load Centers⑥

1-phase, 3-wire, 120/240 Volts AC

Main Lug / Convertible Load Centers③
125-225 Amperes

Copper Bus
60/75°C Rated

			Indoor Enclosure - NEMA Type 1		Outdoor Enclosure - NEMA Type 3R	
Amp Rating	**No. of Spaces**	**No. of Circuits**	**Catalog Number**	**Enclosure Height (inches)①**	**Catalog Number**	**Enclosure Height (inches)②**
125	12	12	**PN1212L1125C**	18	**PNW1212L1125C**	21
125	12	24	**PN1224L1125C**	18	**PNW1224L1125C**	21
125	16	32	**PN1632L1125C**	21	**PNW1632L1125C**	23
125	20	20	**PN2020L1125C**	21	–	–
125	20	40	**PN2040L1125C**	21	–	–
125	24	48	**PN2448L1125C**	24	–	–
125	30	48	**PN3048L1125C**	26	**PNW3048L1125C**	29
125	40	40	**PN4040L1125C**	36	–	–
150	20	40	**PN2040L1150C**	24	**PNW2040L1150C**	27
200	8	16	–	–	**PNW0816L1200TC⑤**	23
200	12	24	**PN1224L1200C**	21	**PNW1224L1200C**	23
200	20	40	**PN2040L1200C**	26	**PNW2040L1200C**	27
200	24	48	**PN2448L1200C**	30	–	–
200	30	30	**PN3030L1200C**	30	–	–
200	30	48	**PN3048L1200④**	30	–	–
200	30	48	**PN3048L1200C**	30	**PNW3048L1200C**	35
200	40	40	**PN4040L1200④**	36	–	–
200	40	40	**PN4040L1200C**	36	**PNW4040L1200C**	38
200	40	60	**PN4060L1200C**	36	–	–
225	12	24	–	–	**PNW1224L1225C**	27
225	42	64	**PN4264L1225C**	39	**PNW4264L1225C**	38
225	54	82	**PN5482L1225C**	43	–	–

① Indoor enclosures are 14 1/4" wide by 3 7/8" deep.
② Outdoor enclosures are 14 1/2" wide by 4 1/4" deep.
③ 125A load centers will accept MBK100A and MBK125A. 150A load centers will accept MBK150A. 200A load centers will accept MBK200A and MBK150A. 225A load centers will accept MBK225A, MBK200A, MBK150A.
④ Includes all PN series features with aluminum bus.
⑤ Feed-thru lugs.
⑥ Available (made to order) in white by adding "W" to the end of the catalog number.

SN Series 1-phase Main Breaker Plug-on Neutral Load Centers⑤

1-phase, 3-wire, 120/240 Volts AC

Main Breaker Load Centers①
100-225 Amperes

Aluminum Bus
60/75°C Rated

			Indoor Enclosure - NEMA Type 1		Outdoor Enclosure - NEMA Type 3R	
Amp Rating	**No. of Spaces**	**No. of Circuits**	**Catalog Number**	**Enclosure Height (inches)②**	**Catalog Number**	**Enclosure Height (inches)③**
100	12	24	**SN1224B1100**	18	**SNW1224B1100**	21
100	16	32	**SN1632B1100**	21	**SNW1632B1100**	23
100	20	20	**SN2020B1100**	21	**SNW2020B1100**	27
100	20	40	**SN2040B1100**	21	–	–
100	24	48	**SN2448B1100**	24	–	–
100	30	30	**SN3030B1100**	26	–	–
100	30	48	**SN3048B1100**	**26**	–	–
125	12	24	–	–	**SNW1224B1125**	**21**
125	16	32	**SN1632B1125**	**21**	–	–
125	20	40	–	–	**SNW2040B1125**	27
125	24	24	**SN2424B1125**	24	**SNW2424B1125**	27
125	30	30	**SN3030B1125**	26	–	–
125	30	48	**SN3048B1125**	**26**	**SNW3048B1125**	29
150	16	32	**SN1632B1150**	**24**	–	–
150	20	40	**SN2040B1150**	24	**SNW2040B1150**	27
150	24	48	**SN2448B1150**	26	–	–
150	30	30	**SN3030B1150**	30	–	–
150	30	48	**SN3048B1150**	30	**SNW3048B1150**	**35**
200	40	40	–	–	**SNW4040B1150**	38
200	8	16	–	–	**SNW0816B1200T④**	**23**
200	12	24	–	–	**SNW1224B1200**	**23**
200	16	32	**SN1632B1200**	24	–	–
200	20	40	**SN2040B1200**	26	**SNW2040B1200**	27
200	24	48	**SN2448B1200**	30	–	–
200	30	48	**SN3048B1200**	30	**SNW3048B1200**	**35**
200	40	40	**SN4040B1200**	36	**SNW4040B1200**	**38**
200	40	60	**SN4060B1200**	36	–	–
200	42	64	**SN4264B1200**	39	–	–
200	54	82	**SN5482B1200**	42	–	–
225	42	64	**SN4264B1225**	39	**SNW4264B1225**	**38**
225	54	82	**SN5482B1225**	43	–	–

① Factory installed 22KAIC main breaker. Suitable for use as service equipment.
② Indoor enclosures are 14 1/4" wide by 3 7/8" deep.
③ Outdoor enclosures are 14 1/2" wide by 4 1/4" deep.
④ Feed-thru lugs.
⑤ Available (made to order) in white by adding "W" to the end of the catalog number.

SN Series 1-phase Main Lug Plug-on Neutral Load Centers④

1-phase, 3-wire, 120/240 Volts AC

Main Lug Load Centers
100-225 Amperes

Aluminum Bus
60/75°C Rated

			Indoor Enclosure - NEMA Type 1		Outdoor Enclosure - NEMA Type 3R	
Amp Rating	**No. of Spaces**	**No. of Circuits**	**Catalog Number**	**Enclosure Height (inches)①**	**Catalog Number**	**Enclosure Height (inches)②**
125	12	12	**SN1212L1125**	18	**SNW1212L1125**	21
125	12	24	**SN1224L1125**	18	**SNW1224L1125**	21
125	16	32	**SN1632L1125**	21	**SNW1632L1125**	21
125	20	20	**SN2020L1125**	21	–	–
125	20	40	**SN2040L1125**	21	**SNW2040L1125**	**23**
125	24	24	**SN2424L1125**	24	**SNW2424L1125**	**27**
125	24	48	**SN2448L1125**	24	–	–
125	30	48	**SN3048L1125**	26	**SNW3048L1125**	**29**
125	40	40	**SN4040L1125**	30	–	–
150	16	32	**SN1632L1150**	**21**	–	–
150	20	40	**SN2040L1150**	24	**SNW2040L1150**	27
150	24	48	**SN2448L1150**	26	–	–
200	8	16	–	–	**SNW0816L1200T③**	**23**
200	12	24	**SN1224L1200**	21	**SNW1224L1200**	**21**
200	20	40	**SN2040L1200**	26	**SNW2040L1200**	**27**
200	24	48	**SN2448L1200**	26	–	–
200	30	30	**SN3030L1200**	30	–	–
200	30	48	**SN3048L1200**	30	**SNW3048L1200**	29
200	40	40	**SN4040L1200**	36	**SNW4040L1200**	**35**
225	12	24	–	–	**SNW1224L1225**	21
225	40	60	**SN4060L1225**	36	–	–
225	42	64	**SN4264L1225**	36	**SNW4264L1225**	**38**
225	54	82	**SN5482L1225**	42	–	–

① Indoor enclosures are 14 1/4" wide by 3 7/8" deep.
② Outdoor enclosures are 14 1/2" wide by 4 1/4" deep.
③ Feed-thru lugs.
④ Available (made to order) in white by adding "W" to the end of the catalog number.

Specialty Main Lug and Main Breaker Plug-on Neutral Load Centers

1-phase, 3-wire, 120/240 Volts AC

500 Kcmil Lug Load Center

			Indoor Enclosure - NEMA Type 1	
Amp Rating	**No. of Spaces**	**No. of Circuits**	**Catalog Number**	**Enclosure Height (inches)**
200	30	48	**SN3048L1200L50**	36

Selectable Main Load Centers

			Indoor Enclosure - NEMA Type 1		Outdoor Enclosure - NEMA Type 3R	
Amp Rating	**No. of Spaces**	**No. of Circuits**	**Catalog Number**	**Enclosure Height (inches)**	**Catalog Number**	**Enclosure Height (inches)**
125	24	24	**SN2424C1125**	24	**SNW2424C1125**	27
200	20	40	**SN2040C1200**	26	**SNW2040C1200**	27
200	30	48	**SN3048C1200**	30	**SNW3048C1200**	35
200	40	40	**SN4040C1200**	36	**SNW4040C1200**	38

Notes:

Legal Manufacturer

Siemens Industry, Inc.
3617 Parkway Ln
Peachtree Corners, GA 30092
United States of America

Telephone: +1 (800) 333-7421
www.usa.siemens.com/loadcenters

Order No. RPBR-PLUGO-0524

This document contains a general description of available technical options only, and its effectiveness will be subject to specific variables including field conditions and project parameters. Siemens does not make representations, warranties, or assurances as to the accuracy or completeness of the content contained herein. Siemens reserves the right to modify the technology and product specifications in its sole discretion without advance notice.

© 05.2024, Siemens Industry, Inc.