
Commercial grade switches

Designed for the most demanding commercial applications

Arrow Hart's commercial grade switches are designed to provide superior quality, reliability and performance in a variety of commercial environments

Commercial grade AC switch features & benefits

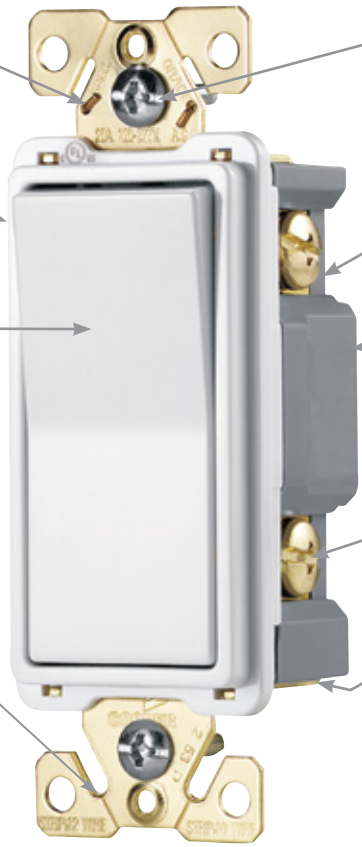

Automatic grounding eliminates need for bonding jumper in metal enclosures

Welded construction provides superior assembly security under heavy use

Smooth face for ease of cleaning

Built-in wire stripper to speed up installation

Tri-combo head terminal and mounting screws, plus easy-access grounding terminal

Stippled line and ground contacts ensure solid contact; ground screw clamp provides secure wiring

Tapered back-wire openings handle multiple sizes and types, up to #10 AWG solid or stranded wire

Oversized termination screws for simplified wire installation

Horsepower rated for motor loads

Horsepower rated for motor loads per UL20

Amps	120V/AC	240V/AC	277V/AC	Max.
15A	1/2 HP	2HP	2HP	12A
20A	1HP	2HP	2HP	16A

A complete line of switches available for any commercial application:



Combination switches



CuVerro® antimicrobial surfaces



Commercial grade CSB series



Commercial grade CS series


Compliances, specifications and availability are subject to change without notice.

www.eaton.com
www.eaton.com/arrowhart

Commercial grade AC toggle combination switches

Product description

Single-pole, 3-way
15A, 120/277V/AC; 15A, 120V/AC
20A, 120V/AC




271

Toggle combination switches, back & side wire

Rating A	Rating V/AC	Description	Color suffix	Catalog no.	RoHS
15	120/277	(2) Single-pole, switches	A, B, LA, V, W	☐271__	•
		(1) Single-pole, switch with (1) 3-Way switch	B, LA, V, W	☐275__	•
		(2) 3-Way, switches	LA, V, W	☐276__	•
15	120	(1) Single-pole, switch 1/25w (1) 125V pilot light	B, LA, V, W	☐277__*	•
		(1) 3-Way, switch w/pilot light 1/25w (1) 125V pilot light	B, V	☐294__*	•

* Not NOM cert




277

Toggle switch with receptacle, back & side wire

Rating A	Rating V/AC	Description	Color suffix	Catalog no.	RoHS
15 15	120 125	(1) Single-pole, switch with NEMA 5-15 (1) 2-Pole, 3-wire tamper resistant receptacle	A, B, BK, LA, V, W	☐TR274___	•
15 15	120 125	(1) 3-Way switch with NEMA 5-15 (1) 2-Pole, 3-wire tamper resistant receptacle	A, B, BK, LA, V, W	☐TR293___	•
15 20	120 125	(1) Single-pole, switch with NEMA 5-20 (1) 2-Pole, 3-wire tamper resistant receptacle	A, B, BK, LA, V, W	☐TR291___*	•

* Not NOM cert



TR274

Accessories for commercial specification grade toggle combination switches

Description	Catalog no.	NAFTA	RoHS
1-Gang, standard size duplex, 302/304 Stainless steel receptacle wallplate	☐93101	•	•
1-Gang, standard size duplex, unbreakable nylon receptacle wallplate, almond	☐5132A	•	•


93101

5132A

Color ordering information:

For ordering devices, include Catalog no. Followed by the Color suffix: A (Almond), B (Brown), BK (Black), LA (Light Almond), V (Ivory), W (White)

A	B	BK	LA	V	W
(Almond)	(Brown)	(Black)	(Lt. Almond)	(Ivory)	(White)

Specification information: 120/277V/AC commercial toggle combination: E-40
Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page Q-32
RoHS compliant - Page Q-32
TR Tamper resistant