## ACB series

# ACB SERIES – STEEL & MALLEABLE IRON

## Applications:

- Acb series connectors are used to connect armoured cable, metal-clad cable or flexible metallic conduit to a box or enclosure

## Features:

- Dual gripping saddle design on the connector safely secures cable or conduit in place and prevents loosening from vibration
- Insulated throat provides a smooth pulling surface that won't strip cable
- Angled teeth on locknut bite into enclosure, preventing loosening from vibration
- Tri-head set screw may be installed using a slotted, Phillips or Robertson head screwdriver
- Steel connector is zinc electroplated for corrosion resistance

Listed for use with:

- Flexible Metal Conduit (RWFMC): 3/8" - 4"
- Armoured cable (AC): 3/8" - 1 1/4"
- MC cable (MC): 3/8" - 3"
- MCI-A cable (MCI-A): 3/8" - 1 1/4"

## Certifications and compliances:

- UL Listed
- cUL Listed
- UL File No. E-19188


## Standard materials and finishes:

- Body – straight: steel, zinc electroplated
- Body – 45° and 90°: malleable, zinc electroplated
- Saddle – steel, zinc electroplated
- Screw – steel, zinc electroplated
- Insulated throat – thermoplastic, natural



### Straight connectors







| Cat. # | Trade size | Cable opening Max. | Cable opening Min. | Unit qty. | Dimensions A | Dimensions B | Dimensions C |
|---|---|---|---|---|---|---|---|
| **ACB38** | 3/8" | 0.660 | 0.400 | 50 | 1 3/16" | 1 1/4" | 1/2" |
| **ACB50** | 1/2" | 0.920 | 0.520 | 25 | 1 3/8" | 1 1/4" | 7/16" |
| **ACB75** | 3/4" | 1.110 | 0.680 | 10 | 1 3/8" | 1 7/16" | 7/16" |
| **ACB100** | 1" | 1.380 | 0.880 | 5 | 1 9/16" | 1 13/16" | 1/2" |
| **ACB125** | 1 1/4" | 1.635 | 1.150 | 5 | 2 3/16" | 2 1/8" | 5/8" |
| **ACB150** | 1 1/2" | 1.950 | 1.490 | 5 | 2 7/16" | 2 1/2" | 5/8" |
| **ACB200** | 2" | 2.450 | 1.765 | 1 | 2 9/16" | 3" | 5/8" |
| **ACB250** | 2 1/2" | 3.060 | 2.270 | 1 | 2 11/16" | 3 5/8" | 13/16" |
| **ACB300** | 3" | 3.560 | 3.160 | 1 | 2 13/16" | 4 1/4" | 15/16" |
| **ACB350** | 3 1/2" | 4.060 | 3.860 | 1 | 2 15/16" | 3 3/4" | 1" |
| **ACB400** | 4" | 4.560 | 4.360 | 1 | 3" | 5 3/16" | 1 1/16" |

### 45° connectors







| Cat. # | Trade size | Cable opening Max. | Cable opening Min. | Unit qty. | Dimensions A | Dimensions B | Dimensions C |
|---|---|---|---|---|---|---|---|
| **ACB3845** | 3/8" | 0.660 | 0.400 | 50 | 1 13/16" | 1 13/16" | 15/16" |
| **ACB5045** | 1/2" | 0.920 | 0.520 | 25 | 2 1/8" | 2 1/8" | 1 1/4" |
| **ACB7545** | 3/4" | 1.110 | 0.680 | 10 | 2 3/8" | 2 3/8" | 1 7/16" |

### 90° connectors






| Cat. # | Trade size | Cable opening Max. | Cable opening Min. | Unit qty. | Dimensions A | Dimensions B | Dimensions C |
|---|---|---|---|---|---|---|---|
| **ACB3890** | 3/8" | 0.660 | 0.400 | 50 | 1 3/4" | 2 1/16" | 1" |
| **ACB5090** | 1/2" | 0.920 | 0.520 | 25 | 2 1/8" | 2 1/4" | 1 1/4" |
| **ACB7590** | 3/4" | 1.110 | 0.680 | 10 | 2 1/2" | 2 1/2" | 1 3/8" |
| **ACB10090** | 1" | 1.380 | 0.880 | 5 | 2 13/16" | 2 1/8" | 1 11/16" |




 Copyright© 2026 Commercial Products Catalog 

## Quick-Lok™ connectors

### QUICK-LOK™ CONNECTORS – STEEL





### Features:

- No locknut required
- Single unit or duplex construction with captive clamp
- Connects 50 MC, AC and flex RW cable sizes with just three fittings
- Easy to install: tilt, insert and snap down
- Single unit construction eliminates loose component parts; integral green plastic insulated throat bushing provides maximum protection for wire installation

### Standard material:

- Tubular steel

### Standard finish:

- Zinc plated

### Certifications and compliances:

- cULus
- UL File No. E-19188



| Cat. # | Trade size | Cable size HCF | Cable size Aluminum and steel RWFMC/FMC | Cable dia. range | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|---|---|---|
| **QLK50S**ⓩ❶ | ½" single | 14/2 to 10/3 | ⅜" | 0.385" - 0.600" | 50 | 8 |
| **QLK50D**ⓩ❶ | ½" duplex | 14/2 to 10/3 | ½" | 0.433" - 0.600" | 25 | 10 |
| **QLK75**ⓩ❶ | ¾" | 10/3 to 6/3 | ⅜" & ½" | 0.550" - 0.850" | 25 | 14 |

ⓩUL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.
❶UL approved for use with MC-PCS cable.

 Copyright© 2026 Commercial Products Catalog

## Quick-Lok™ pro connectors – zinc die cast & steel

### QUICK-LOK™ PRO CONNECTORS – ZINC DIE CAST & STEEL




### Applications:

- Quick-Lok™ Pro connectors are used to connect armored cable, metal-clad cable, MCI-A cable, MC-PCS cable or flexible metallic conduit to a box or enclosure for dry location applications
- Fits ½" knockout

**Connectors:**

- **Single connector –** For installation of one cable into a box or enclosure
- **Duplex connector –** Allows for installation of two cables in a single KO, into box or enclosure
- **90° connector –** For installation of 90° bend in cable
- **Old work connector –** For installing and terminating cable after an old work box has been installed

### Features:

- Easy tool-free installation (the single and old work connector can also be removed without tools)
- Integral insulated throat bushing provides protection for wire insulation
- Reusable
- Wide range of styles and configurations to meet customer requirements and preferences
- Single unit construction eliminates loose component parts
- Duplex and 90° connector cover opens wide for easy access and wiring
- For use in dry locations/concrete tight when taped

### Certifications and compliances:

- cULus
- UL File No. E-19188
- Concrete tight when taped

### Standard materials:

- Body – zinc die cast, zinc plated steel
- Cover – zinc plated steel
- Insulator – non-metallic

| | | Cable size | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Cat. # | Description | AL and steel AC | AL and steel MC/MCI-A/ MC-PCS/ HCF[2] | AL and steel RWFMC | Cable dia. range | Outlet box KO size | Unit qty. | Wt. lbs. per 100 |
| **38MCQ** | ⅜" Connector | 14/2 to 10/3 | 14/2 to 10/3 | ⅜" | 0.395" - 0.638" | ½" | 50 | 6.0 |
| **38MCQS** | ⅜" Connector | 14/2 to 10/3 | 14/2 to 10/3 | ⅜" | 0.395" - 0.638" | ½" | 50 | 6.0 |
| **38MCQSBUCKET** | ⅜" Connector | 14/2 to 10/3 | 14/2 to 10/3 | ⅜" | 0.395" - 0.638" | ½" | 1[2] | 43[2] |
| **38MCQBULK** | ⅜" Connector | 14/2 to 10/3 | 14/2 to 10/3 | ⅜" | 0.395" - 0.638" | ½" | 500 | 6.0 |
| **38MCQD** | ⅜" Duplex connector - zinc | 14/2 to 10/3 | 14/2 to 10/3 | ⅜" | 0.460" - 0.610" | ½" | 25 | 11.3 |
| **38MCQDS** | ⅜" Duplex connector - steel | 14/2 to 10/3 | 14/2 to 10/3 | ⅜" | 0.460" - 0.610" | ½" | 25 | 11.3 |
| **38MCQDBULK** | ⅜" Duplex connector | 14/2 to 10/3 | 14/2 to 10/3 | ⅜" | 0.460" - 0.610" | ½" | 250 | 11.3 |
| **38MCQ90** | ⅜" 90° connector | 14/2 to 10/3 | 14/2 to 10/4 | ⅜" | 0.469" - 0.610" | ½" | 25 | 7.5 |
| **50MCQ90** | ½" 90° connector | 8/2 to 8/3 | 8/2 to 8/3 | ½" | 0.670" - 0.785" | ½" | 25 | 11.3 |
| **38MCQOW** | ⅜" Old work connector | 14/2 to 10/3 | 14/2 to 10/3 | - | 0.395" - 0.638" | ½" | 50 | 6.0 |

[2] UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire company.
[2] Unit quantity and weight listed is per bucket. One bucket consists of 700 connectors and one pallet consists of 24 buckets. Pallet quantity is 16,800 which consists of two layers of 12 buckets per layer.



 Copyright© 2026 Commercial Products Catalog 

## SQUEEZE TYPE – MALLEABLE IRON

### Applications:

- Used to squeeze and secure AC/MC cable to a box or enclosure

### Features:

- High strength malleable iron
- 105°C temperature rating
- Used with armored cable and flexible metal conduit
- Male threads – NPSM

### Standard materials:

- Malleable iron
- Steel locknut

### Standard finish:

- Zinc plated

### Squeeze type❺ – straight – non-insulated

UL File No. E-19189



| Cat. # | Trade size | Dia. of opening for cable | Dia. of bushed hole | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|---|---|
| **707❷❻** | 3/8" | 5/8" | 3/8" | 100 | 7 |
| **708❷❼** | 1/2" | 15/16" | 5/8" | 50 | 14 |
| **709** | 3/4" | 1 1/8" | 3/4" | 20 | 22 |
| **710** | 1" | 1 3/8" | 1" | 20 | 31 |
| **711** | 1 1/4" | 1 21/32" | 1 5/16" | 10 | 46 |
| **712** | 1 1/2" | 1 7/8" | 1 1/2" | 5 | 79 |
| **713** | 2" | 2 1/2" | 2" | 2 | 101 |
| **714** | 2 1/2" | 2 7/8" | 2 3/8" | 2 | 161 |
| **715** | 3" | 3 6/16" | 3" | 1 | 220 |
| **721** | 3 1/2" | 4" | 2 13/32" | 1 | 470 |
| **722** | 4" | 4 19/32" | 3 31/32" | 1 | 610 |

❷UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.
❺UL Listed flexible metallic conduit fittings are suitable as grounding means under NEC 350-5 and suitable for hazardous location use per Class I, Division 2, NEC 501-4(b).
❻Suitable for use with armored cable.
❼Suitable for use with metal-clad cable.

### Squeeze type❺ – straight – insulated

UL File No. E-19189



| Cat. # | Trade size | Dia. of opening for cable | Dia. of bushed hole | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|---|---|
| **1707❷❻** | 3/8" | 5/8" | 3/8" | 100 | 8 |
| **1708❷❼** | 1/2" | 15/16" | 5/8" | 50 | 14 |
| **1709** | 3/4" | 1 1/8" | 3/4" | 20 | 17 |
| **1710** | 1" | 1 3/8" | 1" | 20 | 26 |
| **1711** | 1 1/4" | 1 21/32" | 1 5/16" | 10 | 42 |
| **1712** | 1 1/2" | 1 7/8" | 1 1/2" | 5 | 77 |
| **1713** | 2" | 2 1/2" | 2" | 2 | 100 |
| **1714** | 2 1/2" | 2 7/8" | 2 3/8" | 2 | 160 |
| **1715** | 3" | 3 6/16" | 3" | 1 | 221 |
| **1721** | 3 1/2" | 4" | 3 13/32" | 1 | 470 |
| **1722** | 4" | 4 19/32" | 3 31/32" | 1 | 610 |

❷UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.
❺UL Listed flexible metallic conduit fittings are suitable as grounding means under NEC 350-5 and suitable for hazardous location use per Class I, Division 2, NEC 501-4(b).
❻Suitable for use with armored cable.
❼Suitable for use with metal-clad cable.

 Copyright© 2026 Commercial Products Catalog

## Squeeze type – zinc die cast

## SQUEEZE TYPE – ZINC DIE CAST

### Applications:

- Used to squeeze and secure AC/MC cable to a box or enclosure

### Features:

- Zinc connectors assembled with die cast locknuts and zinc plated screws
- 105°C temperature rating
- Used with armored cable and flexible metal conduit
- Male threads – NPSM

### Standard materials:

- Zinc die cast
- Zinc die cast locknut

### Standard finish:

- Natural

### Squeeze type❺ – straight – non-insulated

UL File No. E-19189



| Cat. # | Trade size | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|
| **707DC** | 3/8" | 50 | 6 |
| **708DC** | 1/2" | 25 | 8 |
| **709DC** | 3/4" | 25 | 11 |
| **710DC** | 1" | 10 | 16 |
| **711DC** | 1 1/4" | 10 | 21 |
| **712DC** | 1 1/2" | 5 | 28 |
| **713DC** | 2" | 4 | 36 |
| **714DC** | 2 1/2" | 2 | 85 |
| **715DC** | 3" | 1 | 109 |
| **721DC** | 3 1/2" | 1 | 144 |
| **722DC** | 4" | 1 | 183 |

❺UL Listed flexible metallic conduit fittings are suitable as grounding means under NEC 350-5 and suitable for hazardous location use per Class I, Division 2, NEC 501-4(b).

### Squeeze type❺ – straight – insulated

UL File No. E-19189



| Cat. # | Trade size | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|
| **1707DC** | 3/8" | 50 | 6 |
| **1708DC** | 1/2" | 25 | 8 |
| **1709DC** | 3/4" | 25 | 11 |
| **1710DC** | 1" | 10 | 16 |
| **1711DC** | 1 1/4" | 10 | 21 |
| **1712DC** | 1 1/2" | 5 | 28 |
| **1713DC** | 2" | 4 | 36 |
| **1714DC** | 2 1/2" | 2 | 85 |
| **1715DC** | 3" | 1 | 109 |
| **1721DC** | 3 1/2" | 1 | 144 |
| **1722DC** | 4" | 1 | 183 |

❺UL Listed flexible metallic conduit fittings are suitable as grounding means under NEC 350-5 and suitable for hazardous location use per Class I, Division 2, NEC 501-4(b).

## Squeeze type – zinc die cast



# SQUEEZE TYPE – ZINC DIE CAST

## Applications:

- Used to squeeze and secure AC/MC cable to a box or enclosure

## Features:

- Zinc connectors assembled with die cast locknuts and zinc plated screws
- 105°C temperature rating
- Used with armored cable and flexible metal conduit
- Male threads – NPSM

## Standard materials:

- Zinc die cast
- Zinc die cast locknut

## Standard finish:

- Natural

### Squeeze type❺ 90° angle – non-insulated

UL File No. 19189



| Cat. # | Trade size | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|
| **724DC❶** | 3/8″ | 50 | 8 |
| **736DC** | 1/2″ | 25 | 11 |
| **738DC❷** | 3/4″ | 10 | 15 |
| **739DC** | 1″ | 5 | 25 |
| **740DC** | 1 1/4″ | 10 | 41 |
| **741DC** | 1 1/2″ | 1 | 117 |
| **742DC** | 2″ | 1 | 119 |
| **744DC** | 2 1/2″ | 1 | 286 |
| **745DC** | 3″ | 1 | 405 |
| **746DC** | 3 1/2″ | 1 | 560 |
| **747DC** | 4″ | 1 | 642 |

❷UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.
❺UL Listed flexible metallic conduit fittings are suitable as grounding means under NEC 350-5 and suitable for hazardous location use per Class I, Division 2, NEC 501-4(b).
❶UL approved for use with MC-PCS cable.

### Squeeze type❺ 90° angle – insulated

UL File No. 19189



| Cat. # | Trade size | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|
| **1724DC** | 3/8″ | 50 | 8 |
| **1736DC** | 1/2″ | 25 | 11 |
| **1738DC** | 3/4″ | 10 | 15 |
| **1739DC** | 1″ | 5 | 25 |
| **1740DC** | 1 1/4″ | 10 | 41 |
| **1741DC** | 1 1/2″ | 1 | 117 |
| **1742DC** | 2″ | 1 | 119 |
| **1744DC** | 2 1/2″ | 1 | 286 |
| **1745DC** | 3″ | 1 | 405 |
| **1746DC** | 3 1/2″ | 1 | 560 |
| **1747DC** | 4″ | 1 | 642 |

❺UL Listed flexible metallic conduit fittings are suitable as grounding means under NEC 350-5 and suitable for hazardous location use per Class I, Division 2, NEC 501-4(b).

 Copyright® 2026 Commercial Products Catalog

## Clamp type – malleable iron

# CLAMP TYPE 45° ANGLE – MALLEABLE IRON

## Applications:

- Used to clamp and secure AC/MC cable to a box or enclosure

## Features:

- High strength malleable iron
- 105°C temperature rating
- Used with armored cable and flexible metal conduit
- Male hub threads – NPSM

## Standard materials:

- Malleable iron
- Steel locknut
- Stamped steel covers

## Standard finish:

- Zinc plated

### Clamp type 45° angle – non-insulated

UL File No. E-19188 or E-19189



| Cat. # | Trade size | Dia. of opening for cable | Dia. of bushed hole | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|---|---|
| **723**[Z] | 3/8" | 21/32" | 17/32" | 50 | 14 |
| | | For 2 conductor Nos. 14, 12, 10<br>3 conductor Nos. 14, 12, 10<br>4 conductor Nos. 14, 12<br>Flexible metallic conduit 5/16" and 3/8" | | | |
| **735** | 1/2" | 15/16" | 9/16" | 25 | 18 |
| | | For 2 conductor No. 8<br>Flexible metallic conduit 1/2" | | | |
| **737**[Z] | 3/4" | 1 1/8" | 25/32" | 25 | 24 |
| | | For 2 conductor Nos. 6, 4<br>3 conductor Nos. 6, 4<br>Flexible metallic conduit 3/4" | | | |

[Z] UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™)
MCAP™ is a registered trademark of Southwire Company.

### Clamp type 45° angle – insulated

UL File No. E-19188 or E-19189



| Cat. # | Trade size | Dia. of opening for cable | Dia. of bushed hole | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|---|---|
| **1723**[Z] | 3/8" | 21/32" | 17/32" | 50 | 14 |
| **1735** | 1/2" | 15/16" | 9/16" | 25 | 17 |
| **1737**[Z] | 3/4" | 1 1/8" | 25/32" | 25 | 24 |

[Z] UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.

## CLAMP TYPE 90° ANGLE – MALLEABLE IRON

### Applications:

- Used to clamp and secure AC/MC cable to a box or enclosure

### Features:

- High strength malleable iron
- 105°C temperature rating
- Used with armored cable and flexible metal conduit
- Male hub threads – NPSM

### Standard materials:

- Malleable iron
- Steel locknut
- Stamped steel covers

### Standard finish:

- Zinc plated



### Clamp type❺ 90° angle – non-insulated

UL File No. E-19188 or E-19189




| Cat. # | Trade size | Dia. of opening for cable | Dia. of bushed hole | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|---|---|
| 724❷❻ | 3/8" | 21/32" | 17/32" | 50 | 15 |
| | | For 2 conductor Nos. 14, 12, 10<br>3 conductor Nos. 14, 12, 10<br>4 conductor Nos. 14, 12<br>Flexible metallic conduit 5/16" and 3/8" | | | |
| 736❻ | 1/2" | 15/16" | 9/16" | 25 | 19 |
| 738❷❻ | 3/4" | 1 1/8" | 13/16" | 20 | 31 |
| 739 | 1" | 1 13/32" | 1" | 5 | 50 |
| 740 | 1 1/4" | 1 21/32" | 1 1/4" | 2 | 113 |
| 741 | 1 1/2" | 1 7/8" | 1 1/2" | 1 | 188 |
| 742 | 2" | 2 1/2" | 1 15/16" | 1 | 236 |
| 744 | 2 1/2" | 3" | 2 1/2" | 1 | 400 |
| 745 | 3" | 3 1/2" | 3" | 1 | 600 |
| 746 | 3 1/2" | 4" | 3 13/32" | 1 | 1150 |
| 747 | 4" | 4 19/32" | 3 31/32" | 1 | 1460 |

❷UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.
❺UL Listed flexible metallic conduit fittings are suitable as grounding means under NEC 350-5 and suitable for hazardous location use per Class I, Division 2, NEC 501-4(b).
❻Suitable for use with armoured cable.

### Clamp type 90° angle – insulated

UL File No. E-19188 or E-19189



| Cat. # | Trade size | Dia. of opening for cable | Dia. of bushed hole | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|---|---|
| 1736❻ | 1/2" | 15/16" | 9/16" | 25 | 19 |
| 1738❷❻ | 3/4" | 1 1/8" | 13/16" | 20 | 31 |
| 1739 | 1" | 1 13/32" | 1" | 5 | 50 |
| 1740 | 1 1/4" | 1 21/32" | 1 1/4" | 2 | 113 |
| 1741 | 1 1/2" | 1 7/8" | 1 1/2" | 1 | 188 |
| 1742 | 2" | 2 1/2" | 1 15/16" | 1 | 236 |
| 1744 | 2 1/2" | 3" | 2 1/2" | 1 | 400 |
| 1745 | 3" | 3 1/2" | 3" | 1 | 600 |
| 1746 | 3 1/2" | 4" | 3 13/32" | 1 | 1150 |
| 1747 | 4" | 4 19/32" | 3 31/32" | 1 | 1460 |

❹UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.
❻Suitable for use with armored cable.

 Copyright© 2026 Commercial Products Catalog

# Flexible metallic conduit fittings

## Set screw & duplex type – malleable iron

### Applications:

- Used to clamp and secure AC/MC cable to a box or enclosure

### Features:

- High strength malleable iron
- Used with armored cable and flexible metal conduit

### Standard materials:

- Malleable iron
- Steel locknut
- Stamped steel cover (Duplex Type only)

### Standard finish:

- Zinc plated

## SET SCREW TYPE – MALLEABLE IRON

UL File No. E-19188



| Cat. # | Trade size | Dia. of opening for cable | Dia. of bushed hole | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|---|---|
| 702V❷ | 3/8" | 5/8" | 7/16" | 100 | 7 |
| | | For 2 conductor Nos. 14, 12<br>3 conductor Nos. 14, 12<br>4 conductor No. 14, 5/16" flex | | | |

❷UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.

## DUPLEX TYPE – MALLEABLE IRON

UL File No. E-19188



| Cat. # | Trade size | Dia. of opening for cable | Dia. of bushed hole | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|---|---|
| **Straight** | | | | | |
| 699❷❹ | 3/8" | 5/8" | 9/16" | 25 | 20 |
| **90 Degree** | | | | | |
| 700❷❹ | 3/8" | 5/8" | 9/16" | 25 | 14 |

❷UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.
❹UL Listed as grounding means.

## Set screw & duplex type – zinc die cast

### SET SCREW TYPE – ZINC DIE CAST

UL File No. E-19188



| Cat. # | Trade size | Desc. | Cable opening Max. | Cable opening Min. | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|---|---|---|
| **BX38R** | 3/8″ | Round | 0.600 | 0.460 | 50 | 5 |

### SET SCREW TYPE – ZINC DIE CAST


UL File No. E-19188



| Cat. # | Trade size | Cable opening Max. | Cable opening Min. | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|---|---|
| **ACB38DC**ⓩ❶Ⓘ | 3/8″ | 0.610 | 0.469 | 50 | 9 |
| **ACB50DC**ⓩ❶Ⓘ | 1/2″ | 0.610 | 0.469 | 25 | 10 |
| **ACB75DC** | 3/4″ | 0.986❸ | 0.819❸ | 20 | 13 |
| **ACB100DC** | 1″ | 1.130❸ | 1.130❸ | 10 | 17 |

ⓩUL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.
❸Tested with AC cable only.
❶UL approved for use with MC-PCS cable.
ⒾUL approved for use with HCF MCI-A cable.

### Dimensions (in inches):

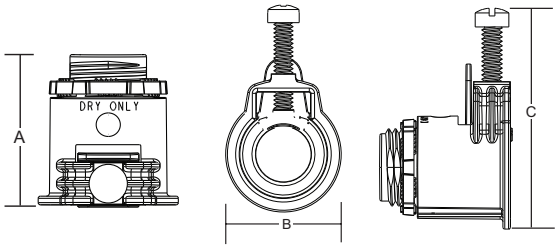


| Cat. # | A | B | C |
|---|---|---|---|
| **ACB38DC** | 0.969 | 1.094 | 1.828 |
| **ACB50DC** | 1.377 | 1.299 | 2.322 |
| **ACB75DC** | 1.464 | 1.476 | 2.559 |
| **ACB100DC** | 1.699 | 1.759 | 3.267 |

### DUPLEX TYPE – ZINC DIE CAST

UL File No. E-19188



| Cat. # | Trade size | Dia. of opening for cable | Dia. of bushed hole | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|---|---|
| **2699**ⓩ❹❶Ⓘ | 3/8″ | 5/8″ | 9/16″ | 25 | 13 |

ⓩUL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™). MCAP™ is a registered trademark of Southwire company.
❹UL Listed as grounding means.
❶UL approved for use with MC-PCS cable.
ⒾUL approved for use with HCF MCI-A cable.

### SET SCREW FLEX CONNECTOR – ZINC DIE CAST

#### Angled set screw

UL File No. E-19189



| Cat. # | Trade size | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|
| **702DC** | 1/2″ | 25 | 23 |
| **703DC** | 3/4″ | 25 | 35 |



 Copyright© 2026 Commercial Products Catalog

## Screw-in type – zinc die cast

# SCREW-IN TYPE – ZINC DIE CAST

### Straight connectors – insulated

UL File No. E-19189



| Cat. # | Trade size | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|
| **1770DC** | 3/8″ | 80 | 5 |
| **1771DC** | 1/2″ | 60 | 5 |
| **1772DC** | 3/4″ | 35 | 9 |
| **1773DC** | 1″ | 15 | 13 |
| **1774DC** | 1 1/4″ | 10 | 24 |
| **1775DC** | 1 1/2″ | 6 | 35 |
| **1776DC** | 2″ | 3 | 52 |

### Straight connectors – non-insulated

UL File No. E-19189



| Cat. # | Trade size | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|
| **770DC** | 3/8″ | 80 | 5 |
| **771DC** | 1/2″ | 60 | 5 |
| **772DC** | 3/4″ | 35 | 9 |
| **773DC** | 1″ | 15 | 13 |
| **774DC** | 1 1/4″ | 10 | 24 |
| **775DC** | 1 1/2″ | 6 | 35 |
| **776DC** | 2″ | 3 | 52 |

### Couplings

UL File No. 19189



| Cat. # | Trade size | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|
| **791DC** | 1/2″ | 40 | 4 |
| **792DC** | 3/4″ | 25 | 8 |
| **793DC** | 1″ | 15 | 12 |
| **794DC** | 1 1/4″ | 10 | 21 |
| **795DC** | 1 1/2″ | 6 | 31 |
| **796DC** | 2″ | 3 | 44 |



 Copyright© 2026 Commercial Products Catalog 

## Combination couplings

### ACC SERIES COMBINATION COUPLINGS – STEEL

### Applications:

- ACC combination couplings are used to join EMT conduit to armoured cable, metal-clad cable or flexible metallic conduit

### Features:

- Dual gripping saddle design on the coupling safely secures cable or conduit in place and prevents loosening from vibration
- Steel compression ring and nut provide a strong, secure termination point for EMT conduit
- Tri-head set screw may be installed using a slotted, Phillips or Robertson head screwdriver
- Steel combination coupling is zinc electroplated for corrosion resistance

### Certifications and compliances:

- UL Listed
- cUL Listed

### Standard materials and finishes:

- Body – steel, zinc electroplated
- Saddle – steel, zinc electroplated
- Screw – steel, zinc electroplated




#### Compression couplings AC/MC, FMC to EMT



| Cat. # | Trade size | Cable opening Max. | Cable opening Min. | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|---|---|
| ACC38 | 3/8" - 1/2" | 0.660 | 0.400 | 25 | 10 |
| ACC50 | 1/2" - 1/2" | 0.920 | 0.520 | 10 | 13 |
| ACC75 | 3/4" - 3/4" | 1.100 | 0.680 | 10 | 16 |

### Dimensions (in inches):

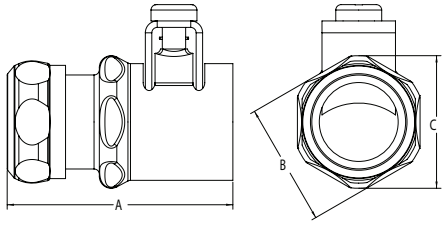


| Cat. # | A | B | C |
|---|---|---|---|
| ACC38 | 1.65 | 1.05 | 1.13 |
| ACC50 | 2.09 | 1.14 | 1.23 |
| ACC75 | 2.15 | 1.30 | 1.39 |


#### Set screw couplings



| Cat. # | Trade size | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|
| ACCSS38[G] | 3/8" - 1/2" | 25 | 9 |
| ACCSS50 | 1/2" - 1/2" | 10 | 12 |
| ACCSS75 | 3/4" - 3/4" | 10 | 14 |

[G] Not UL Listed.

### Dimensions (in inches):




| Cat. # | A Min. | A Max. | B Min. | B Max. | C Min. | C Max. |
|---|---|---|---|---|---|---|
| ACCSS38 | 0.615 | 0.645 | N/A | N/A | 0.712 | 0.730 |
| ACCSS50 | 0.925 | 0.955 | 0.560 | 0.620 | 0.712 | 0.730 |
| ACCSS75 | 1.110 | 1.140 | 0.742 | 0.813 | 0.930 | 0.942 |


 Copyright© 2026 Commercial Products Catalog

## Combination couplings

### COMBINATION COUPLINGS – ZINC DIE CAST

#### EMT (set screw) to flexible steel (clamp)❺

UL File No. E-19189



| Cat. # | Trade size | Unit qty. | Wt. Llbs. per 100 |
|---|---|---|---|
| **780DC** | 1/2″ to 3/8″ | 50 | 8 |

❺UL Listed flexible metallic conduit fittings are suitable as grounding means under NEC 350-5 and suitable for hazardous location use per Class I, Division 2, NEC 501-4(b).

### SET SCREW SQUEEZE TYPE COMBINATION COUPLINGS – ZINC DIE CAST

#### Set screw squeeze type

UL File No. E-19189



| Cat. # | Trade size | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|
| **FECS38DC** | 1/2″ to 3/8″ | 50 | 34 |
| **FECS50DC** | 1/2″ to 1/2″ | 25 | 22 |
| **FECS75DC** | 3/4″ to 3/4″ | 25 | 36 |

### SCREW-IN TYPE COMPRESSION COMBINATION COUPLINGS – ZINC DIE CAST

UL File No. E-19189



| Cat. # | Trade size | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|
| **FECC50DC** | 1/2″ | 50 | 41 |
| **FECC75DC** | 3/4″ | 25 | 31 |
| **FECC100DC** | 1″ | 25 | 46 |

## Clamps, bushings & grommets

### CLAMPS – STEEL

#### Light gauge





| Cat. # | Trade size | Size of strap inside | Unit qty. | Wt. lbs. per 100 |
|---|---|---|---|---|
| **566** | 1/4" | 0.540 | 500 | 2 |
| **567** | 3/8" | 0.675 | 200 | 2 |
| **567BX** | 3/8" | 0.675 | 100 | 14 |
| **567BXD** | 3/8" | 0.675 | 50 | 14 |

### ANTI-SHORT BUSHINGS

#### Applications:

- Protects the sheathing on conductors from sharp edges within MC, AC and FMC cable
- Easily installed
- For use indoors
- UL Listed

Temperature rating: 90°C



| Cat. # | Trade size | Armored cable size | Unit qty. |
|---|---|---|---|
| **ASB 0** | 5/16" | 14-2, 14-3, 12-2 | 100 |
| **ASB 1** | 3/8" | 14-4, 12-3, 6-1, 4-1 | 100 |
| **ASB 2** | 7/16" | 12-4, 10-2, 10-3, 2-1 | 50 |
| **ASB 3** | 1/2" | 10-4, 8-2, 8-3, 1-1 | 50 |
| **ASB 4** | 3/4" | 8-4, 6-4, 6-3, 6-2, 4-3, 4-2 | 50 |
| **ASB 5** | 1" | 3-1, 2-1, 2 - 1/0, 1 - 300MCM, 1 - 350MCM, 1 - 400MCM, 1 - 450MCM, 1 - 500MCM | 25 |
| **ASB 6** | 1 1/4" | 4-1, 4 - 1/0, 4 - 2/0, 3 - 1/0, 3 - 2/0, 3 - 3/0, 2 - 2/0, 2 - 3/0, 2 - 4/0, 1 - 600MCM, 1 - 650MCM, 1 - 700MCM, 1 - 750MCM, 1 - 800MCM, 1 - 900MCM | 10 |
| **ASB 7** | 1 1/2" | 4 - 3/0, 4 - 4/0, 3 - 4/0, 3 - 250MCM, 3 - 300MCM, 2 - 250MCM, 2 - 300MCM, 2 - 350MCM, 1 - 1000MCM | 10 |
| **ASB 8** | 2" to 2 1/2" | 4 - 250MCM, 4 - 300MCM, 4 - 350MCM, 4 - 400MCM, 4 - 450MCM, 4 - 500MCM, 3 - 350MCM, 3 - 400MCM, 3 - 450MCM, 3 - 500MCM, 2 - 400MCM, 2 - 450MCM, 2 - 500MCM | 10 |

**Note:** Bushings are packed in clear poly bags.



 Copyright® 2026 Commercial Products Catalog