


Beam fasteners, such as I-beam fasteners and I-beam hangers, are among the many fasteners and fixing systems available in the Eaton B-Line series of spring steel product line. It includes products designed for attachment to metal studs, steel beams, acoustical tees, purlins, channel and more.





Flange Beam Fasteners

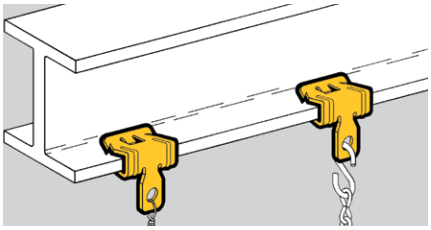

- Permits fast and easy installation on W shape, C shape, and angle steel.
- Clearance hole for ¼" bolt in tab.
- Simply installed with a hammer.



BE-1-2

UPC/Part Number	Catalog Number	Flange Thickness	Static Load Cap.	Box Qty.
78101118290	**BE-1-2**	3⁄32" - 9⁄64"	160 lbs.	100




BE-2-4

UPC/Part Number	Catalog Number	Flange Thickness	Static Load Cap.	Box Qty.
78101118295	**BE-2-4**	1⁄8" - ¼"	200 lbs.	100
78101118300	**BE-5-8**	5⁄16" - ½"	200 lbs.	100
78101118305	**BE-9-12**	9⁄16" - ¾"	200 lbs.	100

Read safety/installation instruction sheets in packages before use.


Push-Type Conduit-to-Beam Fasteners

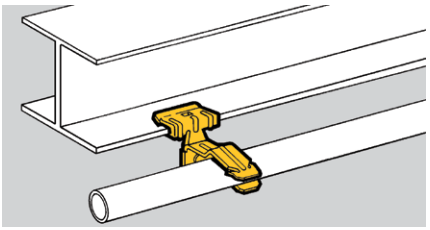



BP-8-E-2-4


Ultimate Static Load Capacity



- Quickly attaches conduit to beams.
- Fasteners will rotate 360°.
- Simply installed with a hammer.

UPC/Part Number	Catalog Number	Conduit Size	Flange Thickness	Box Qty.
78101119275	**BP-8-E-2-4**	½" EMT	⅛" - ¼"	100
78101119280	**BP-8-E-5-8**	½" EMT	5⁄16" - ½"	100
78101119285	**BP-8-E-9-12**	½" EMT	9⁄16" - ¾"	100
78101119375	**BP-12-E-2-4**	¾" EMT ½" IMC, Rigid	⅛" - ¼"	100
78101119380	**BP-12-E-5-8**	¾" EMT ½" IMC, Rigid	5⁄16" - ½"	100
78101119385	**BP-12-E-9-12**	¾" EMT ½" IMC, Rigid	9⁄16" - ¾"	100
78101119465	**BP-16-E-2-4**	1" EMT ¾" IMC, Rigid	⅛" - ¼"	100
78101119470	**BP-16-E-5-8**	1" EMT ¾" IMC, Rigid	5⁄16" - ½"	100
78101119475	**BP-16-E-9-12**	1" EMT ¾" IMC, Rigid	9⁄16" - ¾"	100


Guide-Rite Conduit-to-Beam Fasteners

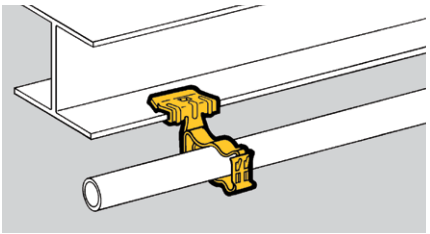



BG-6-E-2-4

Static Load Capacity




- Guide-Rite™ fastener provides for fast and easy installation.
- Fasteners will rotate 360°.
- Simply installed with a hammer and pliers.

UPC/Part Number	Catalog Number	Conduit Size	Flange Thickness	Box Qty.
78101118430	**BG-6-E-2-4***	⅜"	⅛" - ¼"	100
78101118435	**BG-6-E-5-8***	⅜"	5⁄16" - ½"	100
78101118440	**BG-6-E-9-12***	⅜"	9⁄16" - ¾"	100
78101118505	**BG-8-12-E-2-4**	½", ¾"	⅛" - ¼"	100
78101118510	**BG-8-12-E-5-8**	½", ¾"	5⁄16" - ½"	100
78101118515	**BG-8-12-E-9-12**	½", ¾"	9⁄16" - ¾"	100
78101118575	**BG-16-E-2-4**	1"	⅛" - ¼"	100
78101118580	**BG-16-E-5-8**	1"	5⁄16" - ½"	100
78101118585	**BG-16-E-9-12**	1"	9⁄16" - ¾"	100
78101118660	**BG-20-E-2-4**	1¼"	⅛" - ¼"	100
78101118665	**BG-20-E-5-8**	1¼"	5⁄16" - ½"	100
78101118670	**BG-20-E-9-12**	1¼"	9⁄16" - ¾"	100
78101118705	**BG-24-E-2-4**	1½"	⅛" - ¼"	50
78101118710	**BG-24-E-5-8**	1½"	5⁄16" - ½"	50
78101118715	**BG-24-E-9-12**	1½"	9⁄16" - ¾"	50
78101118745	**BG-32-E-2-4**	2"	⅛" - ¼"	50
78101118750	**BG-32-E-5-8**	2"	5⁄16" - ½"	50
78101118755	**BG-32-E-9-12**	2"	9⁄16" - ¾"	50

* BG-6 will accept the following range ∅.420 - ∅.675: 14/2 thru 10/4 MC/AC cable and 5⁄16" or ⅜" flexible conduit.

Read safety/installation instruction sheets in packages before use.

Cable-to-Beam Fasteners

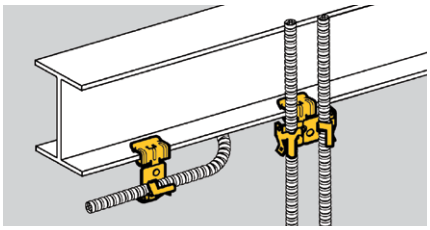



BX4-E-2-4




BX4M-E-2-4

- Attaches MC, AC, sizes 14/2 through 10/3 or ⅜" FMC to beam flanges ⅛" to ¾" thick.
- Fasteners will rotate 360°.
- Simply installed with a hammer.

UPC/Part Number	Catalog Number	Types Of Runs	Flange Thickness	Box Qty.
78101101192	**BX4-E-2-4**	Single	⅛" - ¼"	100
78101101193	**BX4-E-5-8**	Single	5⁄16" - ½"	100
78101101194	**BX4-E-9-12**	Single	9⁄16" - ¾"	100


UPC/Part Number	Catalog Number	Types Of Runs	Flange Thickness	Box Qty.
78101101213	**BX4M-E-2-4**	Double	⅛" - ¼"	100
78101101214	**BX4M-E-5-8**	Double	5⁄16" - ½"	100
78101101215	**BX4M-E-9-12**	Double	9⁄16" - ¾"	100

MC/AC Cable Carrier-to-Beam Fastener

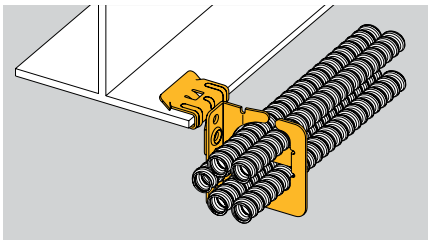



BRC5-2-E24



Static Load Capacity


50 lbs.

- Secures and supports MC/AC cables as required by the NEC.
- Effectively organizes cables and eliminates derating issues.
- BRC5-1 secures up to four (4) runs of .430 to .560 diameter cable.
- BRC5-2 secures up to nine (9) runs of .430 to .560 diameter cable.
- BRC5-3 secures up to seven (7) runs of .560 to .690 diameter cable.
- Load Capacity: 50 lbs.

UPC/Part Number	Catalog Number	Flange Thickness	Box Qty.
78205144093	**BRC51-E12**	3⁄32" - 9⁄64"	25
78205144096	**BRC51-E24**	⅛" - ¼"	25
78205144099	**BRC51-E58**	5⁄16" - ½"	25
78205144102	**BRC51-E912**	9⁄16" - ¾"	25
78205144094	**BRC52-E12**	3⁄32" - 9⁄64"	25
78205144097	**BRC52-E24**	⅛" - ¼"	25
78205144100	**BRC52-E58**	5⁄16" - ½"	25
78205144103	**BRC52-E912**	9⁄16" - ¾"	25
78205144095	**BRC53-E12**	3⁄32" - 9⁄64"	25
78205144098	**BRC53-E24**	⅛" - ¼"	25
78205144101	**BRC53-E58**	5⁄16" - ½"	25
78205144104	**BRC53-E912**	9⁄16" - ¾"	25

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Universal Beam Fasteners

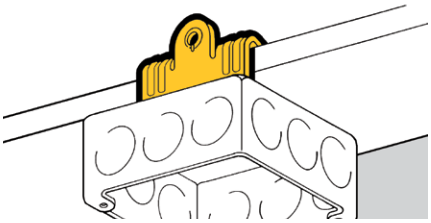

- Suspend boxes or fixtures from beam flanges ⅛" to ¾" thick.
- Provided with ¼"-20 thread impression for quick and secure attachment.
- Simply installed with a hammer.

UPC/Part Number	Catalog Number	Flange Thickness	Box Qty.
78101119600	**BU-2-4**	⅛" - ¼"	100
78101119605	**BU-5-8**	5/16" - ½"	100
78101119610	**BU-9-12**	9/16" - ¾"	100


UPC/Part Number	Catalog Number	Flange Thickness	Box Qty.
78101119615	**BU-2-4-S**	⅛" - ¼"	100
78101119620	**BU-5-8-S**	5/16" - ½"	100
78101119625	**BU-9-12-S**	9/16" - ¾"	100



BU-2-4




¼"-20 x ⅜"
Staked Stud

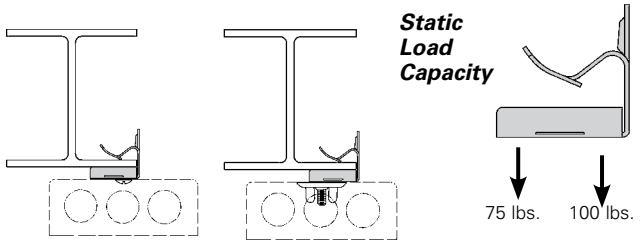

Note: Indicated loads are static load capacity and should not be combined.

MC/AC Cable Carrier-to-Beam Fastener

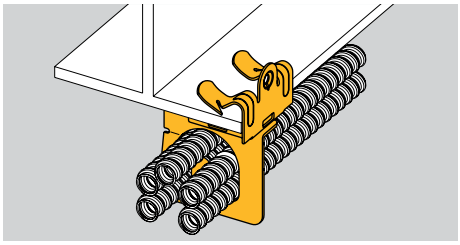


- Secures and supports MC/AC cables as required by the NEC.
- Effectively organizes cables and eliminates derating issues.
- BRC5-1 secures up to four (4) runs of .430 to .560 diameter cable.
- BRC5-2 secures up to nine (9) runs of .430 to .560 diameter cable.
- BRC5-3 secures up to seven (7) runs of .560 to .690 diameter cable.
- Load Capacity: 50 lbs.

UPC/Part Number	Catalog Number	Flange Thickness	Box Qty.
78205144066	**BRC51-U24**	⅛" - ¼"	25
78205144069	**BRC51-U58**	5/16" - ½"	25
78205144072	**BRC51-U912**	9/16" - ¾"	25
78205144067	**BRC52-U24**	⅛" - ¼"	25
78205144070	**BRC52-U58**	5/16" - ½"	25
78205144073	**BRC52-U912**	9/16" - ¾"	25
78205144068	**BRC53-U24**	⅛" - ¼"	25
78205144071	**BRC53-U58**	5/16" - ½"	25
78205144074	**BRC53-U912**	9/16" - ¾"	25




BRC51-U24



Read safety/installation instruction sheets in packages before use.


Push-Type Conduit-to-Beam Fasteners

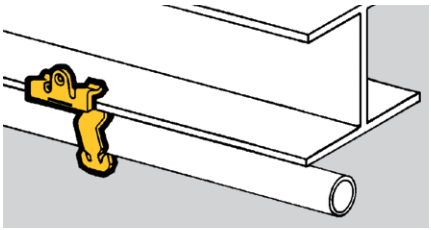



BP-8-U-2-4


Ultimate Static Load Capacity



- Quickly attaches conduit to beams.
- Fasteners will rotate 360°.
- Simply installed with a hammer.

UPC/Part Number	Catalog Number	Conduit Size	Flange Thickness	Box Qty.
78101119310	**BP-8-U-2-4**	½" EMT	⅛" - ¼"	100
78101119315	**BP-8-U-5-8**	½" EMT	5⁄16" - ½"	100
78101119320	**BP-8-U-9-12**	½" EMT	9⁄16" - ¾"	100
78101119405	**BP-12-U-2-4**	¾" EMT ½" IMC, Rigid	⅛" - ¼"	100
78101119410	**BP-12-U-5-8**	¾" EMT ½" IMC, Rigid	5⁄16" - ½"	100
78101119415	**BP-12-U-9-12**	¾" EMT ½" IMC, Rigid	9⁄16" - ¾"	100
78101119490	**BP-16-U-2-4**	1" EMT ¾" IMC, Rigid	⅛" - ¼"	100
78101119495	**BP-16-U-5-8**	1" EMT ¾" IMC, Rigid	5⁄16" - ½"	100
78101119500	**BP-16-U-9-12**	1" EMT ¾" IMC, Rigid	9⁄16" - ¾"	100

Guide-Rite Conduit-to-Beam Fasteners

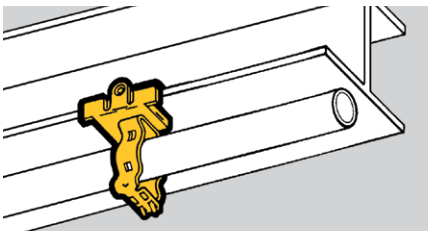



BG-6-U-2-4

Static Load Capacity




- Unique Guide-Rite™ Fastener provides for fast and easy installation.
- Fasteners will rotate 360°.
- Simply installed with a hammer and pliers.


UPC/Part Number	Catalog Number	Conduit Size	Flange Thickness	Box Qty.
78101118450	**BG-6-U-2-4***	⅜"	⅛" - ¼"	100
78101118455	**BG-6-U-5-8***	⅜"	5⁄16" - ½"	100
78101118460	**BG-6-U-9-12***	⅜"	9⁄16" - ¾"	100
78101118525	**BG-8-12-U-2-4**	½", ¾"	⅛" - ¼"	100
78101118530	**BG-8-12-U-5-8**	½", ¾"	5⁄16" - ½"	100
78101118535	**BG-8-12-U-9-12**	½", ¾"	9⁄16" - ¾"	100
78101118625	**BG-16-U-2-4**	1"	⅛" - ¼"	100
78101118630	**BG-16-U-5-8**	1"	5⁄16" - ½"	100
78101118635	**BG-16-U-9-12**	1"	9⁄16" - ¾"	100
78101118680	**BG-20-U-2-4**	1¼"	⅛" - ¼"	100
78101118685	**BG-20-U-5-8**	1¼"	5⁄16" - ½"	100
78101118690	**BG-20-U-9-12**	1¼"	9⁄16" - ¾"	100
78101118720	**BG-24-U-2-4**	1½"	⅛" - ¼"	50
78101118725	**BG-24-U-5-8**	1½"	5⁄16" - ½"	50
78101118730	**BG-24-U-9-12**	1½"	9⁄16" - ¾"	50
78101118760	**BG-32-U-2-4**	2"	⅛" - ¼"	50
78101118765	**BG-32-U-5-8**	2"	5⁄16" - ½"	50
78101118770	**BG-32-U-9-12**	2"	9⁄16" - ¾"	50

* BG-6 will accept the following range Ø.420 - Ø.675: 14/2 thru 10/4 MC/AC cable and 5⁄16" or ⅜" flexible conduit

Read safety/installation instruction sheets in packages before use.

Beam Fasteners with Anchor Straps







Static Load Capacity
75 lbs.




Static Load Capacity
160 lbs.


- Anchor strap provides secure attachment to beam flanges.
- Suspends threaded rod from beam flanges.
- 8" anchor straps are provided for ⅛" to ¼" thick flanges.
- 13" anchor straps are provided for 5⁄16" to ¾" thick flanges.

UPC/Part Number	Catalog Number	Stud Size	Flange Thickness	Box Qty.
78101104942	**BU-2-4-S-AS**	¼"-20 x ⅜"	⅛" - ¼"	50
78101104943	**BU-5-8-S-AS**	¼"-20 x ⅜"	5⁄16" - ½"	50
78101104944	**BU-9-12-S-AS**	¼"-20 x ⅜"	9⁄16" - ¾"	50

UPC/Part Number	Catalog Number	Threaded Rod Size	Flange Thickness	Box Qty.
78101104948	**BH4-E-2-4-AS**	¼"-20	⅛" - ¼"	50
78101104949	**BH4-E-5-8-AS**	¼"-20	5⁄16" - ½"	50
78101104950	**BH4-E-9-12-AS**	¼"-20	9⁄16" - ¾"	50
78101104951	**BH6-E-2-4-AS**	⅜"-16	⅛" - ¼"	50
78101104952	**BH6-E-5-8-AS**	⅜"-16	5⁄16" - ½"	50
78101104953	**BH6-E-9-12-AS**	⅜"-16	9⁄16" - ¾"	50

Conduit-to-Beam Fasteners with Anchor Straps







Static Load Capacity
75 lbs.



Static Load Capacity
25 lbs.


- Anchor strap provides secure attachment to beam flanges.
- Unique Guide-Rite™ Fastener provides for fast and easy installation.
- 8" anchor straps are provided for ⅛" to ¼" thick flanges.
- 13" anchor straps are provided for 5⁄16" to ¾" thick flanges.

UPC/Part Number	Catalog Number	Conduit Size	Flange Thickness	Box Qty.
78101104966	**BG-8-12-U-2-4-AS**	½", ¾"	⅛" - ¼"	50
78101104967	**BG-8-12-U-5-8-AS**	½", ¾"	5⁄16" - ½"	50
78101104968	**BG-8-12-U-9-12-AS**	½", ¾"	9⁄16" - ¾"	50
78101104969	**BG-16-U-2-4-AS**	1"	⅛" - ¼"	50
78101104970	**BG-16-U-5-8-AS**	1"	5⁄16" - ½"	50
78101104971	**BG-16-U-9-12-AS**	1"	9⁄16" - ¾"	50

UPC/Part Number	Catalog Number	Conduit Size	Flange Thickness	Box Qty.
78101104972	**BG-8-12-E-2-4-AS**	½", ¾"	⅛" - ¼"	50
78101104973	**BG-8-12-E-5-8-AS**	½", ¾"	5⁄16" - ½"	50
78101104974	**BG-8-12-E-9-12-AS**	½", ¾"	9⁄16" - ¾"	50
78101104975	**BG-16-E-2-4-AS**	1"	⅛" - ¼"	50
78101104976	**BG-16-E-5-8-AS**	1"	5⁄16" - ½"	50
78101104977	**BG-16-E-9-12-AS**	1"	9⁄16" - ¾"	50

Read safety/installation instruction sheets in packages before use.

Cable-to-Beam Fasteners

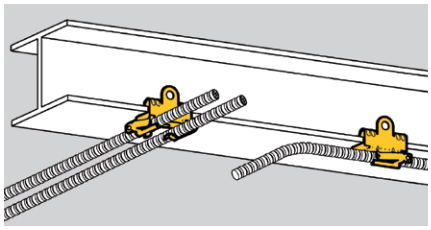

- Attaches MC, AC, sizes 14/2 through 10/3 or ⅜" FMC to flanges ⅛" to ¾" thick.
- Fasteners will rotate 360°.

UPC/Part Number	Catalog Number	Description	Flange Thickness	Box Qty.
78101101197	**BX4-U-2-4**	Single Runs	⅛" - ¼"	100
78101101198	**BX4-U-5-8**	Single Runs	5⁄16" - ½"	100
78101101199	**BX4-U-9-12**	Single Runs	9⁄16" - ¾"	100



BX4-U-2-4

- Attaches MC, AC, sizes 14/2 through 10/3 or ⅜" FMC to flanges ⅛" to ¾" thick.
- Fasteners will rotate 360°.


UPC/Part Number	Catalog Number	Description	Flange Thickness	Box Qty.
78101101206	**BX4M-U-2-4**	Double Runs	⅛" - ¼"	100
78101101207	**BX4M-U-5-8**	Double Runs	5⁄16" - ½"	100
78101101208	**BX4M-U-9-12**	Double Runs	9⁄16" - ¾"	100



BX4M-U-2-4

These products are designed for positioning only. No load rating.

MC/AC Cable Carrier-to-Beam Fastener

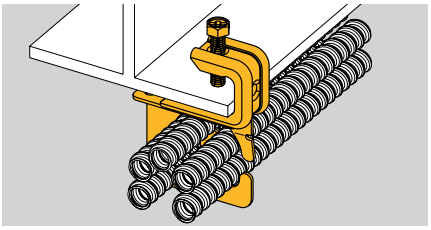

- Secures and supports MC/AC cables as required by the NEC.
- Effectively organizes cables and eliminates derating issues.
- Fits beam flanges from ⅛" thru ⅝" thick.
- Load Capacity: 50 lbs.


UPC/Part Number	Catalog Number	Cable Diameter & Number of Runs	Box Qty.
78205144087	**BRC51-C442**	.430" to .560" Up to 4 Runs	25
78205144088	**BRC52-C442**	.430" to .560" Up to 9 Runs	25
78205144089	**BRC53-C442**	.560" to .690" Up to 7 Runs	25



BRC5-1-C442

Read safety/installation instruction sheets in packages before use.

Beam Fasteners

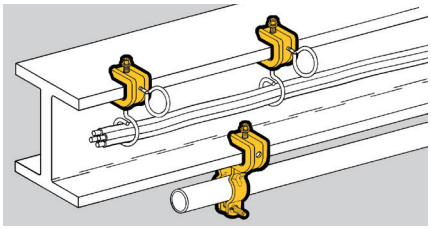



BC442

- BC442 fits beam flanges ⅛" to ⅝". BC442-6 fits beam flanges up to ¾".
- Finish: Zinc-plated.
- Static Load Capacity: BC442 = 100 lbs.; BC442-6 = 200 lbs.


UPC/Part Number	Catalog Number	Description	Box Qty.
78101118278	**BC442**	Accepts ¼"-20 Threaded Rod or ¼"-20 Threaded Bridle Rings	50
78101104283	**BC442-6**	Accepts ⅜"-16 Threaded Rod	25



BL1400-C442

UPC/Part Number	Catalog Number	Conduit Size Rigid	Conduit Size EMT	Box Qty.
78101119850	**BL1400-C442**	½"	½"	50
78101119851	**BL1410-C442**	¾"	¾"	50
78101119852	**BL1420-C442**	1"	1"	50
78101119853	**BL1425-C442**	–	1¼"	50
78101119854	**BL1430-C442**	1¼"	1½"	50
78101119855	**BL1440-C442**	1½"	–	25
78101119856	**BL1450-C442**	2"	2"	25

Beam Fasteners

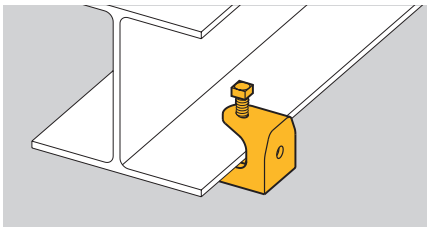




B444

- Can be used with ¼"-20 and ⅜"-16 threaded rod or bridle rings.
- Max. flange thickness
  ¾" (19.0) for ¼ & 5/16 sizes
  1" (25.4) for ⅜ & ½ sizes
- Safety Factor of 5.
- Finish: Zinc-plated.

UPC/Part Number	Catalog Number	Rod Size	Static Load Cap.	Box Qty.
78101155333	**B444-¼**	¼"-20	150 lbs.	50
78101155338	**B444-5/16**	5/16"-18	150 lbs.	50
78101155343	**B444-⅜**	⅜"-16	350 lbs.	50
78101155348	**B444-½**	½"-13	1000 lbs.	10

Read safety/installation instruction sheets in packages before use.

Conduit-to-Beam Fasteners

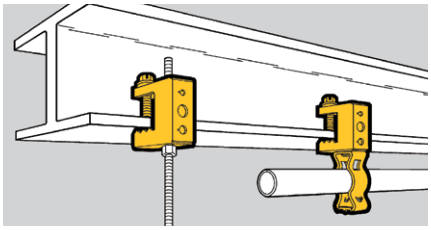

- Fits beam flanges thru ½" thick.
- Accepts "S" hooks, ¼" and ⅜" threaded rod, ¼"-20 or #10-24 threaded bridle rings.
- Supports conduit and electrical boxes.

UPC/Part Number	Catalog Number	Flange Thickness	Static Load Cap.	Box Qty.
78101118275	**BC1**	Thru ½"	100 lbs.	100



Guide-Rite™ Fastener

UPC/Part Number	Catalog Number	Conduit Size EMT & Rigid	Static Load Cap.	Box Qty.
78101118490	**BG-8-12-C2**	½", ¾"	100 lbs.	100
78101118570	**BG-16-C2**	1"	100 lbs.	100
78101118655	**BG-20-C2**	1¼"	100 lbs.	100
78101118700	**BG-24-C2**	1½"	100 lbs.	100
78101118740	**BG-32-C2**	2"	100 lbs.	100



BC1



Guide-Rite™ Fastener

UPC/Part Number	Catalog Number	Conduit Size EMT & Rigid	Static Load Cap.	Box Qty.
78101118485	**BG-8-12-C1**	½", ¾"	25 lbs.	100
78101118565	**BG-16-C1**	1"	25 lbs.	100
78101118650	**BG-20-C1**	1¼"	25 lbs.	100
78101118695	**BG-24-C1**	1½"	25 lbs.	50
78101118735	**BG-32-C1**	2"	25 lbs.	50



sh-Type

UPC/Part Number	Catalog Number	Conduit Size	Ultimate Static Load Cap.	Box Qty.
78101119260	**BP-8-C2**	½" EMT	25 lbs.	100
78101119360	**BP-12-C2**	¾" EMT ½" IMC, Rigid	25 lbs.	100
78101119455	**BP-16-C2**	1" EMT ¾" IMC, Rigid	25 lbs.	100




Push-Type

UPC/Part Number	Catalog Number	Conduit Size	Ultimate Static Load Cap.	Box Qty.
78101119255	**BP-8-C1**	½" EMT	25 lbs.	100
78101119355	**BP-12-C1**	¾" EMT ½" IMC, Rigid	25 lbs.	100
78101119450	**BP-16-C1**	1" EMT ¾" IMC, Rigid	25 lbs.	100

Read safety/installation instruction sheets in packages before use.

MC/AC Cable Carrier-to-Beam Fastener

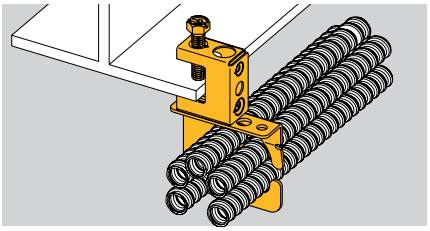




BRC5-x-C2

- Secures and supports MC/AC cables as required by the NEC.
- Effectively organizes cables and eliminates derating issues.
- Fits beam flanges thru ½" thick.
- Load Capacity: 50 lbs.

UPC/Part Number	Catalog Number	Cable Diameter & Number of Runs	Box Qty.
78205144090	**BRC51-C2**	.430" to .560" Up to 4 Runs	25
78205144091	**BRC52-C2**	.430" to .560" Up to 9 Runs	25
78205144092	**BRC53-C2**	.560" to .690" Up to 7 Runs	25

Cable-to-Beam Fasteners

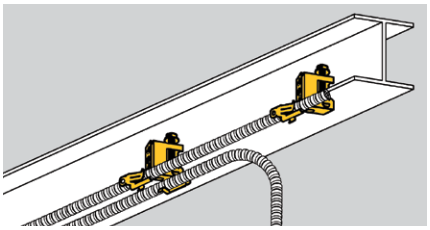



BX4-C2




BX4M-C2

- Attaches MC, AC, sizes 14/2 through 10/3 or ⅜" FMC to beam flanges thru ½" thick.
- Fasteners will rotate 360°.
- Requires only a screwdriver to install.

UPC/Part Number	Catalog Number	Flange Thickness	Box Qty.
78101101190	**BX4-C2**	Single Runs	100
78101101210	**BX4M-C2**	Double Runs	100

These products are designed for positioning only. No load rating.

Cable-to-Beam Fasteners

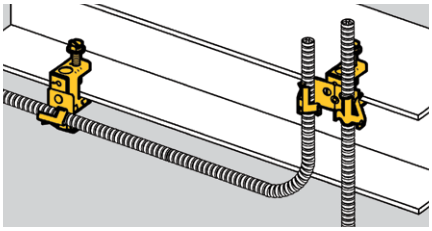



X4-C1




X4M-C1

- Attaches MC, AC, sizes 14/2 through 10/3 or ⅜" FMC to beam flanges thru ½" thick.
- Fasteners will rotate 360°.
- Requires only a screwdriver to install.

UPC/Part Number	Catalog Number	Flange Thickness	Box Qty.
78101101191	**BX4-C1**	Single Runs	100
78101101209	**BX4M-C1**	Double Runs	100

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Cable-to-Beam Fasteners

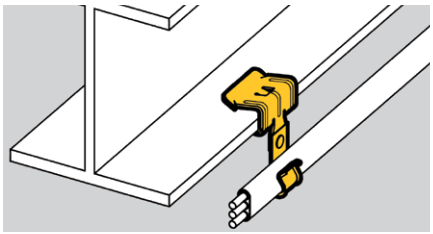




BRC3-E-2-4

- Attaches type NM cable to beam flanges ⅛" to ½" thick.
- Supports cable sizes 14/2 and 12/2 with ground wire.
- Simply installed with a hammer.

UPC/Part Number	Catalog Number	Flange Thickness	Box Qty.
78101103550	**BRC3-E-2-4**	⅛" to ¼"	100
78101103551	**BRC3-E-5-8**	5/16" to ½"	100
78101103552	**BRC3-E-9-12**	9/16" to ¾"	100

Guide-Rite Conduit & Box Support Fasteners

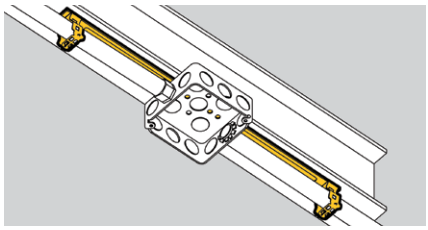



BG__-S18-U__



BG__-S18-U__-MC3


- BMC3 plate is available to support multiple conduit runs.
- Guide-Rite™ riveted assembly secures electrical boxes and conduit runs to beam flanges ⅛" to ½" thick.
- Provides support for conduit on either side of electrical box.
- Assemblies using BMC3 plate include center conduit clamp. Additional conduit clamps may be purchased separately.
- Consult factory for prefabricated box assemblies.

UPC/Part Number	Catalog Number	Conduit Size	Flange Thickness	Box Qty.
78101103583	**BG6-S18-U24** *	⅜"	⅛" to ¼"	25
78101103584	**BG6-S18-U58** *	⅜"	5/16" to ½"	25
78101103579	**BG812-S18-U24**	½", ¾"	⅛" to ¼"	25
78101103580	**BG812-S18-U58**	½", ¾"	5/16" to ½"	25
78101103581	**BG16-S18-U24**	1"	⅛" to ¼"	25
78101103582	**BG16-S18-U58**	1"	5/16" to ½"	25
With Multiple Conduit Plate				
78205152813	**BG6-S18-U24-MC3** *	⅜"	⅛" to ¼"	25
78205152814	**BG6-S18-U58-MC3** *	⅜"	5/16" to ½"	25
78205152815	**BG812-S18-U24-MC3**	½", ¾"	⅛" to ¼"	25
78205152816	**BG812-S18-U58-MC3**	½", ¾"	5/16" to ½"	25
78205152817	**BG16-S18-U24-MC3**	1"	⅛" to ¼"	25
78205152823	**BG16-S18-U58-MC3**	1"	5/16" to ½"	25

* BG-6 will accept the following range Ø.420 - Ø.675: 14/2 thru 10/4 MC/AC cable and 5/16" or ⅜" flexible conduit.

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Multi-Run Cable Carrier & Box Support Fastener

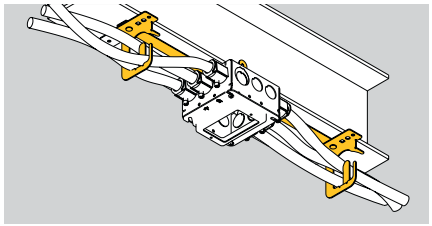




BRC5_-S18-U__

- Riveted assembly provides support for electrical box and cable run on either side of box.
- Cable retention tab is open for easy loading and contains cable when bent in place.

UPC/Part Number	Catalog Number	Conduit Size Number of Runs	Flange Thickness	Box Qty.
78205152829	**BRC51-S18-U24**	.430" - .560" Up to 4 Runs	1/8" to 1/4"	25
78205152830	**BRC51-S18-U58**	.560" - .690" Up to 7 Runs	5/16" to 1/2"	25
78205152834	**BRC53-S18-U24**	.430" - .560" Up to 4 Runs	1/8" to 1/4"	25
78205152835	**BRC53-S18-U58**	.560" - .690" Up to 7 Runs	5/16" to 1/2"	25

Push-Type Conduit & Box Support Fasteners

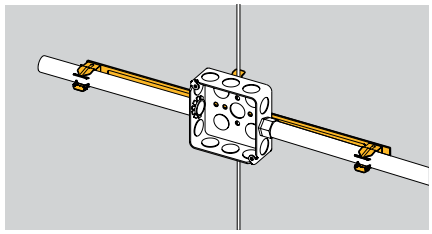



BP__-S18-U__



BP__-S18-U__-MC3

- BMC3 plate is available to support multiple conduit runs.
- Riveted assembly secures electrical boxes and conduit runs to beam flanges 1/8" to 1/2" thick.
- Provides support for conduit on either side of electrical box.
- Assemblies using BMC3 plate include center conduit clamp. Additional conduit clamps may be purchased separately.
- Consult factory for prefabricated box assemblies.

UPC/Part Number	Catalog Number	Conduit Size EMT, IMC, Rigid	Flange Thickness	Box Qty.
78205123635	**BP8-S18-U24**	3/8"	1/8" to 1/4"	25
78205123638	**BP8-S18-U58**	3/8"	5/16" to 1/2"	25
78205123636	**BP12-S18-U24**	1/2", 3/4"	1/8" to 1/4"	25
78205123639	**BP12-S18-U58**	1/2", 3/4"	5/16" to 1/2"	25
78205123637	**BP16-S18-U24**	1"	1/8" to 1/4"	25
78205123640	**BP16-S18-U58**	1"	5/16" to 1/2"	25
With Multiple Conduit Plate				
78205152824	**BP8-S18-U24-MC3**	3/8"	1/8" to 1/4"	25
78205152825	**BP8-S18-U58-MC3**	3/8"	5/16" to 1/2"	25
78205152827	**BP12-S18-U24-MC3**	1/2", 3/4"	1/8" to 1/4"	25
78205152828	**BP12-S18-U58-MC3**	1/2", 3/4"	5/16" to 1/2"	25
78205152825	**BP16-S18-U24-MC3**	1"	1/8" to 1/4"	25
78205152964	**BP16-S18-U58-MC3**	1"	5/16" to 1/2"	25

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.