


Designed for ease of installation, long service life and reliable performance, B-Line series conduit and cable support fasteners provide the ideal choice for a wide range of electrical applications.

Cable support fasteners are used to support metal clad cables (MC), armored cables (AC), non-metallic cables and flexible conduit in new or retrofit commercial construction. These rigid cable support fasteners are used when supporting cable on metal or wood wall studs, wire, purlins and more.







Guide-Rite Conduit Fasteners

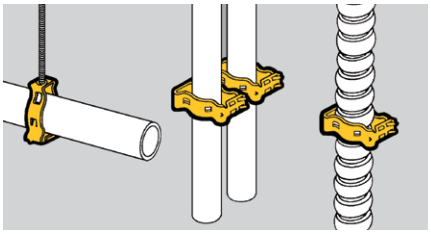

- Supports ⅜" to 2" conduit.
- Guide-Rite™ fastener provides for fast and easy installation with pliers.
- Dura-Copper™ finish - add DCU to part number.
- Static Load Capacity: 100 lbs. - Vertical; 25 lbs. - Horizontal.







Clearance Hole For ¼" Bolt

UPC/Part number	Catalog number	Conduit size EMT & rigid	Box Qty.
78101118350	**BG-6***	⅜"	100
78101118355	**BG-8-12**	½", ¾"	100
78101118360	**BG-16**	1"	100
78101118365	**BG-20**	1¼"	100
78101118360	**BG-24**	1½"	100
78101118375	**BG-32**	2"	100




4T Suffix ¼"-20 Thread Impression


UPC/Part number	Catalog number	Conduit size EMT & rigid	Box Qty.
78101118380	**BG-6-4T***	⅜"	100
78101118385	**BG-8-12-4T**	½", ¾"	100
78101118390	**BG-16-4T**	1"	100
78101118395	**BG-20-4T**	1¼"	100
78101118400	**BG-24-4T**	1½"	100
78101118405	**BG-32-4T**	2"	100

* BG-6 and BG-6-4T will accept the following range Ø.420 - Ø.675: 14/2 thru 10/4 MC/AC cable and 5/16" or ⅜" flexible conduit

Read safety/installation instruction sheets in packages before use.

Push-Type Conduit Fasteners

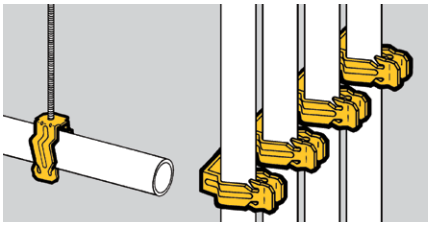

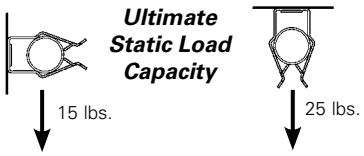



Clearance Hole
For ¼" Bolt



¼"-20
Thread Impression


Note: Use -4T suffix ¼"-20 thread impression

- Conduit easily snaps into push type fastener for secure support.
- Available with clearance hole for ¼" bolt or ¼"-20 thread impression.
- Ultimate Static Load Capacity: 25 lbs. Vertical; 15 lbs. Horizontal
- Use -4T suffix ¼"-20 thread impression.

UPC/Part number	Catalog number	Conduit size	Box Qty.
78101119200	**BP-8**	½" EMT	100
78101119205	**BP-12**	¾" EMT, ½" IMC/ Rigid	100
78101119210	**BP-16**	1" EMT, ¾" IMC/ Rigid	100

UPC/Part number	Catalog number	Conduit size	Box Qty.
78101119215	**BP-8-4T**	½" EMT	100
78101119220	**BP-12-4T**	¾" EMT, ½" IMC/ Rigid	100
78101119225	**BP-16-4T**	1" EMT, ¾" IMC/ Rigid	100

Guide-Rite Conduit Trapeze Fasteners

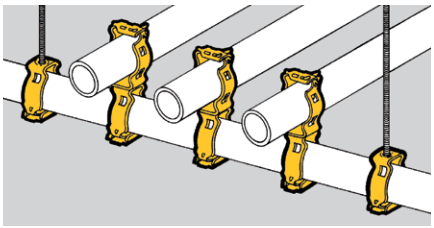



BG-16-G-6


- For use with ⅜" to 2" conduit.
- Guide-Rite™ fastener provides for fast and easy installation with pliers.
- Note: Total load of trapeze must not exceed 100 lbs.

UPC/Part number	Catalog number	Conduit To 1" Trapeze	Box Qty.
78101118615	**BG-16-G-6***	⅜"	100
78101118620	**BG-16-G-8-12**	½", ¾"	100
78101118595	**BG-16-G-16**	1"	100
78101118600	**BG-16-G-20**	1¼"	50
78101118605	**BG-16-G-24**	1½"	50
78101118610	**BG-16-G-32**	2"	50

* BG-16-G-6 will accept the following range Ø.420 - Ø.675: 14/2 thru 10/4 MC/AC cable and 5⁄16" or ⅜" flexible conduit.

Read safety/installation instruction sheets in packages before use.

Push-Type Conduit-to-Conduit Fasteners

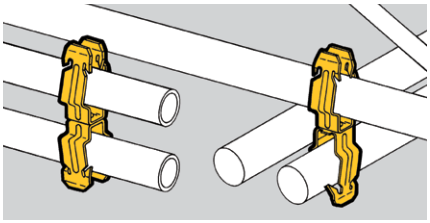




BP-8-P-8

- An ideal spacer between conduits.
- No installation tools required.
- Ultimate Static Load Capacity: 25 lbs.

UPC/Part number	Catalog number	Conduit Size	Box Qty.
78101118615	**BP-8-P-8**	½″ to ½″	100
78101118620	**BP-8-P-12**	½″ to ¾″	100
78101118595	**BP-8-P-16**	½″ to 1″	100
78101118600	**BP-12-P-12**	¾″ to ¾″	100
78101118605	**BP-12-P-16**	¾″ to 1″	100
78101118610	**BP-16-P-16**	1" to 1"	100

Note: For rigid conduit with BP series, use next size larger fastener (½" Rigid use BP-12).

Break-Apart Conduit Clamps

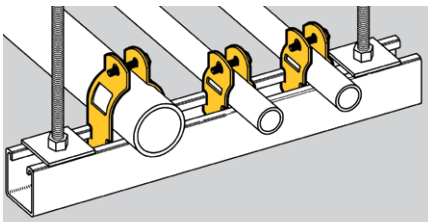




BPC-8 thru BPC-32



BPC-40 thru BPC-64

Static Load Capacity




- Patented Multi-grip design fits Rigid, IMC or EMT conduit.
- Convenient break-apart clamp features retained bolt and 5/16" thread impression to eliminate handling of nuts and bolts.
- Finish: Pre-galvanized.
- Static Load Capacity: 200 lbs.
- Recommended torque: 35 in-lbs.

UPC/Part number	Catalog number	Conduit size EMT & rigid	Box Qty.
78101101676	**BPC-8**	½″	100
78101101677	**BPC-12**	¾″	100
78101101680	**BPC-16**	1″	100
78101101679	**BPC-20**	1¼″	50
78101101678	**BPC-24**	1½″	50
78101101681	**BPC-32**	2″	50
78101103977	**BPC-40**	2½″	50
78101103978	**BPC-48**	3″	50
78101103979	**BPC-56**	3½″	25
78101103981	**BPC-64**	4″	25

Read safety/installation instruction sheets in packages before use.

Conduit/Cable Clamps

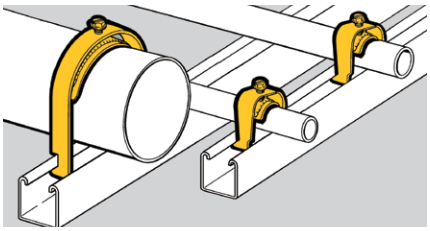




- One-piece assembled product.
- Easy removal without disconnecting adjacent clamps.
- Secure cables easily with protective saddle, preventing damage to conduit or cable.
- One-hand installation.
- Clamp works on equal trade sizes for both EMT and rigid conduit.
- Attaches to cable tray rungs and strut profiles; securing conduit, flexible conduit and cable to cable tray or strut.
- Finish: Pre-galvanized, stainless steel 316.

c UL us

UPC/Part number	Catalog number	Conduit size EMT & rigid	OD Range Inches Min	Max	Static Load Cap. lbs.	Box Qty.
Pre-galvanized steel						
79903860162	**BL050**	½″	0.65	0.89	200	100
79903860163	**BL075**	¾″	0.86	1.11	200	100
79903860164	**BL100**	1″	1.1	1.4	200	100
79903860165	**BL125**	1¼″	1.4	1.725	200	50
79903860166	**BL150**	1½″	1.69	1.98	200	50
79903860168	**BL200**	2″	1.98	2.576	200	50
79903860169	**BL250**	2½″	2.576	3.06	350	25
79903860170	**BL300**	3″	3.06	3.626	350	25
79903860171	**BL350**	3½″	3.626	4.126	350	25
79903860172	**BL400**	4″	4.126	4.626	350	25
Stainless steel						
79903860173	**BL050SS6**	½″	0.65	0.89	200	100
79903860174	**BL075SS6**	¾″	0.86	1.11	200	100
79903860175	**BL100SS6**	1″	1.1	1.4	200	100
79903860176	**BL125SS6**	1¼″	1.4	1.725	200	50
79903860177	**BL150SS6**	1½″	1.69	1.98	200	50
79903860178	**BL200SS6**	2″	1.98	2.576	200	50
79903860179	**BL250SS6**	2½″	2.576	3.06	350	25
79903860180	**BL300SS6**	3″	3.06	3.626	350	25
79903860181	**BL350SS6**	3½″	3.626	4.126	350	25
79903860182	**BL400SS6**	4″	4.126	4.626	350	25

Read safety/installation instruction sheets in packages before use.

Conduit Strut Clamps

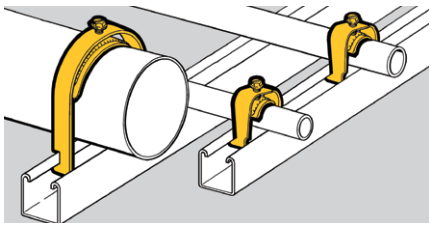

- Attaches conduit, flexible conduit or cables to standard strut channels.
- B1506S designed to secure and support MC/AC cables.
- One-piece design eliminates handling of hardware and allows easy installation and removal in side-by-side conduit runs.
- Anti-rock feature prevents clamp from disengaging during installation.
- Finish: Pre-galvanized..



B1508 thru B1520



B1506S thru B1524S




B1532S thru B1564S

UPC/Part number	Catalog number	Conduit size EMT	Conduit size Rigid	OD Range Inches Min	OD Range Inches Max	Static Load Cap. lbs.	Box Qty.
78101163150	**B1508**	½″	–	–	–	200	100
78101163154	**B1512**	¾″	½″	–	–	200	100
78101163157	**B1516**	1″	¾″	–	–	200	100
78101163160	**B1520**	1¼″	1″	–	–	200	100
Note: Clamps without saddle are not recommended for flexible conduit or cable							
78205144495	**B1506S***	⅜″*		.400	.630	200	100
78101163164	**B1508S**	½″		.250	.680	200	100
78101163168	**B1512S**	¾″	½″	.500	.840	200	100
78101163171	**B1516S**	1″	¾″	.750	1.050	200	100
78101163177	**B1520S**	1¼″	1″	1.125	1.315	200	100
78101163182	**B1524S**	1½″	1¼″	1.375	1.660	350	50
78101163188	**B1532S**	2″	1½″	1.875	2.200	400	50
78101163193	**B1534S**	–	2″	2.125	2.375	400	25
78101163199	**B1540S**	2½″	2½″	2.625	2.875	400	25
78101163205	**B1548S**	3″	3″	3.250	3.500	400	25
78101163211	**B1556S**	3½″	3½″	3.750	4.000	400	10
78101163215	**B1564S**	4″	4″	4.250	4.500	400	10

* B1506S will accept the following
AC Cable 14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4
MC Cable 14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4

Read safety/installation instruction sheets in packages before use.

Conduit Hangers

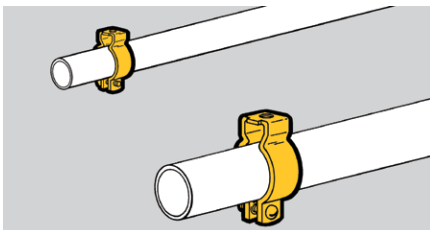



With Retained Bolt and Thread Impression



With Bolt and Nut


- For use with ½" thru 4" Conduit.
- Now available in Dura-Copper™ finish - add DCU to part number.
- Finish: Zinc-plated.

UPC/Part number	Catalog number	Trade Size	Conduit size EMT	Conduit size Rigid	Box Qty.	Design Load Lbs.
78101119800	**BL1400***	0	½″	½″	100	50
78101119801	**BL1410***	1	¾″	¾″	100	50
78101119802	**BL1420***	2	1″	1″	100	60

UPC/Part number	Catalog number	Trade Size	Conduit size EMT	Conduit size Rigid	Box Qty.	Design Load Lbs.
78101119803	**BL1425†**	2.5	1¼″	—	100	75
78101119804	**BL1430†**	3	1½″	1¼″	100	80
78101119805	**BL1440#**	4	—	1½″	50	80
78101119806	**BL1450#**	5	2″	2″	50	100
78101119807	**BL1460#**	6	2½″	2½″	25	125
78101119808	**BL1470#**	7	3″	3″	25	165
78101119809	**BL1480#**	8	3½″	3½″	10	200
78101119810	**BL1490#**	9	4″	4″	10	230

* 9/32" mounting hole. † ¼" mounting hole. # 5/16" mounting hole.

Stainless Steel Conduit Hangers

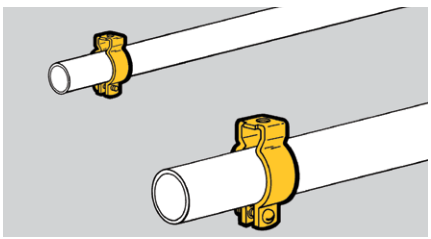



With Bolt And Nut


- For use with ½" thru 4" conduit.
- Static Load Capacity: 400 lbs.
- Material: Type 304 Stainless Steel.

UPC/Part number	Catalog number	Trade Size	Conduit size EMT	Conduit size Rigid	Box Qty.
78101119800	**BL1400-SS4***	0	½″	½″	100
78101119801	**BL1410-SS4***	1	¾″	¾″	100
78101119802	**BL1420-SS4***	2	1″	1″	100
78101119803	**BL1425-SS4***	2.5	1¼″	–	100
78101119804	**BL1430-SS4***	3	1½″	1¼″	100
78101119805	**BL1440-SS4†**	4	–	1½″	50
78101119806	**BL1450-SS4†**	5	2″	2″	50
78101119807	**BL1460-SS4†**	6	2½″	2½″	25
78101119808	**BL1470-SS4†**	7	3″	3″	25
78101119809	**BL1480-SS4†**	8	3½″	3½″	10
78101119810	**BL1490-SS4†**	9	4″	4″	10

* 9/32″ mounting hole. † 11/32″ mounting hole.

Read safety/installation instruction sheets in packages before use.

Guide-Rite Conduit-to-Pedestal Support

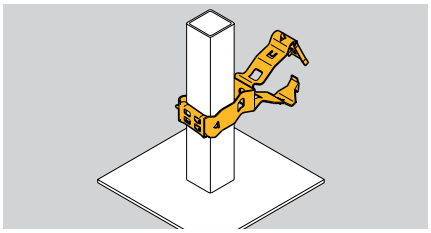




BG-8-12-G6

- Supports conduit from square computer floor pedestals.
- Guide-Rite™ fastener provides for fast and easy installation with pliers.
- Static Load Capacity: 25 lbs.

UPC/Part number	Catalog number	Conduit size EMT & rigid	Box Qty.
78205125589	**BG-8-12-G6***	⅜"	100
78101188538	**BG-8-12-G812**	½", ¾"	100
78101118620	**BG-16-G-8-12**	1"	100
78205125594	**BG-8-12-G20**	1¼"	50
78205125595	**BG-8-12-G24**	1½"	50
78205125597	**BG-8-12-G32**	2"	50

* BG-8-12-G6 will accept the following range Ø.420 - Ø.675: 14/2 thru 10/4 MC/AC cable and 5⁄16" or ⅜" flexible conduit.

Conduit-to-Pedestal Support

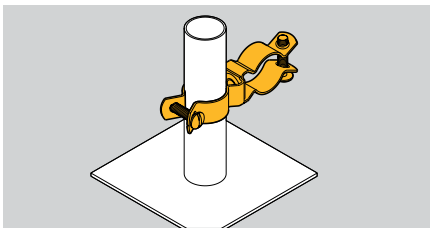




BL1410-L1400

- Supports conduit from 1" O.D. computer floor pedestals.
- Static Load Capacity: 25 lbs.
- Finish: Zinc-plated. Also available in Type 304 Stainless Steel. Contact factory for details.


UPC/Part number	Catalog number	Trade Size	Conduit size EMT	Conduit size Rigid	Box Qty.
78205125599	**BL1410-L1400**	0	½"	½"	50
78205125601	**BL1410-L1410**	1	¾"	¾"	50
78205125602	**BL1410-L1420**	2	1"	1"	50
78205125603	**BL1410-L1425**	2.5	--	1¼"	50
78205125607	**BL1410-L1430**	3	1¼"	1½"	50
78205125612	**BL1410-L1440**	4	1½"	--	25
78205125614	**BL1410-L1450**	5	2"	2"	25
78205125617	**BL1410-L1460**	6	2½"	2½"	10
78205125618	**BL1410-L1470**	7	3"	3"	10
78205125619	**BL1410-L1480**	8	3½"	3½"	5

Read safety/installation instruction sheets in packages before use.

Rod & Wire Fasteners

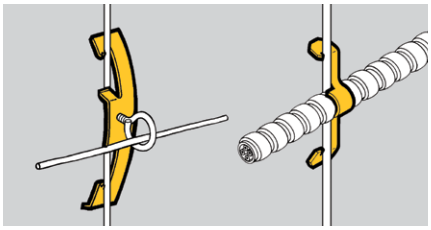



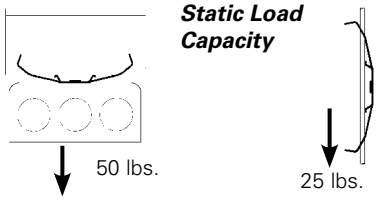

- BW2 and BW6 support #10-24 or ¼"-20 threaded bridle rings and provide attachment for electrical boxes.
- BW2S & BW6S are provided with one each ¼"-20 x ⅜" screw and hex nut.

UPC/Part Number	Catalog Number	Drop Rod/ Wire Size	Flange Thickness	Box Qty.
78101119700	**BW2**	#12 wire thru ¼" plain or threaded rod	⅛" - ⅜"	100
78205140156	**BW2S**	#12 wire thru ¼" plain or threaded rod	⅛" - ⅜"	100
78101195516	**BW6**	⅜" plain or threaded rod	⅜" - 7⁄16"	100
78205140157	**BW6S**	⅜" plain or threaded rod	⅜" - 7⁄16"	100




- BW4 supports cables from #12 thru #8 wire.

MC/AC Cable Size	#12 Wire	#10 Wire	#8 & #9 Wire
14/2 Cable	BW4	BW4	BW4
14/3 Cable	BW4	BW4	BW4
12/2 Cable	BW4	BW4	BW4
12/3 Cable	BW4	BW-8	BW-8

UPC/Part Number	Catalog Number	Description	Box Qty.
78101119705	**BW4**	Multi-size Wire Fastener	100

BW4 is designed for positioning only. No load rating.
Note: An independent means of support is required by NEC Article 300.11.

Rod & Wire Fasteners

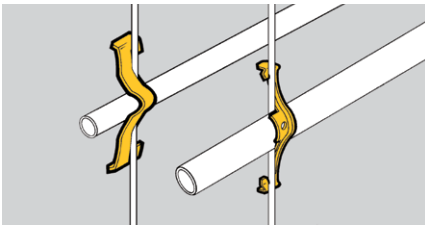




- Attaches conduit to wire rods or flanges.
- Can be used for flexible metallic tubing or armored cable.

UPC/Part Number	Catalog Number	Box Qty.
78101119710	**BW-8**	100
78101119715	**BW-12**	100
78101119720	**BW-16**	100
78101119725	**BW-20**	100

Conduit Size	#10 & #12 Wire	#8 & #9 Wire	3⁄16" & ¼" Rod	⅛" to ¼" Flange	5⁄16" to ⅜" Flange	7⁄16" to ½" Flange
½" EMT	BW-8	BW-8	BW-8	BW-8	BW-12	BW-12
½" Rigid	BW-8	BW-12	BW-12	BW-12	BW-12	BW-16
¾" EMT	BW-12	BW-12	BW-12	BW-12	BW-16	BW-16
¾" Rigid	BW-12	BW-12	BW-16	BW-16	BW-20*	BW-20*
1" EMT	—	BW-16	BW-16	BW-16	BW-20*	BW-20*
1" Rigid	—	—	—	BW-20*	BW-20*	BW-20*
1¼" EMT	—	BW-20	BW-20	BW-20	—	—

*Note: For horizontal applications only.


Static Load Capacity

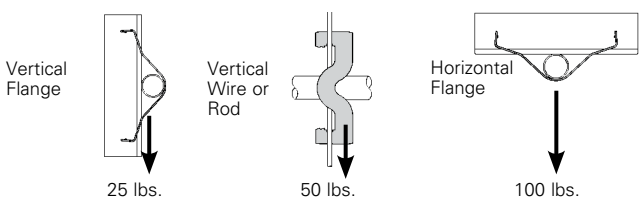

Note: An independent means of support is required by NEC Article 300.11.


Read safety/installation instruction sheets in packages before use.


Guide-Rite Conduit-to-Rod Fasteners

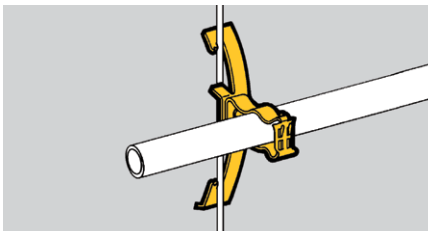



Static Load Capacity







- Assemblies support ½", ¾" and 1"conduit.
- W2 series attaches to ⅛" thru ⅜" flanges or #12 wire thru ¼" plain or threaded rod.
- W6 series attaches to ⅜" thru 7⁄16" flanges or ⅜" plain or threaded rod.

UPC/Part Number	Catalog Number	Conduit Size EMT/Rigid	Box Qty.
78101118540	**BG-8-12-W2**	½", ¾"	100
78101118640	**BG-16-W2**	1"	100
78101195519	**BG-8-12-W6**	½", ¾"	100
78101195520	**BG-16-W6**	1"	100


Push-Type Conduit-to-Rod Fasteners

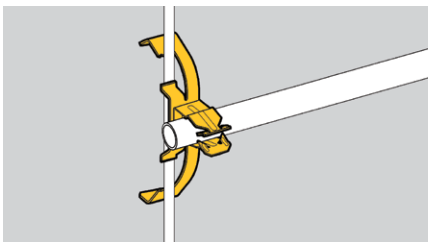





Ultimate Static Load Capacity




- Assemblies support ½", ¾" and 1" conduit.
- W2 series attaches to ⅛" thru ⅜" flanges or #12 wire thru ¼" plain or threaded rod.
- W6 series attaches to ⅜" thru 7⁄16" flanges or ⅜" plain or threaded rod.

UPC/Part Number	Catalog Number	Conduit Size	Box Qty.
78101119325	**BP-8-W2**	½" EMT	100
78101119420	**BP-12-W2**	¾" EMT or ½" IMC. Rigid	100
78101119505	**BP-16-W2**	1" EMT or ¾" IMC, Rigid	100
78101195521	**BP-8-W6**	½" EMT	100
78101195522	**BP-12-W6**	¾" EMT or ½" IMC. Rigid	100
78101195523	**BP-16-W6**	1" EMT or ¾" IMC, Rigid	100

Note: An independent means of support is required by NEC Article 300.11.

Read safety/installation instruction sheets in packages before use.

Flex-Rite Cable/Conduit-to-Wire Fasteners

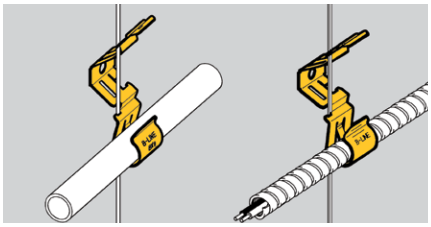




BX-8

- Flex-Rite™ can be used in place of batwings.
- Will not bend or deform hanger wire.
- Attaches to #12 - #8 wire and ¼" plain rod.
- Accommodates MC, AC, ⅜" FMC or ½" EMT.
- Cable can be installed before or after attachment to wire.
- Static Load Capacity: BX-8 - 20 lbs.; BX-18 - 30 lbs.

UPC/Part Number	Catalog Number	Cable/Conduit Size	Box Qty.
78101101402	**BX-8**	.375" to 706" O.D.	100
78101102943	**BX-18**	.706" to 1.380" O.D.	100
78101101685	**BX-8B**	Bulk Packed In Fiber Barrels	4000

Cable-to-Rod Fasteners

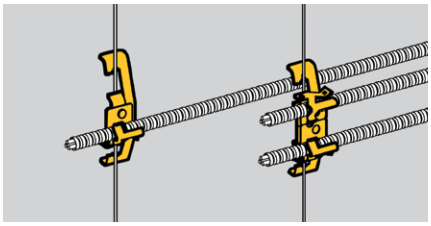



BX4-W2




BX4M-W2

- Assemblies support MC, AC, sizes 14/2 through 10/3 or ⅜" FMC.
- W2 series attaches to ⅛" thru ⅜" flanges or #12 wire thru ¼" plain or threaded rod.
- W6 series attaches to ⅜" thru 7/16" flanges or ⅜" plain or threaded rod.

UPC/Part Number	Catalog Number	Description	Box Qty.
78101101219	**BX4-W2**	Single Runs	100
78101101189	**BX4M-W2**	Double Runs	100
78101195517	**BX4-W6**	Single Runs	100
78101195518	**BX4M-W6**	Double Runs	100

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Cable Fasteners

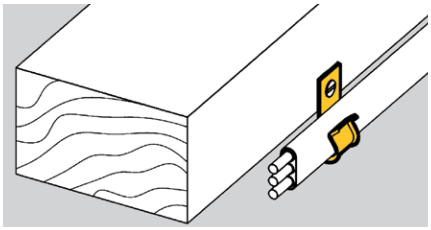




BRC3

- Attaches Type NM cable to most structures.
- Supports cable sizes 14/2 and 12/2 with ground wire.
- May be used with other B-Line series fasteners for attachment to acoustical tees, beams, drop wires, etc.

UPC/Part Number	Catalog Number	Description	Box Qty.
78101103553	**BRC3**	Type NM Cable Fastener	100

Cable Fasteners

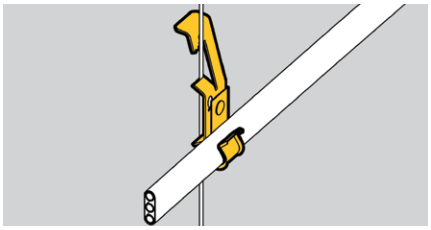




BRC3-W2

- Supports cable sizes 14/2 and 12/2 with ground wire.
- W2 series supports cable from #12 wire thru ¼" plain or threaded rod.
- W6 series supports cable from ⅜" plain or threaded rod.

UPC/Part Number	Catalog Number	Description	Box Qty.
78101103547	**BRC3-W2**	Type NM Cable To Wire Fastener	100
78101195524	**BRC3-W6**	Type NM Cable To Wire Fastener	100

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Multi-Run Cable Carrier for MC/AC Cable

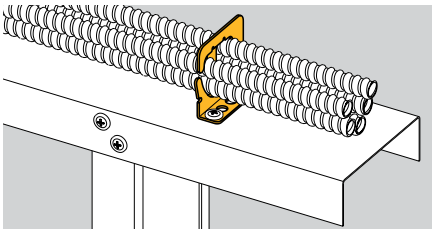

- Secures and supports multiple runs of MC/AC cable as required by the NEC.
- Effectively organizes cables and helps eliminate derating issues.
- Retention tab is open for easy loading and unloading and contains cables when bent in place.
- Compatible with new BCH-HBA for multi tier assemblies.
- Load Capacity: 50 lbs.
- Finish: Zinc-plated.



BRC5-1




BRC5-2



BRC5-3

UPC/Part Number	Catalog Number	Cable Diameter & Number Of Runs	Box Qty.
78205143593	**BRC5-1**	.430" to .560" Up To 4 Runs	50
78205143594	**BRC5-2**	.430" to .560" Up To 9 Runs	50
78205143595	**BRC5-3**	.560" to .690" Up To 7 Runs	50

Multi-Run Cable Carrier for MC/AC Cable

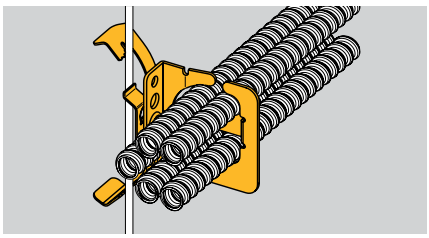

- Secures and supports multiple runs of MC/AC cable as required by the NEC.
- W2 Series attaches to ⅛" thru ⅜" flanges or #12 thru ¼" plain or threaded rod.
- W6 Series attaches to ⅜" thru 7⁄16" flanges or ⅜" plain or threaded rod.
- Load Capacity: 50 lbs.
- Finish: Zinc-plated.




BRC51-W2

UPC/Part Number	Catalog Number	Cable Diameter & Number Of Runs	Box Qty.
78205144075	**BRC51-W2**	.430" to .560" Up To 4 Runs	25
78205144076	**BRC52-W2**	.430" to .560" Up To 9 Runs	25
78205144077	**BRC53-W2**	.560" to .690" Up To 7 Runs	25
78205144078	**BRC51-W6**	.430" to .560" Up To 4 Runs	25
78205144079	**BRC52-W6**	.430" to .560" Up To 9 Runs	25
78205144080	**BRC53-W6**	.560" to .690" Up To 7 Runs	25

Note: An independent means of support is required by NEC Article 300.11.

Read safety/installation instruction sheets in packages before use.

Flexible Cable Support

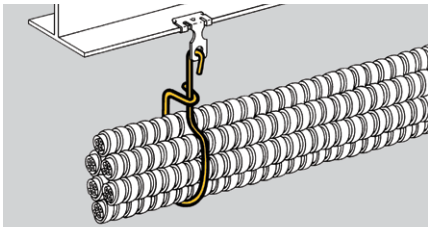




BX2 BX6

- Designed to support multiple runs of MC, AC, FMC or communication cable.
- Static Load Capacity: BX2 - 50 lbs.; BX6 & BX24 - 75 lbs.
- Finish: Zinc-plated.

UPC/Part Number	Catalog Number	Description	Box Qty.
78205104934	**BX2**	Usable Area = 2 sq. in.	100
78205119765	**BX6**	Usable Area = 4 sq. in.	100
78205119766	**BX24**	Usable Area = 13 sq. in.	100

Flexible Conduit/Cable Fasteners

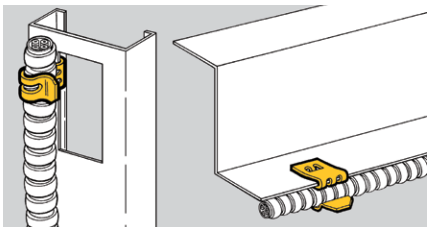




- Fastens flexible conduit and other small cables to beam flanges, bar joists or metal studs.
- Cable O.D. range of 0.42" to 0.70".
- Maximum flange thickness 5⁄32".

UPC/Part Number	Catalog Number	Description	Box Qty.
78101119770	**BX9**	Flexible Conduit Fastener	100

Flexible Conduit/Cable Fasteners

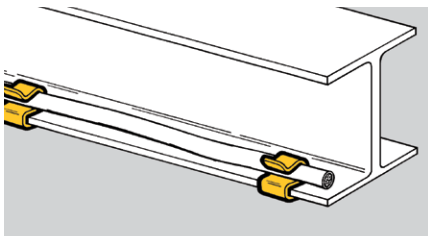

- Secures cable along flanges 1⁄16" to 3⁄4"
- The BFA flange adapters attach BXS series to thicker flanges.
- BX_-67 accepts 14/2, 12/2 & 10/2 romex with ground.
- BX_-1011 accepts 14/2, 12/2 & 10/2 romex with ground.
- BX_-1214 accepts 10/3, romex with ground.
- Finish: Zinc Plated.



BFA Series (For Use with BXS Series Only)



BXS Series




BXL Series

UPC/Part Number	Catalog Number	Flange Thickness	Cable Diameter	Box Qty.
78101119973	**BXS-67**	1⁄16" - 5⁄32"	.218 to .281	100
78101119974	**BXS-89**	1⁄16" - 5⁄32"	.290 to .375	100
78101119975	**BXS-1011**	1⁄16" - 5⁄32"	.375 to .437	100
78101119976	**BXS-1214**	1⁄16" - 5⁄32"	.444 to .560	100
78101119977	**BXS-1519**	1⁄16" - 5⁄32"	.500 to .718	100
78101119978	**BXS-2024**	1⁄16" - 5⁄32"	.748 to .945	100
78101119979	**BXS-2530**	1⁄16" - 5⁄32"	.968 to 1.250	100
78101119980	**BXM-67**	5⁄32" - 9⁄32"	.218 to .281	100
78101119981	**BXM-89**	5⁄32" - 9⁄32"	.290 to .375	100
78101119982	**BXM-1011**	5⁄32" - 9⁄32"	.375 to .437	100
78101119983	**BXM-1214**	5⁄32" - 9⁄32"	.444 to .560	100
78101119984	**BXM-1519**	5⁄32" - 9⁄32"	.500 to .718	100
78101119985	**BXM-2024**	5⁄32" - 9⁄32"	.748 to .945	100
78101119986	**BXM-2530**	5⁄32" - 9⁄32"	.968 to 1.250	100
78101119987	**BXL-67**	5⁄16" - 1⁄2"	.218 to .281	100
78101119988	**BXL-89**	5⁄16" - 1⁄2"	.290 to .375	100
78101119989	**BXL-1011**	5⁄16" - 1⁄2"	.375 to .437	100
78101119990	**BXL-1214**	5⁄16" - 1⁄2"	.444 to .560	100
78101119991	**BXL-1519**	5⁄16" - 1⁄2"	.500 to .718	100
78101119992	**BXL-2024**	5⁄16" - 1⁄2"	.748 to .945	100
78101119993	**BXL-2530**	5⁄16" - 1⁄2"	.968 to 1.250	100
78101119956	**BFA-1520**	5⁄8" - 3⁄4"	–	100

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Conduit Quick Caps & Spacers

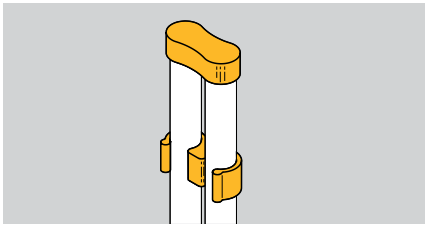



BCS & BES
8 & 8C thru 16
& 16C



BCS 18, 18C, 20, & 20C




BCS 12AS & 16AS

- Quick caps and spacers eliminate the time consuming method of duct taping conduit stubs.
- Quick spacers are designed to separate and secure conduit during concrete pours.
- Quick caps maintain spacing and keep conduit free from dirt and debris.
- Quick caps and spacers properly space conduit for any 4" square box.
- Available in EMT & Rigid conduit sizes.

UPC/Part Number	Catalog Number	Conduit Size	Box Qty.
Conduit Spacer			
78205122356	**BCS-8**	½" Rigid Conduit	50
78205140057	**BES-8**	½" EMT Conduit	50
78205122357	**BCS-12**	¾" Rigid Conduit	50
78205140058	**BES-12**	¾" EMT Conduit	50
78205122358	**BCS-16**	1" Rigid Conduit	50
78205140059	**BES-16**	1" EMT Conduit	50
79903855806	**BCS-18**	1½" Rigid Conduit	25
79903855807	**BCS-20**	2" Rigid Conduit	25
Conduit Cap			
78205122359	**BCS-8C**	½" Rigid Conduit	50
78205140060	**BES-8C**	½" EMT Conduit	50
78205122361	**BCS-12C**	¾" Rigid Conduit	50
78205140061	**BES-12C**	¾" EMT Conduit	50
78205122362	**BCS-16C**	1" Rigid Conduit	50
78205140062	**BES-16C**	1" EMT Conduit	50
79903855803	**BCS-18C**	1½" Rigid Conduit	25
79903855805	**BCS-20C**	2" Rigid Conduit	25
Conduit Spacer			
79903855808	**BCS-12AS**	¾" Rigid Conduit	50
79903855809	**BCS-16AS**	1" Rigid Conduit	25

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Conduit Spacer Brackets

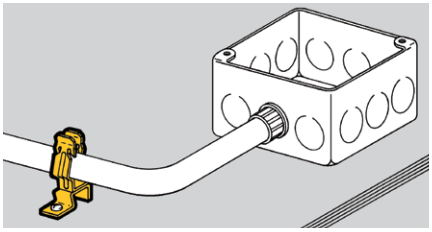



BG




BP

- Helps eliminate the need for offset bends when used with 2⅛" deep boxes.
- Provides secure support between conduit and deck.
- D4 series is easily installed with screw gun or powder actuated tools.
- Allows for complete conduit layout prior to anchoring.

UPC/Part number	Catalog number	Conduit Size	Box Qty.
78101118500	**BG-8-12-D4**	½" or ¾"	100
78101119270	**BP-8-D4**	½" EMT	100
78101119370	**BP-12-D4**	¾" EMT or ½" IMC, Rigid	100
78101119460	**BP-16-D4**	1" EMT or ¾" IMC, Rigid	100

Conduit Spacer Brackets

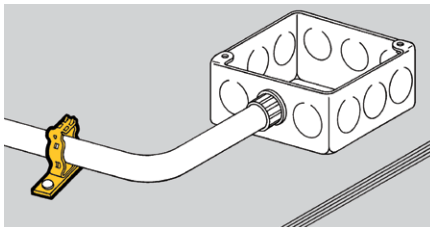



BG




BP

- Helps eliminate the need for offset bends when used with 1½" deep boxes.
- Attaches conduit to concrete, steel or wood with nails.
- May be attached after conduit positioning.

UPC/Part number	Catalog number	Conduit Size	Box Qty.
78101118495	**BG-8-12-D3**	½" or ¾"	100
78101119265	**BP-8-D3**	½" EMT	100
78101118365	**BP-12-D3**	¾" EMT or ½" IMC, Rigid	100

Read safety/installation instruction sheets in packages before use.
These products are designed for positioning only. No load rating.

Guide-Rite Conduit & Box Support Fasteners

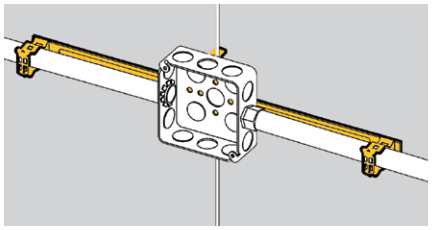

- See Ruff-IN pages for prefabricated box assemblies.



BG__-S18



BG__-S18-MC3

UPC/Part Number	Catalog Number	Conduit Size EMT & Rigid	Box Qty.
78101103575	**BG6-S18** *	⅜"	25
78101103573	**BG812-S18**	½" or ¾"	25
78101103574	**BG16-S18**	1"	25
With Multiple Conduit Plate			
78205152812	**BG6-S18-MC3** *	⅜"	25
78205152900	**BG812-S18-MC3**	½" or ¾"	25
78205152901	**BG16-S18-MC3**	1"	25




BG-__-S18-S
With ¼"-20 x ⅝" Stud



BG-__-S18-S-MC3
With ¼"-20 x ⅝" Stud

With Stud			
78205152902	**BG6-S18S** *	⅜"	25
78110104979	**BG812-S18S**	½" or ¾"	25
78205152903	**BG16-S18S**	1"	25
With Stud & Multiple Conduit Plate			
78205152904	**BG6-S18S-MC3** *	⅜"	25
78205152905	**BG812-S18S-MC3**	½" or ¾"	25
78205152906	**BG16-S18S-MC3**	1"	25

* BG-6 will accept the following range Ø.420 - Ø.675:
14/2 thru 10/4 MC/AC cable and 5⁄16" or ⅜" flexible conduit.

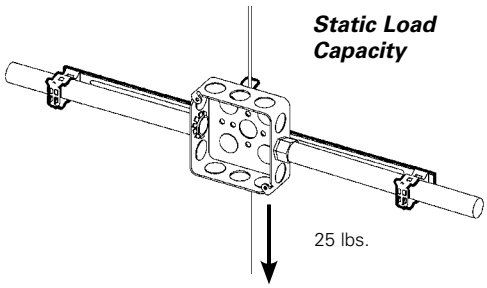

- BMC3 plate supports multiple conduit runs.
- Riveted assembly provides support for electrical boxes and conduit runs on either side of the box.
- Helps reduce drop wires by up to 66% when using W2/W6 assemblies.
- Assemblies using BMC3 plate include center conduit clip.
- Additional conduit clips may be purchased separately.



BG__-S18-W_



BG__-S18-W_-MC3


UPC/Part Number	Catalog Number	Conduit Size EMT & Rigid	Box Qty.
W2 Series for #12 thru ¼" Rod **			
78101103578	**BG6-S18-W2** *	⅜"	25
78101103577	**BG812-S18-W2**	½" or ¾"	25
78101103577	**BG16-S18-W2**	1"	25
W2 Series for #12 thru ¼" Rod & Multiple Conduit Plate **			
78205152855	**BG6-S18-W2-MC3** *	⅜"	25
78205152739	**BG812-S18-W2-MC3**	½" or ¾"	25
78205152862	**BG16-S18-W2-MC3**	1"	25
W6 Series for ⅜" Plain or Threaded Rod **			
78110199581	**BG6-S18-W6** *	⅜"	25
78110199582	**BG812-S18-W6**	½" or ¾"	25
78110199580	**BG16-S18-W6**	1"	25
W6 Series for ⅜" Plain or Threaded Rod & Multiple Conduit Plate **			
78205152856	**BG6-S18-W6-MC3** *	⅜"	25
78205152860	**BG812-S18-W6-MC3**	½" or ¾"	25
78205152864	**BG16-S18-W6-MC3**	1"	25

* BG-6 will accept the following range Ø.420 - Ø.675:
14/2 thru 10/4 MC/AC cable and 5⁄16" or ⅜" flexible conduit

** Note:
An independent means of support is required by NEC Article 300.11.

Read safety/installation instruction sheets in packages before use.

Push-Type Conduit & Box Support Fasteners

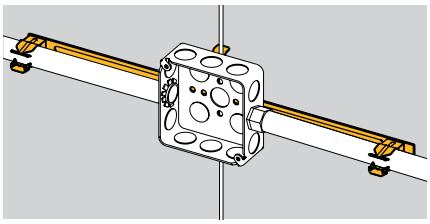



BP__-S18



BP__-S18-MC3



BP-__-S18-S
With ¼"-20 x ⅝"
Stud




BP-__-S18-S-MC3
With ¼"-20 x ⅝"
Stud



BG__-S18-W_



BG__-S18-W_-MC3

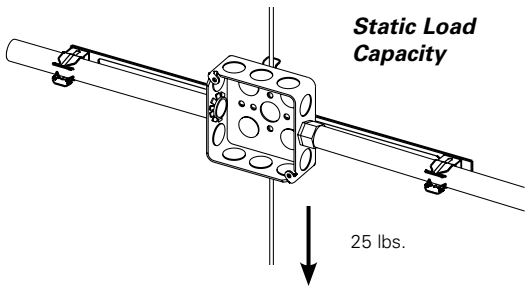

- New BMC3 plate is available to support multiple conduit runs.
- Riveted assembly provides support for electrical boxes and conduit runs on either side of the box.
- Reduces drop wires by up to 66% when using W2/W6 assemblies.
- Assemblies using BMC3 plate include center conduit clip. Additional conduit clips may be purchased separately.
- See the Ruff-IN brochure for prefabricated box assemblies.


UPC/Part Number	Catalog Number	Conduit Size E(EMT) R(Rigid)	Box Qty.
78205123604	**BP8-S18**	½" E	25
78205123605	**BP12-S18**	¾" E or ½" R	25
78205123606	**BP16-S18**	1"E, ¾" R	25
With Multiple Conduit Plate			
78205152907	**BP8-S18-MC3**	½" E	25
78205152908	**BP12-S18-MC3**	¾" E or ½" R	25
78205152909	**BP16-S18-MC3**	1"E, ¾" R	25
With Stud			
78205123631	**BP8-S18S**	½" E	25
78205123633	**BP12-S18S**	¾" E or ½" R	25
78205123634	**BP16-S18S**	1"E, ¾" R	25
With Stud & Multiple Conduit Plate			
78205152913	**BP8-S18S-MC3**	½" E	25
78205152914	**BP12-S18S-MC3**	¾" E or ½" R	25
78205152915	**BP16-S18S-MC3**	1"E, ¾" R	25

UPC/Part Number	Catalog Number	Conduit Size E(EMT) R(Rigid)	Box Qty.
W2 Series for #12 thru ¼" Rod **			
78205123615	**BP8-S18-W2**	½" EMT	25
78205123619	**BP12-S18-W2**	¾" E or ½" R	25
78205123627	**BP16-S18-W2**	1"E, ¾" R	25
W2 Series for #12 thru ¼" Rod & Multiple Conduit Plate **			
78205152847	**BP8-S18-W2-MC3**	½" EMT	25
78205152848	**BP12-S18-W2-MC3**	¾" E or ½" R	25
78205152849	**BP16-S18-W2-MC3**	1"E, ¾" R	25
W6 Series for ⅜" Plain or Threaded Rod **			
78205123628	**BP8-S18-W6**	½" EMT	25
78205123629	**BP12-S18-W6**	¾" E or ½" R	25
78205123630	**BP16-S18-W6**	1"E, ¾" R	25
W6 Series for ⅜" Plain or Threaded Rod & Multiple Conduit Plate **			
78205152850	**BP8-S18-W6-MC3**	½" EMT	25
78205152851	**BP12-S18-W6-MC3**	¾" E or ½" R	25
78205152854	**BP16-S18-W6-MC3**	1"E, ¾" R	25

** Note:
An independent means of support is required by NEC Article 300.11.

Read safety/installation instruction sheets in packages before use.

Multi-Run Cable Carrier & Box Support Fasteners

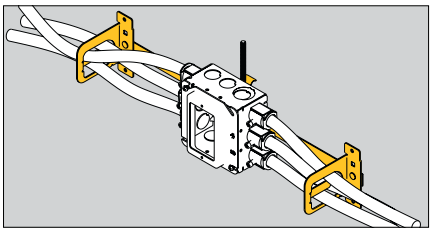

- Riveted assembly provides support for electrical boxes and cable runs on either side of the box.
- Reduces drop wires by up to 66% when using W2/W6 assemblies.
- Cable retention tab is open for easy loading and contains the cables when bent in place.
- Consult factory for prefabricated box assemblies.

UPC/Part Number	Catalog Number	Conduit Size	Box Qty.
78205152916	**BRC51-S18**	Up to 4 runs .430" - .560"	25
78205152918	**BRC53-S18**	Up to 7 runs .560" - .690"	25



BRC5_-S18

UPC/Part Number	Catalog Number	Conduit Size	Box Qty.
With Stud			
78205152919	**BRC51-S18S**	Up to 4 runs .430" - .560"	25
78205152921	**BRC53-S18S**	Up to 7 runs .560" - .690"	25




BRC5_-S18-S
With ¼"-20 x ⅝" Stud

UPC/Part Number	Catalog Number	Conduit Size	Box Qty.
W2 Series for #12 thru ¼" Rod **			
78205152865	**BRC51-S18-W2**	Up to 4 runs .430" - .560"	25
78205152869	**BRC53-S18-W2**	Up to 7 runs .560" - .690"	25



BRC5_-S18-W_

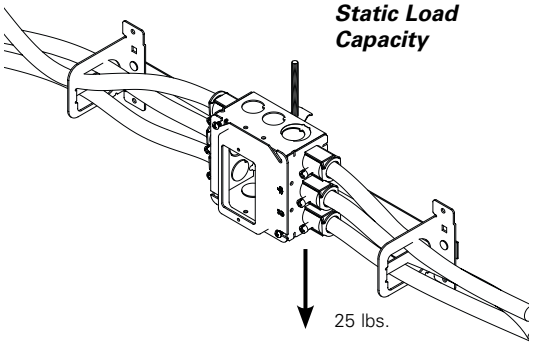

UPC/Part Number	Catalog Number	Conduit Size	Box Qty.
W6 Series for ⅜" Plain or Threaded Rod **			
78205152866	**BRC51-S18-W6**	Up to 4 runs .430" - .560"	25
78205152870	**BRC53-S18-W6**	Up to 7 runs .560" - .690"	25

** Note:
An independent means of support is required by NEC Article 300.11.

Read safety/installation instruction sheets in packages before use.