
1½" DEEP – NON-GANGABLE – 7.5 CUBIC INCH CAPACITY

2" WIDE x 3" LONG


UL LISTED



TP100

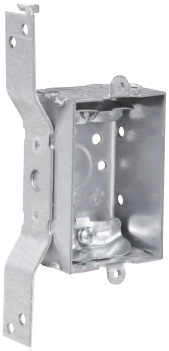

TP104



TP106



TP114

Cat. #	Bracket	Ears (# of screws)	Knockouts			Unit qty.	Wt. lbs. per 100
			Each end	Each side	Bottom		
For non-metallic cable – clamps in each end							
TP100	-	Yes (2)	2 - cable	-	1 - ½"	50	43
TP104	"S", Set ½"	-	2 - cable	-	1 - ½"	50	50
For armored & metal-clad (MCI) cable – clamps in each end							
TP106Ⓐ	-	Yes (2)	2 - cable	-	1 - ½"	50	44
For conduit – no clamps, flush device							
TP114	-	Yes (2)	1 - ½"	-	1 - ½"	50	39

Ⓐ UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.

 Copyright© 2021 Commercial Products Catalog

2″ DEEP – GANGABLE – 10.0 CUBIC INCH CAPACITY

2″ WIDE x 3″ LONG


UL LISTED




TP116




TP118



TP120



TP123




TP124




TP126



TP130



TP132



TP131 Hold-tite

Cat. #	Bracket	Ears (# of screws)	Knockouts			Unit qty.	Wt. lbs. per 100
			Each end	Each side	Bottom		
For non-metallic cable – clamps in each end							
TP116	-	Yes (2)	2 - cable	-	1 - ½″	50	53
TP118	"S", set ⅝″	-	2 - cable	-	1 - ½″	50	60
For armored & metal-clad (MCI) cable – clamps in each end							
TP120[A]	-	Yes (2)	2 - cable	-	1 - ½″	50	54
TP123[A]	"F", set ½″	-	2 - cable	-	1 - ½″	50	63
TP124[A]	"S", set ⅝″	-	2 - cable	-	1 - ½″	50	61
For conduit – no clamps, flush device							
TP126	-	-	1 - ½″	2 - ½″	1 - ½″	50	47
TP130	-	Yes (2)	1 - ½″	2 - ½″	1 - ½″	50	48
TP132	"S", set ⅝″	-	1 - ½″	2 - ½″, 1 Side	1 - ½″	50	58
TP131	Hold-tite	Yes (2)	1 - ½″- T	-	1 - ½″	50	52


[A] UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.

Steel switch boxes

2¼" DEEP – GANGABLE – BEVELED CORNERS – 10.5 CUBIC INCH CAPACITY

2" WIDE x 3" LONG

UL LISTED



TP134



TP137 Hold-tite



TP138

Cat. #	Description	Ears (# of screws)	Bumps	Knockouts			Unit qty.	Wt. lbs. per 100
				Each end	Each side	Bottom		
Clamp screws through beveled corners								
TP134	Gangable	-	Yes	2 - cable	-	1 - ½"	50	51
TP137	Gangable	Yes (1)	-	2 - cable	-	1 - ½"	50	57
TP138	Gangable	Yes (1)	-	2 - cable	-	1 - ½"	50	55


2½" DEEP – GANGABLE – 12.5 CUBIC INCH CAPACITY

2" WIDE x 3" LONG


UL LISTED




TP158




TP162




TP163




TP164



TP168




TP170



TP161



TP172



TP174



TP171

Cat. #	Bracket	Ears (# of screws)	Ground pigtail	Leveling bumps	Knockouts			Unit qty.	Wt. lbs. per 100
					Each end	Each side	Bottom		
For non-metallic cable – clamps in each end									
TP158	-	-	-	Yes	2 - cable, 1 - ½"	-	1 - ½"	50	59
TP115Ⓖ	-	Yes (1)	Yes	-	2 - cable	1 - ½"	1 - ½"	50	63
TP161	Snap-in	Yes (1)	-	-	2 - cable	1 - ½"	-	50	73
TP162	-	Yes (1)	-	-	2 - cable	1 - ½"	1 - ½"	50	62
TP163	Hold-tite	Yes (1)	-	-	2 - cable	-	1 - ½"	50	65
TP164	"F", set ½"	-	-	-	2 - cable, 1 - ½"	1 - ½"	1 - ½"	50	71
TP168	"F", set ¼"	-	-	-	2 - cable, 1 - ½"	1 - ½"	1 - ½"	50	71
TP170	"S", set ⅝"	-	-	-	2 - cable, 1 - ½"	1 - ½"	1 - ½"	50	69
TP172	"D", set ⅝"	-	-	-	2 - cable, 1 - ½"	1 - ½"	1 - ½"	50	70
TP174	"D", set ⅝"	-	Yes	-	2 - cable, 1 - ½"	1 - ½"	1 - ½"	50	71
TP171	"VP", set ½"	-	-	-	2 - cable, 1 - ½"	1 - ½"	1 - ½"	50	73


�GNot UL Listed.

 Copyright© 2021 Commercial Products Catalog


2½" DEEP – GANGABLE – 12.5 CUBIC INCH CAPACITY

2" WIDE x 3" LONG FOR ARMORED & METAL-CLAD (MCI) CABLE – CLAMPS IN EACH END


UL LISTED




TP177




TP178



TP179 Hold-Tite



TP180



TP184



TP185

Cat. #	Bracket	Ears (# of screws)	Knockouts			Unit qty.	Wt. lbs. per 100
			Each end	Each side	Bottom		
TP177Ⓐ	Snap-in	Yes (1)	2 - cable	1 - ½"	-	50	74
TP178Ⓐ	-	Yes (1)	2 - cable	1 - ½"	1 - ½"	50	63
TP179Ⓐ	Hold-tite	Yes (1)	2 - cable	-	1 - ½"	50	66
TP180Ⓐ	"F", set ½"	-	2 - cable, 1 - ½"	1 - ½"	1 - ½"	50	72
TP184Ⓐ	"S", set ⅝"	-	2 - cable, 1 - ½"	1 - ½"	1 - ½"	50	70
TP185Ⓐ	"VP", set ½"	-	2 - cable, 1 - ½"	1 - ½"	1 - ½"	50	74

ⒶUL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.


GANG BOXES SET BACK ½"

2½" DEEP – 3¾" HIGH – ½" & ¾" CONCENTRIC KOs


UL LISTED




TP632



TP633



TP637



TP638

Cat. #	Gang	Bracket	Width	Knockouts			Capacity cu. in.	Unit qty.	Wt. lbs. per 100
				Each end	Each side	Bottom			
TP632	3	VP	5⁹⁄₁₆"	2	3	6	46.5	5	143
TP633	4	VP	7⅜"	2	4	8	62.0	5	179
TP637	3	VS	5⁹⁄₁₆"	2	3	6	46.5	5	143
TP638	4	VS	7⅜"	2	4	8	62.0	5	179

 Copyright© 2021 Commercial Products Catalog


2½" DEEP – GANGABLE – 12.5 CUBIC INCH CAPACITY

2" WIDE x 3" LONG
FOR CONDUIT – NO CLAMPS


UL LISTED




TP214




TP216




TP217




TP218



TP220



TP222




TP224

Cat. #	Bracket	Ears (# of screws)	Leveling Bumps	Knockouts			Unit qty.	Wt. lbs. per 100
				Each end	Each side	Bottom		
TP214	-	-	Yes	1 - ½"	-	1 - ½"	50	55
TP216	Snap-in	Yes (1)	-	1 - ½"	1 - ½"	-	50	69
TP217	-	Yes (1)	-	1 - ½"	-	1 - ½"	50	64
TP218	-	Yes (1)	-	1 - ½"	1 - ½"	1 - ½"	50	58
TP220	"F", set ½"	-	-	1 - ½"	1 - ½", 1 side	1 - ½"	50	66
TP222	"S", set ⅝"	-	-	1 - ½"	1 - ½", 1 side	1 - ½"	50	65
TP224	Hold-tite	Yes (1)	-	1 - ½"	-	1 - ½"	50	61


 Copyright© 2021 Commercial Products Catalog

2½" DEEP SWITCH BOXES – "INSTANT ON" – 12.5 CUBIC INCH CAPACITY

2" WIDE x 3" LONG
WITH BUMPS – CLAMPS IN EACH END (BUMPS LEVEL THE BOX AGAINST THE SIDE OF STUD, TOP TO BOTTOM, FRONT TO BACK)



TP210



TP213


Cat. #	Clamps	Nails	Knockouts			Unit qty.	Wt. lbs. per 100
			Each end	Each side	Bottom		
TP210	NM cable	Angle	2 - cable, 1 - ½"	-	1 - ½"	50	66
TP213	Armored cable	Angle	2 - cable, 1 - ½"	-	1 - ½"	50	66

2¾" DEEP – GANGABLE – 14.0 CUBIC INCH CAPACITY

2" WIDE x 3" LONG
UL LISTED




TP660




TP662



TP664



TP668



TP670

Cat. #	Bracket	Ears (# of screws)	Knockouts			Unit qty.	Wt. lbs. per 100
			Each end	Each side	Bottom		
For non-metallic cable – clamps in each end							
TP660	-	-	2 - cable	1 - ½"	1 - ½"	50	62
TP662	-	Yes (1)	2 - cable	1 - ½"	1 - ½"	50	67
TP664	"S", set ⅝"	-	2 - cable	1 - ½"	1 - ½"	50	70
For armored & metal-clad (MCI) cable – clamps in each end							
TP668Ⓐ	-	Yes (1)	2 - cable	1 - ½"	1 - ½"	50	68
TP670Ⓐ	"S", set ⅝"	-	2 - cable	1 - ½"	1 - ½"	50	71

ⒶUL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.

 Copyright© 2021 Commercial Products Catalog

Steel switch boxes

2¾" DEEP – GANGABLE – 14.0 CUBIC INCH CAPACITY


2" WIDE x 3" LONG
FOR CONDUIT – NO CLAMPS
UL LISTED



TP672, TP674



(TP676 – 1 screw ear),
(TP678 – 2 screw ears)



TP680, TP677

Cat. #	Bracket	Ears (# of screws)	Knockouts			Unit qty.	Wt. lbs. per 100
			Each end	Each side	Bottom		
TP672	-	-	1 - ½"	1 - ½"	1 - ½"	50	59
TP674	-	-	1 - ¾"	1 - ¾"	1 - ½"	50	59
TP676	-	Yes (2)	1 - ½"	1 - ½"	1 - ½"	50	61
TP678	-	Yes (2)	1 - ¾"	1 - ¾"	1 - ½"	50	61
TP680	"S", set ⅝"	-	1 - ½"	1 - ½", 1 Side	1 - ½"	50	70
TP677	"S", set ⅝"	-	1 - ¾"	1 - ¾", 1 Side	1 - ½"	50	70

3½" DEEP – GANGABLE – 18.0 CUBIC INCH CAPACITY


2" WIDE x 3" LONG
FOR NON-METALLIC CABLE – CLAMPS IN EACH END
UL LISTED




TP236




TP238



TP239



TP240



TP242




TP243

Cat. #	Bracket	Ground pigtail	Ears (# of screws)	Knockouts			Unit qty.	Wt. lbs. per 100
				Each end	Each side	Bottom		
TP236	-	-	-	2 - cable, 1 - ½"	2 - ½"	1 - ½"	25	78
TP238	-	-	Yes (2)	2 - cable, 1 - ½"	2 - ½"	1 - ½"	25	80
TP239	-	Yes	Yes (2)	2 - cable, 1 - ½"	2 - ½"	1 - ½"	25	81
TP240	"F", set ½"	-	-	2 - cable, 1 - ½"	2 - ½"	1 - ½"	25	88
TP242	"S", set ⅞"	-	-	2 - cable, 1 - ½"	2 - ½"	1 - ½"	25	87
TP243	"S", set ⅞"	Yes	-	2 - cable, 1 - ½"	2 - ½"	1 - ½"	25	88


 Copyright® 2021 Commercial Products Catalog

3½" DEEP – GANGABLE – 18.0 CUBIC INCH CAPACITY


2" WIDE x 3" LONG
FOR ARMORED & METAL-CLAD (MCI) CABLE – CLAMPS IN EACH END
UL LISTED



TP244



TP249




TP246

Cat. #	Bracket	Ground pigtail	Ears (# of screws)	Knockouts			Unit qty.	Wt. lbs. per 100
				Each end	Each side	Bottom		
TP244Ⓐ	-	-	Yes (2)	2 - cable, 1 - ½"	2 - ½"	1 - ½"	25	81
TP249Ⓐ	-	Yes	Yes (2)	2 - cable, 1 - ½"	2 - ½"	1 - ½"	25	82
TP246Ⓐ	"S", set ⅞"	-	-	2 - cable, 1 - ½"	2 - ½"	1 - ½"	25	88


ⒶUL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.

3½" DEEP – GANGABLE – 18.0 CUBIC INCH CAPACITY


2" WIDE x 3" LONG
FOR CONDUIT – NO CLAMPS
UL LISTED



TP248, TP250



TP252



TP254

Cat. #	Bracket	Ears (# of screws)	Knockouts			Unit qty.	Wt. lbs. per 100
			Each end	Each side	Bottom		
TP248	-	-	2 - ½"	2 - ½"	1 - ½"	25	74
TP250	-	-	2 - ¾"	2 - ¾"	1 - ½"	25	74
TP252	-	Yes (2)	2 - ½"	2 - ½"	1 - ½"	25	76
TP254	-	Yes (2)	2 - ¾"	2 - ¾"	1 - ½"	25	76

1½" DEEP SWITCH & MASONRY BOX EXTENSION RING



TP422Ⓑ

Cat. #	Knockouts		Unit qty.	Wt. lbs. per 100
	Sides	Bottom		
1½" deep switch & masonry box extension ring				
TP422ⒿⒽ	8 - ½", 4 - ½" + ¾" E	-	50	50

ⒿFor use as extension with switch box, not four square box.
ⒽCSA certified.