
4" SQUARE OUTLET BOXES & COVERS

Applications:

- For use with conduit
- Available in red for fire alarm applications

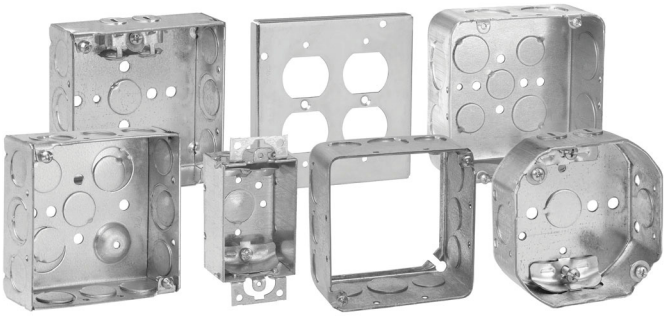

Features:

- Ideal for exposed work applications, providing an easy method for the installation of electrical devices (switches, receptacles, fans, lights, etc.)
- Raised ground screw location in the welded boxes saves time in installation
- Available with pre-installed ground screws and pigtails for increased labor savings
- Knockouts are suitable for use without a bonding jumper in circuits above or below 250 volts
- Available in two depths for differing cubic capacity requirements
- Welded or drawn construction to match customer preference
- Extensive cover offering to meet various customer applications and needs

Certifications and Compliances:

- UL Listed

4" SQUARE OUTLET BOXES – 18.0 CUBIC INCH CAPACITY

1¼" DEEP – FOR CONDUIT

UL LISTED



TP408

			Knockouts			
Cat. #	**Bracket**	**Description**	**Sides**	**Bottom**	**Unit Qty.**	**Wt. Lbs. Per 100**
TP408	-	Drawn	12 – ½"	5 – ½"	50	61


4" SQUARE OUTLET BOXES – 22.0 CUBIC INCH CAPACITY (WELDED)† 21.0 CUBIC INCH CAPACITY (DRAWN)

1½" DEEP – FOR CONDUIT

UL LISTED



TP404/TP404PF



TP404SSB



TP404MSB



TP404RED



TP425



TP469



TP830*



TP405



TP412
TP839*




TP410



TP414RED



TP414



TP418



TP423RED


Cat. #	Metal Stud Sizes	Bracket	Description	Knockouts		Unit Qty.	Wt. Lbs. Per 100
				Sides	Bottom		
TP404**	-	-	Welded	8 - ½", 4 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	50	72
TP404MSB	-	MSB	Welded	8 - ½", 4 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	83
TP404RED	-	-	Welded	8 - ½", 4 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	50	72
TP404REDMSB	-	MSB	Welded	8 - ½", 4 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	83
TP404PF‡**	-	-	Welded	8 - ½", 4 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	50	72
TP404SSB	-	SSB	Welded	8 - ½", 4 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	50	83
TP425**	All	"VP"	Welded	6 - ½", 3 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	82
TP423**	All	"VMS"	Welded	6 - ½", 3 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	81
TP423RED	All	"VMS"	Welded	6 - ½", 3 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	81
TP405	-	-	Drawn	4 - ½", 6 - ½" + ¾" C	3 - ½", 2 - ¾"	50	67
TP410	-	-	Drawn	12 - ½"	5 - ½"	50	67
TP412	-	-	Drawn	8 - ¾"	3 - ½", 2 - ¾"	50	67
TP414	-	-	Drawn	8 - ½", 4 - ¾"	3 - ½", 2 - ¾"	50	67
TP414RED	-	-	Drawn	8 - ½", 4 - ¾"	3 - ½", 2 - ¾"	50	67
TP418	-	"F", Set Flush	Welded	6 - ½", 3 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	84
TP467	-	-	Welded	8 - ¾"	2 - ½", 2 - ½" + ¾" E	50	72
TP467MSB	-	MSB	Welded	8 - ¾"	2 - ½", 2 - ½" + ¾" E	25	78
TP469	All	"VMS"	Welded	6 - ¾"	2 - ½", 2 - ½" + ¾" E	25	81
Air Plenum							
TP830*	-	-	Drawn	8 - ½", 4 - ¾"	3 - ½", 2 - ¾"	50	72
TP839*	-	-	Drawn	8 - ¾" C	3 - ½", 2 - ¾"	50	72

*For Air Plenum (no mounting holes) - not UL Listed.
**cUL Listed.
†All welded 4" Square Outlet Boxes have a raised dimple for ground screw.
‡TP404PF includes ground screw with pigtail lead.


 Copyright© 2016 Commercial Products Catalog

4" SQUARE OUTLET BOXES – 22.0 CUBIC INCH CAPACITY


1½" DEEP
FOR NON-METALLIC CABLE – CLAMPS IN EACH END
UL LISTED




TP444



TP444MSB



TP449




TP446


Cat. #	Bracket	Description	Knockouts Sides	Knockouts Bottom	Unit Qty.	Wt. Lbs. Per 100
TP444	-	Welded	4 - Cable, 4 - ½", 2 - ½" + ¾" E	1 - ½"	50	77
TP444MSB	MSB	Welded	4 - Cable, 4 - ½", 2 - ½" + ¾" E	1 - ½"	25	81
TP444SSB	SSB	Welded	4 - Cable, 4 - ½", 2 - ½" + ¾" E	1 - ½"	50	88
TP446	"F" Set Flush	Welded	4 - Cable, 2 - ½", 1 - ½" + ¾" E	1 - ½"	25	88
TP449	"VMS"	Welded	4 - Cable, 2 - ½", 1 - ½" + ¾" E	1 - ½"	25	85

4" SQUARE OUTLET BOXES – 22.0 CUBIC INCH CAPACITY


1½" DEEP
FOR ARMOURED & METAL-CLAD (MCI) CABLE & HCF CABLE – CLAMPS IN EACH END
UL LISTED




TP454



TP454MSB



TP456



TP459

Cat. #	Bracket	Description	Knockouts Sides	Knockouts Bottom	Unit Qty.	Wt. Lbs. Per 100
TP459	"VMS"	Welded	4 - Cable, 2 - ½", 1 - ½" + ¾" E	1 - ½"	25	89
TP454*	-	Welded	4 - Cable, 4 - ½", 2 - ½" + ¾" E	1 - ½"	50	81
TP454MSB	MSB	Welded	4 - Cable, 4 - ½", 2 - ½" + ¾" E	1 - ½"	25	91
TP454PF†	-	Welded	4 - Cable, 4 - ½", 2 - ½" + ¾" E	1 - ½"	50	81
TP454SSB*	SSB	Welded	4 - Cable, 4 - ½", 2 - ½" + ¾" E	1 - ½"	25	82
TP456*	"F" Set Flush	Welded	4 - Cable, 2 - ½", 1 - ½" + ¾" E	1 - ½"	25	92
TP456PF†	"F" Set Flush	Welded	4 - Cable, 2 - ½", 1 - ½" + ¾" E	1 - ½"	25	92

*UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.
†TP catalog numbers ending in PF include ground screw with pigtail lead.


4" SQUARE OUTLET BOXES – 30.3 CUBIC INCH CAPACITY

2⅛" DEEP – FOR CONDUIT


UL LISTED



TP403/TP403PF




TP403SSB



TP403MSB



TP432



TP432VMS



TP434



TP438
TP831*



TP403RED



TP434RED



TP451RED



TP451


Cat. #	Bracket	Description	Knockouts Sides	Knockouts Bottom	Unit Qty.	Wt. Lbs. Per 100
TP403**	-	Welded	8 - ½", 4 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	84
TP403MSB	MSB	Welded	8 - ½", 4 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	95
TP403RED	-	Welded	8 - ½", 4 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	84
TP403REDMSB	MSB	Welded	8 - ½", 4 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	95
TP403PF†**	-	Welded	8 - ½", 4 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	84
TP403SSB	SSB	Welded	8 - ½", 4 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	95
TP432**	-	Welded	8 - ¾"	2 - ½", 2 - ½" + ¾" E	25	84
TP432MSB	MSB	Welded	8 - ¾"	2 - ½", 2 - ½" + ¾" E	25	95
TP432REDMSB	MSB	Welded	8 - ¾"	2 - ½", 2 - ½" + ¾" E	25	95
TP432VMS	"VMS"	Welded	6 - ¾"	2 - ½", 2 - ½" + ¾" E	25	99
TP436	-	Welded	8 - 1"	2 - ½", 2 - ½" + ¾" E	25	84
TP436MSB	MSB	Welded	8 - 1"	2 - ½", 2 - ½" + ¾" E	25	95
TP434	-	Drawn	8 - ½", 4 - ¾"	3 - ½", 2 - ¾"	25	84
TP434RED	-	Drawn	8 - ½", 4 - ¾"	3 - ½", 2 - ¾"	25	84
TP438	-	Drawn	4 - ½", 6 - ½" + ¾" C	3 - ½", 2 - ¾"	25	84
TP438PF†	-	Drawn	4 - ½", 6 - ½" + ¾" C	3 - ½", 2 - ¾"	25	84
TP451	"VMS"	Welded	6 - ½", 3 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	96
TP451PF†	"VMS"	Welded	6 - ½", 3 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	96
TP451RED	"VMS"	Welded	6 - ½", 3 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	96
TP437	"VP"	Welded	6 - ½", 3 - ½" + ¾" E	2 - ½", 2 - ½" + ¾" E	25	98
Air Plenum						
TP831*	-	Drawn	8 - ½", 4 - ¾"	3 - ½", 2 - ¾"	25	90

*For Air Plenum (no mounting holes) - not UL Listed.
**cUL Listed.
†TP catalog numbers ending in PF include ground screw with pigtail lead.


 Copyright© 2016 Commercial Products Catalog

4" SQUARE OUTLET BOXES – 30.3 CUBIC INCH CAPACITY


2⅛" DEEP
FOR NON-METALLIC CABLE – CLAMPS IN EACH END
UL LISTED




TP450



TP450MSB



TP450SSB




TP452


Cat. #	Bracket	Description	Knockouts Sides	Knockouts Bottom	Unit Qty.	Wt. Lbs. Per 100
TP450	-	Welded	4 - Cable, 4 - ½", 2 - ½" + ¾" E	1 - ½"	25	90
TP450MSB	MSB	Welded	4 - Cable, 4 - ½", 2 - ½" + ¾" E	1 - ½"	25	101
TP450SSB	SSB	Welded	4 - Cable, 4 - ½", 2 - ½" + ¾" E	1 - ½"	25	101
TP452	"VMS"	Welded	4 - Cable, 2 - ½", 1 - ½" + ¾" E	1 - ½"	25	104

4" SQUARE OUTLET BOXES – 30.3 CUBIC INCH CAPACITY


2⅛" DEEP
FOR ARMOURED & METAL-CLAD (MCI) CABLE & HCF CABLE – CLAMPS IN EACH END
UL LISTED



TP431



TP431MSB



TP440


Cat. #	Metal Stud Sizes	Bracket	Description	Knockouts Sides	Knockouts Bottom	Unit Qty.	Wt. Lbs. Per 100
TP431*	-	-	Welded	4 – Cable, 4 – ½", 2 – ½" & ¾" E	1 – ½"	25	91
TP431PF†	-	-	Welded	4 – Cable, 4 – ½", 2 – ½" & ¾" E	1 – ½"	25	91
TP431MSB	-	MSB	Welded	4 – Cable, 4 – ½", 2 – ½" & ¾" E	1 – ½"	25	91
TP431SSB*	-	SSB	Welded	4 – Cable, 4 – ½", 2 – ½" & ¾" E	1 – ½"	25	102
TP440*	All	"VMS"	Welded	4 – Cable, 2 – ½", 1 – ½" & ¾" E	1 – ½"	25	103

*UL approved for use with aluminum interlocking grounding metal-clad cable, Type MCIA (Southwire MCAP™).
MCAP™ is a registered trademark of Southwire Company.
†TP catalog numbers ending in PF include ground screw with pigtail lead.

4" SQUARE TWO DEVICE BOXES – 30.3 CUBIC INCH CAPACITY

2⅛" DEEP – FOR CONDUIT

UL LISTED



TP391



TP395

Cat. #	Bracket	Description	Knockouts		Unit Qty.	Wt. Lbs. Per 100
			Sides	Bottom		
TP391	"VS", Set ⅞"	Drawn	6 - ½", 3 - ¾"	3 - ½", 2 - ¾"	25	95
TP395	-	Drawn	8 - ½", 4 - ¾"	3 - ½", 2 - ¾"	25	84


4" SQUARE OUTLET BOXES – 46.0 CUBIC INCH CAPACITY

3½" DEEP – FOR CONDUIT

UL LISTED, FILE NO. E-15022

Applications:

- 4" square, 3½" deep outlet boxes are ideal for applications requiring increased capacity, including the installation of speaker boxes, fire alarms, strobes, security cameras and other oversized devices
- For use with rigid/IMC and EMT conduit



TP411



TP411RED



TP413



TP413RED

Cat. #	Bracket	Description	Knockouts		Unit Qty.	Wt. Lbs. Per 100
			Sides	Bottom		
TP411	Side	Welded	12 - ½" + ¾" C	4 - ½" + ¾" C	10	137
TP411RED	Side	Welded	12 - ½" + ¾" C	4 - ½" + ¾" C	10	137
TP413	-	Welded	12 - ½" + ¾" C	4 - ½" + ¾" C	20	125
TP413RED	-	Welded	12 - ½" + ¾" C	4 - ½" + ¾" C	20	125

 Copyright© 2015 Commercial Products Catalog

COVERS FOR 4" SQUARE BOXES – CUBIC INCH CAPACITY (SEE BELOW)

UL LISTED

#8-32 Screw Used on Covers


TP472



TP472RED


TP474


TP478
TP487


TP473, TP475, TP476, TP477, TP479, TP483


TP850*


TP854*


AMR0

Cat. #	Description	Unit Qty.	Wt. Lbs. Per 100	Capacity Cu. In.
TP472†	Flat Blank	50	31	-
TP472RED	Flat Blank, Red	50	31	-
TP474†	Flat, Open with Ears 2¾"	50	21	-
TP478†	Flat, with ½" KO	50	31	-
TP487†	Flat, with ¾" KO	50	29	-
TP473†	Raised ¼", Open with Ears 2¾"	50	23	1.3
TP476†	Raised ½", Open with Ears 2¾"	50	26	4.0
TP477†	Raised ⅝", Open with Ears 2¾"	50	27	5.0
TP475†	Raised ¾", Open with Ears 2¾"	25	31	6.0
TP479†	Raised 1", Open with Ears 2¾"	25	34	7.0
TP483†	Raised 1¼", Open with Ears 2¾"	25	37	8.5
AMR0**	¾" - 1½" Round Adjustable Mud Ring	25	44	6.1
Air Plenum				
TP850*	Flat Blank Gasketed with Captive Screws	25	31	-
TP854*	Flat Ring Double Gasketed	25	12	-

*For Air Plenum (no mounting holes) - not UL Listed.
**ETL listed.
†CSA certified.

MUD RINGS FOR 4" SQUARE STEEL OUTLET BOXES

UL LISTED


TP480


TP482, TP484, TP486, TP489



TP494


TP488, TP490


TP496, TP499, TP500, TP501, TP502


AMR1


AMR2



AMR158

Cat. #	Description	Unit Qty.	Wt. Lbs. Per 100	Capacity Cu. In.
One Device				
TP480†	Flat	50	20	-
TP482†	¼" Raised	50	21	1.8
TP484†	½" Raised	50	23	3.8
TP489†	⅝" Raised	50	26	4.3
TP486†	¾" Raised	50	30	5.5
TP488	1" Raised	50	34	6.8
TP490	1¼" Raised	25	39	8.5
AMR1**	¾" - 1½" Raised Adjustable	25	47	-
AMR158**	⅝" - 1¼" Raised Adjustable	25	44	6.0
Two Device				
TP494†	Flat	50	12	-
TP496†‡	¼" Raised	50	13	3.0
TP498†‡	½" Raised	50	18	6.0
TP499†‡	⅝" Raised	50	22	8.0
TP500†‡	¾" Raised	50	24	9.0
TP501	1¼" Raised	25	31	14.0
TP502	1" Raised	25	30	11.7
AMR2**	⅝" - 1½" Raised Adjustable	25	50	11.3

**cULus Listed.
†CSA certified.
‡Slotted design for use with 4" square box partitions.

 Copyright© 2015 Commercial Products Catalog

METALGUARD™ PROTECTIVE PLATES

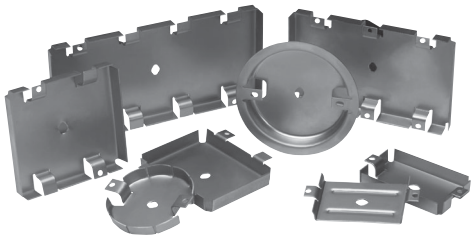

Applications:

- For use with single, two, three and four gang commercial or residential boxes/plaster rings; with or without devices, switches, GFCI, etc. installed
- Commercial or residential ceiling boxes

Features:

- Seals out sheetrock mud, sanding dust and paint overspray to keep the electrical box and its wiring free from contaminants
- Heavy duty reusable metallic plate provides mechanical protection to box and wiring and speeds up trim process
- Easy to install; all you have to do is push them in; they come out easy – just put a screwdriver into the slot in front, turn and pull them out
- Reduces risk of callbacks and expense of rework because of wire and box damage
- MetalGuard serves as a guide for router in cutting out boxes

Standard Material & Finish:

- 18 gauge steel
- Natural finish

Cat. #	Description Pre-fabricated Box, Cover, Ground Screw & Lead Assembly	Unit Qty.	Wt. Lbs. Per 100
MGRK	Contractor Kit (120-1G, 40-2G, 20-3G, 5-4G, and 20-Rnd)	1	33.00
MGR1	1G Residential Wire Protector	60	8.20
MGR2	2G Residential Wire Protector	20	4.80
MGR4	4G Residential Wire Protector	5	3.00
MGR0	Rnd Residential Wire Protector	20	4.00
MGMR1	1G Wire Protector for Commercial MR	50	6.55
MGMR2	2G Wire Protector for Commercial MR	50	10.25
MGMR0	Rnd Wire Protector for Commercial MR	50	6.00

4" SQUARE SURFACE COVERS – 5.5 CUBIC INCH CAPACITY

RAISED ½"

UL LISTED

CSA LISTED

Screw(s) provided in raised cover kit are for use with the center hole on duplex receptacles. Nuts that are provided in kit are to be used in conjunction with the screws that are provided as standard packaging with devices to mount device to raised cover. For GFCI device installation, no screw is needed; please disregard.



TP503



TP504



TP506



TP508



TP510



TP512



TP507, TP514, TP519



TP516



TP509 (4 Screws), TP518 (2 Screws)



TP513



TP511



TP515



TP517


Cat. #	Description	Unit Qty.	Wt. Lbs. Per 100
TP503	Raised Blank	50	35
TP504	For One Toggle Switch and One Single Receptacle 1 13/32" Dia.	50	31
TP506	For One Toggle Switch and One Duplex Receptacle	50	31
TP508	For Two Toggle Switches	50	35
TP510	For Two Duplex Receptacles	50	26
TP512	For One Toggle Switch	50	35
TP507	For One 20 Amp Single Receptacle 1 19/32" Dia.	50	37
TP514	For One Single Receptacle 1 13/32" Dia.	50	34
TP519	For One 30 Amp Twist-Lock Single Receptacle 1 23/32" Dia.	50	37
TP516	For One Duplex Receptacle	50	31
TP509	For One 30-60 Amp Receptacle (4-wire) 2 7/16" Dia.	50	23
TP518	For One 30-50 Amp Receptacle 2 9/64" Dia.	50	34
TP513	For One GFCI Receptacle	50	31
TP511	For Two GFCI Receptacles	50	26
TP515	For One Toggle Switch and One GFCI Receptacle	50	31
TP517	For One Duplex Receptacle and One GFCI Receptacle	50	26

 Copyright© 2015 Commercial Products Catalog

UNI-MOUNT™ COVERS

The Uni-Mount combines the features of a mounting device plate with those of a box support, giving you one universal plate for all of your needs. Specifically designed for use with metal or wood studs:


The new and improved version incorporates four small holes on the left side (support side) of the bracket. These holes allow for the attachment of box mounting brackets to allow for use of both sides of the stud. The holes are strategically located to accept either the Eaton's B-Line Series BB423 bracket or the Caddy H23 bracket. Additionally, the viewing hole has been significantly enlarged (and is now diamond shaped) to make it even easier to find mark lines on the stud.




Features:


- Guide tabs ensure consistent alignment on stud
- Stud alignment hole ensures consistent mounting height
- Rigid bracket design eliminates the need for far side support
- Available as a single or two device cover
- Universal design fits all 4" square boxes
- Available in ½", ⅝" and ¾" raised
- Can be ordered pre-assembled to popular 4" square boxes
- Fast and easy installation
- Can be used in multiple applications, resulting in less items to stock
- Less labor intensive
- Less material handling
- No multiple assemblies to handle
- Can be used in Class II communications outlets for low voltage without a box
- UL Listed and CSA certified*
- UL File No. E-23156

*CSA requires a far side support.

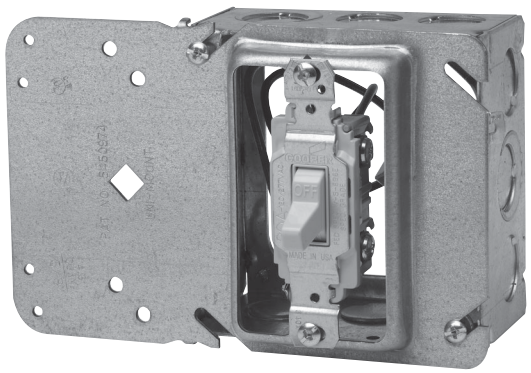



Single Gang




Two Gang

Cat. #	Description	Capacity Cu. In.	Unit Qty.	Wt. Lbs. Per 100
Single Gang				
TP30000	½" Raised	3.8	50	43
TP31000	⅝" Raised	4.3	50	46
TP32000	¾" Raised	5.5	50	50
Two Gang				
TP35000	½" Raised	6.0	50	38
TP36000	⅝" Raised	8.0	50	52
TP37000	¾" Raised	9.0	50	54
Low Profile Screws – Reduces Risk of Sheetrock Bulge				
TP710	L.P. Screws	-	1000	0.5


 Copyright© 2015 Commercial Products Catalog

TILE WALL COVERS FOR 4" SQUARE BOXES – CUBIC INCH CAPACITY (SEE BELOW)


UL LISTED



TP524



TP534



TP540

Applications:

- Typically used with tile or brick

Features:

- Rounded corners help guide cuts around devices

Cat. #	Description	Capacity Cu. In.	Unit Qty.	Wt. Lbs. Per 100
One Device				
TP520	½" Raised	3.7	50	30
TP522	¾" Raised	5.5	50	36
TP524	1" Raised	7.4	50	40
TP526	1¼" Raised	9.3	25	46
TP528	1½" Raised	11.0	25	50
TP530	2" Raised	14.8	25	62
Two Device				
TP532	½" Raised	5.0	10	24
TP534	¾" Raised	7.8	10	30
TP536	1" Raised	10.3	10	36
TP538	1¼" Raised	13.0	10	44
TP540	1½" Raised	15.5	10	50
TP542	2" Raised	20.8	10	66

4" SQUARE BOX PARTITIONS



TP860



TP861



TP862



TP863

Cat. #	Description	Unit Qty.	Wt. Lbs. Per 100
For 1½" Deep Box with Square Cut Tile Wall Two Gang Covers			
TP860	For ½", ¾", 1" Raised Covers	25	13
TP861	For 1¼", 1½", 2" Raised Covers	25	18
For 2⅛" Deep Box with Square Cut Tile Wall Two Gang Covers			
TP862	For ½", ¾", 1" Raised Covers	25	16
TP863	For 1¼", 1½", 2" Raised Covers	25	21

 Copyright© 2015 Commercial Products Catalog

Steel Square Covers

4" SQUARE EXTENSION RINGS

1½" DEEP WITH CONDUIT KNOCKOUTS – 21.0 CUBIC INCH CAPACITY
2⅛" DEEP WITH CONDUIT KNOCKOUTS – 30.3 CUBIC INCH CAPACITY
UL LISTED



TP424



TP422†



TP426



TP428RED



TP443 (2⅛" Deep)



TP428, TP833*

Cat. #	Knockouts Sides	Knockouts Bottom	Unit Qty.	Wt. Lbs. Per 100
1½" Deep				
TP424	12 - ½"	-	50	46
TP426	8 - ¾"	-	50	46
TP428	8 - ½", 4 - ¾"	-	50	46
TP428RED	8 - ½", 4 - ¾"	-	50	46
TP833*	8 - ½", 4 - ¾"	-	50	48
2⅛" Deep				
TP443	8 - ½", 4 - ¾"	-	25	66
TP465	8 - 1"	-	25	60
1½" Deep Switch & Masonry Box Extension Ring				
TP422†	8 - ½", 4 - ½" + ¾" E	-	50	50

*For Air Plenum (no mounting holes). Requires the use of TP854; purchase separately - not UL Listed.
†For use as extension with switch box, not four square box.

FLEXIBLE FIXTURE HANGERS

TPSFH Square Flexible Fixture Hangers are used in commercial or light industrial applications where HID high bay and low bay lighting fixtures are used. Specific applications include storage facilities, shipping warehouses, retail and DIY facilities.

Features:

- Suitable for use with ½" or ¾" fixture conduit stems, these hangers allow the conduit stem of the fixture (luminaire) to swing in any direction; maximum swing angle is 26° from vertical max. slope angles 22½°
- Available for attachment to 4" square steel boxes
- Quickly and easily attached by two screws
- Hangers are drilled and tapped for use with ¾" conduit stem as standard and come supplied with a ¾" - ½" reducer for ½" conduit stem applications

Certifications and Compliances:

- UL1598
- CSA C22.2 No. 250
- Suitable for damp locations

Standard Materials and Finishes:

- Material – sheet steel
- Finish – zinc chromate for corrosion resistance




Cat. #	Description	Support Wt. (Lbs.)
TPSFH12	For use with 4" Square Boxes	50


 Copyright© 2015 Commercial Products Catalog

UNI-MOUNT™ COVERS

The Uni-Mount combines the features of a mounting device plate with those of a box support, giving you one universal plate for all of your needs. Specifically designed for use with metal or wood studs:

The new and improved version incorporates four small holes on the left side (support side) of the bracket. These holes allow for the attachment of box mounting brackets to allow for use of both sides of the stud. The holes are strategically located to accept either the Eaton's B-Line Series BB423 bracket or the Caddy H23 bracket. Additionally, the viewing hole has been significantly enlarged (and is now diamond shaped) to make it even easier to find mark lines on the stud.




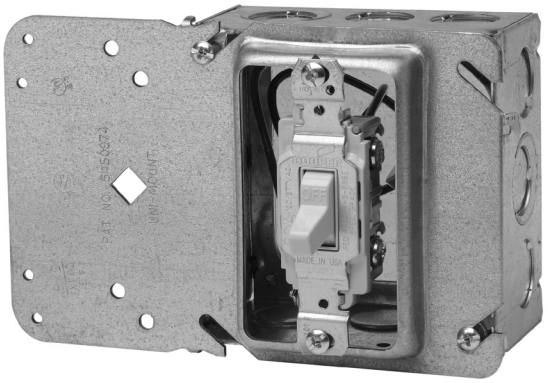


Features:

- Guide tabs ensure consistent alignment on stud
- Stud alignment hole ensures consistent mounting height
- Rigid bracket design eliminates the need for far side support
- Available as a single or two device cover
- Universal design fits all 4" square boxes
- Available in ½", ⅝" and ¾" raised
- Can be ordered pre-assembled to popular 4" square boxes
- Fast and easy installation
- Can be used in multiple applications, resulting in less items to stock
- Less labor intensive
- Less material handling
- No multiple assemblies to handle
- Can be used in Class II communications outlets for low voltage without a box
- UL Listed and CSA certified*
- UL File No. E-23156

*CSA requires a far side support.



Single Gang



Two Gang

Cat. #	Description	Capacity Cu. In.	Unit Qty.	Wt. Lbs. Per 100
Single Gang				
TP30000	½" Raised	3.8	50	43
TP31000	⅝" Raised	4.3	50	46
TP32000	¾" Raised	5.5	50	50
Two Gang				
TP35000	½" Raised	6.0	50	38
TP36000	⅝" Raised	8.0	50	52
TP37000	¾" Raised	9.0	50	54
Low Profile Screws – Reduces Risk of Sheetrock Bulge				
TP710	L.P. Screws	-	1000	0.5

 Copyright© 2015 Commercial Products Catalog