PRE-formance
Raised surface (RS) and mud ring device assemblies

CROUSE-HINDS SERIES



Pre-fabricated covers with devices

Improve job site productivity

Applications:


- 4" square pre-fabricated covers are used in commercial and light industrial applications
- RS cover assemblies are designed for surface mounted applications
- Mud ring assemblies are designed for in-wall mounted applications

Features & benefits:

- Available in the most popular configuration of cover and device to meet the most common applications
- Products are factory assembled and help meet NEC® grounding requirements when properly attached with metal to metal connection with a 4" square box
- Devices are supplied with 8", #12 solid copper leads securely terminated into a four or six port push-in style connector
- Mud ring cover assemblies come standard with metal protect plate for drywall routing protection
- Simplifies ordering and receiving, improves job site productivity, reduces packaging and job site waste
- Third party certified

Certifications & compliances:

- UL Listed
- cUL Listed
- UL File No. E-324733

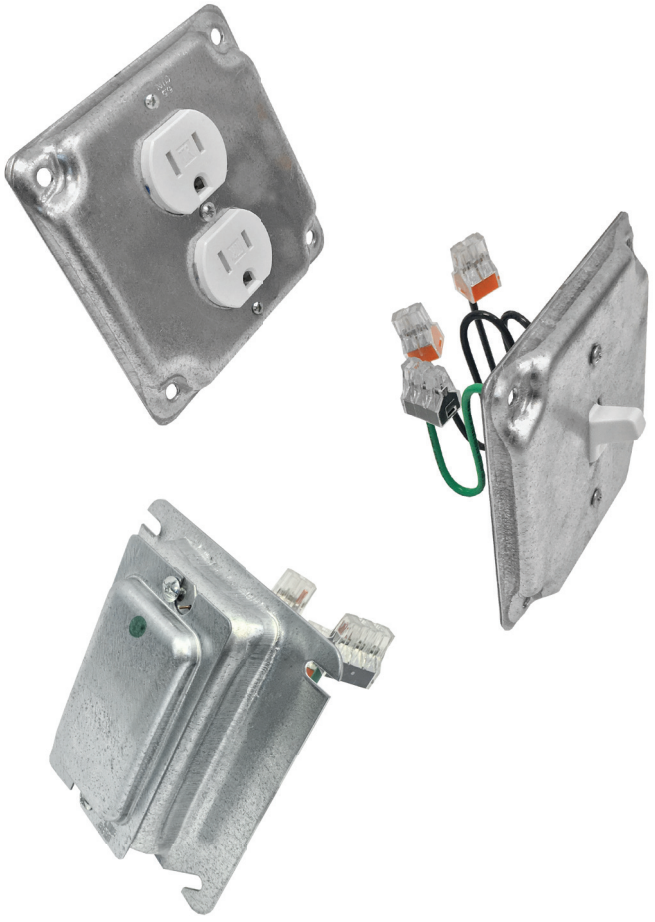

EATON
Powering Business Worldwide

Pre-fabricated covers with devices

Ordering information:

	Cat. #	Description	Unit qty.	Wt. lbs. per 100
 TP510	**PFX 510C20DDW**	TP510 4" square surface cover with two 20A commercial grade duplex receptacles installed, white	10	80
 TP512	**PFX 512C20SPW**	TP512 4" square surface cover with one 20A single pole toggle switch installed, white	10	75
 TP513	**PFX 513S20GW**	TP513 4" square surface cover with one 20A specification grade GFCI receptacle installed, white	10	75
 TP516	**PFX 516C20DW**	TP516 4" square surface cover with one 20A commercial grade duplex receptacle installed, white	10	75
 AMR1	**PFX ARC20DW**	AMR1 one gang 3/4" - 1 1/2" raised adjustable mud ring with metal protect plate and one 20A commercial grade duplex receptacle installed, white	10	75
 TP486	**PFX 75C20DW**	TP486 one gang 3/4" raised mud ring with metal protect plate and one 20A commercial grade duplex receptacle installed, white	10	75

Catalog numbering system:

PFX 510 C 20 DD W

Series

PFX	Cover assembly

Cover style

504	TP504 one toggle switch & one single receptacle 1 13/32" dia.
506	TP506 one toggle switch & one duplex receptacle
508	TP508 two toggle switches
510	TP510 two duplex receptacles
512	TP512 one toggle switch
507	TP507 one 20 amp single receptacle 1 19/32" dia.
514	TP514 one single receptacle 1 13/32" dia.
519	TP519 one 30 amp twist-lock single receptacle 1 23/32" dia.
516	TP516 one duplex receptacle
509	TP509 one 30-60 amp receptacle (4-wire) 2 7/16" dia.
518	TP518 one 30-50 amp receptacle 2 9/64" dia.
513	TP513 one GFCI receptacle
511	TP511 two GFCI receptacles
515	TP515 one toggle switch and one GFCI receptacle
517	TP517 one duplex receptacle and one GFCI receptacle
AMR1	AMR1 3/4" - 1 1/2" raised adjustable mud ring
486	TP486 3/4" raised mud ring

Device amperage

15	15A
20	20A

Device grade

C	Commercial
S	Specification
I	Industrial
H	Hospital
CON	Construction spec

Device color

V	Ivory
W	White
R	Red
LA	Light almond

Device type

D	Duplex receptacle
DU	Duplex receptacle/USB
SP	Single pole
G	GFCI
3W	Three way switch
DDU	Two duplex receptacles/USB
DD	Two duplex receptacles
SPSP	Two single pole switches
3W3W	Two three way switches
GG	Two GFCI receptacles

See the complete offering of our PRE-formance™ family at www.crouse-hinds.com

Powering Business Worldwide

Eaton's Crouse-Hinds Division
1201 Wolf Street
Syracuse, NY 13208
(866) 764-5454
CrouseCustomerCTR@eaton.com

© 2017 Eaton Corporation
All Rights Reserved
Printed in USA
Publication No. 5356-0217
February 2017

Eaton is a registered trademark.

All other trademarks are property of their respective owners.