Residential & Commercial



Track & Pendant Lighting

LED / Low Voltage / Line Voltage

ELCO Lighting

The Best Choice in Lighting



Track & Pendant Lighting

Track Lighting has become an instant style upgrade to any home or commercial space. ELCO has put a lot of thought and care into the design and manufacture of our Track Lighting line. Our fixtures are a combination of style and sophistication that will match any room design adding drama and style to a define space.

Product Guide

LED Integrated Track Lighting



Integrated LED Track Fixtures 5



Integrated LED Wall Wash Track Fixtures 23

Low/Line Voltage Track Lighting



Low Voltage LED Lamp Track Fixtures 29



Low Voltage Track Fixtures 31



Line Voltage Track Fixtures 46



Wall Wash Track Fixtures 62



CFL & Metal Halide Track Fixtures 63


Tracks & Accessories



Single Circuit Track and Accesories 67



Two Circuit Track and Accesories 70




General Track Accesories 72


Pendant Lighting



LED Pendants 76



Line Voltage Pendants and Accesories 80



Low Voltage Pendants and Accesories 82



Decorative Pendants 84

Extras

Dimmer Compatibility Chart 85


Photometrics 87

ELCO Lighting


Integrated LED Track Lighting



FIXTURES FEATURES



38° Beam Angle
(Optional 15° & 24° lens)



Tilt (90°)

Rotation (358°)

FINISHES


White

Black

Bronze

Nickel

LUMENS



400 lm to 2000 lm

COLOR TEMPERATURE



3000K - 4000K

Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 90+ CRI | 50,000 HOURS



White
ET580DW
800 lm
3000K
10W




Black
ET580DB
800 lm
3000K
10W

LED Albright™

DIMMABLE

- Diecast adjustable track fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP719C (15°) or EP720C (24°) available

Input Power	10W
Lumens	800
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°







White
ET599DW
700 lm
3000K
10W



Black
ET599DB
700 lm
3000K
10W



Bronze
ET599DBZ
700 lm
3000K
10W




Nickel
ET599DN
700 lm
3000K
10W

LED Dutch™

DIMMABLE


- Traditional aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span

Input Power	10W
Lumens	700
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	40°



Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track





White
ET598W
710 lm
3000K
10W




Black
ET598B
710 lm
3000K
10W

LED Clove™

- Solid diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span

Input Power	10W
Lumens	710
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	No
Beam Angle	30°





White
ET578L30W
1075 lm
3000K
14W




Black
ET578L30B
1075 lm
3000K
14W

LED Clove™ II



- Solid diecast aluminum fixture
- Integrated driver
- ETL listed
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP719C (15°) or EP720C (24°) available

Input Power	14W
Lumens	1075
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°



Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 90+ CRI | 50,000 HOURS



White
ET612DW
800 lm
3000K
10W




Black
ET612DB
800 lm
3000K
10W

LED Transom™ (S)

DIMMABLE

- Diecast adjustable track fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP719C (15°) or EP720C (24°) available

Input Power	10W
Lumens	800
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°





White
ET613DW
1500 lm
3000K
17W




Black
ET613DB
1500 lm
3000K
17W

LED Transom™ (L)

DIMMABLE

- Diecast adjustable track fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP722C (15°) or EP723C (24°) available

Input Power	17W
Lumens	1500
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°



Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 90+ CRI | 50,000 HOURS



White
ET614DW
820 lm
3000K
12W




Black
ET614DB
820 lm
3000K
12W

LED Trilene™ (S)

DIMMABLE

- Diecast adjustable track fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP724C (15°) or EP725C (24°) available

Input Power	12W
Lumens	820
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°





White
ET615DW
1300 lm
3000K
16W




Black
ET615DB
1300 lm
3000K
16W

LED Trilene™ (L)

DIMMABLE

- Diecast adjustable track fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP726C (15°) or EP727C (24°) available

Input Power	16W
Lumens	1300
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°



Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 90+ CRI | 50,000 HOURS



White
ET616-27DW
800 lm
2700K
10W

White
ET616DW
800 lm
3000K
10W



Black
ET616-27DB
800 lm
2700K
10W

Black
ET616DB
800 lm
3000K
10W

White
ET616-40DW
850 lm
4000K
10W


Black
ET616-40DB
850 lm
4000K
10W

LED Stein™ (S)

DIMMABLE

- Diecast adjustable track fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP719C (15°) or EP720C (24°) available

Input Power	10W
Lumens	800 - 850
Color Temp.	2700K - 4000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°





White
ET617DW
1500 lm
3000K
18W

White
ET617-40DW
1600 lm
4000K
18W



Black
ET617DB
1500 lm
3000K
18W


Black
ET617-40DB
1600 lm
4000K
18W

LED Stein™ (L)

DIMMABLE


- Diecast adjustable track fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP722C (15°) or EP723C (24°) available

Input Power	18W
Lumens	1500 - 1600
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°



Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track





White
ET740W
650 lm
3000K
10W
18° Beam

White
ET741W
650 lm
3000K
10W
40° Beam



Black
ET740B
650 lm
3000K
10W
18° Beam

Black
ET741B
650 lm
3000K
10W
40° Beam


White
ET742W
650 lm
3000K
10W
60° Beam

Black
ET742B
650 lm
3000K
10W
60° Beam

LED Timber™

- Sleek diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span

Input Power	10W
Lumens	650
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	No
Beam Angle	18° - 60°





White
ET74730W
1050 lm
3000K
17W
42° Beam




Black
ET74730B
1050 lm
3000K
17W
42° Beam

LED Windsor™

- 42° standard. Includes 20° lens
- Diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span

Input Power	17W
Lumens	1050
Color Temp.	3000K
CRI	90+
Input Volt	120V
Beam Angle	42°



Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 90+ CRI | 50,000 HOURS



White

3000K, 1000 lm, 15W

ET743DW 15° Beam
ET744DW 25° Beam
ET745DW 38° Beam
ET746DW 60° Beam

3500K, 1050 lm, 15W

ET743-35DW 15° Beam
ET744-35DW 25° Beam
ET745-35DW 38° Beam
ET746-35DW 60° Beam

4000K, 1100 lm, 15W

ET743-40DW 15° Beam
ET744-40DW 25° Beam
ET745-40DW 38° Beam
ET746-40DW 60° Beam



Black

3000K, 1000 lm, 15W

ET743DB 15° Beam
ET744DB 25° Beam
ET745DB 38° Beam
ET746DB 60° Beam

3500K, 1050 lm, 15W

ET743-35DB 15° Beam
ET744-35DB 25° Beam
ET745-35DB 38° Beam
ET746-35DB 60° Beam

4000K, 1100 lm, 15W


ET743-40DB 15° Beam
ET744-40DB 25° Beam
ET745-40DB 38° Beam
ET746-40DB 60° Beam

LED Magnus™

DIMMABLE

- Modern diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span

Input Power	15W
Lumens	1000 - 1100
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	15° - 60°



Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 90+ CRI | 50,000 HOURS



White
ET750DW
1000 lm
3000K
15W
25° Beam

White
ET752DW
1000 lm
3000K
15W
35° Beam



Black
ET750DB
1000 lm
3000K
15W
25° Beam


Black
ET752DB
1000 lm
3000K
15W
35° Beam

LED Celtic™ (S)

DIMMABLE

- Modern diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span

Input Power	15W
Lumens	1000
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	25° - 35°





White
ET753DW
2400 lm
3000K
30W
15° Beam

White
ET754DW
2400 lm
3000K
30W
28° Beam



Black
ET753DB
2400 lm
3000K
30W
15° Beam

Black
ET754DB
2400 lm
3000K
30W
28° Beam

White
ET755DW
2400 lm
3000K
30W
38° Beam


Black
ET755DB
2400 lm
3000K
30W
38° Beam

LED Celtic™ (L)

DIMMABLE

- Modern diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span

Input Power	30W
Lumens	2400
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	15° - 38°



Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 90+ CRI | 50,000 HOURS

Adjustable Beam Angle



White
ET756DW
1000 lm
3000K
15W




Black
ET756DB
1000 lm
3000K
15W

LED Angler™ (S)

DIMMABLE

- Diecast **adjustable beam** track fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 18°-50° adjustable beam angle

Input Power	15W
Lumens	1000
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	18° - 50°



Adjustable Beam Angle



White
ET757DW
2000 lm
3000K
30W




Black
ET757DB
2000 lm
3000K
30W

LED Angler™ (L)

DIMMABLE

- Diecast **adjustable beam** track fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 18°-50° adjustable beam angle

Input Power	30W
Lumens	2000
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	18° - 50°



Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 90+ CRI | 50,000 HOURS

Adjustable Beam Angle



White
ET75830DW
1600 lm
3000K
20W




Black
ET75830DB
1600 lm
3000K
20W

LED Bachman™ (S)

DIMMABLE

- Diecast **adjustable beam** track fixture
- Solid diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span

Input Power	20W
Lumens	1600
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	20° - 50°



Adjustable Beam Angle



White
ET75930DW
2240 lm
3000K
28W




Black
ET75930DB
2240 lm
3000K
28W

LED Bachman™ (L)

DIMMABLE

- Diecast **adjustable beam** track fixture
- Solid diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span

Input Power	28W
Lumens	2240
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	20° - 50°



Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 90+ CRI | 50,000 HOURS



White
ET62530DW
700 lm
3000K
10W

White
ET62630DW
1000 lm
3000K
13W



Black
ET62530DB
700 lm
3000K
10W


Black
ET62630DB
1000 lm
3000K
13W

LED Cleat™

DIMMABLE

- Solid diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP719C (15°) or EP720C (24°) available

Input Power	10W - 13W
Lumens	700 - 1000
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°





White
ET579L30W
730 lm
3000K
10W

White
ET579L35W
760 lm
3500K
10W



Black
ET579L30B
730 lm
3000K
10W

Black
ET579L35B
760 lm
3500K
10W

White
ET579L40W
800 lm
4000K
10W


Black
ET579L40B
800 lm
4000K
10W

LED Cleat™ Monopoint

DIMMABLE

- Monopoint diecast fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP719C (15°) or EP720C (24°) available

Input Power	10W
Lumens	730 - 800
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°



Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 90+ CRI | 50,000 HOURS



White
ET61830DW
750 lm
3000K
10W




Black
ET61830DB
750 lm
3000K
10W

LED Gordian™ (Mini)

DIMMABLE

- Solid diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP719C (15°) or EP720C (24°) available

Input Power	10W
Lumens	750
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°





White
ET61930DW
1150 lm
3000K
15W




Black
ET61930DB
1150 lm
3000K
15W

LED Gordian™ (S)

DIMMABLE

- Solid diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP719C (15°) or EP720C (24°) available

Input Power	15W
Lumens	1150
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°



Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 90+ CRI | 50,000 HOURS



White
ET62030DW
2100 lm
3000K
30W

White
ET62040DW
2250 lm
4000K
30W



Black
ET62030DB
2100 lm
3000K
30W


Black
ET62040DB
2250 lm
4000K
30W

LED Gordian™ (M)

DIMMABLE

- Solid diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP722C (15°) or EP723C (24°) available

Input Power	30W
Lumens	2100 - 2250
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°





White
ET62130DW
2900 lm
3000K
40W

White
ET62140DW
3150 lm
4000K
40W



Black
ET62130DB
2900 lm
3000K
40W


Black
ET62140DB
3150 lm
4000K
40W

LED Gordian™ (L)

DIMMABLE

- Solid diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard

Input Power	40W
Lumens	2900 - 3150
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°



Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 90+ CRI | 50,000 HOURS



White
ET62730DW
600 lm
3000K
8W




Black
ET62730DB
600 lm
3000K
8W

LED Uni™

DIMMABLE

- Solid aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span

Input Power	8W
Lumens	600
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°





White
ET62230DW
700 lm
3000K
10W




Black
ET62230DB
700 lm
3000K
10W

LED Highpoint™ (S)

DIMMABLE

- Solid diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard

Input Power	10W
Lumens	700
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°





Hex Louver

For ET622 series

EP322W White

EP322B Black

Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 90+ CRI | 50,000 HOURS



White
ET62330DW
1050 lm
3000K
15W




Black
ET62330DB
1050 lm
3000K
15W

LED Highpoint™ (M)

DIMMABLE

- Solid diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP724C (12°) or EP725C (24°) available

Input Power	15W
Lumens	1050
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°





White
ET62430DW
1400 lm
3000K
20W

White
ET62440DW
1500 lm
4000K
20W



Black
ET62430DB
1400 lm
3000K
20W


Black
ET62440DB
1500 lm
4000K
20W

LED Highpoint™ (L)

DIMMABLE

- Solid diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP726C (12°) or EP727C (24°) available

Input Power	20W
Lumens	1400 - 1500
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°







Hex Louver

For ET623 series

EP323W White

EP323B Black


For ET624 series

EP324W White

EP324B Black

Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track





White

ET62830DW

1000 lm
3000K
13W



Black

ET62830DB


1000 lm
3000K
13W

LED Tiggap™



- Solid diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span
- 38° Beam Angle Standard. Optional Lenses: EP719C (15°) or EP720C (24°)

Input Power	13W
Lumens	1000
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	38°





Barndoor Accesory

For ET628 series

EP820W White

EP820B Black



Framing Projector

For ET628 series

EP821B Black

Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 90+ CRI | 50,000 HOURS



White
ET591W
520 lm
3000K
10W




Black
ET591B
520 lm
3000K
10W

LED Axle™

- Diecast adjustable track fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span

Input Power	10W
Lumens	520
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	No
Beam Angle	40°





White
ET592W
400 lm
3000K
7W





Black
ET593B
400 lm
3000K
10W

LED Contempo™ & Bimini™

- Diecast adjustable track fixture
- Integrated driver
- 90° tilt, 358° rotation
- 35,000 hours life-span


Input Power	7W - 10W
Lumens	400
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	No
Beam Angle	38°





Integrated LED Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track






Black
ET594DB
500 lm
3000K
10W

LED Halter™ (S)



- Solid diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span

Input Power	10W
Lumens	500
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	Yes
Beam Angle	30°






Black
ET597B
2000 lm
3000K
40W

LED Halter™ (L)

- Solid diecast aluminum fixture
- Integrated driver
- 90° tilt, 358° rotation
- 50,000 hours life-span

Input Power	40W
Lumens	2000
Color Temp.	3000K
CRI	90+
Input Volt	120V
Dimmable	No
Beam Angle	30°



Integrated LED Wall Wash Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 50,000 HOURS



White
ETW4030W
2400 lm
3000K
30W

White
ETW4040W
2500 lm
4000K
30W



Black
ETW4030B
2400 lm
3000K
30W


Black
ETW4040B
2500 lm
4000K
30W

LED Distell™ (12")

DIMMABLE

- Frosted lens for even light distribution
- 90° tilt, 358° rotation
- 50,000 hours life-span
- Optional front louver available

Input Power	30W
Lumens	2400 - 2500
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Dimmable	Yes



12" Wall Wash Front Louver

EP555W
White

EP555B
Black





White
ETW4130W
4800 lm
3000K
60W

White
ETW4140W
5000 lm
4000K
60W



Black
ETW4130B
4800 lm
3000K
60W


Black
ETW4140B
5000 lm
4000K
60W

LED Distell™ (24")

DIMMABLE

- Frosted lens for even light distribution.
- 90° tilt, 358° rotation
- 50,000 hours life-span
- Optional front louver available

Input Power	60W
Lumens	4800 - 5000
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Dimmable	Yes



24" Wall Wash Front Louver

EP666W
White


EP666B
Black




Integrated LED Wall Wash Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 50,000 HOURS

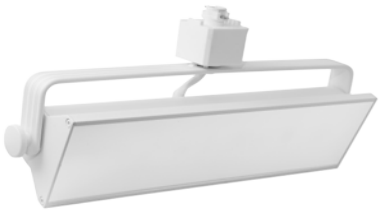

White	White
ETW4230W	**ETW4240W**
1400 lm	1550 lm
3000K	4000K
20W	20W

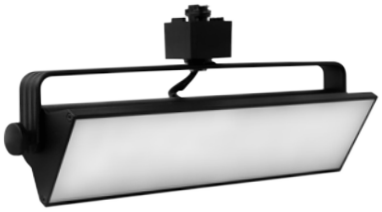


Black	Black
ETW4230B	**ETW4240B**
1400 lm	1550 lm
3000K	4000K
20W	20W

LED Pipe™ (12″)

DIMMABLE

- Frosted lens for even light distribution.
- 90° tilt, 358° rotation
- 50,000 hours life-span
- Optional front louver available

Input Power	20W
Lumens	1400 - 1550
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Dimmable	Yes

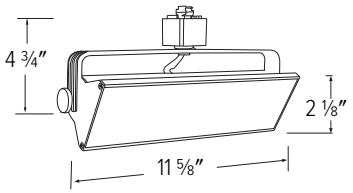



White	White
ETW4330W	**ETW4340W**
2500 lm	2700 lm
3000K	4000K
40W	40W




Black	Black
ETW4330B	**ETW4340B**
2500 lm	2700 lm
3000K	4000K
40W	40W

LED Pipe™ (21″)

DIMMABLE

- Frosted lens for even light distribution.
- 90° tilt, 358° rotation
- 50,000 hours life-span
- Optional front louver available


Input Power	40W
Lumens	2500 - 2700
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Dimmable	Yes



Integrated LED Wall Wash Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED | 50,000 HOURS

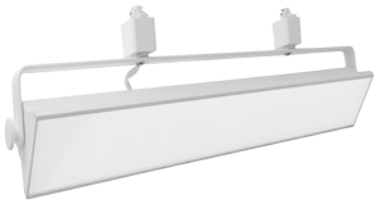

White
ETW4430W
4000 lm
3000K
58W

White
ETW4440W
4300 lm
4000K
58W



Black
ETW4430B
4000 lm
3000K
58W


Black
ETW4440B
4300 lm
4000K
58W

LED Pipe™ (27")

DIMMABLE

- Frosted lens for even light distribution.
- 90° tilt, 358° rotation
- 50,000 hours life-span
- Optional front louver available

Input Power	58W
Lumens	4000 - 4300
Color Temp.	3000K - 4000K
CRI	90+
Input Volt	120V
Dimmable	Yes

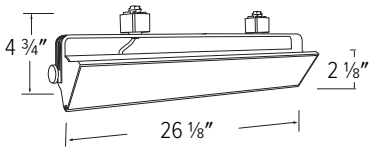

ELCO Lighting

LED Tarbuck™ Linear Track Fixtures



18W Input Power

1400 - 1500 lumens


90+ CRI

UL Listed

120V AC, 60 Hz

For use with ELCO single and double circuit track system

Wide flood beam angle (110°)



Single & Two Circuit Track
Track supplied with dead end and mounting hardware

FEATURES	FINISHES	LUMENS	COLOR TEMPERATURE
INTEGRATED LED	White	1400 lm to 1500 lm	3000K - 4000K
90+ CRI	Black		
50K HRS 50,000 HOURS			

Integrated LED Linear Track Fixtures

All track fixtures have adjustable adapters to be used with 120V Single or Two Circuit Track

INTEGRATED LED

50K HRS
50,000 HOURS



White
ETL2130W
1400 lm
3000K
18W

White
ETL2140W
1500 lm
4000K
18W




Black
ETL2130B
1400 lm
3000K
18W


Black
ETL2140B
1500 lm
4000K
18W

LED Tarbuck™

- For use with ELCO single and double circuit track system
- Wide flood beam angle (110°)
- UL Listed

Input Power	18W
Input Volt	120V AC, 60 Hz
Lumens	1400 - 1500
Color Temp.	3000K - 4000K
CRI	90+





ELCO Lighting

Low Voltage Track Lighting

H-Style Standard
(J & L Style Available)






Low Voltage Transformer
For use with 120V Single
or Two Circuit Tracks

ETLD Option has no minimum load transformer


Wide selection of finishes and styles
to match any room design

Fixtures accommodates
LED **(ETLD)** and Halogen Lamps

FIXTURES FEATURES



Tilt (90°)



Rotation (358°)

FINISHES

White

Black


Bronze

Copper


Gold

Nickel

LAMPS



LED (ETLD)



Halogen

Low Voltage MR16 Track Fixtures **(LED & Halogen Lamps)**

For use with 12V GU5.3 MR16 LED Lamps or MR16 Halogen Lamps. No minimum load transformer. Lamp not included



White
ETLD526W




Black
ETLD526B

Zeppelin™

DIMMABLE

- For use with 12V GU5.3 MR16 LED lamp or MR16 Halogen lamp (not included)
- No minimum load transformer
- 90° tilt, 358° rotation

Input Power	3W - 50W
Input Volt	120V
Dimmable	Yes







White
ETLD528W



Black
ETLD528B



Bronze
ETLD528BZ



Copper
ETLD528CP



Gold
ETLD528G




Nickel
ETLD528N

Cylinder™

DIMMABLE

- For use with 12V GU5.3 MR16 LED lamp or MR16 Halogen lamp (not included)
- No minimum load transformer
- 90° tilt, 358° rotation

Input Power	3W - 50W
Input Volt	120V
Dimmable	Yes







All White
ETLD530WW



White
ETLD530W




Black
ETLD530B

Anchor™

DIMMABLE

- For use with 12V GU5.3 MR16 LED lamp or MR16 Halogen lamp (not included)
- No minimum load transformer
- 90° tilt, 358° rotation

Input Power	3W - 50W
Input Volt	120V
Dimmable	Yes



Low Voltage MR16 Track Fixtures **(LED & Halogen Lamps)**

For use with 12V GU5.3 MR16 LED Lamps or MR16 Halogen Lamps. No minimum load transformer. Lamp not included





White
ETLD532W




Black
ETLD532B

Hoxton™

DIMMABLE

- For use with 12V GU5.3 MR16 LED lamp or MR16 Halogen lamp (not included)
- No minimum load transformer
- 90° tilt, 358° rotation

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes







White
ETLD534W



Black
ETLD534B




Nickel
ETLD534N

Icicle™

DIMMABLE

- For use with 12V GU5.3 MR16 LED lamp or MR16 Halogen lamp (not included)
- No minimum load transformer
- 90° tilt, 358° rotation

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes





White
ETLD558W




Black
ETLD558B

Studio™

DIMMABLE

- For use with 12V GU5.3 MR16 LED lamp or MR16 Halogen lamp (not included)
- No minimum load transformer
- 90° tilt, 358° rotation

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes



Low Voltage MR16 Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included



Art Deco Gimbal

ET502W White
ET502B Black

- Lamp: 50W 12V MR16
- Lamp not included






High Tech Swivel

ET504W White
ET504B Black
ET504N Nickel

- Lamp: 50W 12V MR16
- Lamp not included






Diecast Gimbal Ring

ET505B Black

- Lamp: 50W 12V MR16
- Lamp not included






Gimbal Ring

ET507W White
ET507B Black

- Lamp: 50W 12V MR16
- Lamp not included






Gimbal Ring

ET526W White / 50W
ET526B Black / 50W

ET526-75W White / 75W
ET526-75B Black / 75W

- Lamp: 12V MR16
- Lamp not included
- Snoot available EP300 (W)(B)






Mini Deco

ET527B Black

- Lamp: 50W 12V MR16
- Lamp not included
- Snoot available EP300 (W)(B)



Low Voltage MR16 Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included



High Tech

ET529B Black

- Lamp: 50W 12V MR16
- Lamp not included






Cylinder

ET528W White / 50W
ET528B Black / 50W
ET528G Gold / 50W
ET528N Nickel / 50W
ET528BZ Bronze / 50W
ET528CP Copper / 50W

ET528-75W White / 75W
ET528-75B Black / 75W

- Lamp: 12V MR16
- Lamp not included






Round Back

ET530WW All White
ET530W White
ET530B Black

- Lamp: 50W 12V MR16
- Lamp not included






Soft Square

ET532W White / 50W
ET532B Black / 50W

ET532-75W White / 75W
ET532-75B Black / 75W

- Lamp: 12V MR16
- Lamp not included






Step Cylinder

ET531W White
ET531B Black
ET531WW All White

- Lamp: 42W/50W 12V MR16
- Lamp not included
- Snoot available EP300 (W)(B)



Low Voltage MR16 Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included



Clasp

ET534W White / 50W
ET534B Black / 50W
ET534N Nickel / 50W

- Lamp: 12V MR16
- Lamp not included






Mini Deco

ET535W White
ET535B Black

- Lamp: 50W 12V MR16
- Lamp not included
- Snoot available EP300 (W)(B)






Barndoor

ET536W White

- Lamp: 50W 12V MR16
- Lamp not included






Louver

ET537W White
ET537B Black

- Lamp: 50W 12V MR16
- Lamp not included






Mini Projector

ET539W White / 50W
ET539B Black / 50W

ET539-75W White / 75W
ET539-75B Black / 75W

- Lamp: 12V MR16
- Lamp not included






Pinch Back with Barndoor

ET540W White / 50W
ET540B Black / 50W

- Lamp: 12V MR16
- Lamp not included



Low Voltage MR16 Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included



Gimbal with Barndoor

ET541W White
ET541B Black

- Lamp: 50W 12V MR16
- Lamp not included






High Tech Glass Shade

ET546W White/Frosted Glass
ET546B Black/Frosted Glass

- Lamp: 50W 12V MR16
- Lamp not included






Pinch Back

ET547W White / 50W
ET547B Black / 50W
ET547N Nickel / 50W

- Lamp: 12V MR16
- Lamp not included






Frosted Stepped Shade Goose Neck

ET544B-R Black/Red Glass
ET544W-R White/Red Glass
ET544B-BL Black/Blue Glass
ET544W-BL White/Blue Glass

- Lamp: 50W 12V MR16
- Track head with 24″ goose neck and glass shade
- Lamp not included






Thin Goose Neck with Solid Shade

ET550W White
ET550B Black
ET550N Nickel

- Lamp: 50W 12V MR16
- Track head with 24″ thin goose neck and solid shade
- Lamp not included





Framing Projector

For use with ET547

EP821B Black

Low Voltage MR16 Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included



Telescopic Antenna

ET548W White
ET548B Black

- Lamp: 42W/50W 12V MR16
- Lamp not included






Wireform

ET554W White
ET554B Black
ET554BZ Bronze

- Lamp: 50W 12V MR16
- Lamp not included






Contempo

ET549B Black

- Lamp: 42W/50W 12V MR16
- Lamp not included






Clasp Globe Shade

ET551B-BL Black/Blue Glass
ET551W-BL White/Blue Glass
ET551B-YL Black/Yellow Glass
ET551W-YL White/Yellow Glass

- Lamp: 50W 12V MR16
- Lamp not included



Low Voltage MR16 Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included



Studio

ET558W White
ET558B Black

- Lamp: 50W 12V MR16
- Takes color film membrane
- Lamp not included






Micro Style

ET559B Black

- Lamp: 50W 12V MR16
- Lamp not included






Vertical Gimbal

ET562W White
ET562B Black

- Lamp: 50W 12V MR16
- Lamp not included






Vertical Spot

ET563W White
ET563B Black

- Lamp: 50W 12V MR16
- Lamp not included



Low Voltage PAR36 Track Fixtures

For use with 120V Single or Two Circuit Track. Lamp not included




High Tech Gimbal

ET565W White
ET565B Black

- Lamp: 50W 12V PAR36
- Lamp not included

ET570W White
ET570B Black

- Lamp: 50W 12V AR111
- Lamp not included



MR16 Monopoint Fixtures


Stand alone fixture with round base for mounting onto junction box. Lamp not included



Low Voltage Bi-Pin Monopoint

ET1528W White
ET1528B Black
ET1528N Nickel
ET1528BZ Bronze

- Lamp: 50W 12V MR16 Bi-Pin GU5.3
- Lamp not included



Low Voltage MR16 Builder's Track Kits


Kit Includes: (3) Track Fixtures, (1) 4 Ft. Track, and (1) Floating Canopy. Lamp not included



Gimbal Ring Track Kit

ET566W White
ET566B Black

- Lamp: 50W 12V MR16
- Track Kit Includes: (3) Gimbal Ring Fixtures (ET526), (1) 4' Track, (1) Floating canopy
- Lamps not included

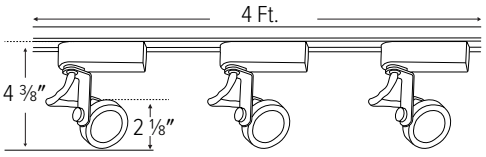




Cylinder Track Kit

ET567W White
ET567B Black

- Lamp: 50W 12V MR16
- Track Kit Includes: (3) Cylinder Fixtures (ET528), (1) 4' Track, (1) Floating canopy
- Lamps not included

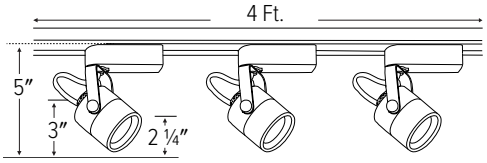




Soft Square Track Kit

ET568W White
ET568B Black

- Lamp: 50W 12V MR16
- Track Kit Includes: (3) Soft Square Fixtures (ET532), (1) 4' Track, (1) Floating canopy
- Lamps not included

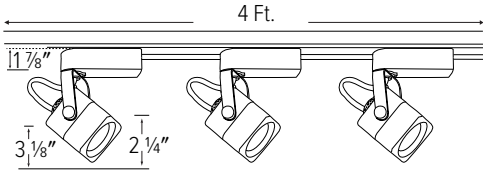

Low Voltage Fixtures with Stem Extensions

For use with 120V Single or Two Circuit Track. Lamp not included



- For use with 120V Single or Two Circuit Track
- Fixtures with Stem Extensions feature:
  - (1) 12V Solid State Transformer
  - (1) 12"-48" Stem Extension
  - (1) Track Fixture

W = White Extension
B = Black Extension



Gimbal Ring
(LED or Halogen)

White
ETLD526-12W 12"
ETLD526-18W 18"
ETLD526-24W 24"
ETLD526-36W 36"
ETLD526-48W 48"
Black
ETLD526-12B 12"
ETLD526-18B 18"
ETLD526-24B 24"
ETLD526-36B 36"
ETLD526-48B 48"

- Lamp: 50W MAX 12V GU5.3 MR16 LED or MR16 Halogen
- Fixture: 4 ½" L x 2 ⅛" O.D.
- Lamp not included



Cylinder (LED or Halogen)

White
ETLD528-12W 12"
ETLD528-18W 18"
ETLD528-24W 24"
ETLD528-36W 36"
ETLD528-48W 48"
Black
ETLD528-12B 12"
ETLD528-18B 18"
ETLD528-24B 24"
ETLD528-36B 36"
ETLD528-48B 48"

- Lamp: 50W MAX 12V GU5.3 MR16 LED or MR16 Halogen
- Fixture: 4 ½" L x 2 ⅛" O.D.
- Lamp not included

Low Voltage Fixtures with Stem Extensions

For use with 120V Single or Two Circuit Track. Lamp not included



Gimbal Ring

White
ET526-12W 12″
ET526-18W 18″
ET526-24W 24″
ET526-36W 36″
ET526-48W 48″
Black
ET526-12B 12″
ET526-18B 18″
ET526-24B 24″
ET526-36B 36″
ET526-48B 48″

- Lamp: 50W 12V MR16
- Fixture: 2″ L x 2 ⅛″ O.D.
- Lamp not included



Round Back

White
ET530-12W 12″
ET530-18W 18″
ET530-24W 24″
ET530-36W 36″
ET530-48W 48″
Black
ET530-12B 12″
ET530-18B 18″
ET530-24B 24″
ET530-36B 36″
ET530-48B 48″

- Lamp: 50W 12V MR16
- Fixture: 4″ L x 2 ½″ O.D.
- Lamp not included



Cylinder

White
ET528-12W 12″
ET528-18W 18″
ET528-24W 24″
ET528-36W 36″
ET528-48W 48″
Black
ET528-12B 12″
ET528-18B 18″
ET528-24B 24″
ET528-36B 36″
ET528-48B 48″

- Lamp: 50W 12V MR16
- Fixture: 3″ L x 2 ¼″ O.D.
- Lamp not included



Soft Square

White
ET532-12W 12″
ET532-18W 18″
ET532-24W 24″
ET532-36W 36″
ET532-48W 48″
Black
ET532-12B 12″
ET532-18B 18″
ET532-24B 24″
ET532-36B 36″
ET532-48B 48″

- Lamp: 50W 12V MR16
- Fixture: 3 ⅛″ L x 2 ¼″ O.D.
- Lamp not included

Low Voltage Fixtures with Stem Extensions


For use with 120V Single or Two Circuit Track. Lamp not included



Studio

White
ET558-12W 12″
ET558-18W 18″
ET558-24W 24″
ET558-36W 36″
ET558-48W 48″
Black
ET558-12B 12″
ET558-18B 18″
ET558-24B 24″
ET558-36B 36″
ET558-48B 48″

- Lamp: 50W 12V MR16
- Fixture: 4 ¾″ L x 3″ O.D.
- Lamp not included

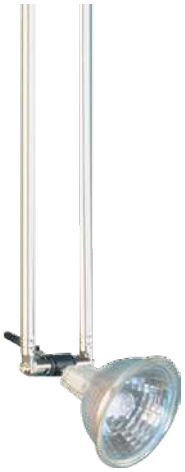

Telescopic Antenna

ET548W White
ET548B Black

- Lamp: 50W 12V MR16
- Fixture: 2″ O.D.
- Lamp not included



Clasp

White
ET534-12W 12″
ET534-18W 18″
ET534-24W 24″
ET534-36W 36″
ET534-48W 48″
Black
ET534-12B 12″
ET534-18B 18″
ET534-24B 24″
ET534-36B 36″
ET534-48B 48″

- Lamp: 50W 12V MR16
- Fixture: 2 ⅝″ L x 3 ⅛″ O.D.
- Lamp not included



Gimbal Ring

White
ET565-12W 12″
ET565-18W 18″
ET565-24W 24″
ET565-36W 36″
ET565-48W 48″
Black
ET565-12B 12″
ET565-18B 18″
ET565-24B 24″
ET565-36B 36″
ET565-48B 48″

- Lamp: 50W 12V PAR36
- Fixture: 2 ½″ L x 4 ⅝″ O.D.
- Lamp not included

Low Voltage MR11 Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included



Mini Cylinder

ET128B Black
ET128G Gold

- Lamp: 35W 12V MR11
- Transformer included
- Lamp not included






Mini Soft Square

ET132W White
ET132G Gold

- Lamp: 35W 12V MR11
- Transformer included
- Lamp not included






Mini Octagon

ET169B Black

- Lamp: 35W 12V MR11
- Transformer included
- Lamp not included



Low Voltage MR16 Track 22 Fixtures


Track fixtures can be installed on Line Voltage Track with EP900 Power Pack or Monopoint installation using EP702
Lamps not included



Gimbal Ring

ET926W White
ET926B Black

- Lamp: 50W 12V MR16
- Transformer not included
- Lamp not included






Cylinder

ET928W White
ET928B Black

- Lamp: 50W 12V MR16
- Transformer not included
- Lamp not included






Soft Square

ET932W White
ET932B Black

- Lamp: 50W 12V MR16
- Transformer not included
- Lamp not included



Low Voltage MR16 Track 22 **Accessories**

For use with Track22 Low Voltage Track Heads



Power Pack

EP900W White
EP900B Black

- 50W transformer for use with Track 22, 12V track fixtures
- For line voltage track only



Monopoint with Transformer

EP702W White
EP702B Black

- 75W monopoint with low voltage transformer
- 12V for use with ET900 series

Line Voltage Halogen Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included



Gimbal Ring

ET426W White
ET426B Black

- Lamp: 50W 120V G8 Base MR16 (not included)






Cylinder

ET428W White
ET428B Black

- Lamp: 50W 120V G8 Base MR16 (not included)






Soft Square

ET432W White
ET432B Black

- Lamp: 50W 120V G8 Base MR16 (not included)



Line Voltage Halogen Track Fixtures **Lamp**



G8 Base MR16 Lamp

MR120

- 50W 120V
- Bi-Pin G8 base lamp

ELCO Lighting

Line Voltage GU10 Track Fixtures

(for LED or Halogen Lamps)

H-Style Standard
(J & L Style Available)





For use with 120V Single or Two Circuit Tracks

Wide selection of finishes and styles
to match any room design


Fixtures accommodates
GU10 MR16 LED or Halogen Lamps

Dimmability based on lamp




DIMMABLE

FIXTURES FEATURES



Tilt (90°)



Rotation (358°)

FINISHES


White

Black

Bronze

Nickel

LAMPS



GU10 Halogen
MR120-GU10



GU10 LED
MR120-GU10LD

Line Voltage GU10 Track Fixtures **(LED or Halogen)**

For use with 120V Single or Two Circuit Track. Lamp not included. Dimmability based on lamp






White **ET1603W** | Black **ET1603B** | Nickel **ET1603N**

Ossel™

DIMMABLE

- For use with 120V GU10 MR16 LED lamp or Halogen lamp (not included)
- 90° tilt, 358° rotation
- Dimmability based on lamp

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes





White **ET1604W**




Black **ET1604B**

Swivel™

DIMMABLE

- For use with 120V GU10 MR16 LED lamp or Halogen lamp (not included)
- 90° tilt, 358° rotation
- Dimmability based on lamp

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes





White **ET1625W**




Black **ET1625B**

Savoy™

DIMMABLE

- For use with 120V GU10 MR16 LED lamp or Halogen lamp (not included)
- 90° tilt, 358° rotation
- Dimmability based on lamp

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes



Line Voltage GU10 Track Fixtures **(LED or Halogen)**

For use with 120V Single or Two Circuit Track. Lamp not included. Dimmability based on lamp






White **ET1626W** | Black **ET1626B** | Nickel **ET1626N**

Bowen™

DIMMABLE

- For use with 120V GU10 MR16 LED lamp or Halogen lamp (not included)
- 90° tilt, 358° rotation
- Dimmability based on lamp

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes







White **ET1628W** | Black **ET1628B**




Bronze **ET1628BZ** | Nickel **ET1628N**

Garda™

DIMMABLE

- For use with 120V GU10 MR16 LED lamp or Halogen lamp (not included)
- 90° tilt, 358° rotation
- Dimmability based on lamp

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes








All White **ET1630WW** | White **ET1630W** | Black **ET1630B**

Arbor™

DIMMABLE

- For use with 120V GU10 MR16 LED lamp or Halogen lamp (not included)
- 90° tilt, 358° rotation
- Dimmability based on lamp

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes



Line Voltage GU10 Track Fixtures **(LED or Halogen)**

For use with 120V Single or Two Circuit Track. Lamp not included. Dimmability based on lamp





White
ET1632W



Black
ET1632B




Nickel
ET1632N

Crown™

DIMMABLE

- For use with 120V GU10 MR16 LED lamp or Halogen lamp (not included)
- 90° tilt, 358° rotation
- Dimmability based on lamp

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes







White
ET1634W



Black
ET1634B




Nickel
ET1634N

Basket™

DIMMABLE

- For use with 120V GU10 MR16 LED lamp or Halogen lamp (not included)
- 90° tilt, 358° rotation
- Dimmability based on lamp

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes





White
ET1650W




Black
ET1650B

Noose™

DIMMABLE

- 18″ Goose neck with shade
- For use with 120V GU10 MR16 LED lamp or Halogen lamp (not included)
- 90° tilt, 358° rotation
- Dimmability based on lamp

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes



Line Voltage GU10 Track Fixtures **(LED or Halogen)**

For use with 120V Single or Two Circuit Track. Lamp not included. Dimmability based on lamp




White
ET1654W

Wireform™

DIMMABLE

- For use with 120V GU10 MR16 LED lamp or Halogen lamp (not included)
- 90° tilt, 358° rotation
- Dimmability based on lamp

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes






Nickel
ET1687N

Knute™

DIMMABLE

- For use with 120V GU10 MR16 LED lamp or Halogen lamp (not included)
- 90° tilt, 358° rotation
- Dimmability based on lamp

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes





White
ET1728W



White
ET1728W



Black
ET1728B




Nickel
ET1728BZ

Garda™ Monopoint

- For use with 120V GU10 MR16 LED lamp or Halogen lamp (not included)
- 90° tilt, 358° rotation
- Dimmability based on lamp

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes



Line Voltage GU10 Track Fixtures **(LED or Halogen)**

For use with 120V Single or Two Circuit Track. Lamp not included. Dimmability based on lamp



White
ET1671W




Black
ET1671B

Dropper™

DIMMABLE

- For use with 120V GU10 MR16 LED lamp or Halogen lamp (not included)
- 90° tilt, 358° rotation
- Dimmability based on lamp

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes





White
ET1673W




Black
ET1673B

Decorative

DIMMABLE

- For use with 120V GU10 MR16 LED lamp or Halogen lamp (not included)
- 90° tilt, 358° rotation
- Dimmability based on lamp

Input Power	50W MAX.
Input Volt	120V
Dimmable	Yes



Line Voltage GU10 Track Fixtures **Lamps**



GU10 MR16 Lamp

MR120-GU10

- 50W
- 120V



GU10 MR16 LED Lamp

MR120-GU10LD

- 7W
- 120V, 500 lm, 3000K, CRI 90
- Dimmable

ELCO Lighting

Line Voltage PAR Track Lighting

H-Style Standard
(J & L Style Available)






For use with 120V Single or Two Circuit Tracks

Wide selection of finishes and styles
to match any room design


Fixtures accommodates
PAR20, PAR28, PAR30, PAR38

Its timeless design is perfect for traditional
as well as contemporary interiors

FIXTURES FEATURES



Tilt (90°)



Rotation (358°)

FINISHES

White

Black


Bronze

Copper

Gold

Nickel

LAMPS



(LED or Halogen)

PAR20

PAR28

PAR30

PAR38

Line Voltage 120V PAR Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included. Dimmability based on lamp



Gimbal Ring

ET629W White
ET629B Black
ET629N Nickel
ET629BZ Bronze

- Lamp: 50W PAR20
- Lamp not included






Gimbal Ring

ET631W White
ET631B Black
ET631N Nickel
ET631CP Copper

- Lamp: 150W PAR38
- Lamp not included
- Louver available EP333 (W)(B)
- Barndoors available EP822






Flat Back Cylinder

ET634W White
ET634B Black
ET634WW All White

- Lamp: 50W R20/PAR20
- Lamp not included






Gimbal Ring

ET630W White
ET630B Black
ET630N Nickel
ET630BZ Bronze

- Lamp: 75W PAR30
- Lamp not included
- Louver available EP222 (W)(B)
- Barndoors available EP823






Industrial Grade Gimbal

ET633W White
ET633B Black

- Lamp: 150W PAR38
- With clips for accessories
- Lamp not included
- Louver available EP222 (W)(B)






Flat Back Cylinder

ET635W White
ET635B Black
ET635WW All White

- Lamp: 75W R30/PAR30
- Lamp not included
- Barndoors available EP822



Line Voltage 120V PAR Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included. Dimmability based on lamp



Step Cylinder with Baffle

ET636W White
ET636B Black
ET636WG White/Gold Ring
ET636BG Black/Gold Ring
ET636WW All White

- Lamp: 50W R20/PAR20
- Lamp not included






Step Cylinder with Baffle

ET637W White
ET637B Black
ET637WW All White

- Lamp: 75W R30/PAR30
- Lamp not included
- Barndoors available EP822






Round Back Cylinder

ET638W White
ET638B Black
ET638WW All White

- Lamp: 50W R20/PAR20
- Lamp not included






Round Back Cylinder

ET639W White
ET639B Black
ET639WW All White

- Lamp: 75W R30/PAR30
- Lamp not included
- Barndoors available EP822






Round Back Cylinder

ET640W White
ET640B Black
ET640WW All White

- Lamp: 150W R40/PAR38
- Lamp not included
- Louver available EP444 (W)(B)
- Barndoors available EP422






Universal

ET641W White
ET641B Black

- Lamp: 150W R or PAR
- Lamp not included



Line Voltage 120V PAR Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included. Dimmability based on lamp



Universal

ET642W White
ET642B Black
ET642N Nickel
ET642BZ Bronze
ET642CP Copper

- Lamp: 150W R or PAR
- Lamp not included






Classic Round Back

ET643W White
ET643B Black
ET643WG White/Gold Ring
ET643BG Black/Gold Ring

- Lamp: 50W R20/PAR20
- Lamp not included






Classic Round Back

ET644B Black
ET644BG Black/Gold Ring

- Lamp: 75W R30/PAR30
- Lamp not included
- Barndoors available EP822






Mini Porcelain

ET646W White

- Lamp: 150W R or PAR
- Lamp not included






Mini Universal

ET647W White
ET647B Black
ET647N Nickel
ET647BZ Bronze
ET647CP Copper

- Lamp: 75W R or PAR
- Lamp not included






Flat Back Cylinder

ET650W White
ET650B Black
ET650WW All White

- Lamp: 150W R40/PAR38
- Lamp not included
- Louver available EP444 (W)(B)
- Barndoors available EP422



Line Voltage 120V PAR Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included. Dimmability based on lamp



Wireform

ET654W White
ET654B Black
ET654N Nickel
ET654BZ Bronze
ET654CP Copper

- Lamp: 150W PAR38
- Lamp not included






Wireform

ET655B Black

- Lamp: 75W PAR30
- Lamp not included






Wireform

ET656B Black
ET656CP Copper

- Lamp: 75W PAR20
- Lamp not included






Solid PAR Classic

ET657W White
ET657B Black
ET657N Nickel
ET657BZ Bronze

- Lamp: 50W PAR20
- Lamp not included






Solid PAR Classic

ET658W White
ET658B Black
ET658N Nickel
ET658BZ Bronze

- Lamp: 75W PAR30
- Lamp not included






Solid PAR Classic

ET659W White
ET659B Black
ET659BZ Bronze

- Lamp: 150W PAR38
- Lamp not included



Line Voltage 120V PAR Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included. Dimmability based on lamp



Wall Wash with Louver

ET660B Black

- Lamp: 300W MAX. T3 Double end quartz
- Lamp not included






Yoke Mount Round Back Cylinder

ET661W White
ET661B Black

- Lamp: 50W R20/PAR20
- Lamp not included






Yoke Mount Round Back Cylinder

ET662W White
ET662B Black

- Lamp: 75W PAR30
- Lamp not included






Wall Wash

ET668W White

- Lamp: 150W T4 ETF Halogen DC bayonet
- Lamp not included






Wall Wash

ET669B Black

- Lamp: 150W R40/PAR38
- Lamp not included






PAR Classic with Cone

ET673W White
ET673B Black

- Lamp: 50W PAR20
- Lamp not included



Line Voltage 120V PAR Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included. Dimmability based on lamp



PAR Classic with Cone

ET674W White
ET674B Black

- Lamp: 75W PAR30
- Lamp not included






PAR Classic with Cone

ET675W White
ET675B Black

- Lamp: 150W PAR38
- Lamp not included






PAR with Mesh

ET676W White
ET676B Black

- Lamp: 50W PAR20
- Lamp not included






PAR with Mesh

ET677W White
ET677B Black
ET677N Nickel

- Lamp: 75W PAR30
- Lamp not included






High Tech PAR with Cone

ET681W White
ET681B Black

- Lamp: 50W PAR20
- Lamp not included






High Tech PAR with Cone

ET682B Black

- Lamp: 75W PAR30
- Lamp not included



Line Voltage 120V PAR Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included. Dimmability based on lamp



Front Loading Adjustable Gimbal

ET685W White
ET685B Black

- Lamp: 50W PAR20
- Lamp not included






Front Loading Adjustable Gimbal

ET686W White
ET686B Black

- Lamp: 75W PAR30
- Lamp not included






Front Loading Adjustable Gimbal

ET687W White
ET687B Black

- Lamp: 150W PAR38
- Lamp not included






Mini Universal with Sliding Sleeve

ET690W White
ET690B Black

- Lamp: 50W PAR16, PAR20, PAR30 or 150W PAR38
- Lamp not included






PAR Classic with Cover

ET691W White

- Lamp: 50W PAR20
- Lamp not included






PAR Classic with Cover

ET692W White
ET692B Black

- Lamp: 75W PAR30
- Lamp not included



Line Voltage 120V PAR Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included. Dimmability based on lamp



PAR Classic with Cover

ET693G Gold

- Lamp: 150W PAR38
- Lamp not included






PAR Classic

ET694W White
ET694C Chrome
ET694G Gold

- Lamp: 50W PAR20
- Lamp not included






PAR Classic

ET695B Black
ET695G Gold

- Lamp: 75W PAR30
- Lamp not included






PAR Classic

ET696C Chrome
ET696G Gold

- Lamp: 150W PAR38
- Lamp not included



Line Voltage 120V PAR Builder's Track Kits


Kit Includes: (3) Track Fixtures, (1) 4 Ft. Track, and (1) Floating Canopy. Lamp not included. Dimmability based on lamp



Step Cylinder Track Kit

ET665W White
ET665B Black

- Lamp: 75W PAR30
- Track Kit Includes: (3) Step Cylinder Fixtures (ET637)
- Lamps not included






Flat Back Track Kit

ET666W White
ET666B Black

- Lamp: 75W PAR30
- Track Kit Includes: (3) Flat Back Fixtures (ET635)
- Lamps not included

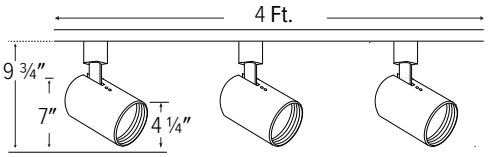




Round Back Track Kit

ET667W White
ET667B Black

- Lamp: 75W PAR30
- Track Kit Includes: (3) Round Back Fixtures (ET639)
- Lamps not included

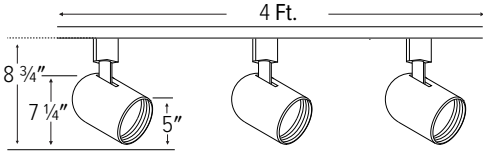

Line Voltage Track Fixtures


For use with 120V Single or Two Circuit Track. Lamp not included. Dimmability based on lamp



Flat Back Cylinder with Clear Reflector

ET1135W White
ET1135B Black
ET1135WG White w/Gold Ring
ET1135BG Black w/Gold Ring

- Lamp: 26W MAX. Medium Base self ballasted CFL Lamp
- Lamp not included






Round Back Cylinder with Clear Reflector

ET1139W White
ET1139B Black

- Lamp: 26W MAX. Medium Base self ballasted CFL Lamp
- Lamp not included






Solid Cone with Clear Reflector

ET1158W White
ET1158B Black

- Lamp: 26W MAX. GU24 Base self ballasted CFL or LED Lamp
- Lamp not included



Wall Wash Track Fixtures

For use with 120V Single or Two Circuit Track




LED Wall Wash

DIMMABLE

ETC464B Black

- 70W, 5300 lm, 3500K
- CRI80+
- Dimmable

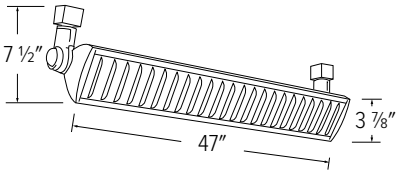



Wall Wash Fluorescent

ETC424W White


- Lamp: (2) 24W High output T5 fluorescent (not included)
- 24 ½″ Length

ETC439B Black

- Lamp: (2) 39W High output T5 fluorescent (not included)
- 36 ½″ Length

ETC454B Black

- Lamp: (2) 54W High output T5 fluorescent (not included)
- 47″ Length






Wall Wash Compact Fluorescent

ETC420W White
ETC420B Black

- Lamp: (1) 26W, 32W, 42W, 4-Pin lamp (not included)



H.I.D. Metal Halide PAR Track Fixtures

For use with 120V Single or Two Circuit Track




PAR20 Metal Halide

ET794W White/20W
ET794B Black/20W

ET795W White/39W
ET795B Black/39W

- Lamp: PAR20 Metal Halide
- Lamp not included






PAR30 Metal Halide

ET796W White/39W
ET796B Black/39W

ET797W White/70W
ET797B Black/70W

- Lamp: PAR30 Metal Halide
- Lamp not included






PAR38 Metal Halide

ET798W White/70W
ET798B Black/70W

- Lamp: PAR38 Metal Halide
- Lamp not included






PAR20 Adjustable Metal Halide

ET734W White
ET734B Black

- Lamp: 39W PAR20 Metal Halide
- Lamp not included






PAR30 Adjustable Metal Halide

ET735W White
ET735B Black

- Lamp: 70W PAR30 Metal Halide
- Lamp not included






PAR38 Adjustable Metal Halide

ET736W White
ET736B Black

- Lamp: 100W PAR38 Metal Halide
- Lamp not included



H.I.D. Metal Halide MR16 Track Fixtures

For use with 120V Single or Two Circuit Track




Decorative Gimbal

ET771W White/20W
ET771B Black/20W

ET772W White/39W
ET772B Black/39W

- Lamp: MR16 Metal Halide GX10 Base
- Lamp not included






Decorative Gimbal

ET773W White/20W
ET773B Black/20W

ET774W White/39W
ET774B Black/39W

- Lamp: MR16 Metal Halide GX10 Base
- Lamp not included






Track Lighting **Accessories**


ELCO Lighting provides a wide range of track lighting accessories to build on or add to any existing track systems. We offer easy to install single or two circuit tracks, connectors, power feeds, monopoint canopies, mounting accessories, and a variety of other track lighting accessories. Our high quality accessories are suitable for use in residential, commercial and retail applications.

Single & Two Circuit Tracks

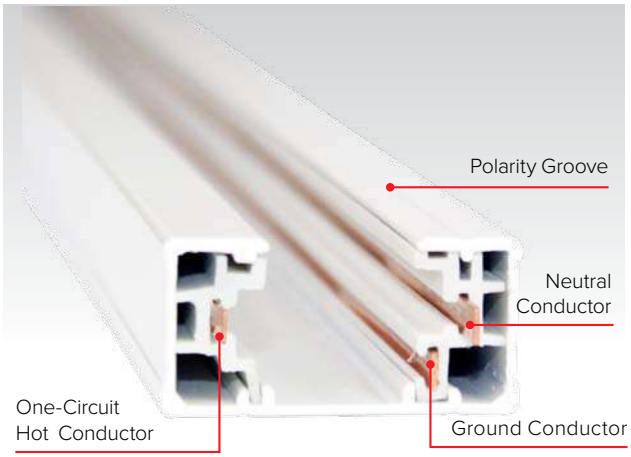

Single Circuit Track

Elco Single Circuit Track is UL/CUL listed, 120V, 20 amp circuit and is solid, safe and easy to use, with quality recognized throughout the lighting industry. For use in residential, commercial and retail applications.

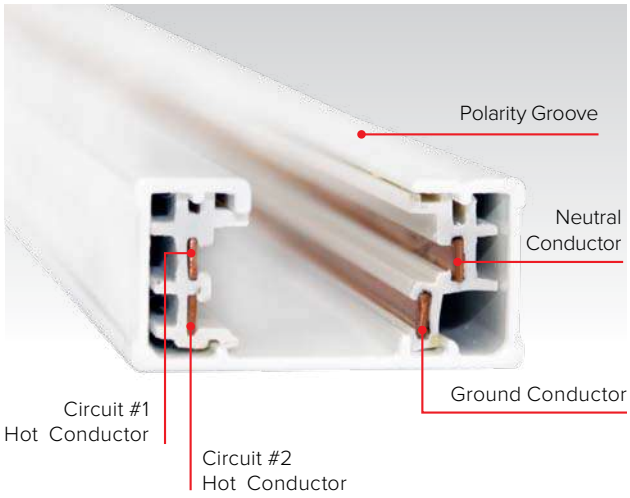

Two Circuit Track

ELCO Two Circuit Track is UL/CUL listed, 120V, 20 amps per circuit and provides greater system flexibility. The ELCO two circuit track system allows each 20 amp circuit to be independently switched. Provides maximum flexibility, with a low profile. Suitable for a wide range of commercial, merchandising and residential applications.

Connectors
Connectors push easily into the ends of the track, eliminating splicing. Polarity arrows on connectors assure proper electrical installation. Just align arrows with polarity line on track and push in. L's, T's, X's and Flexible Connector allow track to be assembled in almost any pattern.

Grounding
To ensure safe operation the entire track system is fully polarized and grounded. Grounding is accomplished automatically by a separate solid copper ground conductor in the track. The ground conductor maintains continuity to the building's grounding system through the ground contact fingers in each of the connectors.

Installation of Track Head
Most Elco track head can be use on single and two circuit track systems. The track head has a stem, with three blades. Two rigid blades on one side, and a single adjustable blade on the other. The single blade can move up or down until it locks into position for the circuit #1 (close to lamp) or circuit #2 (away from lamp).

Polarity
The visual polarity groove on the top of the single and two circuit track indicates the neutral/ground side of the track. For proper fixture installation, insert the lamp holder into the track and turn (twist) the two-blade side of the lamp holder towards (into) the polarity side of the track.

Single Circuit Track and Accessories




Single Circuit Track

Track supplied with dead end and mounting hardware.

White		Black	
EP002W	2′	**EP002B**	2′
EP004W	4′	**EP004B**	4′
EP006W	6′	**EP006B**	6′
EP008W	8′	**EP008B**	8′
EP012W	12′	**EP012B**	12′


Bronze		Nickel	
EP002BZ	2′	**EP002N**	2′
EP004BZ	4′	**EP004N**	4′
EP006BZ	6′	**EP006N**	6′
EP008BZ	8′	**EP008N**	8′



Live End Connector

Live end connector use for direct wiring.


EP801W White
EP801B Black
EP801BZ Bronze
EP801N Nickel



Flexible Connector

Flexible connector to join two track sections at an angle up to 90º. Can be used as a feed point.


EP802W White
EP802B Black
EP802BZ Bronze
EP802N Nickel



Straight Connector

Power feedable connector to join two track sections.


EP803W White
EP803B Black
EP803BZ Bronze
EP803N Nickel



L Connector

Power feedable connector to join two track sections at a 90° angle.


EP804W White
EP804B Black
EP804BZ Bronze
EP804N Nickel



T Connector

Power feedable connector to join three track sections.


EP805W White
EP805B Black
EP805BZ Bronze
EP805N Nickel



X Connector

Power feedable connector to join four track sections.


EP806W White
EP806B Black
EP806BZ Bronze
EP806N Nickel



Mini Connector

Mini Connector to join two track sections. Cannot be used as a feed point.

EP808W White
EP808B Black
EP808BZ Bronze
EP808N Nickel




Floating Canopy

Can be used anywhere along length of track to supply power. Includes end cap.

EP809W White
EP809B Black
EP809BZ Bronze
EP809N Nickel

Single Circuit Track Accessories



End Feed Kit

Kit includes live end feed and canopy to mount on outlet box. 4 ½" x 4 ½" x ¼" thick.


EP810W	White
EP810B	Black
EP810BZ	Bronze
EP810N	Nickel



Dead End

Dead end cap for single and two circuit track.


EP812W	White
EP812B	Black
EP812BZ	Bronze
EP812N	Nickel



T-Bar Ceiling Feed

Live feed with outlet box for use with T-bar ceilings.


EP817W	White
EP817B	Black
EP817BZ	Bronze
EP817N	Nickel



Dead Mini Connector

Dead Mini Connector to join two track sections without passing the power.


EP825W	White
EP825B	Black
EP825BZ	Bronze
EP825N	Nickel



T-Bar Ceiling Feed

In-line T-bar ceiling feed.


EP827W	White
EP827B	Black



Cord and Plug Connector

Cord and Plug Connector for single circuit track. 10 Amp MAX. or 1200W. 12 ft. long.


EP850W	White
EP850B	Black
EP850BZ	Bronze
EP850N	Nickel



Conduit Connector

To start a surface run.

EP880W	White
EP880B	Black
EP880BZ	Bronze
EP880N	Nickel




Conduit Continuation Kit

Kit includes: (1) Left and (1) Right feed, to continue around obstructions with ½" surface conduit.

EP979W	White
EP979B	Black

Single Circuit Track Accessories






Live Feed with Current Limiter

Current Limiter for single circuit track. 1A to 12A available.

White		Black		Bronze	
EP840W-1A	1 Amp	**EP840B-1A**	1 Amp	**EP840BZ-1A**	1 Amp
EP840W-2A	2.5 Amp	**EP840B-2A**	2.5 Amp	**EP840BZ-2A**	2.5 Amp
EP840W-3A	3 Amp	**EP840B-3A**	3 Amp	**EP840BZ-3A**	3 Amp
EP840W-4A	4 Amp	**EP840B-4A**	4 Amp	**EP840BZ-4A**	4 Amp
EP840W-5A	5 Amp	**EP840B-5A**	5 Amp	**EP840BZ-5A**	5 Amp
EP840W-7A	7.5 Amp	**EP840B-7A**	7.5 Amp	**EP840BZ-7A**	7.5 Amp
EP840W-10A	10 Amp	**EP840B-10A**	10 Amp	**EP840BZ-10A**	10 Amp
EP840W-12A	12 Amp	**EP840B-12A**	12 Amp	**EP840BZ-12A**	12 Amp





In-Line Feed Connector with Current Limiter

Current Limiter for single circuit track. 1A to 12A available.

White		Black	
EP841W-1A	1 Amp	**EP841B-1A**	1 Amp
EP841W-2A	2.5 Amp	**EP841B-2A**	2.5 Amp
EP841W-3A	3 Amp	**EP841B-3A**	3 Amp
EP841W-4A	4 Amp	**EP841B-4A**	4 Amp
EP841W-5A	5 Amp	**EP841B-5A**	5 Amp
EP841W-7A	7.5 Amp	**EP841B-7A**	7.5 Amp
EP841W-10A	10 Amp	**EP841B-10A**	10 Amp
EP841W-12A	12 Amp	**EP841B-12A**	12 Amp

Two Circuit Track and Accessories



Two Circuit Track

Track supplied with dead end and mounting hardware.


White

EC002W 2′
EC004W 4′
EC006W 6′
EC008W 8′



Black


EC002B 2′
EC004B 4′
EC006B 6′
EC008B 8′



Live End Connector

Two Circuit live end connector to start a run.


EC801W White
EC801B Black



Flexible Connector

Power feedable connector to join two track sections up to 90° angle.


EC802W White
EC802B Black



Straight Connector

Power feedable connector to join two track sections.


EC803W White
EC803B Black



L Connector

Power feedable connector to join two track sections at a 90° angle.


EC804W White
EC804B Black



T Connector

Power feedable connector to join three track sections.


EC805W White
EC805B Black



X Connector

Power feedable connector to join four track sections.


EC806W White
EC806B Black



Mini Connector

Mini Connector to join two track sections. Cannot be used as a feed point

EC808W White
EC808B Black




Floating Canopy

Can be used anywhere along length of track to supply power. Includes end cap.

EC809W White
EC809B Black

Two Circuit Track Accessories






Dead End

Dead End Cap for single and two circuit track.

EC812W White
EC812B Black






T-Bar Ceiling Feed

Live feed with outlet box for use with T-bar ceilings.

EC817W White
EC817B Black





Conduit Connector

To start a surface run.


EC880W White
EC880B Black



Two Circuit Live-End Feed Connector with Current Limiter

1A to 12A available. Separate circuit breaker for each circuit. Custom current rating available upon request.

EC840W White
EC840B Black



Product Number Builder	ELCO 2 Circuit Live-End Feed	Finish	Circuit 1	Circuit 2
	EC840	**W** White **B** Black	**1A** 1 Amp **2A** 2.5 Amp **3A** 3 Amp **4A** 4 Amp **5A** 5 Amp **7A** 7.5 Amp **10A** 10 Amp **12A** 12.5 Amp	**1A** 1 Amp **2A** 2.5 Amp **3A** 3 Amp **4A** 4 Amp **5A** 5 Amp **7A** 7.5 Amp **10A** 10 Amp **12A** 12.5 Amp


Example: **EC840W1A7A** [ELCO 2 Circuit Live-End Feed, White, 1 Amp, 7 Amp]



Two Circuit In-Line Feed Connector with Current Limiter

1A to 12A available. Separate circuit breaker for each circuit. Custom current rating available upon request.


EC841W White
EC841B Black



Product Number Builder	ELCO 2 Circuit In-Line Feed	Finish	Circuit 1	Circuit 2
	EC841	**W** White **B** Black	**1A** 1 Amp **2A** 2.5 Amp **3A** 3 Amp **4A** 4 Amp **5A** 5 Amp **7A** 7.5 Amp **10A** 10 Amp **12A** 12.5 Amp	**1A** 1 Amp **2A** 2.5 Amp **3A** 3 Amp **4A** 4 Amp **5A** 5 Amp **7A** 7.5 Amp **10A** 10 Amp **12A** 12.5 Amp

Example: **EC841B2A12A** [ELCO 2 Circuit In-Line Feed, Black, 2.5 Amp, 12.5 Amp]

General Track Accessories



Louvers

Louver for ET630 for PAR30.

EP222W White
EP222B Black

Louver for ET631 and ET633 for PAR30.

EP333W White
EP333B Black

Louver for ET640 and ET650 for PAR38.


EP444W White
EP444B Black



Snoot

1 ½" Snoot to reduce glare and spill light. For use with ET526, ET527, ET531, and ET535.

EP300W White
EP300B Black



Barndoors

Barndoors for ET640 and ET650 for PAR38 or R40 with holder ring.


EP422W White
EP422B Black



Track Adapter Trim

For use with standard 6" recessed housings. Allow track lamp holders to be use with recessed intallations. Up to 150W MAX. 7 ½" O.D.


EP577W White
EP577B Black



Outlet Box Cover

Outlet box cover. Screws not included. 5" x 5" x 1⁄16" x 1 1⁄4" Sq.

EP800W White
EP800B Black
EP800BZ Bronze



Monopoint Canopy

Allows any lamp holder (300W MAX.) to be converted to canopy installation. For Line Voltage fixtures.


EP811W White
EP811B Black
EP811BZ Bronze
EP811N Nickel



Sign Hanger

Sign Hanger with hook for single and two circuit track. Holds up to 25 lbs.

EP813W White
EP813B Black
EP813BZ Bronze
EP813N Nickel



Outlet Adapter

Outlet Adapter for single and two circuit track.

EP814W White
EP814B Black
EP814BZ Bronze
EP814N Nickel




Pendant Adapter

For single and two circuit track with strain relief connector for cord or chain hung fixtures. Holds up to 25 lbs.

EP815W White
EP815B Black
EP815BZ Bronze
EP815N Nickel


General Track Accessories



Canopy Adapter

For Low Voltage fixtures with transformer. Can be used with EP900.

EP816W White
EP816B Black
EP816BZ Bronze
EP816N Nickel



Round Monopoint Canopy

For Line Voltage fixtures. 4 ⅝" O.D.

EP819W White
EP819B Black
EP819BZ Bronze



Barndoors

For use with ET547.


EP820W White
EP820B Black

For use with ET631, ET635, ET637, ET639, and ET644.

EP822W White
EP822B Black

For use with ET630.


EP823W White
EP823B Black



Straight Channel

Provides support for straight connection points in suspended track system. Track sits inside the channel. 16 ¼" long.


EP844W White
EP844B Black



L Channel

Support corner connection points in suspended track system. Track sits inside the channel. 16 ¼" long in each side.


EP845W White
EP845B Black



Dimmer Switch

Dimmer with ON/OFF switch. For Line Voltage fixtures. 150W MAX


EP901W White
EP901B Black



Clamp Cord and Plug

Clamp with 6 ft.cord and plug with female track connector for attaching a Line Voltage fixture.

EP903W White
EP903B Black



48" Steel Stem

For additional pendant length. Includes coupling. Use with EP918, EP924, EP936, and EP948.

EP904W White
EP904B Black




T-Bar Attachment Clip

Allows track to be attached to inverted T-Bar ceiling. Order as follow: (2) clips for 2′ or 4′ track, (3) clips for 6′ track, (4) clips for 8′ or 12′ track.

EP989B

General Track Accessories



Slope Ceiling Fixture Adapter

Allows use of extension wands on slope ceiling. 0°-90°.

EP906W White
EP906B Black



Track Pendant Kit

Track pendant kit with 60″ stainless steel cable. 1⁄16″ stranded.

EP960W White
EP960B Black



Clamp Cord and Track Adapter

Connects to Line Voltage track. Includes female track connector for attaching a Line Voltage fixture.

EP907W White
EP907B Black



Pendant Assembly

Suspends track from ceiling. Order as follow: (2) kits for 2′ or 4′ track, (3) kits for 6′ track, (4) kits for 8′ track, (5) kits for 12′, (1) EP807 per feed.


White		Black	
EP918W	18″	**EP918B**	18″
EP924W	24″	**EP924B**	24″
EP936W	36″	**EP936B**	36″
EP948W	48″	**EP948B**	48″



Sloped Ceiling Pendant Adapter

Sloped Ceiling Pendant adapter for use with EP918, EP924, EP936, and EP948.


EP905W White
EP905B Black



Wire Cover

Wire cover for power feed through with pendant assembly. One per run. For use with EP918 to EP948.

EP807W White
EP807B Black
EP807BZ Bronze
EP807N Nickel



Extension Wand

Line voltage extension wands. Drops head from track.

White		Black	
EP881W	6″	**EP881B**	6″
EP882W	12″	**EP882B**	12″
EP818W	18″	**EP818B**	18″
EP824W	24″	**EP824B**	24″
EP836W	36″	**EP836B**	36″
EP848W	48″	**EP848B**	48″



Pendant Lighting

Add a pop of color to your kitchen island with a series of our sleek and stylish glass pendants. Modern and traditional shapes combined with popular colors makes our glass pendants the perfect addition to any home design. Available in LED, Line and Low Voltage, our energy efficient pendants are designed to save you money, maintenance and energy.

LED Die-Cast Aluminum Pendants

Sleek and modern die-cast aluminum pendants

LED Die-Cast Aluminum Pendants include a Flat Canopy





White
EDL8030W
700 lm
3000K
10W

White
EDL8040W
750 lm
4000K
10W

Black
EDL8030B
700 lm
3000K
10W

Black
EDL8040B
750 lm
4000K
10W

LED Bait™ (2″ x 8″)

DIMMABLE

- Modern Die-cast Aluminum Pendant
- Canopy included
- ETL listed
- 50,000 hours life-span
- Optional beam angle lens: EP719C (15°) or EP720C (25°)

Input Power	10W
Lumens	700 - 750
Color Temp.	3000K - 4000K
Input Volt	120V
Dimmable	Yes
Beam Angle	38°





White
EDL8130W
1490 lm
3000K
18W

White
EDL8140W
1610 lm
4000K
18W

Black
EDL8130B
1490 lm
3000K
18W

Black
EDL8140B
1610 lm
4000K
18W

LED Bait™ (3″ x 8″)

DIMMABLE

- Modern Die-cast Aluminum Pendant
- Canopy included
- ETL listed
- 50,000 hours life-span
- Optional beam angle lens: EP722C (15°) or EP723C (25°)

Input Power	18W
Lumens	1490 - 1610
Color Temp.	3000K - 4000K
Input Volt	120V
Dimmable	Yes
Beam Angle	38°





Optional Steel Stems for LED Die-Cast Aluminum Pendants

EP883W White
EP883B Black

- 24″ L x ⅜″ O.D.

EP884W White
EP884B Black

- 48″ L x ⅜″ O.D.

EP885W White
EP885B Black

- 72″ L x ⅜″ O.D.

LED Die-Cast Aluminum Pendants

Sleek and modern die-cast aluminum pendants

LED Die-Cast Aluminum Pendants include a Flat Canopy





White
EDL8230W
1920 lm
3000K
30W

White
EDL8240W
2070 lm
4000K
30W

Black
EDL8230B
1920 lm
3000K
30W


Black
EDL8240B
2070 lm
4000K
30W

LED Bait™ (3″ x 10″)

DIMMABLE

- Modern Die-cast Aluminum Pendant
- Canopy included
- ETL listed
- 50,000 hours life-span
- Optional beam angle lens: EP722C (15°) or EP723C (25°)

Input Power	30W
Lumens	1920 - 2070
Color Temp.	3000K - 4000K
Input Volt	120V
Dimmable	Yes
Beam Angle	38°





White
EDL8330W
2690 lm
3000K
40W

White
EDL8340W
2900 lm
4000K
40W

Black
EDL8330B
2690 lm
3000K
40W


Black
EDL8340B
2900 lm
4000K
40W

LED Bait™ (4″ x 10″)

DIMMABLE

- Modern Die-cast Aluminum Pendant
- Canopy included
- ETL listed
- 50,000 hours life-span

Input Power	40W
Lumens	2690 - 2900
Color Temp.	3000K - 4000K
Input Volt	120V
Dimmable	Yes
Beam Angle	38°





Optional Steel Stems for LED Die-Cast Aluminum Pendants

EP883W White
EP883B Black
- 24″ L x ⅜″ O.D.

EP884W White
EP884B Black
- 48″ L x ⅜″ O.D.

EP885W White
EP885B Black
- 72″ L x ⅜″ O.D.

LED Glass Pendants

Add a pop of color to any room space with our modern and stylish glass pendants

LED Glass Pendants include a Flat Canopy with 5W LED Driver





Athena
EDL60N-AT
300 lm
3000K
5W

Cobalt
EDL60N-CO

Frost
EDL60N-FR

Mars
EDL60N-MA


Autumn
EDL60N-AU

LED Bale™

DIMMABLE

- Modern LED Glass Pendant
- ETL Listed
- 50,000 hours life-span
- 6 ½" ft. metal finish cable

Input Power	5W
Lumens	300
Color Temp.	3000K
Input Volt	120V
Dimmable	Yes





Cobalt
EDL61N-CO
300 lm
3000K
5W

Autumn
EDL61N-AU

Athena
EDL61N-AT

Frost
EDL61N-FR


Mars
EDL61N-MA

LED Blake™

DIMMABLE

- Modern LED Glass Pendant
- ETL Listed
- 50,000 hours life-span
- 6 ½" ft. metal finish cable

Input Power	5W
Lumens	300
Color Temp.	3000K
Input Volt	120V
Dimmable	Yes



LED Glass Pendants

Add a pop of color to any room space with our modern and stylish glass pendants

LED Glass Pendants include a Flat Canopy with 5W LED Driver





Mars
EDL62N-MA
300 lm
3000K
5W

Frost
EDL62N-FR

Athena
EDL62N-AT

Autumn
EDL62N-AU


Cobalt
EDL62N-CO


LED Becket™

DIMMABLE

- Modern LED Glass Pendant
- ETL Listed
- 50,000 hours life-span
- 6 ½″ ft. metal finish cable

Input Power	5W
Lumens	300
Color Temp.	3000K
Input Volt	120V
Dimmable	Yes



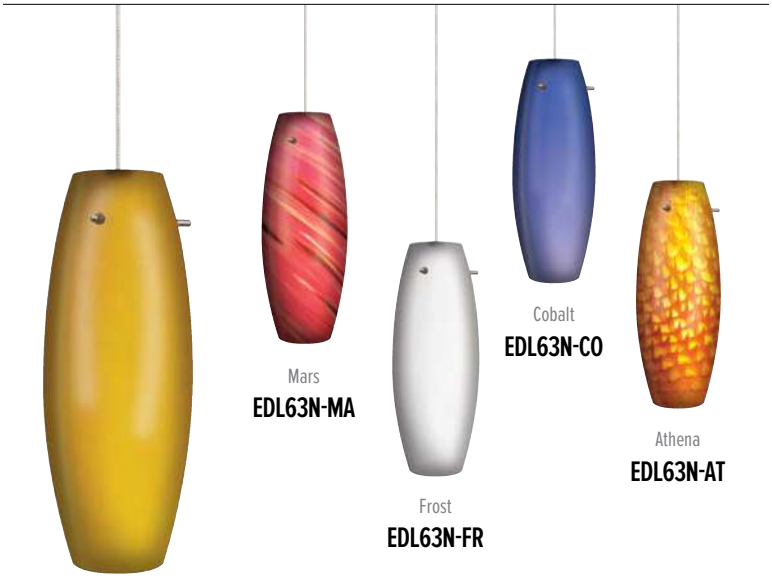

Autumn
EDL63N-AU
300 lm
3000K
5W

Mars
EDL63N-MA

Frost
EDL63N-FR

Cobalt
EDL63N-CO


Athena
EDL63N-AT

LED Barrel™

DIMMABLE

- Modern LED Glass Pendant
- ETL Listed
- 50,000 hours life-span
- 6 ½″ ft. metal finish cable

Input Power	5W
Lumens	300
Color Temp.	3000K
Input Volt	120V
Dimmable	Yes



Line Voltage Glass Pendants


Combine with Line Voltage Monopoint Canopy or Track Connector



Athena	Cobalt	Frost	Mars	Autumn
E10AT	**E10CO**	**E10FR**	**E10MA**	**E10AU**

Line Voltage Bale™

- E12 Socket for 60W MAX. Candelabra Lamp
- Combine with ECT or ETT Line Voltage connectors
- 6 ½ ft. clear finish cord






Athena	Cobalt	Frost	Mars	Autumn
E11AT	**E11CO**	**E11FR**	**E11MA**	**E11AU**

Line Voltage Blake™

- E26 Medium Base Socket for 60W A19 Lamp
- Combine with ECT or ETT Line Voltage connectors
- 6 ½ ft. clear finish cord






Athena	Cobalt	Frost	Mars	Autumn
E12AT	**E12CO**	**E12FR**	**E12MA**	**E12AU**

Line Voltage Becket™

- E26 Medium Base Socket for 60W A19 Lamp
- Combine with ECT or ETT Line Voltage connectors
- 6 ½ ft. clear finish cord



Line Voltage Glass Pendants


Combine with Line Voltage Monopoint Canopy or Track Connector



Athena **E13AT** | Cobalt **E13CO** | Frost **E13FR** | Mars **E13MA** | Autumn **E13AU**

Line Voltage Barrel™

- E12 Socket for 60W MAX. Candelabra Lamp
- Combine with ECT or ETT Line Voltage connectors
- 6 ½ ft. clear finish cord



Line Voltage Glass Pendants **Accessories**



Monopoint Canopy

ECTW White
ECTB Black
ECTN Nickel

- ⅝″ H x 5″ O.D.



Track Connector

ETTW White
ETTB Black
ETTN Nickel

- For 1 or 2 Circuit Tracks

Low Voltage Glass Pendants


Combine with Low Voltage Track Connectors



Athena **E20AT** | Cobalt **E20CO** | Frost **E20FR** | Mars **E20MA** | Autumn **E20AU**

Low Voltage Bale™

- GU5.3 Base Socket for 50W MAX. MR16 or JC Lamp
- Combine with ELW, ETV, ECL, ECF, or EP2015 Low Voltage connectors
- 6 ½ ft. clear finish cord






Athena **E21AT** | Cobalt **E21CO** | Frost **E21FR** | Mars **E21MA** | Autumn **E21AU**

Low Voltage Blake™

- GU5.3 Base Socket for 50W MAX. MR16 or JC Lamp
- Combine with ELW, ETV, ECL, ECF, or EP2015 Low Voltage connectors
- 6 ½ ft. clear finish cord






Athena **E22AT** | Cobalt **E22CO** | Frost **E22FR** | Mars **E22MA** | Autumn **E22AU**

Low Voltage Becket™

- GU5.3 Base Socket for 50W MAX. MR16 or JC Lamp
- Combine with ELW, ETV, ECL, ECF, or EP2015 Low Voltage connectors
- 6 ½ ft. clear finish cord



Low Voltage Glass Pendants


Combine with Line Voltage Monopoint Canopy or Track Connector



Athena **E23AT** | Cobalt **E23CO** | Frost **E23FR** | Mars **E23MA** | Autumn **E23AU**

Low Voltage Barrel™

- GU5.3 Base Socket for 50W MAX. MR16 or JC Lamp
- Combine with ELW, ETV, ECL, ECF, or EP2015 Low Voltage connectors
- 6 ½ ft. clear finish cord



Low Voltage Glass Pendants **Accessories**



50W Track Transformer

ELWW White
ELWB Black
ELWN Nickel

- For Low Voltage Pendants



50W Vertical Track Transformer

ETVW White
ETVB Black
ETVN Nickel

- For 1 or 2 Circuit Tracks



50W Semicircular Canopy with Transformer

ECLW White
ECLB Black
ECLN Nickel

- For Low Voltage Pendants



50W Flat Canopy with Transformer

ECFW White
ECFB Black
ECFN Nickel

- For Low Voltage Pendants



Mini Track Adapter

EP2015W White
EP2015B Black

- For Low Voltage Pendants

Low Voltage Decorative Pendants


Decorative Light Pendants to match any room design



Satin Nickel Pendant (Ceiling Mount)

EDL30

- 12V 50W MR16 Lamp
- Satin Nickel Canopy for ceiling mount
- Electronic Transformer
- Matching 60″ cord included






Satin Nickel Pendant

EDL31

- 12V 50W MR16 Lamp
- Track adapter included
- Electronic Transformer
- Matching 60″ cord included






Red Glass Sconce Pendant


- 120V 50W JC Lamp
- Canopy for ceiling mount
- 60″ cord included

EDL70R Black Cord
EDL71R White Cord




- 120V 50W JC Lamp
- Track adapter included
- 60″ cord included

EDL72R Black Cord
EDL73R White Cord



- 12V 50W MR16 Lamp
- Track adapter included
- Transformer and 60″ cord included

EDL74R Black Cord
EDL75R White Cord



Dimmer Compatibility Chart

ET612D, ET613D, ET614D, ET615D, ET616D, ET617, ET61830D,ET61930D, ET62030D, ET62130D, ET62230D, ET62330D, ET62430D, ET62530D, ET62630D, ET62730D, ET62830D, ETW4230, ETW4330 & ETW4430

Manufacturer	Product	Part Number	Dimmed Light Output Range
Triac/ELV Type Dimmers			
Lutron	Ariadni® 150W Single Pole/3-Way Dimmer	AYCL-153P	10% - 100%
	Ariadni® 250W Single Pole/3-Way Dimmer	AYCL-253P	10% - 100%
	Skylark Contour® 150W Single Pole/3-Way Dimmer	CTCL-153P	10% - 100%
	Diva® 150W Single Pole/3-Way Dimmer	DVCL-153P	10% - 100%
	Diva® 250W Single Pole/3-Way Dimmer	DVCL-253P	10% - 100%
	Diva® 450W 3-Way Magnetic Low Voltage Dimmer	DVLV-603P	10% - 100%
	Diva® 150W Single Pole/3-Way Dimmer	DVSCCL-153P	10% - 100%
	Diva® 250W Single Pole/3-Way Dimmer	DVSCCL-253P	10% - 100%
	Diva® 150W Single Pole/3-Way Dimmer	DVWCL-153PH-WH	10% - 100%
	Grafik T® 150W Single Pole Dimmer	GT-150	10% - 100%
	Grafik T® 250W Single Pole/Multi-Location Dimmer	GTJ-250M	10% - 100%
	Maestro® 150W Single Pole/3-Way/Multi-Location Dimmer	MACL-153MH-WH	10% - 100%
	Skylark® 150W Single Pole/3-Way Dimmer	SCL-153P	10% - 100%
	Skylark® 300W Single Pole Electronic Low Voltage Dimmer	SELV-300P	10% - 100%
	Toggler® 150W Single Pole/3-Way Dimmer	TGCL-153P	10% - 100%

ET743D, ET744D, ET745D, ET746D, ETW4030, ETW4040, ETW4130 & ETW4140

Manufacturer	Product	Part Number	Dimmed Light Output Range
Cooper	DEVINE Decorator Single Pole/3-Way Preset Dimmer	DLC03P	10% - 100%
	SKYE Slide Single Pole/3-Way Preset Dimmer	SLC03P	10% - 100%
	AL Series Decorator Single Pole/3-Way Preset Dimmer	DAL06P	10% - 100%
Lightolier	Sunrise 3-Way Preset Electronic Low Voltage Dimmer	ZP260QEW	8% - 100%
Lutron	Skylark® Contour Single Pole/3-Way Dimmer	CT-103P	8% - 100%
	Diva® Single Pole Incandescent/Halogen Preset Dimmer	DV-600P	10% - 100%
	Diva® C·L Single Pole/3-Way Dimmer	DVCL-153P	7% - 100%
	Diva® 3-Way Electronic Low Voltage Dimmer	DVELV-303P	8% - 100%
	Lumea® Single Pole Incandescent/Halogen Preset Dimmer	LG-600P	10% - 100%
	Maestro® Single Pole/Multi-Location Electronic Low Voltage Dimmer	MAELV-600	8% - 100%

Dimmer Compatibility Chart

ET743D, ET744D, ET745D, ET746D, ETW4030, ETW4040, ETW4130 & ETW4140

Manufacturer	Product	Part Number	Dimmed Light Output Range
Lutron	Skylark® Single Pole Incandescent/Halogen Slide to Off Dimmer	S-600P	10% - 100%
	Skylark® Single Pole/3-Way Incandescent/Halogen Preset "Eco-Dim" Dimmer	S-603PG	5% - 85%
	Skylark® Single Pole Electronic Low Voltage Preset Dimmer	SELV-300P	8% - 100%
	Toggler® Single Pole Incandescent Dimmer	TG-600P	10% - 100%
	Toggler® C·L Single Pole/3-Way Dimmer	TGCL-153P	7% - 100%
	Faedra® Single Location Digital Fade Dimmer	FAELV-500	8% - 100%
Leviton	Decora 4-Level Step Electro-Mechanical Incandescent Dimmer	6161	10% - 100%
	SureSlide Electro-Mechanical Incandescent Dimmer	6631-2	10% - 100%
	SureSlide 3-Way Preset Incandescent Dimmer	6633-P	10% - 100%
	Trimatron Deluxe 3-Way Push On/Off Rotary Incandescent Dimmer	6683-IW	10% - 100%
	IllumaTech Single Pole/3-Way Electronic Low Voltage Dimmer	IPE04	8% - 100%
	IllumaTech Single Pole/3-Way Incandescent Dimmer	IPI06-1LZ	10% - 100%
	Vizia Single Pole/3-Way Electronic Low Voltage Dimmer	VPE06	8% - 100%

ET750D & ET752D

Manufacturer	Product	Part Number	Dimmed Light Output Range
Cooper	ASPIRE Decorator Single Pole/3-Way Dimmer	9573WS	10% - 100%
	DEVINE Decorator Dimmer	DI06P-A-K	10% - 100%
Legrand	Adorne® Paddle 450W Single Pole/3-Way Dimmer	ADPD453L-W2	10% - 100%
Leviton	IllumaTech Single Pole/3-Way Incandescent Dimmer	IPI06	10% - 100%
	Decora Sureslide Single Pole Slide-to-Off Incandescent Dimmer	6631-LW	10% - 100%
	Decora Sureslide Single Pole/3-Way Magnetic Low Voltage Dimmer	6613-PL	8% - 100%
Lutron	Ariadni Single Pole/3-Way Dimmer	AY-600P-AL	10% - 100%
	Diva® C·L Single Pole/3-Way Dimmer	DVCL-153PR	7% - 100%
	Diva® Single Pole Incandescent/Halogen Dimmer	DV-600P-WH	10% - 100%
	Glyder® Single Pole Magnetic Low Voltage Dimmer	GLV-600-WH	8% - 100%
	Maestro® Incandescent/Halogen Digital Fade Dimmer	MRF2-600M-WH	10% - 100%
	Nova® Single Pole Incandescent/Halogen Slide-to-Off Dimmer	N-600	10% - 100%
	Skylark® Single Pole/3-Way Incandescent/Halogen "Eco-Dim" Dimmer	S-603PG	5% - 85%
	Skylark® Single Pole/3-Way Incandescent/Halogen Dimmer	S-600P-AL	10% - 100%
	Skylark® Single Pole Magnetic Low Voltage Dimmer	SLV-600-WH	8% - 100%

Dimmer Compatibility Chart

ET756

Manufacturer	Product	Part Number	Dimmed Light Output Range
Cooper	ASPIRE Single Pole/3-Way Dimmer	9530	10% - 100%
Lightolier	Momentum Preset Single Pole/Multi-Location Incandescent Dimmer	MP600	10% - 100%
Philips	Sunrise Single Pole/3-Way Dimmer	SR150LED120	10% - 100%
Lutron	Skylark® Single Pole Magnetic Low Voltage Preset Dimmer	SLV-600	8% - 100%
	Skylark® Single Pole Incandescent/Halogen Dimmer	S2-L	10% - 100%
	Glyder® Single Pole Incandescent/Halogen Slide-to-Off Dimmer	GL-600H	10% - 100%
	Nova® Single Pole 2-Wire Fluorescent Slide-to-Off Dimmer	NFTU-5A	10% - 100%
	Diva® Single Pole Magnetic Low Voltage Dimmer	DVLV-600P	8% - 100%
Leviton	Trimatron Deluxe Single Pole Rotary On/Off Electro-Mechanical Incandescent Dimmer	6602	10% - 100%
	Trimaatron Deluxe Single Pole Rotary Push On/Off Electro-Mechanical Incandescent Dimmer	6681	10% - 100%
	Trimatron Deluxe 3-Way Illuminated Rotary Pus On/Off Electro-Mechanical Incandescent Dimmer	6684	10% - 100%
	Rotary Single Pole Dimmer	700	10% - 100%
	Rotary Single Pole Push On/Off Dimmer	705	10% - 100%
	Decora SureSlide 3-Way Preset Incandescent Dimmer	6633	10% - 100%
	Decora SureSlide Single Pole/3-Way Preset Dimmer	6674	10% - 100%
	IllumaTech Single Pole/3-Way Preset Dimmer	IPI06-1LZ	10% - 100%

For Reference Only: Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

*NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details


Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used.

Photometric Report

LED Track Fixtures

PHOTOMETRIC REPORT

Product #: ET612D
Wattage/Lumens: 10W / 701 lm
Luminaire LPW: 70 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	1460
5	322
15	892
25	382
35	120
45	37
55	14
65	4
75	1
85	0
90	0

ILLUMINANCE AT A DISTANCE


Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	91.2	2.6′
6′	40.6	4.0′
8′	22.8	5.3′
10′	14.6	6.6′

ZONAL LUMEN SUMMARY

Zone	Lumens	%Luminaire
0-30°	557.07	79.50
0-40°	647.19	92.40
0-60°	695.87	99.30
0-90°	700.67	100.00

PHOTOMETRIC REPORT

Product #: ET740
Wattage/Lumens: 10W / 603 lm
Luminaire LPW: 60 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	2054
5	2003
15	973
25	403
35	141
45	10
55	6
65	5
75	3
85	1
90	0

ILLUMINANCE AT A DISTANCE


Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	128	1.7′
6′	57.0	2.6′
8′	32.1	3.5′
10′	20.5	4.4′

ZONAL LUMEN SUMMARY

Zone	Lumens	%Luminaire
0-30°	526.75	87.30
0-40°	585.07	97.00
0-60°	596.91	98.90
0-90°	603.27	100.00

PHOTOMETRIC REPORT

Product #: ET741
Wattage/Lumens: 10W / 581 lm
Luminaire LPW: 58 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	1131
5	1119
15	908
25	459
35	143
45	12
55	7
65	3
75	2
85	1
90	0

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	70.7	3.0′
6′	31.4	4.6′
8′	17.7	6.1′
10′	11.3	7.6′

ZONAL LUMEN SUMMARY


Zone	Lumens	%Luminaire
0-30°	501.47	86.30
0-40°	563.07	96.90
0-60°	576.81	99.20
0-90°	581.26	100.00

Photometrics

LED Track Fixtures

PHOTOMETRIC REPORT

Product #: ET742
Wattage/Lumens: 10.1 W / 600 lm
Luminaire LPW: 59 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	869
5	868
15	753
25	532
35	219
45	17
55	7
65	4
75	2
85	1
90	0

ILLUMINANCE AT A DISTANCE


Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	54.3	3.9′
6′	24.1	5.9′
8′	13.6	7.8′
10′	8.69	9.8′

ZONAL LUMEN SUMMARY

Zone	Lumens	%Luminaire
0-30°	482.06	80.30
0-40°	577.17	96.10
0-60°	595.20	99.10
0-90°	600.42	100.00

PHOTOMETRIC REPORT

Product #: ET743D
Wattage/Lumens: 15.6 W / 937 lm
Luminaire LPW: 60 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	3401
5	2494
15	673
25	423
35	321
45	86
55	12
65	8
75	6
85	2
90	1

ILLUMINANCE AT A DISTANCE


Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	213	1.2′
6′	94.5	1.9′
8′	53.1	2.5′
10′	34.0	3.1′

ZONAL LUMEN SUMMARY

Zone	Lumens	%Luminaire
0-30°	632.58	67.50
0-40°	829.31	88.50
0-60°	922.34	98.40
0-90°	937.05	100.00

PHOTOMETRIC REPORT

Product #: ET744D
Wattage/Lumens: 15.6 W / 940 lm
Luminaire LPW: 60 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	2306
5	1983
15	794
25	423
35	319
45	94
55	14
65	8
75	7
85	2
90	1

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	144	1.8′
6′	64.0	2.7′
8′	36.0	3.6′
10′	23.1	4.4′

ZONAL LUMEN SUMMARY


Zone	Lumens	%Luminaire
0-30°	631.98	67.30
0-40°	828.41	88.20
0-60°	925.26	98.50
0-90°	939.69	100.00

Photometrics

LED Track Fixtures

PHOTOMETRIC REPORT

Product #: ET745D
Wattage/Lumens: 15.6 W / 936 lm
Luminaire LPW: 60 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	1524
5	1410
15	936
25	461
35	318
45	90
55	17
65	9
75	7
85	1
90	1

ILLUMINANCE AT A DISTANCE


Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	95.3	2.7′
6′	42.3	4.1′
8′	23.8	5.5′
10′	15.2	6.8′

ZONAL LUMEN SUMMARY

Zone	Lumens	%Luminaire
0-30°	618.60	66.10
0-40°	816.87	87.30
0-60°	917.51	98.00
0-90°	936.11	100.00

PHOTOMETRIC REPORT

Product #: ET746D
Wattage/Lumens: 14.8 W / 949 lm
Luminaire LPW: 64 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	1000
5	995
15	845
25	632
35	441
45	204
55	23
65	14
75	9
85	4
90	1

ILLUMINANCE AT A DISTANCE


Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	62.5	4.4′
6′	24.8	6.6′
8′	15.6	8.8′
10′	10.0	11.0′

ZONAL LUMEN SUMMARY

Zone	Lumens	%Luminaire
0-30°	572.21	60.30
0-40°	811.68	85.50
0-60°	926.81	97.70
0-90°	949.10	100.00

PHOTOMETRIC REPORT

Product #: ET750D
Wattage/Lumens: 13.4 W / 1135 lm
Luminaire LPW: 85 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	3094
5	2768
15	1417
25	562
35	194
45	63
55	26
65	6
75	1
85	1
90	1

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	193	1.9′
6′	85.9	2.9′
8′	48.3	3.9′
10′	30.9	4.9′

ZONAL LUMEN SUMMARY


Zone	Lumens	%Luminaire
0-30°	898.68	79.20
0-40°	1042.61	91.80
0-60°	1127.19	99.30
0-90°	1135.27	100.00

Photometrics

LED Track Fixtures

PHOTOMETRIC REPORT

Product #: ET752D
Wattage/Lumens: 13.4 W / 1127 lm
Luminaire LPW: 84 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	2349
5	2127
15	1436
25	615
35	194
45	60
55	22
65	6
75	1
85	1
90	1

ILLUMINANCE AT A DISTANCE


Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	147	2.6′
6′	65.2	4.0′
8′	36.7	5.3′
10′	23.5	6.6′

ZONAL LUMEN SUMMARY

Zone	Lumens	%Luminaire
0-30°	896.30	79.50
0-40°	1041.31	92.40
0-60°	1119.62	99.30
0-90°	1127.35	100.00

PHOTOMETRIC REPORT

Product #: ET753
Wattage/Lumens: 28.7 W / 2250 lm
Luminaire LPW: 78 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	13984
5	10642
15	2926
25	848
35	268
45	109
55	48
65	20
75	9
85	4
90	3

ILLUMINANCE AT A DISTANCE


Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	874	1.2′
6′	388	1.8′
8′	218	2.4′
10′	140	3.0′

ZONAL LUMEN SUMMARY

Zone	Lumens	%Luminaire
0-30°	1947.89	86.60
0-40°	2106.68	93.60
0-60°	2221.72	98.70
0-90°	2250.03	100.00

PHOTOMETRIC REPORT

Product #: ET754
Wattage/Lumens: 28.7 W / 2291 lm
Luminaire LPW: 80 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	6275
5	5884
15	3397
25	1206
35	273
45	99
55	44
65	20
75	9
85	3
90	2

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	392	2.2′
6′	174	3.3′
8′	98.0	4.4′
10′	62.7	5.6′

ZONAL LUMEN SUMMARY


Zone	Lumens	%Luminaire
0-30°	1972.9	86.10
0-40°	2147.59	93.80
0-60°	2261.93	98.80
0-90°	2290.55	100.00

Photometrics

LED Track Fixtures

PHOTOMETRIC REPORT

Product #: ET755
Wattage/Lumens: 28.6 W / 2181 lm
Luminaire LPW: 76 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	4927
5	4693
15	3240
25	1212
35	356
45	133
55	56
65	25
75	10
85	3
90	2

ILLUMINANCE AT A DISTANCE


Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	308	2.7′
6′	137	4.0′
8′	77.0	5.3′
10′	49.3	6.7′

ZONAL LUMEN SUMMARY

Zone	Lumens	%Luminaire
0-30°	1784.07	81.80
0-40°	1997.59	91.60
0-60°	2144.79	98.40
0-90°	2180.66	100.00

PHOTOMETRIC REPORT

Product #: ET756D
Wattage/Lumens: 14.3 W / 1013 lm
Luminaire LPW: 71 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	5005
5	4594
15	1708
25	373
35	66
45	18
55	5
65	2
75	1
85	1
90	1

ILLUMINANCE AT A DISTANCE


Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	313	1.5′
6′	139	2.3′
8′	78.2	3.1′
10′	50.1	3.9′

ZONAL LUMEN SUMMARY

Zone	Lumens	%Luminaire
0-30°	937.43	92.50
0-40°	990	97.70
0-60°	1011.09	99.80
0-90°	1013.15	100.00

PHOTOMETRIC REPORT

Product #: ET757D
Wattage/Lumens: 28.6 W / 2061 lm
Luminaire LPW: 72 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	10180
5	9345
15	3475
25	758
35	134
45	37
55	10
65	4
75	3
85	1
90	1

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	636	1.5′
6′	283	2.3′
8′	159	3.1′
10′	102	3.9′

ZONAL LUMEN SUMMARY


Zone	Lumens	%Luminaire
0-30°	1906.69	92.50
0-40°	2012.83	97.70
0-60°	2056.51	99.80
0-90°	2060.7	100.00

Photometrics

LED Wall Wash Track Fixtures

PHOTOMETRIC REPORT

Product #: ETW4030
Wattage/Lumens: 31.4 W / 2439 lm
Luminaire LPW: 78 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	995
5	990
15	970
25	840
35	709
45	558
55	403
65	251
75	104
85	15
90	3

ILLUMINANCE AT A DISTANCE


Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	62.2	9.1′
6′	27.6	13.7′
8′	15.5	18.3′
10′	9.95	22.9′

ZONAL LUMEN SUMMARY

Zone	Lumens	%Luminaire
0-30°	746.87	30.60
0-40°	1195.33	49.00
0-60°	2009.73	82.40
0-90°	2438.51	100.00

PHOTOMETRIC REPORT

Product #: ETW4130
Wattage/Lumens: 62 W / 4854 lm
Luminaire LPW: 78 lm / W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	1970
5	1958
15	1856
25	1663
35	1405
45	1106
55	798
65	495
75	203
85	33
90	5

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4′	123	9.1′
6′	54.7	13.7′
8′	30.8	18.3′
10′	19.7	22.9′

ZONAL LUMEN SUMMARY

Zone	Lumens	%Luminaire
0-30°	1480.41	30.50
0-40°	2370.55	48.80
0-60°	3989.58	82.20
0-90°	4853.88	100.00

Index

E10 80
E11 80
E12 80
E13 81
E20 82
E21 82
E22 82
E23 83
EC002 70
EC004 70
EC006 70
EC008 70
EC801 70
EC802 70
EC803 70
EC804 70
EC805 70
EC806 70
EC808 70
EC809 70
EC812 71
EC817 71
EC840 71
EC841 71
EC880 71
ECF 83
ECL 83
ECT 81
EDL30 84
EDL31 84
EDL60N 78
EDL61N 78
EDL62N 79
EDL63N 79
EDL70 84
EDL71 84
EDL72 84
EDL73 84
EDL74 84
EDL75 84
EDL8030 76
EDL8040 76
EDL8130 76
EDL8140 76
EDL8230 77
EDL8240 77
EDL8330 77
EDL8340 77
ELW 83
EP002 67
EP004 67
EP006 67
EP008 67
EP012 67
EP222 72
EP300 72
EP322 18
EP323 19
EP324 19
EP333 72
EP422 72
EP444 72
EP555 23
EP577 72
EP666 23
EP702 43
EP800 72
EP801 67
EP802 67
EP803 67
EP804 67
EP805 67
EP806 67
EP807 74
EP808 67
EP809 67
EP810 68
EP811 72
EP812 68
EP813 72
EP814 72
EP815 72
EP816 73
EP817 68
EP818 74
EP819 73
EP820 ..... 20, 73
EP821 ..... 20, 34
EP822 73
EP823 73
EP824 74
EP825 68
EP827 68
EP836 74
EP840B-1A 69
EP840B-2A 69
EP840B-3A 69
EP840B-4A 69
EP840B-5A 69
EP840B-7A 69
EP840B-10A 69
EP840B-12A 69
EP840BZ-1A 69
EP840BZ-2A 69
EP840BZ-3A 69
EP840BZ-4A 69
EP840BZ-5A 69
EP840BZ-7A 69
EP840BZ-10A 69
EP840BZ-12A 69
EP840W-1A 69
EP840W-2A 69
EP840W-3A 69
EP840W-4A 69
EP840W-5A 69
EP840W-7A 69
EP840W-10A 69
EP840W-12A 69
EP841B-1A 69
EP841B-2A 69
EP841B-3A 69
EP841B-4A 69
EP841B-5A 69
EP841B-7A 69
EP841B-10A 69
EP841B-12A 69
EP841W-1A 69
EP841W-2A 69
EP841W-3A 69
EP841W-4A 69
EP841W-5A 69
EP841W-7A 69
EP841W-10A 69
EP841W-12A 69
EP844 73
EP845 73
EP848 74
EP850 68
EP880 68
EP881 74
EP882 74
EP883 ..... 76, 77
EP884 ..... 76, 77
EP885 ..... 76, 77
EP900 43
EP901 73
EP903 73
EP904 73
EP905 74
EP906 74
EP907 74
EP918 74
EP924 74
EP936 74
EP948 74
EP960 74
EP979 68
EP989 73
EP2015 83
ET128 42
ET132 42
ET169 42
ET426 44
ET428 44
ET432 44
ET502 31
ET504 31
ET505 31
ET507 31
ET526 31
ET526-12 40
ET526-18 40
ET526-24 40
ET526-36 40
ET526-48 40
ET526-75 31
ET527 31
ET528 32
ET528-12 40
ET528-18 40
ET528-24 40
ET528-36 40
ET528-48 40
ET528-75 32
ET529 32
ET530 32
ET530-12 40
ET530-18 40
ET530-24 40
ET530-36 40
ET530-48 40
ET531 32
ET532 32
ET532-12 40
ET532-18 40
ET532-24 40
ET532-36 40
ET532-48 40
ET532-75 32
ET534 33
ET534-12 41
ET534-18 41
ET534-24 41
ET534-36 41
ET534-48 41
ET535 33
ET536 33
ET537 33
ET539 33
ET539-75 33
ET540 33
ET541 34
ET544 34
ET546 34
ET547 34
ET548 ..... 35, 41
ET549 35
ET550 34
ET551 35
ET554 35
ET558 36
ET558-12 41
ET558-18 41
ET558-24 41
ET558-36 41
ET558-48 41
ET559 36
ET562 36
ET563 36
ET565 37
ET565-12 41
ET565-18 41
ET565-24 41
ET565-36 41
ET565-48 41
ET566 38
ET567 38
ET568 38
ET570 37
ET578L30 6
ET579L30 15
ET579L35 15
ET579L40 15
ET580D 5
ET591 21
ET592 21
ET593 21
ET594D 22
ET597 22
ET598 6
ET599D 5
ET612D 7
ET613D 7
ET614D 8
ET615D 8
ET616-27D 9

Index

ET616-40D 9
ET616D 9
ET617-40D 9
ET617D 9
ET629 52
ET630 52
ET631 52
ET633 52
ET634 52
ET635 52
ET636 53
ET637 53
ET638 53
ET639 53
ET640 53
ET641 53
ET642 54
ET643 54
ET644 54
ET646 54
ET647 54
ET650 54
ET654 55
ET655 55
ET656 55
ET657 55
ET658 55
ET659 55
ET660 56
ET661 56
ET662 56
ET665 60
ET666 60
ET667 60
ET668 56
ET669 56
ET673 56
ET674 57
ET675 57
ET676 57
ET677 57
ET681 57
ET682 57
ET685 58
ET686 58
ET687 58
ET690 58
ET691 58
ET692 58
ET693 59
ET694 59
ET695 59
ET696 59
ET734 63
ET735 63
ET736 63
ET740 10
ET741 10
ET742 10
ET743-35D 11
ET743-40D 11
ET743D 11
ET744-35D 11
ET744-40D 11
ET744D 11
ET745-35D 11
ET745-40D 11
ET745D 11
ET746-35D 11
ET746-40D 11
ET746D 11
ET750D 12
ET752D 12
ET753D 12
ET754D 12
ET755D 12
ET756D 13
ET757D 13
ET771 64
ET772 64
ET773 64
ET774 64
ET794 63
ET795 63
ET796 63
ET797 63
ET798 63
ET926 43
ET928 43
ET932 43
ET1135 61
ET1139 61
ET1158 61
ET1528 37
ET1603 46
ET1604 46
ET1625 46
ET1626 47
ET1628 47
ET1630 47
ET1632 48
ET1634 48
ET1650 48
ET1654 49
ET1671 50
ET1673 50
ET1687 49
ET1728 49
ET61830D 16
ET61930D 16
ET62030D 17
ET62040D 17
ET62130D 17
ET62140D 17
ET62230D 18
ET62330D 19
ET62430D 19
ET62530D 15
ET62630D 15
ET62730D 18
ET62830D 20
ET74730 10
ET75830D 14
ET75930D 14
ETC420 62
ETC439 62
ETC454 62
ETC464 62
ETL2130 27
ETL2140 27
ETLD526 29
ETLD526-12 39
ETLD526-18 39
ETLD526-24 39
ETLD526-36 39
ETLD526-48 39
ETLD528 29
ETLD528-12 39
ETLD528-18 39
ETLD528-24 39
ETLD528-36 39
ETLD528-48 39
ETLD530 29
ETLD532 30
ETLD534 30
ETLD558 30
ETT 81
ETV 83
ETW4030 23
ETW4040 23
ETW4130 23
ETW4140 23
ETW4230 24
ETW4240 24
ETW4330 24
ETW4340 24
ETW4430 25
ETW4440 25
MR120 44
MR120-GU10 50
MR120-GU10LD 50

ELCAT1058



ELCO Lighting

Corporate Headquarters

2042 E. Vernon Ave.
Vernon, CA 90058
Tel: 323.231.2600
Fax: 323.231.3200
elcolighting.com

Customer Service

Tel: 800.522.2626
Fax: 800.644.2626
orderdesk@elcolighting.com
customerservice@elcolighting.com
sales@elcolighting.com

Printed in the U.S.A. 1/19
$18.00

© ELCO Lighting. The marks appearing in this catalog are registered trademarks of ELCO Lighting. Other marks use herein are recognized trademarks of their respective companies. Products shown in this brochure may be covered by U.S. and international patents. Specifications subject to change without notice.