
TOGGLE SWITCHES

Versatile toggle switch family with multiple position configurations.

- Available in single or double pole.
- Perfect for industrial equipment or emergency lighting.
- Mounts in standard 1/2" diameter hole.
- Standard nut size (15/32"- 32).
- Commonly used on: Power Tools, Panel Controls, Appliances, Circulation Fans, Marine, Motors and Grinders.


GSW-10

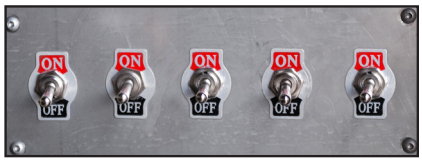

tip: All switches must be installed with a hex nut (provided) behind panel to prevent damage during installation.

Part Number	GSW-10	GSW-11*	GSW-17*	GSW-110	GSW-111	GSW-121L*	GSW-124	GSW-121	GSW-122	GSW-127	GSW-18*	GSW-125
Poles & Throws	SPST											
Toggle Position	ON-OFF	ON-OFF	ON-OFF	ON-OFF	ON-OFF	ON-OFF	ON-OFF	ON-OFF	ON-OFF	ON-OFF	ON-OFF	ON-OFF
Terminal Type (# of terminals)	Screw (2)	Screw (2)	Screw (2)	"O" Ring & Screw (2)	Screw (2)	Screw (2)	Screw (2)	Spade (2)	Spade (2)	Spade (2)	6" Wire Leads (2)	6" Wire Leads (2)
Actuator	Bat Shaped	Bat Shaped	Bat Shaped	Bat Shaped	Bat Shaped, Long Handle	Long Shank & Short Ball	Short Ball	Bat Shaped	Bat Shaped	Bat Shaped	Bat Shaped	Short Ball
Rating	1½ HP 125-250 VAC, 20A/125-227 VAC	1½ HP 125-250 VAC, 20A/125-227 VAC	3A/240 VAC, 6A/120 VAC	1½ HP 125-250 VAC, 20A/125-227 VAC	¾ HP 125-250 VAC, 20A/125 VAC, 10A/277 VAC	3A/250 VAC, 6A/125 VAC	3A/240 VAC, 6A/120 VAC	1½ HP 125-250 VAC, 20A/125-227 VAC	¾ HP 125-250 VAC, 20A/125 VAC, 10A/277 VAC	18(12) A/125 VAC	⅓ HP 125 VAC, 4A/250 VDC, 8A/125 VDC, 10A/125 VAC	⅓ HP 125 VAC, 4A/250 VDC, 8A/125 VDC, 10A/125 VAC

**Switch has an ON-OFF faceplate*

Part Number	GSW-12	GSW-13	GSW-117	GSW-120
Poles & Throws	SPDT			
Toggle Position	ON-ON	ON-OFF-ON	(ON)-OFF-(ON)	ON-OFF-ON
Terminal Type (# of terminals)	Screw (3)	Screw (3)	Screw (3)	Spade (3)
Actuator	Bat Shaped	Bat Shaped	Bat Shaped	Bat Shaped
Rating	1½ HP 125-250 VAC, 20A/125-277 VAC	1½ HP 125-250 VAC, 20A/125-277 VAC	1½ HP 125-250 VAC, 20A/125-277 VAC	1½ HP 125-250 VAC, 20A/125-277 VAC

Part Number	GSW-14	GSW-140
Poles & Throws	DPST	
Toggle Position	ON-OFF	ON-OFF
Terminal Type (# of terminals)	Screw (4)	Spade (4)
Actuator	Bat Shaped	Bat Shaped
Rating	1½ HP 125-250 VAC, 20A/125-277 VAC	10A/125-250 VAC

Part Number	GSW-15	GSW-16	GSW-123	GSW-126	GSW-143
Poles & Throws	DPDT				
Toggle Position*	ON-ON	ON-OFF-ON	(ON)-OFF-(ON)	ON-OFF-ON	ON-OFF-ON
Terminal Type (# of terminals)	Screw (6)	Screw (6)	Screw (6)	Spade (6)	Spade (6)
Actuator	Bat Shaped	Bat Shaped	Bat Shaped	Bat Shaped	Bat Shaped
Rating	1½ HP 125-250 VAC, 20A/125-277 VAC	1½ HP 125-250 VAC, 20A/125-277 VAC	1½ HP 125-250 VAC, 20A/125-277 VAC	1½ HP 125-250 VAC, 10A/277 VAC, 20A/125 VAC	10A/125-250 VAC

**( ) Indicates momentary action*