
## Features

Mini-toggles provide for multiple switches in a compact single gang. Maximize control while maintaining function and appearance.

- Low profile, less than 1 inch
- Self-grounding feature is standard
- Combination devices provide compact switches in a single-gang opening
- Smooth toggle action
- Multiple-drive Slot/Phillips/Robertson head screws
- Hi-visibility yellow base for easy installation
- Operating temperature: -20°C to 60°C
- UL Listed, CSA Certified

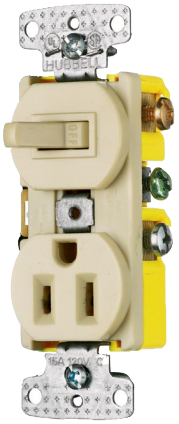

RC108I

### Combination Toggle Switches/Devices

| Description | Two (2) Single Pole Switches. | Single Pole Switch, Tamper-Resistant, 2 Pole, 3 Wire, Receptacle. TR | Single Pole Switch, 2 Pole, 3 Wire, Receptacle. | Single Pole Switch, Pilot Light, Clear Lens, Amber Neon Bulb*. |
|---|---|---|---|---|
| Termination | Self-Grounding, Side Wire | Self-Grounding, Side Wire | Self-Grounding, Side Wire | Self-Grounding, Side Wire |
| Rating | 15A 120V AC | 15A 120V (switch)<br>15A 125V (recept.)<br>NEMA 5-15R | 15A 120V (switch)<br>15A 125V (recept.)<br>NEMA 5-15R | 15A 120V AC |
| Color |  |  |  |  |
| Brown<br>Ivory<br>Light Almond<br>White | **RC101**<br>**RC101I**<br>**RC101LA**<br>**RC101W** | **RC108TR**<br>**RC108ITR**<br>**RC108LATR**<br>**RC108WTR** | **RC108**<br>**RC108I**<br>**RC108LA**<br>**RC108W** | **RC109**<br>**RC109I**<br>**RC109LA**<br>**RC109W** |

*Note: See page Tech-10 for Tamper-Resistant description. *Neutral required for pilot light, see page BB-4 for wiring diagram.*

### Combination Toggle Switches/Devices

| Description | Single Pole and Three Way Switch. | Two (2) Three Way Switches. | Three Way Switch, Tamper-Resistant, 2 Pole, 3 Wire, Receptacle. TR | Three Way Switch, 2 Pole, 3 Wire, Receptacle. | Three Way Switch, Pilot Light, Clear Lens, Amber Neon Bulb*. |
|---|---|---|---|---|---|
| Termination | Self-Grounding, Side Wire | Self-Grounding, Side Wire | Self-Grounding, Side Wire | Self-Grounding, Side Wire | Self-Grounding, Side Wire |
| Rating | 15A 120V AC | 15A 120V AC | 15A 120V (switch)<br>15A 125V (recept.)<br>NEMA 5-15R | 15A 120V (switch)<br>15A 125V (recept.)<br>NEMA 5-15R | 15A 120V AC |
| Color |  |  |  |  |  |
| Brown<br>Ivory<br>Light Almond<br>White | **RC103**<br>**RC103I**<br>**RC103LA**<br>**RC103W** | **RC303**<br>**RC303I**<br>**RC303LA**<br>**RC303W** | **RC308TR**<br>**RC308ITR**<br>**RC308LATR**<br>**RC308WTR** | **RC308**<br>**RC308I**<br>—<br>**RC308W** | **RC309**<br>**RC309I**<br>—<br>**RC309W** |

*Note: See page Tech-10 for Tamper-Resistant description. *Neutral required for pilot light, see page BB-4 for wiring diagram.*

*Dimensions in Inches (mm)*