PECO
PRODUCTO ELECTRIC CORP





WORLD-CLASS ELECTRICAL CONDUIT FITTINGS AND ACCESSORIES

- Cable Supports
- EMT Fittings
- Rigid/IMC Fittings
- Hazardous Location Fittings
- Liquidtight Fittings
- Cable Connectors
- Strain Relief Cord Grips
- PVC Fittings
- Weatherproof Products
- Service Entrance
- Installation Supports
- Grounding

WWW.PECO-ELECTRIC.COM

Since 1935, PECO has been an American, family-owned business, and a reliable, trusted, and "no nonsense" source of world-class electrical conduit fittings and accessories for thousands of electricians, contractors, and distributors across the United States and Canada.



Dear Valued Customer,

At Producto Electric Corporation (PECO), we have always strived to have long-term relationships with our customers, sales representatives and suppliers. Our new catalog embodies this approach by incorporating industry feedback based on the needs of our customers and targeting methodologies to overcome the global supply chain challenges to be the premier provider within the fittings industry.

Since 1935, PECO has been a name synonymous with the electrical conduit fittings and accessories business. Now, we have our 3rd and 4th generations of our family running the business and investing in our growth and revival as we approach our 90th year of continuous operations. We pride ourselves in being a US-based, family-owned and operated business.

We are rounding out our products lines and expanding our partnerships with sales representatives and distributors who share in our philosophy of being smaller and more agile in the face of corporate consolidations and acquisitions. Our goals are to remain dedicated to continuous improvement in our NY-based manufacturing processes, customer service, and support to our valued sales representatives, who are also the lifeblood of PECO.

We look forward to the coming years as we grow together in the United States, North America, and other strategic locations around the world. We thank you for your loyalty and partnership, and we will continue to invest in our collective success.

Sincerely,

Scott Aronson
President

Please visit us on our website and follow us on LinkedIn.
Be a partner in our future success.

www.peco-electric.com **/company/producto-electric**

PECO
PRODUCTO ELECTRIC CORP

CONTENTS

About PECO i

Terms & Conditions ii

Cable Support Profile iii

Hazardous Locations Profile iv

PRODUCT CATEGORIES

Cable Supports 1

EMT Fittings 3

Rigid/IMC Fittings 11

Hazardous Locations Fittings 23

Liquidtight Fittings 27

Cable Connectors 30

Strain Relief Cord Grips 33

PVC Fittings 36

Weatherproof Products 41

Service Entrance 44

Installation Supports 46

Grounding 48

Miscellaneous 51

Index 53

NEED HELP? CONTACT OUR FRIENDLY CUSTOMER SERVICE
845-359-4900 • CUSTOMERSERVICE@PECO-ELECTRIC.COM

ABOUT PECO



Founded in 1935, PECO is headquartered in Orangeburg, New York, just 20 miles north of New York City. We make Hazardous Location products for other large manufacturers in the industry—and are one of only two Underwriter Laboratory-listed manufacturers of Cable Support Bodies and Wedges.

PECO provides an extensive line of premium-quality electrical construction products to service commercial, industrial, and residential electrical distributors. Our tier-one support is coordinated across a strong nationwide network of sales representatives and distribution partners to satisfy all of our customers' purchasing requirements.

PECO's national distribution network is anchored from our New York location with current stocking warehouses strategically located throughout the continental United States and in Puerto Rico, which supports our Caribbean business.

OUTSTANDING QUALITY

EXCEPTIONAL CUSTOMER SERVICE

EXTENSIVE INVENTORY + FAST TURNAROUND

An American Icon for Generations of Distributors + Contractors

Throughout our history, PECO has thrived by continuously translating American ingenuity, working-class grit, and entrepreneurial agility into innovation, quality, and service. Even as our nation and industry has adapted to challenges—from wars, industrial expansions and economic booms to globalization and technological advances, PECO has been counted on to remain at the very heart of the electrical and construction industries.

An Intense Focus on our Mission

Throughout these eras, PECO has stayed focused on its mission: serving as a partner to representatives, distributors, and contractors who continue to reward us for new product ideas and designs that made their job easier, their projects more efficient and their time on task shorter and trouble-free.

Freedom Tower and WTC Plaza

We are proud to have our UL-listed Cable Support Bodies and Wedges in the new Freedom Tower and other WTC Plaza buildings. We were able to support our nation at a critical time by providing these components on an exceptionally accelerated turnaround basis.

TERMS & CONDITIONS

1. ORDER ACCEPTANCE: Purchaser agrees that all Purchase Orders and final contracts between the purchaser and PECO are subject to the terms and conditions indicated in this catalog. Any order containing different or additional terms to those set forth herein shall be deemed material alterations and are subject to specific approval by PECO.

2. MINIMUM ORDER: A minimum charge of $200.00 will be made for each invoice. Orders for less than $200.00 can be processed for a $25.00 small order handling fee.

3. CASH DISCOUNT: Upon approved credit, the following terms will apply; 2% Cash Discount, 10th prox., net 30 days. To earn this discount, invoices dated 1st through 25th inclusive are payable on the 10th of the following month. Invoices dated 26th through 31st inclusive are considered for cash discount purposes only as being dated the first day of the following month and are payable as such. Invoices bear the date the order was shipped. Cash discount does not apply to transportation, special packaging, or other special preparation or handling charges.

4. FREIGHT: Full freight is allowed of $1200.00 for shipments made to locations East of the Mississippi and $1,500.00 for shipments made to locations West of the Mississippi.
Orders that do not meet the above requirements will be shipped prepaid, and charges to be added to invoices. Special routing requests such as air freight or other special handling will be shipped freight collect, except direct to job sites which will be shipped prepaid and charged.

5. CLAIMS: All PECO shipments are made F.O.B. shipping location. Title to the goods and risk of loss passes to the Purchaser on delivery to the Common Carrier at the shipping point. Any claim for loss or damage in transit should be filed by the Purchaser with the Common Carrier involved. PECO will not be responsible for any losses after having received "in good order" receipts from the transportation company. Claims for shortages must be reported in writing to PECO in Orangeburg, N.Y. within 30 days after receipt of shipment. Claims not reported within this time period will not be allowed.

6. RETURN GOODS POLICY: PECO will accept items of its manufacture for return and material credit subject to the following conditions:

Prior formal approval with an RGA Number must be secured from the Home Office in Orangeburg. This request may be initiated by the local PECO sales representative and must contain the following information: dates, catalog number, quantities, invoice and order numbers and the reason for the return request.

- All material to be returned must be currently cataloged items, in resalable condition, in full carton quantities. No broken cartons will be accepted.
- Credit will be allowed only on quantities actually received by PECO and subject to PECO inspection.
- A minimum restocking charge of 25% will be applied to all returned materials.
- Material purchased more than 12 months-prior to the return request are not returnable.
- Return shipments must be prepaid to the warehouse designated.
- Credit will be issued in the form of material credit only. Cash refunds will not be made.

7. LIMITED WARRANTY: PECO fittings, if properly used, are guaranteed against mechanical, electrical and physical defects for a period of one year from the date of shipment from our factory. No other express warranties or guarantees are intended or implied and are expressly disclaimed. Our obligation under this guarantee shall be limited to furnishing new fittings in exchange for fittings inspected by us and found to be defective and any other direct or consequential costs are expressly excluded.

8. PRICES: Subject to change without notice and are those in effect at the time of shipment. Any written quotations for specific quantities will be protected for 30 days unless otherwise noted in the original quote.

9. TAXES: PECO reserves the right to add to the sales price any tax imposed by law on the sale of our products.

10. SPECIAL ORDERS: Orders for special items not listed in our catalog which includes items modified per customer specification or unusual quantities of a standard catalog item produced especially for an order are accepted only on a non-cancelable, nonreturnable basis.

11. GENERAL NOTES:

- Producto Electric Corporation's fittings meet the requirements of Federal specifications:
  W-F-408C Fittings for cable, power, electrical and conduit, metal flexible.
  W-F-408D Fittings for conduit, metal, rigid (thick wall & thin wall EMT) type.
- Underwriters Laboratories listings will be supplied upon request.
- Products are manufactured per NEMA FB-1 to be utilized according to the National Electric Code.
- NAED/DC1 No. 78-5244.
- Product weights shown our catalog are approximate and are meant for shipping information only.



PECO
PRODUCTO ELECTRIC CORP

HIGHEST QUALITY
CABLE SUPPORTS

The level of construction in the U.S. continues to escalate at a rapid pace. In many cities, the only option is to build up!

Producto Electric Corp (PECO) features a fittings line led by our cable supports for vertical raceways and risers for high-rise buildings, making us well positioned to support the construction industry.

Proudly used in construction of the Freedom Tower at One World Trade Center



PECO has a complete UL-listed assembly for Cable Supports (Bodies & Wedges) and is one of only two manufacturers in the U.S. to meet the requirements of the NFPA 70® National Electric Code. Other manufacturers, along with their distributors, only have UL-listed bodies which presents risk and exposure to the contractors for a non-compliant installation.

"PECO has been a true partner. They have a quick turnaround for getting us the Cable Support bodies and wedges and have a quality product. It is nice to know that we can not only speak to a live person on the phone but that the product is also configured and fabricated right here in New York."
~NYC Distributor

THE PECO ADVANTAGE

We complete all wire configurations & customizations in our New York manufacturing location.

Our production team's special skill set can turn around high-quality products more rapidly than our only industry competitor.

SPECS ON BACK

CONTACT OUR FRIENDLY CUSTOMER SERVICE **845-359-4900 • CUSTOMERSERVICE@PECO-ELECTRIC.COM**

HAZARDOUS LOCATION FITTINGS – FLEXIBLE COUPLINGS (FCs)


The PECO Flexible Couplings (FCs) are made right here in the US and cut/configured at our factory in Orangeburg, NY. They are all made from bronze braided tubing, have an arc resistant liner and come with two female threaded-end fittings and two male nipples.

The FCs are c UL us LISTED listed for sizes ½" to 2" and lengths up to 36" for each size (equal to ECGJH). Custom lengths are available, yet third party certifications are not available for lengths >36".

APPLICATIONS
Explosion Proof and Dust Ignition Proof FCs are designed for use in areas where machine vibration or movement is a problem. They can also be used in place of rigid conduit in difficult bend situations. They are corrosion resistant and watertight.


USES

- Chemical Plants
- Food and Beverage Plants
- Energy and Power Utilities Facilities
- Oil, Gas, Petroleum Refineries
- Pulp and Paper Facilities
- Wastewater Plants

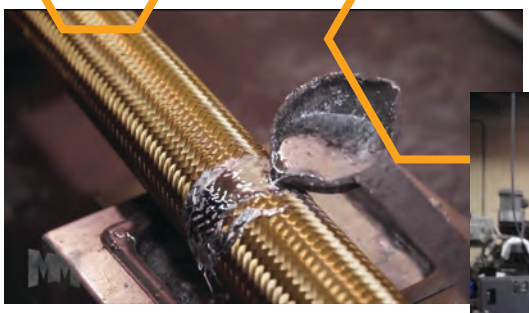

Preparing to cut, smooth & weld the FC.



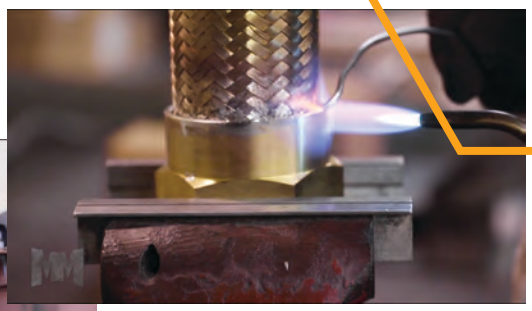

DID YOU KNOW?
Materials used for the FCs were also used in the US space program. Tried, tested and proven!

PECO's FCs are regarded as among the highest quality in the industry. Under agreement, we make them for two of the leading manufacturers in the electrical industry.

See our Hazardous Location Section of this catalog or visit www.PECO-electric.com for more hazardous location products.

PECO
PRODUCTO ELECTRIC CORP

CABLE SUPPORTS

CABLE SUPPORT WEDGES

CABLE SUPPORT BODIES

CABLE SUPPORT RETROFIT BODIES



CS150-B

HIGHEST QUALITY

CABLE SUPPORTS

FEATURES

- Supports cables in vertical raceways or risers per the NFPA 70® National Electric Code
- Meets UL-listing requirements for both body & wedge assembly in High Rise Buildings (> than 75ft in height)
- Custom-cut insulating wedges for your specific application (customized at PECO's U.S. factory)
- Designed for indoor use with non-armored electrical cable at voltages up to and including 600V – for vertical conduit raceways and risers
- Required whenever the vertical rise of conductors in a raceway exceeds the values listed on back (Support Requirements for Conductors)

APPLICATIONS

- For use with non-armored electrical cables in vertical conduit raceways and risers





UL LISTED 6C32

CABLE SUPPORT WEDGES

Wood with Black Lacquer Finish

Cat. No.	Trade Size	Std. Pkg.	St. Weight	Large End Dia	Height
		Cut for between 1 and 3 Conductors			
CS-150PT1	1-1/2"	1	0.1	1.75	1.75
CS-200PT1	2"	1	0.3	2.13	2.13
CS-250PT1	2-1/2"	1	0.4	2.83	2.38
CS-300PT1	3"	1	0.4	3.13	2.75
CS-350PT1	3-1/2"	1	0.6	3.63	3.13
CS-400PT1	4"	1	0.7	3.88	3.38
		Cut for between 4 and 6 Conductors			
CS-150PT2	1-1/2"	1	0.1	1.75	1.75
CS-200PT2	2"	1	0.3	2.13	2.13
CS-250PT2	2-1/2"	1	0.4	2.83	2.38
CS-300PT2	3"	1	0.4	3.13	2.75
CS-350PT2	3-1/2"	1	0.6	3.63	3.13
CS-400PT2	4"	1	0.7	3.88	3.38

Support Requirements for Conductors

AWG or Circular-Mill Size of Wire	Support of Conductors in Vertical Raceways	Aluminum or Copper-Clad Aluminum	Copper
1 AWG through 1/0 AWG	Not greater than	200 feet	100 feet
2/0 AWG through 4/0 AWG	Not greater than	180 feet	80 feet
Over 4/0 AWG through 350 kcmil	Not greater than	135 feet	60 feet
Over 350 kcmil through 500 kcmil	Not greater than	120 feet	50 feet
Over 500 kcmil through 750 kcmil	Not greater than	95 feet	40 feet
Over 750 kcmil	Not greater than	85 feet	35 feet

N.E.C. Table 300-19 (a). Spacing for Conductors Supports.
NOTE: Orders are Non-Cancellable and Non-Returnable.

CABLE SUPPORT BODIES

Malleable Iron - Zinc Plated with Phenolic Liner

Cat. No.	Trade Size	Unit Pkg.	Std. Pkg.	Dia	Height
CS-150B	1-1/2"	-	5	2.61	2.16
CS-200B	2"	2	10	3.13	2.25
CS-250B	2-1/2"	2	10	3.63	2.60
CS-300B	3"	2	10	4.25	2.75
CS-350B	3-1/2"	1	5	5.00	3.13
CS-400B	4"	1	5	5.50	3.38



CABLE SUPPORT RETROFIT BODIES

Two Bakelite Body Sections
with Stainless Steel Retaining Straps

Cat. No.	Trade Size	Unit Pkg.	Std. Pkg.	Dia	Height
CSR-200B	2"	3	15	4.77	2.30
CSR-250B	2-1/2"	1	10	5.32	2.70
CSR-300B	3"	1	10	5.96	2.85
CSR-350B	3-1/2"	1	5	6.63	3.33
CSR-400B	4"	1	5	7.26	3.58

PECO
PRODUCTO ELECTRIC CORP

EMT FITTINGS

- SET SCREW CONNECTORS & COUPLINGS
- COMPRESSION CONNECTORS & COUPLINGS
- COMBINATION COUPLINGS
- SET SCREW CONDUIT BODIES
- CONDUIT BODY COVERS & GASKETS
- STRAPS
- ELBOWS



300ST

STEEL EMT SET SCREW CONNECTORS

Connects EMT conduit to a box or enclosure

Features: Concrete-tight when taped
Material: Steel
Certifications: cULus



STANDARD				INSULATED THROAT			
Catalog Number	Trade Size	Uni Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
300ST	1/2"	50	500	300BST	1/2"	50	500
301ST	3/4"	25	250	301BST	3/4"	25	250
302ST	1"	50	200	302BST	1"	50	200
303ST	1 1/4"	25	100	303BST	1 1/4"	25	100
304ST	1 1/2"	10	40	304BST	1 1/2"	10	40
305ST	2"	5	20	305BST	2"	5	20
306ST	2 1/2"	-	12	306BST	2 1/2"	-	12
307ST	3"	-	12	307BST	3"	-	12
308ST	3 1/2"	-	6	308BST	3 1/2"	-	6
309ST	4"	-	6	309BST	4"	-	6

STEEL EMT SET SCREW COUPLINGS

Connects two lengths of EMT conduit

Features: Concrete-tight when taped
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
310ST	1/2"	50	500	315ST	2"	5	20
311ST	3/4"	25	250	316ST	2 1/2"	-	12
312ST	1"	50	200	317ST	3"	-	12
313ST	1 1/4"	25	100	318ST	3 1/2"	-	6
314ST	1 1/2"	10	40	319ST	4"	-	6

STEEL EMT COMPRESSION CONNECTORS

Connects EMT conduit to a box or enclosure

Features: Concrete-tight
Material: Steel
Certifications: cULus



STANDARD				INSULATED THROAT			
Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
260ST	1/2"	50	500	260BST	1/2"	50	500
261ST	3/4"	25	250	261BST	3/4"	25	250
262ST	1"	50	200	262BST	1"	50	200
263ST	1 1/4"	25	100	263BST	1 1/4"	25	100
264ST	1 1/2"	10	40	264BST	1 1/2"	10	40
265ST	2"	5	20	265BST	2"	5	20
266ST	2 1/2"	-	12	266BST	2 1/2"	-	12
267ST	3"	-	12	267BST	3"	-	12
268ST	3 1/2"	-	6	268BST	3 1/2"	-	6
269ST	4"	-	6	269BST	4"	-	6

STEEL EMT COMPRESSION COUPLINGS

Connects two lengths of EMT conduit

Features: Concrete-tight
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
320ST	1/2"	50	500	325ST	2"	5	20
321ST	3/4"	25	250	326ST	2 1/2"	-	12
322ST	1"	50	200	327ST	3"	-	12
323ST	1 1/4"	25	100	328ST	3 1/2"	-	6
324ST	1 1/2"	10	40	329ST	4"	-	6

STEEL EMT RAINTIGHT COMPRESSION CONNECTORS

Connects EMT conduit to a box or enclosure for a raintight fit

Features: Suitable for wet locations, Concrete-tight
Material: Steel
Certifications: cULus



STANDARD				INSULATED THROAT			
Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
260RST	1/2"	50	500	260RBST	1/2"	50	500
261RST	3/4"	25	250	261RBST	3/4"	25	250
262RST	1"	50	200	262RBST	1"	50	200
263RST	1 1/4"	25	100	263RBST	1 1/4"	25	100
264RST	1 1/2"	10	40	264RBST	1 1/2"	10	40
265RST	2"	5	20	265RBST	2"	5	20
266RST	2 1/2"	-	12	266RBST	2 1/2"	-	12
267RST	3"	-	12	267RBST	3"	-	12
268RST	3 1/2"	-	6	268RBST	3 1/2"	-	6
269RST	4"	-	6	269RBST	4"	-	6

STEEL EMT RAINTIGHT COMPRESSION COUPLINGS

Connects two lengths of EMT conduit for a raintight fit

Features: Suitable for wet locations, Concrete-tight
Material: Steel
Certifications: cULus



Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
320RST	1/2"	50	500	325RST	2"	5	20
321RST	3/4"	25	250	326RST	2 1/2"	-	12
322RST	1"	50	200	327RST	3"	-	12
323RST	1 1/4"	25	100	328RST	3 1/2"	-	6
324RST	1 1/2"	10	40	329RST	4"	-	6

ZINC EMT SET SCREW CONNECTORS



Connects EMT conduit to a box or enclosure

Features: Concrete-tight when taped
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
300	1/2"	50	500	305	2"	5	20
301	3/4"	25	250	306	2 1/2"	-	12
302	1"	50	200	307	3"	-	12
303	1 1/4"	25	100	308	3 1/2"	-	6
304	1 1/2"	10	40	309	4"	-	6

ZINC EMT SET SCREW COUPLINGS



Connects two lengths of EMT conduit

Features: Concrete-tight when taped
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
310	1/2"	50	500	315	2"	5	20
311	3/4"	25	250	316	2 1/2"	-	12
312	1"	50	200	317	3"	-	12
313	1 1/4"	25	100	318	3 1/2"	-	6
314	1 1/2"	10	40	319	4"	-	6

ZINC EMT COMPRESSION CONNECTORS



Connects EMT conduit to a box or enclosure

Features: Concrete-tight
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
260	1/2"	50	500	265	2"	5	20
261	3/4"	25	250	266	2 1/2"	-	12
262	1"	50	200	267	3"	-	12
263	1 1/4"	25	100	268	3 1/2"	-	6
264	1 1/2"	10	40	269	4"	-	6

ZINC EMT COMPRESSION COUPLINGS



Connects two lengths of EMT conduit

Features: Concrete-tight
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
320	1/2"	50	500	325	2"	5	20
321	3/4"	25	250	326	2 1/2"	-	12
322	1"	50	200	327	3"	-	12
323	1 1/4"	25	100	328	3 1/2"	-	6
324	1 1/2"	10	40	329	4"	-	6

ZINC 90° SET SCREW CONNECTORS



Use to connect EMT conduit to a steel box or enclosure where a close radius is desired

Features: Concrete-tight when taped
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
300-90	1/2"	25	250
301-90	3/4"	20	200

ZINC 90° COMPRESSION CONNECTORS



Use to connect EMT conduit to a steel box or enclosure where a close radius is desired

Features: Concrete-tight when taped
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
260-90	1/2"	25	250
261-90	3/4"	20	200

EMT OFFSET CONNECTORS EMT TO BOX



Connects EMT conduit to box or enclosure

Features: Concrete-tight when taped
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
300-OC	1/2"	10	100
301-OC	3/4"	10	100
302-OC	1"	10	100

COMBINATION COUPLINGS EMT TO FLEXIBLE CONDUIT


685


686 & 687

Connects EMT conduit to flexible metal conduit

Features: Set-screw to clamp type
Material: Zinc
Certifications: cULus
*Product Approved for EMT to NM cable

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
*685	1/2" EMT to 3/8" Flex	10	100
686	1/2" EMT to 1/2" Flex	10	100
687	3/4" EMT to 3/4" Flex	10	100

COMBINATION COUPLINGS LIQUIDTIGHT TO EMT CONDUIT

Connects Liquidtight conduit to EMT conduit



Features: Liquidtight, Raintight, Oiltight
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-260	1/2"	25	250
RT-261	3/4"	20	200

EMT INSIDE CORNER PULL ELBOWS

Connects 2 lengths of EMT conduit for a 90° inside corner bend



Features: Concrete-tight connection when taped
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
680EMT	1/2"	10	100
681EMT	3/4"	5	50

EMT TO BOX 90° PULL ELBOW

Use to connect EMT conduit to a steel box or enclosure to form a 90° bend



Features: Removable cover facilitates wire pulling
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
650EMT	1/2"	10	100
651EMT	3/4"	5	50

EMT TO EMT 90° PULL ELBOW

Use to connect EMT conduit together on a 90° bend



Features: Removable cover facilitates wire pulling
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
670EMT	1/2"	10	100
671EMT	3/4"	5	50
672EMT	1"	-	25

RIGID AND EMT COMBO PULL ELBOWS

Connects 2 lengths of EMT or Rigid/IMC conduit for a 90 ° bend



Features: Threaded interior for use with Rigid/IMC conduit. Set screws for EMT conduit.
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
FCPE-50	1/2"	10	100
FCPE-75	3/4"	5	50
FCPE-100	1"	-	25
FCPE-125	1 1/4"	-	20

RIGID AND EMT COMBO PULL ELBOWS TO BOX

Connects EMT or Rigid/IMC conduit to box or enclosure



Features: Threaded interior for use with Rigid/IMC conduit. Set screws for EMT conduit.
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
MCPE-50	1/2"	10	100
MCPE-75	3/4"	5	50
MCPE-100	1"	-	25
MCPE-125	1 1/4"	-	20

EMT CONDUIT BODIES TYPE C - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance



Features: Threadless body with set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
C-50AE	1/2"	10	50	C-200AE	2"	-	5
C-75AE	3/4"	10	50	C-250AE	2 1/2"	-	1
C-100AE	1"	5	25	C-300AE	3"	-	1
C-125AE	1 1/4"	-	10	C-350AE	3 1/2"	-	1
C-150AE	1 1/2"	-	10	C-400AE	4"	-	1

EMT CONDUIT BODIES TYPE LB - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance



Features: Threadless body with set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LB-50AE	1/2"	10	50	LB-200AE	2"	-	5
LB-75AE	3/4"	10	50	LB-250AE	2 1/2"	-	1
LB-100AE	1"	5	25	LB-300AE	3"	-	1
LB-125AE	1 1/4"	-	10	LB-350AE	3 1/2"	-	1
LB-150AE	1 1/2"	-	10	LB-400AE	4"	-	1

EMT CONDUIT BODIES TYPE LL - ALUMINUM

Allows access to the interior of a conduit system for inspection, pulling, and maintenance



Features: Threadless body with set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LL-50AE	1/2"	10	50	LL-200AE	2"	-	5
LL-75AE	3/4"	10	50	LL-250AE	2 1/2"	-	1
LL-100AE	1"	5	25	LL-300AE	3"	-	1
LL-125AE	1 1/4"	-	10	LL-350AE	3 1/2"	-	1
LL-150AE	1 1/2"	-	10	LL-400AE	4"	-	1

EMT CONDUIT BODIES TYPE LR - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threadless body with set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LR-50AE	1/2"	10	50	LR-200AE	2"	-	5
LR-75AE	3/4"	10	50	LR-250AE	2 1/2"	-	1
LR-100AE	1"	5	25	LR-300AE	3"	-	1
LR-125AE	1 1/4"	-	10	LR-350AE	3 1/2"	-	1
LR-150AE	1 1/2"	-	10	LR-400AE	4"	-	1

EMT CONDUIT BODIES TYPE T - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threadless body with set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
T-50AE	1/2"	10	50	T-200AE	2"	-	5
T-75AE	3/4"	10	50	T-250AE	2 1/2"	-	1
T-100AE	1"	5	25	T-300AE	3"	-	1
T-125AE	1 1/4"	-	10	T-350AE	3 1/2"	-	1
T-150AE	1 1/2"	-	10	T-400AE	4"	-	1

EMT CONDUIT BODIES W/ COVER & GASKET - TYPE C - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threadless body with set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
CC-50AE	1/2"	10	50	CC-200AE	2"	-	5
CC-75AE	3/4"	10	50	CC-250AE	2 1/2"	-	1
CC-100AE	1"	5	25	CC-300AE	3"	-	1
CC-125AE	1 1/4"	-	10	CC-350AE	3 1/2"	-	1
CC-150AE	1 1/2"	-	10	CC-400AE	4"	-	1

EMT CONDUIT BODIES W/ COVER & GASKET - TYPE LB - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threadless body with set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LBC-50AE	1/2"	10	50	LBC-200AE	2"	-	5
LBC-75AE	3/4"	10	50	LBC-250AE	2 1/2"	-	1
LBC-100AE	1"	5	25	LBC-300AE	3"	-	1
LBC-125AE	1 1/4"	-	10	LBC-350AE	3 1/2"	-	1
LBC-150AE	1 1/2"	-	10	LBC-400AE	4"	-	1

EMT CONDUIT BODIES W/ COVER & GASKET - TYPE LL - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threadless body with set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LLC-50AE	1/2"	10	50	LLC-200AE	2"	-	5
LLC-75AE	3/4"	10	50	LLC-250AE	2 1/2"	-	1
LLC-100AE	1"	5	25	LLC-300AE	3"	-	1
LLC-125AE	1 1/4"	-	10	LLC-350AE	3 1/2"	-	1
LLC-150AE	1 1/2"	-	10	LLC-400AE	4"	-	1

EMT CONDUIT BODIES W/ COVER & GASKET - TYPE LR - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threadless body with set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LRC-50AE	1/2"	10	50	LRC-200AE	2"	-	5
LRC-75AE	3/4"	10	50	LRC-250AE	2 1/2"	-	1
LRC-100AE	1"	5	25	LRC-300AE	3"	-	1
LRC-125AE	1 1/4"	-	10	LRC-350AE	3 1/2"	-	1
LRC-150AE	1 1/2"	-	10	LRC-400AE	4"	-	1

EMT CONDUIT BODIES W/ COVER & GASKET - TYPE T - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threadless body with set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
TC-50AE	1/2"	10	50	TC-200AE	2"	-	5
TC-75AE	3/4"	10	50	TC-250AE	2 1/2"	-	1
TC-100AE	1"	5	25	TC-300AE	3"	-	1
TC-125AE	1 1/4"	-	10	TC-350AE	3 1/2"	-	1
TC-150AE	1 1/2"	-	10	TC-400AE	4"	-	1

COMBINATION CONDUIT BODIES W/COVER & GASKET TYPE C - ALUMINUM



Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
C-50CA	1/2"	10	50	C-125CA	1 1/4"	-	10
C-75CA	3/4"	10	50	C-150CA	1 1/2"	-	10
C-100CA	1"	5	25	C-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET TYPE LB - ALUMINUM



Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LB-50CA	1/2"	10	50
LB-75CA	3/4"	10	50
LB-100CA	1"	5	25
LB-125CA	1 1/4"	-	10
LB-150CA	1 1/2"	-	10
LB-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET TYPE LL - ALUMINUM



Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LL-50CA	1/2"	10	50
LL-75CA	3/4"	10	50
LL-100CA	1"	5	25
LL-125CA	1 1/4"	-	10
LL-150CA	1 1/2"	-	10
LL-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET TYPE LR - ALUMINUM



Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LR-50CA	1/2"	10	50
LR-75CA	3/4"	10	50
LR-100CA	1"	5	25
LR-125CA	1 1/4"	-	10
LR-150CA	1 1/2"	-	10
LR-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET TYPE T - ALUMINUM



Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
T-50CA	1/2"	10	50
T-75CA	3/4"	10	50
T-100CA	1"	5	25
T-125CA	1 1/4"	-	10
T-150CA	1 1/2"	-	10
T-200CA	2"	-	5

CONDUIT BODY COVERS STEEL



Encloses conduit body

Features: Supplied with screws
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
SC-50	1/2"	25	250
SC-75	3/4"	25	250
SC-100	1"	20	250
SC-125	1 1/4" to 1 1/2"	25	100
SC-200	2"	-	50
SC-250	2 1/2" to 3"	-	10
SC-350	3 1/2" to 4"	-	10

CONDUIT BODY COVERS ALUMINUM



Encloses conduit body

Features: Supplied with screws
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
AC-50	1/2"	25	250
AC-75	3/4"	25	250
AC-100	1"	20	250
AC-125	1 1/4" to 1 1/2"	25	100
AC-200	2"	-	50
AC-250	2 1/2" to 3"	-	10
AC-350	3 1/2" to 4"	-	10

CONDUIT BODY GASKETS NEOPRENE



Provides dust and raintight seal between conduit body and cover

Features: Fits all form 5 body types
Material: Neoprene

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
VG-50	1/2"	25	250
VG-75	3/4"	25	250
VG-100	1"	20	250
VG-125	1 1/4" to 1 1/2"	25	100
VG-200	2"	-	50
VG-250	2 1/2" to 3"	-	10
VG-350	3 1/2" to 4"	-	10

CONDUIT BODY WIRE FILL CHART

Die Cast Aluminum Conduit Bodies

Maximum Number of Conductors

Trade Size	LB	C	LL	LR	T
1/2"	N/A	N/A	N/A	N/A	N/A
3/4"	6 AWG	6 AWG	6 AWG	6 AWG	6 AWG
1"	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG
1 1/4"	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG
1 1/2"	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 2 AWG
2"	3 - 4/0 AWG	3 - 2/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG
2 1/2"	300 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 2/0 AWG
3"	350 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM
3 1/2"	3 - 400 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM
4"	3 - 400 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM

Volume in Cu. In.

Trade Size	LB	C	LL	LR	T
1/2"	4.25	4.25	4.25	4.25	4.25
3/4"	7.2	7.2	7.2	7.2	7.2
1"	10.8	10.8	10.8	10.8	10.8
1 1/4"	30.5	30.5	30.5	30.5	30.5
1 1/2"	30.5	30.5	30.5	30.5	30.5
2"	70.7	70.7	70.7	70.7	70.7
2 1/2"	152.5	157.4	157.4	157.4	157.4
3"	152.5	179.8	179.8	179.8	179.8
3 1/2"	311.8	323.0	323.0	323.0	323.0
4"	311.8	323.0	323.0	323.0	323.0

Malleable Iron Conduit Bodies

Maximum Number of Conductors

Trade Size	LB	C	LL	LR	T
1/2"	N/A	N/A	N/A	N/A	N/A
3/4"	3 - 6 AWG	3 - 6 AWG	3 - 6 AWG	3 - 6 AWG	3 - 6 AWG
1"	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG
1 1/4"	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG
1 1/2"	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1 AWG
2"	3 - 3/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG	3 - 2/0 AWG
2 1/2"	3 - 250 MCM	3 - 300 MCM	3 - 300 MCM	3 - 300 MCM	3 - 4/0 AWG
3"	3 - 250 MCM	3 - 350 MCM	3 - 350 MCM	3 - 350 MCM	3 - 4/0 AWG
3 1/2"	3 - 350 MCM	3 - 350 MCM	3 - 350 MCM	3 - 500 MCM	3 - 350 MCM
4"	3 - 350 MCM	3 - 350 MCM	3 - 350 MCM	3 - 500 MCM	3 - 350 MCM

Volume in Cu. In.

Trade Size	LB	C	LL	LR	T
1/2"	4.5	4.5	4.5	4.5	6.0
3/4"	7.5	7.5	7.5	7.5	9.5
1"	12.5	12.5	12.5	12.5	15.0
1 1/4"	32.3	32.3	32.3	32.3	33.0
1 1/2"	35.3	35.3	35.3	35.3	36.0
2"	73.0	73.0	73.0	73.0	75.0
2 1/2"	138.0	138.0	138.0	138.0	138.0
3"	170.0	170.0	170.0	170.0	170.0
3 1/2"	300.0	300.0	300.0	300.0	300.0
4"	328.0	328.0	328.0	328.0	328.0

DISCOVER THE PECO DIFFERENCE



EXTENSIVE INVENTORY + FAST TURNAROUND

EMT 90° CONDUIT ELBOWS

Provides a directional change in an EMT conduit run



Features: Low conductivity, high corrosion resistance
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Radius Min	Length of Straight Min.	Offset Min.	Standard Pkg.
ELB-9050	1/2"	4"	1 1/2"	5 1/2"	50
ELB-9075	3/4"	4 1/2"	1 1/2"	6"	50
ELB-90100	1"	5 3/4"	1 7/8"	7 5/8"	25
ELB-90125	1 1/4"	7 1/4"	2"	9 1/4"	20
ELB-90150	1 1/2"	8 1/4"	2"	10 1/4"	15
ELB-90200	2"	9 1/2"	2"	11 1/2"	10
ELB-90250	2 1/2"	10 1/2"	3"	13 1/2"	1
ELB-90300	3"	13"	3 1/8"	16 1/8"	1
ELB-90350	3 1/2"	15"	3 1/4"	18 1/4"	1
ELB-90400	4"	16"	3 3/8"	19 3/8"	1

EMT 45° CONDUIT ELBOWS

Provides a directional change in an EMT conduit run



Features: Low conductivity, high corrosion resistance
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Radius Min	Length of Straight Min.	Offset Min.	Standard Pkg.
ELB-4550	1/2"	4"	1 1/2"	5 3/8"	50
ELB-4575	3/4"	4 1/2"	1 1/2"	5 3/4"	50
ELB-45100	1"	5 3/4"	1 7/8"	7 1/4"	25
ELB-45125	1 1/4"	7 1/4"	2"	8 1/2"	20
ELB-45150	1 1/2"	8 1/4"	2"	9 1/4"	15
ELB-45200	2"	9 1/2"	2"	10 1/8"	10
ELB-45250	2 1/2"	10 1/2"	3"	12 1/2"	1
ELB-45300	3"	13"	3 1/8"	14 1/2"	1
ELB-45350	3 1/2"	15"	3 1/4"	16 1/8"	1
ELB-45400	4"	16"	3 3/8"	17 1/8"	1

EMT 15° CONDUIT ELBOWS

Provides a directional change in an EMT conduit run



Features: Low conductivity, high corrosion resistance
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Radius Min	Straight Leg Each End	Standard Pkg.
ELB-15125	1 1/4"	7 1/4"	2.781"	30
ELB-15150	1 1/2"	8 1/4"	2.781"	15
ELB-15200	2"	9 1/2"	2.781"	10
ELB-15250	2 1/2"	10 1/2"	3"	1
ELB-15300	3"	13"	3.125"	1
ELB-15350	3 1/2"	15"	3.281"	1
ELB-15400	4"	16"	3.375"	1

EMT 22.5° CONDUIT ELBOWS

Provides a directional change in an EMT conduit run



Features: Low conductivity, high corrosion resistance
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Radius Min	Straight Leg Each End	Standard Pkg.
ELB-22125	1 1/4"	7 1/4"	2.781"	30
ELB-22150	1 1/2"	8 1/4"	2.781"	15
ELB-22200	2"	9 1/2"	2.781"	10
ELB-22250	2 1/2"	10 1/2"	3"	1
ELB-22300	3"	13"	3.125"	1
ELB-22350	3 1/2"	15"	3.281"	1
ELB-22400	4"	16"	3.375"	1

EMT 30° CONDUIT ELBOWS

Provides a directional change in an EMT conduit run



Features: Low conductivity, high corrosion resistance
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Radius Min	Straight Leg Each End	Standard Pkg.
ELB-30125	1 1/4"	7 1/4"	2.781"	30
ELB-30150	1 1/2"	8 1/4"	2.781"	15
ELB-30200	2"	9 1/2"	2.781"	10
ELB-30250	2 1/2"	10 1/2"	3"	1
ELB-30300	3"	13"	3.125"	1
ELB-30350	3 1/2"	15"	3.281"	1
ELB-30400	4"	16"	3.375"	1

EMT STRAPS- ONE HOLE

Supports EMT conduit to mounting surface



Features: Reinforced snap-on feature
Material: Steel
Certifications: cULus
* Dual rated for EMT and Rigid

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
180-S	1/2"	100	1,000	185-S	2"	-	50
181-S	3/4"	100	1,000	*168-S	2 1/2"	-	25
182-S	1"	50	500	*169-S	3"	-	25
183-S	1 1/4"	50	500	*170-S	3 1/2"	-	10
184-S	1 1/2"	50	250	*171-S	4"	-	10

EMT STRAPS- TWO HOLE

Supports EMT conduit to mounting surface



Features: Reinforced snap-on feature
Material: Steel
Certifications: cULus
* Dual rated for EMT and Rigid

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
TH-180S	1/2"	-	250	TH-185S	2"	-	25
TH-181S	3/4"	-	200	*TH-168S	2 1/2"	-	25
TH-182S	1"	-	100	*TH-169S	3"	-	25
TH-183S	1 1/4"	-	50	*TH-170S	3 1/2"	-	10
TH-184S	1 1/2"	-	50	*TH-171S	4"	-	10

PECO
PRODUCTO ELECTRIC CORP

RIGID/IMC FITTINGS

- THREADED CONDUIT BODIES
- CONDUIT BODY COVERS & GASKETS
- SET SCREW CONNECTORS & COUPLINGS
- COMPRESSION CONNECTORS & COUPLINGS
- WATERTIGHT HUBS
- THREE-PIECE COUPLINGS
- SLIP-ON COUPLINGS
- COMBINATION COUPLINGS
- ELBOWS & COUPLINGS
- BUSHINGS & STRAPS
- CLAMP BACKS
- REDUCERS, LOCKNUTS & ELBOWS
- NIPPLES & OFFSET NIPPLES
- PLUGS
- FLOOR FLANGE
- MALE ENLARGER



T-50M

THREADED CONDUIT BODIES TYPE C - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body and Caps Rigid/IMC conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
C-50A	1/2"	10	50	C-200A	2"	-	5
C-75A	3/4"	10	50	C-250A	2 1/2"	-	1
C-100A	1"	5	25	C-300A	3"	-	1
C-125A	1 1/4"	-	10	C-350A	3 1/2"	-	1
C-150A	1 1/2"	-	10	C-400A	4"	-	1

THREADED CONDUIT BODIES TYPE LR - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body and Caps Rigid/IMC conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LR-50A	1/2"	10	50	LR-200A	2"	-	5
LR-75A	3/4"	10	50	LR-250A	2 1/2"	-	1
LR-100A	1"	5	25	LR-300A	3"	-	1
LR-125A	1 1/4"	-	10	LR-350A	3 1/2"	-	1
LR-150A	1 1/2"	-	10	LR-400A	4"	-	1

THREADED CONDUIT BODIES TYPE LB - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body and Caps Rigid/IMC conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LB-50A	1/2"	10	50	LB-200A	2"	-	5
LB-75A	3/4"	10	50	LB-250A	2 1/2"	-	1
LB-100A	1"	5	25	LB-300A	3"	-	1
LB-125A	1 1/4"	-	10	LB-350A	3 1/2"	-	1
LB-150A	1 1/2"	-	10	LB-400A	4"	-	1

THREADED CONDUIT BODIES TYPE T - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body and Caps Rigid/IMC conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
T-50A	1/2"	10	50	T-200A	2"	-	5
T-75A	3/4"	10	50	T-250A	2 1/2"	-	1
T-100A	1"	5	25	T-300A	3"	-	1
T-125A	1 1/4"	-	10	T-350A	3 1/2"	-	1
T-150A	1 1/2"	-	10	T-400A	4"	-	1

THREADED CONDUIT BODIES TYPE LL - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body and Caps Rigid/IMC conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LL-50A	1/2"	10	50	LL-200A	2"	-	5
LL-75A	3/4"	10	50	LL-250A	2 1/2"	-	1
LL-100A	1"	5	25	LL-300A	3"	-	1
LL-125A	1 1/4"	-	10	LL-350A	3 1/2"	-	1
LL-150A	1 1/2"	-	10	LL-400A	4"	-	1

THREADED CONDUIT BODIES W/COVER & GASKET - TYPE C ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body and Caps Rigid/IMC conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
CC-50A	1/2"	10	50	CC-200A	2"	-	5
CC-75A	3/4"	10	50	CC-250A	2 1/2"	-	1
CC-100A	1"	5	25	CC-300A	3"	-	1
CC-125A	1 1/4"	-	10	CC-350A	3 1/2"	-	1
CC-150A	1 1/2"	-	10	CC-400A	4"	-	1

THREADED CONDUIT BODIES W/COVER & GASKET TYPE LB - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body and Caps Rigid/IMC conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LBC-50A	1/2"	10	50	LBC-200A	2"	-	5
LBC-75A	3/4"	10	50	LBC-250A	2 1/2"	-	1
LBC-100A	1"	5	25	LBC-300A	3"	-	1
LBC-125A	1 1/4"	-	10	LBC-350A	3 1/2"	-	1
LBC-150A	1 1/2"	-	10	LBC-400A	4"	-	1

THREADED CONDUIT BODIES W/COVER & GASKET TYPE T - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body and Caps Rigid/IMC conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
TC-50A	1/2"	10	50	TC-200A	2"	-	5
TC-75A	3/4"	10	50	TC-250A	2 1/2"	-	1
TC-100A	1"	5	25	TC-300A	3"	-	1
TC-125A	1 1/4"	-	10	TC-350A	3 1/2"	-	1
TC-150A	1 1/2"	-	10	TC-400A	4"	-	1

THREADED CONDUIT BODIES W/COVER & GASKET TYPE LL - ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body and Caps Rigid/IMC conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LLC-50A	1/2"	10	50	LLC-200A	2"	-	5
LLC-75A	3/4"	10	50	LLC-250A	2 1/2"	-	1
LLC-100A	1"	5	25	LLC-300A	3"	-	1
LLC-125A	1 1/4"	-	10	LLC-350A	3 1/2"	-	1
LLC-150A	1 1/2"	-	10	LLC-400A	4"	-	1

COMBINATION CONDUIT BODIES W/COVER & GASKET TYPE C - ALUMINUM



Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
C-50CA	1/2"	10	50
C-75CA	3/4"	10	50
C-100CA	1"	5	25
C-125CA	1 1/4"	-	10
C-150CA	1 1/2"	-	10
C-200CA	2"	-	5

THREADED CONDUIT BODIES W/COVER & GASKET - TYPE LR ALUMINUM



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body and Caps Rigid/IMC conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LRC-50A	1/2"	10	50	LRC-200A	2"	-	5
LRC-75A	3/4"	10	50	LRC-250A	2 1/2"	-	1
LRC-100A	1"	5	25	LRC-300A	3"	-	1
LRC-125A	1 1/4"	-	10	LRC-350A	3 1/2"	-	1
LRC-150A	1 1/2"	-	10	LRC-400A	4"	-	1

COMBINATION CONDUIT BODIES W/COVER & GASKET TYPE LB - ALUMINUM



Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LB-50CA	1/2"	10	50
LB-75CA	3/4"	10	50
LB-100CA	1"	5	25
LB-125CA	1 1/4"	-	10
LB-150CA	1 1/2"	-	10
LB-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET - TYPE LL ALUMINUM



Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LL-50CA	1/2"	10	50
LL-75CA	3/4"	10	50
LL-100CA	1"	5	25
LL-125CA	1 1/4"	-	10
LL-150CA	1 1/2"	-	10
LL-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET - TYPE LR ALUMINUM



Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LR-50CA	1/2"	10	50
LR-75CA	3/4"	10	50
LR-100CA	1"	5	25
LR-125CA	1 1/4"	-	10
LR-150CA	1 1/2"	-	10
LR-200CA	2"	-	5

COMBINATION CONDUIT BODIES W/COVER & GASKET - TYPE T ALUMINUM



Allows access for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit and set screws for EMT conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
T-50CA	1/2"	10	50
T-75CA	3/4"	10	50
T-100CA	1"	5	25
T-125CA	1 1/4"	-	10
T-150CA	1 1/2"	-	10
T-200CA	2"	-	5

THREADED CONDUIT BODIES TYPE C - MALLEABLE IRON



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
C-50M	1/2"	10	50	C-200M	2"	-	5
C-75M	3/4"	10	50	C-250M	2 1/2"	-	1
C-100M	1"	5	25	C-300M	3"	-	1
C-125M	1 1/4"	-	10	C-350M	3 1/2"	-	1
C-150M	1 1/2"	-	10	C-400M	4"	-	1

THREADED CONDUIT BODIES TYPE LB - MALLEABLE IRON



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LB-50M	1/2"	10	50	LB-200M	2"	-	5
LB-75M	3/4"	10	50	LB-250M	2 1/2"	-	1
LB-100M	1"	5	25	LB-300M	3"	-	1
LB-125M	1 1/4"	-	10	LB-350M	3 1/2"	-	1
LB-150M	1 1/2"	-	10	LB-400M	4"	-	1

THREADED CONDUIT BODIES TYPE LL - MALLEABLE IRON



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LL-50M	1/2"	10	50	LL-200M	2"	-	5
LL-75M	3/4"	10	50	LL-250M	2 1/2"	-	1
LL-100M	1"	5	25	LL-300M	3"	-	1
LL-125M	1 1/4"	-	10	LL-350M	3 1/2"	-	1
LL-150M	1 1/2"	-	10	LL-400M	4"	-	1

THREADED CONDUIT BODIES TYPE LR - MALLEABLE IRON



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
LR-50M	1/2"	10	50	LR-200M	2"	-	5
LR-75M	3/4"	10	50	LR-250M	2 1/2"	-	1
LR-100M	1"	5	25	LR-300M	3"	-	1
LR-125M	1 1/4"	-	10	LR-350M	3 1/2"	-	1
LR-150M	1 1/2"	-	10	LR-400M	4"	-	1

THREADED CONDUIT BODIES TYPE T - MALLEABLE IRON



Allows access to the interior of a conduit system for inspection, pulling, and maintenance

Features: Threaded body for Rigid/IMC conduit
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
T-50M	1/2"	10	50	T-200M	2"	-	5
T-75M	3/4"	10	50	T-250M	2 1/2"	-	1
T-100M	1"	5	25	T-300M	3"	-	1
T-125M	1 1/4"	-	10	T-350M	3 1/2"	-	1
T-150M	1 1/2"	-	10	T-400M	4"	-	1

CONDUIT BODY COVERS STEEL



Encloses conduit body

Features: Supplied with screws
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
SC-50	1/2"	25	250
SC-75	3/4"	25	250
SC-100	1"	20	250
SC-125	1 1/4" to 1 1/2"	25	100
SC-200	2"	-	50
SC-250	2 1/2" to 3"	-	10
SC-350	3 1/2" to 4"	-	10

CONDUIT BODY COVERS ALUMINUM



Encloses conduit body

Features: Supplied with screws
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
AC-50	1/2"	25	250
AC-75	3/4"	25	250
AC-100	1"	20	250
AC-125	1 1/4" to 1 1/2"	25	100
AC-200	2"	-	50
AC-250	2 1/2" to 3"	-	10
AC-350	3 1/2" to 4"	-	10

CONDUIT BODY GASKETS NEOPRENE



Provides dust and raintight seal between conduit body and cover

Features: Fits all form 5 body types
Material: Neoprene

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
VG-50	1/2"	25	250
VG-75	3/4"	25	250
VG-100	1"	20	250
VG-125	1 1/4" to 1 1/2"	25	100
VG-200	2"	-	50
VG-250	2 1/2" to 3"	-	10
VG-350	3 1/2" to 4"	-	10

CONDUIT BODY WIRE FILL CHART

Die Cast Aluminum Conduit Bodies

Maximum Number of Conductors

Trade Size	LB	C	LL	LR	T
1/2"	N/A	N/A	N/A	N/A	N/A
3/4"	6 AWG	6 AWG	6 AWG	6 AWG	6 AWG
1"	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG
1 1/4"	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG
1 1/2"	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 2 AWG
2"	3 - 4/0 AWG	3 - 2/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG
2 1/2"	300 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 2/0 AWG
3"	350 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM
3 1/2"	3 - 400 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM
4"	3 - 400 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM	3 - 250 MCM

Volume in Cu. In.

Trade Size	LB	C	LL	LR	T
1/2"	4.25	4.25	4.25	4.25	4.25
3/4"	7.2	7.2	7.2	7.2	7.2
1"	10.8	10.8	10.8	10.8	10.8
1 1/4"	30.5	30.5	30.5	30.5	30.5
1 1/2"	30.5	30.5	30.5	30.5	30.5
2"	70.7	70.7	70.7	70.7	70.7
2 1/2"	152.5	157.4	157.4	157.4	157.4
3"	152.5	179.8	179.8	179.8	179.8
3 1/2"	311.8	323.0	323.0	323.0	323.0
4"	311.8	323.0	323.0	323.0	323.0

Malleable Iron Conduit Bodies

Maximum Number of Conductors

Trade Size	LB	C	LL	LR	T
1/2"	N/A	N/A	N/A	N/A	N/A
3/4"	3 - 6 AWG	3 - 6 AWG	3 - 6 AWG	3 - 6 AWG	3 - 6 AWG
1"	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG	3 - 4 AWG
1 1/4"	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG	3 - 2 AWG
1 1/2"	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1/0 AWG	3 - 1 AWG
2"	3 - 3/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG	3 - 4/0 AWG	3 - 2/0 AWG
2 1/2"	3 - 250 MCM	3 - 300 MCM	3 - 300 MCM	3 - 300 MCM	3 - 4/0 AWG
3"	3 - 250 MCM	3 - 350 MCM	3 - 350 MCM	3 - 350 MCM	3 - 4/0 AWG
3 1/2"	3 - 350 MCM	3 - 350 MCM	3 - 350 MCM	3 - 500 MCM	3 - 350 MCM
4"	3 - 350 MCM	3 - 350 MCM	3 - 350 MCM	3 - 500 MCM	3 - 350 MCM

Volume in Cu. In.

Trade Size	LB	C	LL	LR	T
1/2"	4.5	4.5	4.5	4.5	6.0
3/4"	7.5	7.5	7.5	7.5	9.5
1"	12.5	12.5	12.5	12.5	15.0
1 1/4"	32.3	32.3	32.3	32.3	33.0
1 1/2"	35.3	35.3	35.3	35.3	36.0
2"	73.0	73.0	73.0	73.0	75.0
2 1/2"	138.0	138.0	138.0	138.0	138.0
3"	170.0	170.0	170.0	170.0	170.0
3 1/2"	300.0	300.0	300.0	300.0	300.0
4"	328.0	328.0	328.0	328.0	328.0

RIGID SET SCREW CONNECTORS MALLEABLE IRON



Connects threadless Rigid/IMC conduit to box or enclosure

Features: Concrete-tight when taped
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
970MA	1/2"	25	250	975MA	2"	2	10
971MA	3/4"	25	100	976MA	2 1/2"	2	10
972MA	1"	5	25	977MA	3"	1	5
973MA	1 1/4"	5	25	978MA	3 1/2"	-	5
974MA	1 1/2"	5	20	979MA	4"	-	5

RIGID SET SCREW COUPLINGS MALLEABLE IRON



Connects two lengths of threadless Rigid/IMC conduit

Features: Concrete-tight when taped
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
990MA	1/2"	20	100	995MA	2"	2	10
991MA	3/4"	20	100	996MA	2 1/2"	2	10
992MA	1"	5	50	997MA	3"	1	5
993MA	1 1/4"	5	25	998MA	3 1/2"	1	5
994MA	1 1/2"	5	20	999MA	4"	1	5

RIGID COMPRESSION CONNECTORS MALLEABLE IRON



Connects threadless Rigid/IMC conduit to box or enclosure

Features: Concrete-tight
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
960MA	1/2"	25	250	965MA	2"	5	25
961MA	3/4"	25	250	966MA	2 1/2"	1	10
962MA	1"	10	100	967MA	3"	1	5
963MA	1 1/4"	5	50	968MA	3 1/2"	1	5
964MA	1 1/2"	2	20	969MA	4"	1	5

RIGID COMPRESSION COUPLINGS MALLEABLE IRON



Connects two lengths of threadless Rigid/IMC conduit

Features: Concrete-tight
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
980MA	1/2"	20	100	985MA	2"	2	10
981MA	3/4"	20	100	986MA	2 1/2"	2	10
982MA	1"	5	50	987MA	3"	1	5
983MA	1 1/4"	5	25	988MA	3 1/2"	1	5
984MA	1 1/2"	5	20	989MA	4"	1	5

RIGID COMPRESSION CONNECTORS- STEEL



Use to connect threadless Rigid/IMC conduit to a box or enclosure

Features: Concrete-tight
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
960	1/2"	25	250	963	1 1/4"	5	50
961	3/4"	25	250	964	1 1/2"	5	20
962	1"	10	100	965	2"	5	25

RIGID COMPRESSION COUPLINGS - STEEL



Connects two unthreaded lengths of Rigid/IMC conduit

Features: Concrete-tight
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
980	1/2"	25	250	983	1 1/4"	5	50
981	3/4"	10	100	984	1 1/2"	2	20
982	1"	5	50	985	2"	4	20

RIGID RAINTIGHT COMPRESSION CONNECTORS



Compression type connector used to join unthreaded steel Rigid conduit to a box or enclosure in a wet location

Features: Raintight & concrete tight. Suitable for use with UL 6 & UL6 A rigid conduit. Threadless for steel or aluminum conduit. Zinc plated.
Material: Steel- 1/2" to 2"
Malleable Iron- 2 1/2" to 4"
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
960RT	1/2"	25	250	965RT	2"	5	25
961RT	3/4"	25	100	966MART	2 1/2"	1	10
962RT	1"	10	100	967MART	3"	1	5
963RT	1 1/4"	5	50	968MART	3 1/2"	1	5
964RT	1 1/2"	2	20	969MART	4"	1	5

RIGID RAINTIGHT COMPRESSION COUPLINGS



Use to join two lengths of Rigid/IMC conduit in a wet location

Features: Raintight & concrete tight. Suitable for use with UL 6 & UL6 A rigid conduit. Threadless for steel or aluminum conduit. Zinc plated.
Material: Steel- 1/2" to 2"
Malleable Iron- 2 1/2" to 4"
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
980RT	1/2"	25	250	985RT	2"	5	25
981RT	3/4"	25	100	986MART	2 1/2"	1	10
982RT	1"	10	100	987MART	3"	1	5
983RT	1 1/4"	5	50	988MART	3 1/2"	1	5
984RT	1 1/2"	2	20	989MART	4"	1	5

WATERTIGHT HUBS ZINC DIE CAST



To connect Rigid/IMC conduit to a box or enclosure where a watertight joint is required

Features: Raintight, Oiltight, Dust tight w/insulated throat
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
WH-1	1/2"	25	250	WH-6	2"	2	20
WH-2	3/4"	25	250	WH-7	2 1/2"	-	10
WH-3	1"	10	100	WH-8	3"	-	10
WH-4	1 1/4"	5	25	WH-9	3 1/2"	-	5
WH-5	1 1/2"	2	20	WH-10	4"	-	5

WATERTIGHT HUBS MALLEABLE IRON



To connect Rigid/IMC conduit to a box or enclosure where a watertight joint is required

Features: Raintight, Oiltight, Dust tight w/insulated throat
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
WH-1M	1/2"	25	250	WH-6M	2"	2	20
WH-2M	3/4"	25	250	WH-7M	2 1/2"	-	10
WH-3M	1"	10	100	WH-8M	3"	-	10
WH-4M	1 1/4"	5	25	WH-9M	3 1/2"	-	5
WH-5M	1 1/2"	2	20	WH-10M	4"	-	5

RIGID THREE-PIECE COUPLINGS



Connects two lengths of Rigid/IMC conduit when conduit cannot be turned

Features: Concrete-tight
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
370	1/2"	25	100	376	2 1/2"	-	10
371	3/4"	20	200	377	3"	-	10
372	1"	10	100	378	3 1/2"	-	5
373	1 1/4"	5	100	379	4"	-	5
374	1 1/2"	4	25	381	5"	-	1
375	2"	4	20	382	6"	-	1

COMBINATION COUPLINGS RIGID TO LIQUIDTIGHT



Connects Liquidtight conduit to Rigid/IMC conduit

Features: Liquidtight, Raintight, Oiltight
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RTCC-50	1/2"	20	200	RTCC-75	3/4"	10	100

RIGID CONDUIT COUPLINGS



Use to join and ensure proper alignment of threaded Rigid/IMC conduit

Features: NPSM thread
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
P105	1/2"	10	100	P120	2"	5	25
P107	3/4"	5	50	P125	2 1/2"	-	12
P110	1"	5	50	P130	3"	-	12
P112	1 1/4"	5	25	P135	3 1/2"	-	6
P115	1 1/2"	5	25	P140	4"	-	6

SLIP-ON COUPLINGS



To join two lengths of threaded Rigid/IMC conduit

Features: Neoprene gasket provides a concrete seal at the joint
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
375SPC	2"	5	25	379SPC	4"	1	5
376SPC	2 1/2"	2	20	381SPC	5"	-	1
377SPC	3"	2	20	382SPC	6"	-	1
378SPC	3 1/2"	1	5				

RIGID 90° CONDUIT ELBOWS



Provides a directional change in a Rigid conduit run

Features: Low conductivity, high corrosion resistance
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Radius Min	Length of Straight Min.	Offset Min.	Standard Pkg.
RLB-9050	1/2"	4"	1 1/2"	5 1/2"	50
RLB-9075	3/4"	4 1/2"	1 1/2"	6"	50
RLB-90100	1"	5 3/4"	1 7/8"	7 5/8"	25
RLB-90125	1 1/4"	7 1/4"	2"	9 1/4"	20
RLB-90150	1 1/2"	8 1/4"	2"	10 1/4"	15
RLB-90200	2"	9 1/2"	2"	11 1/2"	10
RLB-90250	2 1/2"	10 1/2"	3"	13 1/2"	1
RLB-90300	3"	13"	3 1/8"	16 1/8"	1
RLB-90350	3 1/2"	15"	3 1/4"	18 1/4"	1
RLB-90400	4"	16"	3 3/8"	19 3/8"	1

RIGID 45° CONDUIT ELBOWS

Provides a directional change in a Rigid conduit run



Features: Low conductivity, high corrosion resistance
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Radius Min	Length of Straight Min.	Offset Min.	Standard Pkg.
RLB-4550	1/2"	4"	1 1/2"	5 3/8"	50
RLB-4575	3/4"	4 1/2"	1 1/2"	5 3/4"	50
RLB-45100	1"	5 3/4"	1 7/8"	7 1/4"	25
RLB-45125	1 1/4"	7 1/4"	2"	8 1/2"	20
RLB-45150	1 1/2"	8 1/4"	2"	9 1/4"	15
RLB-45200	2"	9 1/2"	2"	10 1/8"	10
RLB-45250	2 1/2"	10 1/2"	3"	12 1/2"	1
RLB-45300	3"	13"	3 1/8"	14 1/2"	1
RLB-45350	3 1/2"	15"	3 1/4"	16 1/8"	1
RLB-45400	4"	16"	3 3/8"	17 1/8"	1

RIGID 15° CONDUIT ELBOWS

Provides a directional change in a Rigid conduit run



Features: Low conductivity, high corrosion resistance
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Radius Min	Straight Leg Each End	Standard Pkg.
RLB-15125	1 1/4"	7 1/4"	2.781"	20
RLB-15150	1 1/2"	8 1/4"	2.781"	15
RLB-15200	2"	9 1/2"	2.781"	10
RLB-15250	2 1/2"	10 1/2"	3"	1
RLB-15300	3"	13"	3.125"	1
RLB-15350	3 1/2"	15"	3.281"	1
RLB-15400	4"	16"	3.375"	1

RIGID 22.5° CONDUIT ELBOWS

Provides a directional change in Rigid conduit run



Features: Low conductivity, high corrosion resistance
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Radius Min	Straight Leg Each End	Standard Pkg.
RLB-22125	1 1/4"	7 1/4"	2.781"	20
RLB-22150	1 1/2"	8 1/4"	2.781"	15
RLB-22200	2"	9 1/2"	2.781"	10
RLB-22250	2 1/2"	10 1/2"	3"	1
RLB-22300	3"	13"	3.125"	1
RLB-22350	3 1/2"	15"	3.281"	1
RLB-22400	4"	16"	3.375"	1

RIGID 30° CONDUIT ELBOWS

Provides a directional change in a Rigid conduit run



Features: Low conductivity, high corrosion resistance
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Radius Min	Straight Leg Each End	Standard Pkg.
RLB-30125	1 1/4"	7 1/4"	2.781"	20
RLB-30150	1 1/2"	8 1/4"	2.781"	15
RLB-30200	2"	9 1/2"	2.781"	10
RLB-30250	2 1/2"	10 1/2"	3"	1
RLB-22300	3"	13"	3.125"	1
RLB-30350	3 1/2"	15"	3.281"	1
RLB-30400	4"	16"	3.375"	1

RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure



Features: Threaded on both ends
Material: Steel
Certifications: cULus

1/2" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P10500	CLOSE	25	P10550	5"	25
P10515	1 1/2"	25	P10560	6"	25
P10520	2"	25	P10580	8"	25
P10525	2 1/2"	25	P10510	10"	25
P10530	3"	25	P10512	12"	25
P10540	4"	25			

RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure




Features: Threaded on both ends
Material: Steel
Certifications: cULus

3/4" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P10700	CLOSE	25	P10750	5"	25
P10715	1 1/2"	25	P10760	6"	25
P10720	2"	25	P10780	8"	25
P10725	2 1/2"	25	P10710	10"	25
P10730	3"	25	P10712	12"	25
P10740	4"	25			

RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure




Features: Threaded on both ends
Material: Steel
Certifications: cULus

1" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P11000	CLOSE	25	P11060	6"	25
P11020	2"	25	P11080	8"	25
P11030	3"	25	P11010	10"	25
P11040	4"	25	P11012	12"	25
P11050	5"	25			

RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure




Features: Threaded on both ends
Material: Steel
Certifications: cULus

1 1/4" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P11200	CLOSE	25	P11260	6"	25
P11220	2"	25	P11280	8"	25
P11230	3"	25	P11210	10"	25
P11240	4"	25	P11212	12"	25
P11250	5"	25			

RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure



Features: Threaded on both ends
Material: Steel
Certifications: cULus

1 1/2" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P11500	CLOSE	25	P11560	6"	25
P11520	2"	25	P11580	8"	25
P11530	3"	25	P11510	10"	25
P11540	4"	25	P11512	12"	20
P11550	5"	25			

RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure



Features: Threaded on both ends
Material: Steel
Certifications: cULus

2" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P12000	CLOSE	25	P12060	6"	25
P12025	2 1/2"	25	P12080	8"	25
P12030	3"	25	P12010	10"	10
P12040	4"	25	P12012	12"	10
P12050	5"	25			

RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure



Features: Threaded on both ends
Material: Steel
Certifications: cULus

2 1/2" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P12500	CLOSE	10	P12560	6"	10
P12530	3"	10	P12580	8"	10
P12540	4"	10	P12510	10"	5
P12550	5"	10	P12512	12"	5

RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure



Features: Threaded on both ends
Material: Steel
Certifications: cULus

3" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P13000	CLOSE	10	P13060	6"	10
P13030	3"	10	P13080	8"	5
P13040	4"	10	P13010	10"	5
P13050	5"	10	P13012	12"	5

RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure



Features: Threaded on both ends
Material: Steel
Certifications: cULus

3 1/2" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P13500	CLOSE	10	P13580	8"	3
P13540	4"	6	P13510	10"	3
P13550	5"	6	P13512	12"	3
P13560	6"	5			

RIGID CONDUIT NIPPLES

Extends a conduit system or connects two steel boxes or other metal enclosure



Features: Threaded on both ends
Material: Steel
Certifications: cULus

4" TRADE SIZE

Catalog Number	Length	Standard Pkg.	Catalog Number	Length	Standard Pkg.
P14000	CLOSE	10	P14080	8"	3
P14040	4"	6	P14010	10"	3
P14050	5"	6	P14012	12"	3
P14060	6"	5			

INSULATED MALLEABLE IRON GROUNDING BUSHINGS - W/ LAY-IN LUG

Use with locknut to terminate service conduit to a cabinet



Features: For use with either copper or aluminum grounding conductor
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
MIGB-80M	1/2"	100	1,000	MIGB-86M	2 1/2"	-	10
MIGB-81M	3/4"	50	500	MIGB-87M	3"	-	10
MIGB-82M	1"	25	250	MIGB-88M	3 1/2"	-	10
MIGB-83M	1 1/4"	25	250	MIGB-89M	4"	-	10
MIGB-84M	1 1/2"	25	250	MIGB-101M	5"	-	5
MIGB-85M	2"	25	250	MIGB-102M	6"	-	5

INSULATED ZINC GROUNDING BUSHINGS - W/LAY-IN LUG

Use with locknut to terminate service conduit to a cabinet



Features: For use with either copper or aluminum grounding conductor
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
ZIGB-50	1/2"	100	1,000	ZIGB-200	2"	25	250
ZIGB-75	3/4"	50	500	ZIGB-250	2 1/2"	-	10
ZIGB-100	1"	25	250	ZIGB-300	3"	-	10
ZIGB-125	1 1/4"	25	250	ZIGB-350	3 1/2"	-	10
ZIGB-150	1 1/2"	25	250	ZIGB-400	4"	-	10

INSULATED BUSHINGS MALLEABLE IRON

Use with locknut to terminate threaded Rigid/IMC conduit to an outlet



Features: Insulated liner rated at 150° C
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
MIB-90M	1/2"	100	1,000	MIB-96M	2 1/2"	-	25
MIB-91M	3/4"	100	1,000	MIB-97M	3"	-	25
MIB-92M	1"	50	500	MIB-98M	3 1/2"	-	25
MIB-93M	1 1/4"	25	250	MIB-99M	4"	-	25
MIB-94M	1 1/2"	25	250	MIB-101M	5"	-	10
MIB-95M	2"	25	100	MIB-102M	6"	-	10

INSULATING BUSHINGS PLASTIC

Use with locknut to terminate threaded Rigid/IMC conduit to an outlet



Features: Rated flame retardant to 105° C
Material: Polypropylene
Certifications: UL

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
501	1/2"	100	1,000	507	2 1/2"	-	25
502	3/4"	100	1,000	508	3"	-	25
503	1"	50	500	509	3 1/2"	-	25
504	1 1/4"	25	250	510	4"	-	25
505	1 1/2"	25	250	512	5"	-	5
506	2"	10	100	513	6"	-	5

RIGID ONE HOLE STRAPS STEEL

Supports Rigid/IMC conduit to mounting surface



Features: Reinforced snap-on feature
Material: Steel
Certifications: cULus
* Dual rated for EMT and Rigid

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
160-S	1/4"	100	1,000	166-S	1 1/2"	50	250
161-S	3/8"	100	1,000	167-S	2"	-	50
162-S	1/2"	100	1,000	*168-S	2 1/2"	-	25
163-S	3/4"	100	1,000	*169-S	3"	-	25
164-S	1"	50	500	*170-S	3 1/2"	-	10
165-S	1 1/4"	50	500	*171-S	4"	-	10

RIGID TWO HOLE STRAPS STEEL

Supports Rigid/IMC conduit to mounting surface



Features: Reinforced snap-on feature
Material: Steel
Certifications: cULus
* Dual rated for EMT and Rigid

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
TH-161S	3/8"	50	500	*TH-168S	2 1/2"	-	25
TH-162S	1/2"	-	250	*TH-169S	3"	-	25
TH-163S	3/4"	-	200	*TH-170S	3 1/2"	-	10
TH-164S	1"	-	100	*TH-171S	4"	-	10
TH-165S	1 1/4"	-	50	TH-173S	5"	-	10
TH-166S	1 1/2"	-	50	TH-174S	6"	-	10
TH-167S	2"	-	25				

RIGID ONE HOLE STRAPS MALLEABLE IRON

Supports Rigid/IMC conduit to mounting surface



Features: Heavy duty casting
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
162	1/2"	100	1,000	167	2"	-	50
163	3/4"	100	1,000	168	2 1/2"	-	25
164	1"	50	500	169	3"	-	25
165	1 1/4"	50	500	170	3 1/2"	-	25
166	1 1/2"	-	50	171	4"	-	10

RIGID CLAMP BACK SPACERS

Provides space between conduit and mounting surface



Features: Extensive size range for multiple specifications
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
282	1/2"	100	1,000	287	2"	10	50
283	3/4"	100	500	288	2 1/2"	-	25
284	1"	50	500	289	3"	-	25
285	1 1/4"	50	250	290	3 1/2"	-	10
286	1 1/2"	20	100	291	4"	-	10

REDUCING BUSHINGS - STEEL

Use to reduce the size of internal female threads



Features: Rounded bushing protects conductors
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
RB50-38	1/2" x 3/8"	200	RB150-75	1 1/2" x 3/4"	50
RB75-50	3/4" x 1/2"	200	RB150-100	1 1/2" x 1"	50
RB100-50	1" x 1/2"	100	RB150-125	1 1/2" x 1 1/4"	50
RB100-75	1" x 3/4"	100	RB200-50	2" x 1/2"	25
RB125-50	1 1/4" x 1/2"	50	RB200-75	2" x 3/4"	25
RB125-75	1 1/4" x 3/4"	50	RB200-100	2" x 1"	25
RB125-100	1 1/4" x 1"	50	RB200-125	2" x 1 1/4"	25
RB150-50	1 1/2" x 1/2"	50	RB200-150	2" x 1 1/2"	25

REDUCING BUSHINGS MALLEABLE IRON

Serves as short raceway between enclosures when used with a locknut



Features: Rounded bushing protects conductors
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
RB250-100	2 1/2" x 1"	10	RB300-250	3" x 2 1/2"	10
RB250-125	2 1/2" x 1 1/4"	10	RB350-200	3 1/2" x 2"	5
RB250-150	2 1/2" x 1 1/2"	10	RB350-250	3 1/2" x 2 1/2"	5
RB250-200	2 1/2" x 2"	10	RB350-300	3 1/2" x 3"	5
RB300-100	3" x 1"	10	RB400-200	4" x 2"	5
RB300-125	3" x 1 1/4"	10	RB400-250	4" x 2 1/2"	5
RB300-150	3" x 1 1/2"	10	RB400-300	4" x 3"	5
RB300-200	3" x 2"	10	RB400-350	4" x 3 1/2"	5

REDUCING WASHERS

To be used to reduce the size of knockout holes



Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RW75-50	3/4" x 1/2"	250	2,500	RW300-100	3" x 1"	25	250
RW100-50	1" x 1/2"	250	2,500	RW300-125	3" x 1 1/4"	25	250
RW100-75	1" x 3/4"	250	2,500	RW300-150	3" x 1 1/2"	25	250
RW125-50	1 1/4" x 1/2"	100	1,000	RW300-200	3" x 2"	25	250
RW125-75	1 1/4" x 3/4"	100	1,000	RW300-250	3" x 2 1/2"	25	250
RW125-100	1 1/4" x 1"	100	1,000	RW350-50	3 1/2" x 1/2"	10	100
RW150-50	1 1/2" x 1/2"	100	1,000	RW350-75	3 1/2" x 3/4"	10	100
RW150-75	1 1/2" x 3/4"	100	1,000	RW350-100	3 1/2" x 1"	10	100
RW150-100	1 1/2" x 1"	100	1,000	RW350-125	3 1/2" x 1 1/4"	10	100
RW150-125	1 1/2" x 1 1/4"	100	1,000	RW350-150	3 1/2" x 1 1/2"	10	100
RW200-50	2" x 1/2"	50	500	RW350-200	3 1/2" x 2"	10	100
RW200-75	2" x 3/4"	50	500	RW350-250	3 1/2" x 2 1/2"	10	100
RW200-100	2" x 1"	50	500	RW350-300	3 1/2" x 3"	10	100
RW200-125	2" x 1 1/4"	50	500	RW400-50	4" x 1/2"	10	100
RW200-150	2" x 1 1/2"	50	500	RW400-75	4" x 3/4"	10	100
RW250-50	2 1/2" x 1/2"	50	500	RW400-100	4" x 1"	10	100
RW250-75	2 1/2" x 3/4"	50	500	RW400-125	4" x 1 1/4"	10	100
RW250-100	2 1/2" x 1"	50	500	RW400-150	4" x 1 1/2"	10	100
RW250-125	2 1/2" x 1 1/4"	50	500	RW400-200	4" x 2"	10	100
RW250-150	2 1/2" x 1 1/2"	50	500	RW400-250	4" x 2 1/2"	10	100
RW250-200	2 1/2" x 2"	50	500	RW400-300	4" x 3"	10	100
RW300-50	3" x 1/2"	25	250	RW400-350	4" x 3 1/2"	10	100
RW300-75	3" x 3/4"	25	250				

CONDUIT LOCKNUTS

Use to fasten threaded conduit to an opening in a box or enclosure



Features: Tightens without deforming
Material: Steel
* Square fixture nut
** Square panel nut

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
*199	1/4"	100	3,000	206	2"	50	500
**200	3/8"	250	2,500	207	2 1/2"	50	250
201	1/2"	100	3,000	208	3"	50	250
202	3/4"	100	1,000	209	3 1/2"	25	125
203	1"	100	1,000	210	4"	25	125
204	1 1/4"	100	1,000	212	5"	-	10
205	1 1/2"	100	1,000	213	6"	-	10

SEALING LOCKNUTS

Provides a raintight seal when fastening threaded conduit to threadless opening in a box or enclosure



Features: Zinc plate with molded PVC gasket for a watertight seal
Material: Steel/Neoprene Gasket
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
201SL	1/2"	100	1,000	206SL	2"	25	100
202SL	3/4"	50	500	207SL	2 1/2"	20	100
203SL	1"	25	250	208SL	3"	10	50
204SL	1 1/4"	25	250	209SL	3 1/2"	10	50
205SL	1 1/2"	25	100	210SL	4"	5	25

GROUNDING LOCKNUTS

Use to fasten threaded conduit to an opening in a box or enclosure



Features: For use in harsh vibration environments
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
GL-50	1/2"	100	1,000	GL-250	2 1/2"	10	100
GL-75	3/4"	100	1,000	GL-300	3"	10	100
GL-100	1"	50	500	GL-350	3 1/2"	10	100
GL-125	1 1/4"	50	500	GL-400	4"	10	100
GL-150	1 1/2"	50	500	GL-500	5"	-	10
GL-200	2"	25	250				

RIGID TO BOX 90° PULL ELBOWS

Connects threaded Rigid/IMC conduit to a steel box or enlosure for a 90° bend



Features: Removable cover facilitates wire pulling
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
650	1/2"	10	100
651	3/4"	5	50

RIGID TO RIGID 90° PULL ELBOWS

Connects threaded Rigid/IMC conduit to a steel box or enlosure for a 90° bend



Features: Removable cover facilitates wire pulling
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
670	1/2"	10	100
671	3/4"	5	50
672	1"	-	25
673	1 1/4"	-	20

RIGID AND EMT COMBO PULL ELBOWS

Connects 2 lengths of EMT or Rigid/IMC conduit for a 90 ° bend



Features: Threaded interior for use with Rigid/IMC conduit. Set screws for EMT conduit.
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
FCPE-50	1/2"	10	100
FCPE-75	3/4"	5	50
FCPE-100	1"	-	25
FCPE-125	1 1/4"	-	20

RIGID AND EMT COMBO PULL ELBOWS TO BOX

Connects EMT or Rigid/IMC conduit to box or enclosure



Features: Threaded interior for use with Rigid/IMC conduit. Set screws for EMT conduit.
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
MCPE-50	1/2"	10	100	MCPE-100	1"	-	25
MCPE-75	3/4"	5	50	MCPE-125	1 1/4"	-	20

RIGID 90° SHORT ELBOWS

Connects Rigid/IMC conduit to outlet box



Features: Appropriate where close radius is required
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
780-DC	1/2"	50	500
781-DC	3/4"	25	250

RIGID 90° LONG ELBOWS

Telephone elbow for Rigid/IMC conduit



Features: Accurately tapped & tapered thread
Material: Malleable Iron

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
800	1/2"	10	100
801	3/4"	10	100
802	1"	5	50
803	1 1/4"	5	25

CONDUIT NIPPLES - ZINC

Serves as short raceway between enclosures when used with a locknut



Features: Corrosion resistant
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
332	1/2"	100	1,000	337	2"	10	40
333	3/4"	50	500	338	2 1/2"	-	10
334	1"	25	250	339	3"	-	10
335	1 1/4"	25	250	340	3 1/2"	-	10
336	1 1/2"	25	100	341	4"	-	10

CONDUIT NIPPLES MALLEABLE IRON

Serves as short raceway between enclosures when used with a locknut



Features: Corrosion resistant
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
332M	1/2"	100	1,000	338M	2 1/2"	-	10
333M	3/4"	50	500	339M	3"	-	10
334M	1"	25	250	340M	3 1/2"	-	10
335M	1 1/4"	25	250	341M	4"	-	10
336M	1 1/2"	25	100	343M	5"	-	5
337M	2"	10	40	344M	6"	-	5

OFFSET CONDUIT NIPPLES

Use to offset the axis of a raceway 3/4" between enclosure runs



Features: Enable an easier direction change of conduit
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
830	1/2"	10	100	834	1 1/2"	5	50
831	3/4"	10	100	835	2"	2	20
832	1"	10	100	836	2 1/2"	-	2
833	1 1/4"	5	50	837	3"	-	2

COUNTERSUNK INSERT PLUGS

For use with end wrench



Features: NPT threads
Material: Malleable Iron

Catalog Number	Trade Size	Standard Pkg.
1015C	2"	25
1016C	2 1/2"	10
1017C	3"	10
1018C	3 1/2"	5
1019C	4"	5

FLANGE PLATES

Use with threaded conduit for mounting to flat surfaces



Features: Heavy Iron construction
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
850	1/2"	20	100
851	3/4"	20	100
852	1"	10	100
853	1 1/4"	-	50
854	1 1/2"	-	50
855	2"	-	50

MALE ENLARGERS

Converts conduit end sizes, eliminates rework or tear outs



Features: Helps to better accommodate design specs
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
61ME	1/2"M x 3/4"F	20	100
63ME	3/4"M x 1"F	20	100
66ME	1"M x 1 1/4"F	10	100
70ME	1 1/4"M x 1 1/2"F	-	50

PECO
PRODUCTO ELECTRIC CORP

HAZARDOUS LOCATIONS FITTINGS

- FLEXIBLE COUPLINGS
- OUTLET BOXES
- CONDUIT BODIES
- CAPPED ELBOWS
- UNIONS
- SEALING FITTINGS



FC-18

EXPLOSION PROOF FLEXIBLE COUPLINGS

Features:

- All sizes are manufactured from bronze braided brass tubing with an arc resistant liner, assembled with two female threaded End fittings and two male Nipples – Type ECGJH
- Corrosion resistant and watertight
- Custom lengths available upon request

Note: Third party certification not available for lengths exceeding 36" in any size

UL listed for use in Hazardous Locations:
1/2", 3/4"
– Class I, Groups A, B, C, D
– Class II, Groups E, F, G
1", 1-1/2", 2"
– Class I, Groups C, D
– Class II, Groups E, F, G
1-1/4"
– Class I, Group D
– Class II, Group E, F, G

c UL us
LISTED
E166071

Applications:

- Accomplishing difficult bends
- Movement of connected fixtures
- Vibration of connected equipment (as motors)





Note: Flexible Length does not include fittings.

Catalog No.	Size	Flexible Length	Pkg Wt.	Dim. A	Dim. B
FC-14	1/2"	4"	1.0	1.54	1.44
FC-16	1/2"	6"	1.2	1.54	1.44
FC-18	1/2"	8"	1.4	1.54	1.44
FC-110	1/2"	10"	1.6	1.54	1.44
FC-112	1/2"	12"	1.8	1.54	1.44
FC-115	1/2"	15"	2.1	1.54	1.44
FC-118	1/2"	18"	2.4	1.54	1.44
FC-121	1/2"	21"	2.7	1.54	1.44
FC-124	1/2"	24"	3.0	1.54	1.44
FC-127	1/2"	27"	3.3	1.54	1.44
FC-130	1/2"	30"	3.6	1.54	1.44
FC-133	1/2"	33"	3.9	1.54	1.44
FC-136	1/2"	36"	4.2	1.54	1.44
FC-24	3/4"	4"	1.2	1.60	1.87
FC-26	3/4"	6"	1.4	1.60	1.87
FC-28	3/4"	8"	1.7	1.60	1.87
FC-210	3/4"	10"	2.0	1.60	1.87
FC-212	3/4"	12"	2.2	1.50	1.87
FC-215	3/4"	15"	2.6	1.60	1.87
FC-218	3/4"	18"	3.0	1.60	1.87
FC-221	3/4"	21"	3.4	1.60	1.87
FC-224	3/4"	24"	3.8	1.60	1.87
FC-227	3/4"	27"	4.2	1.60	1.87
FC-230	3/4"	30"	4.6	1.60	1.87
FC-233	3/4"	33"	5.0	1.60	1.87
FC-236	3/4"	36"	5.3	1.60	1.87
FC-36	1"	6"	2.7	2.00	2.31
FC-38	1"	8"	3.7	2.00	2.31
FC-310	1"	10"	4.6	2.00	2.31
FC-312	1"	12"	5.5	2.00	2.31
FC-315	1"	15"	6.1	2.00	2.31
FC-318	1"	18"	6.7	2.00	2.31

Catalog No.	Size	Flexible Length	Pkg Wt.	Dim. A	Dim. B
FC-321	1"	21"	7.3	2.00	2.31
FC-324	1"	24"	7.9	2.00	2.31
FC-327	1"	27"	8.5	2.00	2.31
FC-330	1"	30"	9.0	2.00	2.31
FC-333	1"	33"	9.7	2.00	2.31
FC-336	1"	36"	10.3	2.00	2.31
FC-412	1-1/4"	12"	7.2	2.12	2.74
FC-415	1-1/4"	15"	8.1	2.12	2.74
FC-418	1-1/4"	18"	9.0	2.12	2.74
FC-421	1-1/4"	21"	9.9	2.12	2.74
FC-424	1-1/4"	24"	10.8	2.12	2.74
FC-427	1-1/4"	27"	11.7	2.12	2.74
FC-430	1-1/4"	30"	12.6	2.12	2.74
FC-433	1-1/4"	33"	13.5	2.12	2.74
FC-436	1-1/4"	36"	14.4	2.12	2.74
FC-512	1-1/2"	12"	14.7	2.37	3.61
FC-515	1-1/2"	15"	16.8	2.37	3.61
FC-518	1-1/2"	18"	18.9	2.37	3.61
FC-521	1-1/2"	21"	21.0	2.37	3.61
FC-524	1-1/2"	24"	23.0	2.37	3.61
FC-527	1-1/2"	27"	25.0	2.37	3.61
FC-530	1-1/2"	30"	27.0	2.37	3.61
FC-533	1-1/2"	33"	29.0	2.37	3.61
FC-536	1-1/2"	36"	31.0	2.37	3.61
FC-612	2"	12"	15.0	2.41	4.33
FC-615	2"	15"	17.1	2.41	4.33
FC-618	2"	18"	19.2	2.41	4.33
FC-621	2"	21"	21.3	2.41	4.33
FC-624	2"	24"	23.3	2.41	4.33
FC-627	2"	27"	25.4	2.41	4.33
FC-630	2"	30"	27.3	2.41	4.33
FC-633	2"	33"	29.4	2.41	4.33
FC-636	2"	36"	31.3	2.41	4.33

EXPLOSION PROOF CONDUIT OUTLET BOX - TYPE C



Installed in conduit systems within hazardous areas to protect conductors in threaded rigid conduit

Features: Suitable for NEMA 4X applications
Material: Aluminum
Certifications: UL

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
GUAC-50A	1/2"	1	5
GUAC-75A	3/4"	1	5
GUAC-100A	1"	1	5

EXPLOSION PROOF CONDUIT OUTLET BOX - TYPE LB



Installed in conduit systems within hazardous areas to protect conductors in threaded rigid conduit

Features: Suitable for NEMA 4X applications
Material: Aluminum
Certifications: UL

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
GUAB-50A	1/2"	1	5
GUAB-75A	3/4"	1	5
GUAB-100A	1"	1	5

EXPLOSION PROOF CONDUIT OUTLET BOX - TYPE L



Installed in conduit systems within hazardous areas to protect conductors in threaded rigid conduit

Features: Suitable for NEMA 4X applications
Material: Aluminum
Certifications: UL

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
GUAL-50A	1/2"	1	5
GUAL-75A	3/4"	1	5
GUAL-100A	1"	1	5

EXPLOSION PROOF CONDUIT OUTLET BOX - TYPE T



Installed in conduit systems within hazardous areas to protect conductors in threaded rigid conduit

Features: Suitable for NEMA 4X applications
Material: Aluminum
Certifications: UL

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
GUAT-50A	1/2"	1	5
GUAT-75A	3/4"	1	5
GUAT-100A	1"	1	5

EXPLOSION PROOF CONDUIT BODIES - TYPE LB



Connects conduit lengths and changes direction of conduit while meeting classified area requirements

Features: Tapered hub threads for tight, rigid joints and ground continuity
Material: Aluminum
Certifications: UL

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
XLB-50	1/2"	5	25
XLB-75	3/4"	5	25

EXPLOSION PROOF CONDUIT BODIES - TYPE T



Connects conduit lengths and changes direction of conduit while meeting classified area requirements

Features: Tapered hub threads for tight, rigid joints and ground continuity
Material: Aluminum
Certifications: UL

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
XT-50	1/2"	5	25
XT-75	3/4"	5	25

EXPLOSION PROOF CAPPED ELLS



Makes 90° bends in conduit systems where space is limited and can serve as pulling fitting

Features: Screw-on cover for ease of installation and removal
Material: Ductile Iron
Certifications: UL

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
PLBY-50	1/2"	2	10
PLBY-75	3/4"	2	10
PLBY-100	1"	2	10
PLBY-125	1 1/4"	2	10

EXPLOSION PROOF UNIONS



Use for joining conduit and connecting conduit to enclosures in classified areas

Features: Accurately tapped threads for rigid joints and ground continuity
Material: Steel
Certifications: UL

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
UNF-50	1/2"	10	50
UNF-75	3/4"	5	25
UNF-100	1"	5	25

EXPLOSION PROOF - TYPE EYA SEALING FITTINGS - ALUMINUM

Prevents passage of gases, vapors, or flames from one portion of conduit system to another



Features: Dust ignition-proof, Raintight and restricts any explosion to the sealed off enclosure
Material: Aluminum
Certifications: UL

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
EYA-50A	1/2"	10	50
EYA-75A	3/4"	5	25
EYA-100A	1"	5	25

PACKING FIBER NON-ASBESTOS

Forms a dam between the bushing of the sealing fitting and the end of the conduit around the conductors entering the hub



Features: Packs easily to form around each conductor
Material: Ceramic Fiber

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
EYPF-4	4 oz. ctn.	1	10
EYPF-8	8 oz. ctn.	1	10
EYPF-16	1 lb. ctn.	-	1

EXPLOSION PROOF - TYPE EYA SEALING FITTINGS MALLEABLE IRON

Prevents passage of gases, vapors, or flames from one portion of conduit system to another



Features: Dust ignition-proof, Raintight and restricts any explosion to the sealed off enclosure
Material: Malleable Iron
Certifications: UL

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
EYA-50	1/2"	10	50
EYA-75	3/4"	5	25
EYA-100	1"	5	25

SEALING COMPOUND EXPLOSION PROOF FITTINGS

Forms a seal around electrical conductors and the inside of the sealing fitting to restrict the passage of gases and vapors



Features: Water soluble that can be easily mixed and poured
Material: Hydraulic Cement

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
EYSC-8	8 oz. tub	1	12
EYSC-16	16 oz. tub	1	12
EYSC-80	5 lb. tub	1	6
EYSC-160	10 lb. tub	1	4

EXPLOSION PROOF - TYPE EYS SEALING FITTINGS MALLEABLE IRON

Prevents passage of gases, vapors, or flames from one portion of conduit system to another



Features: Dust ignition-proof, Raintight and restricts any explosion to the sealed off enclosure
Material: Malleable Iron
Certifications: UL

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
EYS-1	1/2"	10	50
EYS-2	3/4"	5	25
EYS-3	1"	5	25

PECO
PRODUCTO ELECTRIC CORP

LIQUIDTIGHT FITTINGS

CONNECTORS

LIQUIDTIGHT CONDUIT

COMBINATION COUPLINGS



RT50-S

STRAIGHT LIQUIDTIGHT CONNECTORS - STEEL

To secure and seal Liquidtight conduit to a box or enclosure



Features: Insulated throat protects conductors from abrasion damage
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-38S	3/8"	25	250
RT-50S	1/2"	25	250
RT-75S	3/4"	10	100
RT-100S	1"	5	50
RT-125S	1 1/4"	5	50
RT-150S	1 1/2"	10	50
RT-200S	2"	5	25

STRAIGHT LIQUIDTIGHT CONNECTORS MALLEABLE IRON

To secure and seal Liquidtight conduit to a box or enclosure



Features: Insulated throat protects conductors from abrasion damage
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-38MA	3/8"	25	250	RT-200MA	2"	5	25
RT-50MA	1/2"	25	250	RT-250MA	2 1/2"	1	10
RT-75MA	3/4"	10	100	RT-300MA	3"	1	10
RT-100MA	1"	5	50	RT-350MA	3 1/2"	1	10
RT-125MA	1 1/4"	5	50	RT-400MA	4"	1	5
RT-150MA	1 1/2"	10	50				

90° LIQUIDTIGHT CONNECTORS MALLEABLE IRON

To secure and seal Liquidtight conduit to a box or enclosure



Features: Insulated throat protects conductors from abrasion damage
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-90-38MA	3/8"	10	100	RT-90-200MA	2"	-	5
RT-90-50MA	1/2"	10	100	RT-90-250MA	2 1/2"	-	1
RT-90-75MA	3/4"	10	100	RT-90-300MA	3"	-	1
RT-90-100MA	1"	5	50	RT-90-350MA	3 1/2"	-	1
RT-90-125MA	1 1/4"	-	10	RT-90-400MA	4"	-	1
RT-90-150MA	1 1/2"	-	10				

45° LIQUIDTIGHT CONNECTORS MALLEABLE IRON

To secure and seal Liquidtight conduit to a box or enclosure



Features: Insulated throat protects conductors from abrasion damage
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-45-38MA	3/8"	10	100	RT-45-200MA	2"	-	5
RT-45-50MA	1/2"	10	100	RT-45-250MA	2 1/2"	-	1
RT-45-75MA	3/4"	10	100	RT-45-300MA	3"	-	1
RT-45-100MA	1"	5	50	RT-45-350MA	3 1/2"	-	1
RT-45-125MA	1 1/4"	-	10	RT-45-400MA	4"	-	1
RT-45-150MA	1 1/2"	-	10				

STRAIGHT LIQUIDTIGHT CONNECTORS - ZINC

To secure and seal Liquidtight conduit to a box or enclosure



Features: Liquidtight, Raintight, Oiltight
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-38	3/8"	25	250	RT-200	2"	5	25
RT-50	1/2"	25	250	RT-250	2 1/2"	-	1
RT-75	3/4"	10	100	RT-300	3"	-	1
RT-100	1"	5	50	RT-350	3 1/2"	-	1
RT-125	1 1/4"	5	50	RT-400	4"	-	1
RT-150	1 1/2"	10	50				

90° LIQUIDTIGHT CONNECTORS ZINC

To secure and seal Liquidtight conduit to a box or enclosure



Features: Liquidtight, Raintight, Oiltight
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-90-38	3/8"	10	100	RT-90-200	2"	-	5
RT-90-50	1/2"	10	100	RT-90-250	2 1/2"	-	1
RT-90 75	3/4"	10	100	RT-90-300	3"	-	1
RT-90-100	1"	5	50	RT-90-350	3 1/2"	-	1
RT-90-125	1 1/4"	-	10	RT-90-400	4"	-	1
RT-90-150	1 1/2"	-	10				

STRAIGHT LIQUIDTIGHT CONNECTORS NON-METALLIC

To secure and seal Liquidtight conduit to a box or enclosure



Features: For use in wet or dry locations
Material: Nylon
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
NMLT-38	3/8"	25	100
NMLT-50	1/2"	25	100
NMLT-75	3/4"	10	100
NMLT-100	1"	10	50
NMLT-125	1 1/4"	5	25
NMLT-150	1 1/2"	2	10
NMLT-200	2"	2	10

90° LIQUIDTIGHT CONNECTORS NON-METALLIC

To secure and seal Liquidtight conduit to a box or enclosure



Features: For use in wet or dry locations
Material: Nylon
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
NMLT-90-38	3/8"	25	100
NMLT-90-50	1/2"	25	100
NMLT-90-75	3/4"	10	100
NMLT-90-100	1"	10	50
NMLT-90-125	1 1/4"	5	25
NMLT-90-150	1 1/2"	2	10
NMLT-90-200	2"	2	10

LIQUIDTIGHT CONDUIT NON-METALLIC

For use in wet locations, suitable for commercial and industrial use



Features: Sunlight resistant, approved for direct burial
Material: Nylon
Certifications: cULus

Catalog Number	Trade Size	Length	Unit Pkg.	Standard Pkg.
NMLC-50	1/2"	100'	-	1
NMLC-50R	1/2"	1000'	-	1
NMLC-75	3/4"	100'	-	1
NMLC-75R	3/4"	800'	-	1
NMLC-100	1"	100'	-	1
NMLC-100R	1"	500'	-	1
NMLC-125	1 1/4"	50'	-	1
NMLC-150	1 1/2"	50'	-	1
NMLC-200	2"	50'	-	1

COMBINATION COUPLINGS LIQUIDTIGHT TO EMT CONDUIT

Connects Liquidtight conduit to EMT conduit



Features: Liquidtight, Raintight, Oiltight
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RT-260	1/2"	25	250
RT-261	3/4"	20	200

COMBINATION COUPLINGS RIGID TO LIQUIDTIGHT

Connects Liquidtight conduit to Rigid/IMC conduit



Features: Liquidtight, Raintight, Oiltight
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RTCC-50	1/2"	20	200
RTCC-75	3/4"	10	100

CABLE CONNECTORS

- SQUEEZE CONNECTORS
- CLAMP TYPE CONNECTOR
- NON-WATERTIGHT CONNECTORS
- BX CONNECTORS
- SADDLE TYPE CONNECTORS
- DUPLEX CONNECTORS
- COMBINATION COUPLINGS
- TAKE-ALL CONNECTORS
- STRAPS
- SCREW-IN CONNECTORS
- SNAP CONNECTORS
- COMBINATION CONNECTOR
- SET SCREW CONNECTOR



220

STRAIGHT SQUEEZE TYPE CONNECTORS - ZINC



Use to connect flexible metallic conduit and steel AC cable to a steel outlet box

Features: Rugged metallic construction ensures mechanical protection
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
220	3/8"	50	500
222	1/2"	25	250
223	3/4"	25	250
225	1"	10	100
226	1 1/4"	10	100
227	1 1/2"	5	50
228	2"	10	40

90° SQUEEZE TYPE CONNECTORS - ZINC



Use to connect flexible metallic conduit and steel AC cable to a steel outlet box

Features: Quality set screw design tightens fast and easy
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
40	3/8"	50	500
41	1/2"	25	250
42	3/4"	10	100
43	1"	5	50
44	1 1/4"	10	40
45	1 1/2"	-	10
46	2"	-	5

STRAIGHT SQUEEZE TYPE CONNECTORS MALLEABLE IRON



Use to connect flexible metallic conduit and steel AC cable to a steel outlet box

Features: Rugged metallic construction ensures mechanical protection
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
220M	3/8"	25	250	228M	2"	-	10
222M	1/2"	25	250	229M	2 1/2"	-	5
223M	3/4"	25	250	230M	3"	-	5
225M	1"	10	100	231M	3 1/2"	-	1
226M	1 1/4"	10	100	232M	4"	-	1
227M	1 1/2"	-	10				

90° SQUEEZE TYPE CONNECTORS MALLEABLE IRON



Use to connect flexible metallic conduit and steel AC cable to a steel outlet box

Features: Rugged metallic construction ensures mechanical protection
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
40M	3/8"	50	500	46M	2"	-	5
41M	1/2"	25	250	47M	2 1/2"	-	2
42M	3/4"	10	100	48M	3"	-	1
43M	1"	5	50	49M	3 1/2"	-	1
44M	1 1/4"	-	10	49M-A	4"	-	1
45M	1 1/2"	-	10				

NM CLAMP TYPE CABLE CONNECTOR



For connecting non-metallic cable to box or enclosure

Features: Assembled with die-cast locknut and tri-combo screws
Material: Zinc
Certifications: cULus
*For NMB and UF
** For corrugated, continuous corrugated, and aluminum smooth extended

MC cable: Diameter: .50, Range .345-.525

Catalog Number	Trade Size	Length	Unit Pkg.	Standard Pkg.
*135	3/8"	.18-.64	100	1,000
**135-C	3/8"	.18-.63	100	1,000

NON-WATERTIGHT CONNECTORS - ROUND CABLE



Use to connect non-metallic sheathed cable to a steel box or enclosure

Features: Round type for NMB, UF, SEU, and SER
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
105R	3/4"	50	500
106R	1"	25	250
107R	1 1/4"	10	100
108R	1 1/2"	10	100
109R	2"	5	50

NON-WATERTIGHT CONNECTORS - OVAL CABLE



Use to connect non-metallic sheathed cable to a steel box or enclosure

Features: Oval type for NMB, UF, SEU, and SER
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
108	1 1/2"	10	100
109	2"	10	50

SET SCREW BX CONNECTOR
Connects BX/steel flex to box or enclosure



Features: End stopped
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Length	Unit Pkg.	Standard Pkg.
130	3/8"	14/2 to 10/3	100	1,000

SADDLE TYPE CONNECTOR
Use to connect NM, armored or metal clad cable to box or enclosure



Features: Dry location necessary when used with MC cable
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Length	Unit Pkg.	Standard Pkg.
132	3/8"	14/2 to 10/3	50	500

DUPLEX CONNECTOR CLAMP TYPE
Use to connect two pieces of FMC, AC, MC, or NM sheathed cable to box or enclosure using one knockout



Features: Dry location only
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
6	3/8"	25	250

DUPLEX BX CONNECTOR SINGLE SCREW
Use to connect flexible metallic conduit or armored cable to box or enclosure



Features: Dry location only
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
8	3/8"	25	250

COMBINATION COUPLINGS -EMT TO FLEXIBLE CONDUIT
Connects EMT conduit to flexible metal conduit


685


686 & 687

Features: Set-screw to clamp type
Material: Zinc
Certifications: cULus
* Product Approved for EMT to NM cable

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
*685	1/2" EMT to 3/8" Flex	10	100
686	1/2" EMT to 1/2" Flex	10	100
687	3/4" EMT to 3/4" Flex	10	100

TAKE-ALL CONNECTORS
Use to connect MC, AC, NM, and round SE into a box or enclosure



Features: Indoor dry location use only
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
TAC-50	1/2"	25	250
TAC-75	3/4"	20	200
TAC-100	1"	10	100
TAC-125	1 1/4"	10	100
TAC-150	1 1/2"	10	100
TAC-200	2"	5	50

SET SCREW TYPE CONNECTOR FOR FLEXIBLE CONDUIT
Connects flexible metal conduit to box or enclosure



Features: For use with steel only
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
938	1/2"	25	250

BX STRAP - ONE HOLE
To securely affix cables, tubing, and pipe



Features: Inverted rib provides extra strength
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Length	Unit Pkg.	Standard Pkg.
BX-50	3/8"	14/2 to 12/3	100	1,000
GWS-8	1/4" Mini	14/2 to 12/3	100	1,000

SNAP CONNECTORS
Use to join sheathed cable into box or enclosure



Features: Single-unit or duplex construction with captive clamp
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Length	Unit Pkg.	Standard Pkg.
MC-50	3/8" AC/MC SINGLE	10	100	50 / 500
MC-50D	3/8" AC/MC DOUBLE	10	100	25 / 250

PECO
PRODUCTO ELECTRIC CORP

STRAIN RELIEF CORD GRIPS

STRAIGHT CONNECTORS



CG-50-A250

STRAIGHT STRAIN RELIEF CORD CONNECTORS


Secures & seals cords or cables entering enclosures or raceways



Features: Provides excellent strain relief and prevents cable pullout
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
CG-50-A250	1/2"	25	100	CG-100-B750	1"	10	100
CG-50-A350	1/2"	25	100	CG-100-B850	1"	10	100
CG-50-A450	1/2"	25	100	CG-100-C950	1"	10	100
CG-50-A560	1/2"	25	100	CG-100-C1050	1"	10	100
CG-50-A650	1/2"	25	100	CG-125-C850	1 1/4"	5	50
CG-75-A250	3/4"	25	100	CG-125-C950	1 1/4"	5	50
CG-75-A350	3/4"	25	100	CG-125-D1050	1 1/4"	5	50
CG-75-A450	3/4"	25	100	CG-125-D1150	1 1/4"	5	50
CG-75-A560	3/4"	25	100	CG-125-D1250	1 1/4"	5	50
CG-75-A650	3/4"	25	100	CG-125-D1375	1 1/4"	5	50
CG-75-B750	3/4"	25	100	CG-150-D1050	1 1/2"	5	25
CG-75-B850	3/4"	25	100	CG-150-D1150	1 1/2"	5	25
CG-100-B560	1"	10	100	CG-150-D1250	1 1/2"	5	25
CG-100-B650	1"	10	100	CG-150-D1375	1 1/2"	5	25

DISCOVER THE PECO DIFFERENCE

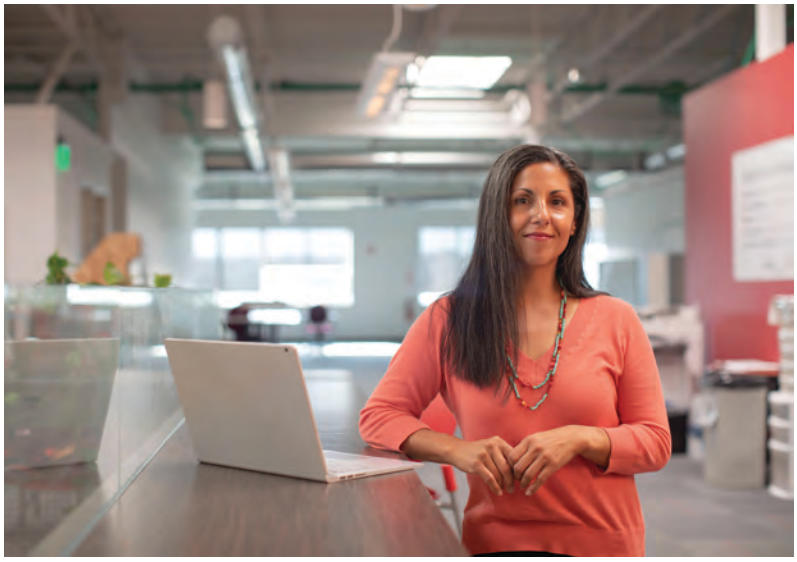

EXCEPTIONAL CUSTOMER SERVICE

CORD SELECTION TABLE

Catalog Number	Trade Size	Cable Range		Color	For Types S, SO, ST & STO	For Types SJ, STO, SJT SJTO, SVO and Bus Drop
		Min.	Max.			
CG-50-A250	1/2"	.150	.250	RED		SVO: 18-2,3
CG-50-A350	1/2"	.250	.350	WHITE		SJT: 18-2,3 SJO: 18-2,3,4 16-2,3
CG-50-A450	1/2"	.350	.450	BLUE	18-2,3,4 16-2,3,4	SJO: 16-4, 14-2,3,4 12-2 BUS DROP: 14-3
CG-50-A560	1/2"	.450	.560	GREEN	18-5,6,7 16-4,5,6 14-2,3	SJO: 12-3 BUS DROP: 12-3 10-3
CG-50-A650	1/2"	.550	.650	BROWN	18-8,10 16-7,8 14-4 12-2,3 10-2	
CG-75-A250	3/4"	.150	.250	RED		SVO: 18-2,3
CG-75-A350	3/4"	.250	.350	WHITE		SJT: 18-2,3 SJO: 18-2,3,4 16-2,3
CG-75-A450	3/4"	.350	.450	BLUE	18-2,3,4 16-2,3,4	SJO: 16-4, 14-2,3,4 12-2 BUS DROP: 14-3
CG-75-A560	3/4"	.450	.560	GREEN	18-5,6,7 16-4,5,6 14-2,3	SJO: 12-3 BUS DROP: 12-3 10-3
CG-75-A650	3/4"	.550	.650	BROWN	18-8,10 16-7,8 14-4 12-2,3 10-2	
CG-75-B750	3/4"	.650	.750	YELLOW	18-12,14 16-10,12 14-5,6,7 12-4,5 10-3,4 8-2	BUS DROP: 8-3
CG-75-B850	3/4"	.750	.850	PURPLE	18-16,18,20 16-14,16,18 14-8 12-6,7,8 10-5 8-3,4 6-2	BUS DROP: 6-3
CG-100-B560	1"	.450	.560	GREEN	18-5,6,7 16-4,5,6 14-2,3	SJO: 12-3 BUS DROP: 12-3 10-3
CG-100-B650	1"	.550	.650	BROWN	18-8,10 16-7,8 14-4 12-2,3 10-2	
CG-100-B750	1"	.650	.750	YELLOW	18-12,14 16-10,12 14-5,6,7 12-4,5 10-3,4 8-2	BUS DROP: 8-3
CG-100-B850	1"	.750	.850	PURPLE	18-16,18,20 16-14,16,18 14-8 12-6,7,8 10-5 8-3,4 6-2	BUS DROP: 6-3
CG-100-C950	1"	.850	.950	GRAY	18-22,24,26 16-20,22,24 14-10,12 10-6,7,8 6-3,4	BUS DROP: 4-3
CG-100-C1050	1"	.950	1.050	BLACK	18-30 16-26 14-14,16 12-10 4-3	
CG-125-C850	1 1/4"	.750	.850	PURPLE	18-16,18,20 16-14,16,18 14-8 12-6,7,8 10-5 8-3,4 6-2	BUS DROP: 6-3
CG-125-C950	1 1/4"	.850	.950	GRAY	18-22,24,26 16-20,22,24 14-10,12 10-6,7,8 6-3,4	BUS DROP: 4-3
CG-125-D1050	1 1/4"	.950	1.050	BLACK	18-30 16-26 14-14,16 12-10 4-3	
CG-125-D1150	1 1/4"	1.050	1.150	ORANGE	18-36,40 16-30,36 14-18,20 12-12,14 10-10 4-4	BUS DROP: 2-3
CG-125-D1250	1 1/4"	1.150	1.250	RED	16-40 14-22 12-16,18 10-12,14 2-3	
CG-125-D1375	1 1/4"	1.250	1.375	WHITE	14-24,26 12-20 10-16 2-4	
CG-150-D1050	1 1/2"	.950	1.050	BLACK	18-30 16-26 14-14,16 12-10 4-3	
CG-150-D1150	1 1/2"	1.050	1.150	ORANGE	18-36,40 16-30,36 14-18,20 12-12,14 10-10 4-4	BUS DROP: 2-3
CG-150-D1250	1 1/2"	1.150	1.250	RED	16-40 14-22 12-16,18 10-12,14 2-3	
CG-150-D1375	1 1/2"	1.250	1.375	WHITE	14-24,26 12-20 10-16 2-4	

PVC FITTINGS

- ELBOWS
- EXPANSION JOINTS
- ENTRANCE HEADS
- CONDUIT BODIES
- ADAPTERS
- COUPLINGS
- MOLDED REDUCERS
- MOLDED END BELLS
- END CAPS
- CONDUIT BOXES
- JUNCTION BOXES
- DUPLEX BOXES & COVERS
- TWO HOLE PIPE STRAPS
- PLOY PLUGS
- CONDUIT CEMENT & PRIMER



V90-S-50

PVC 90° STANDARD RADIUS ELBOWS

Use to change the direction of a conduit run by 90° degrees



Features: Indoor/outdoor use, suitable for aboveground or buried
Material: Schedule 40 PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
V90-S-50	1/2"	40	V90-S-250	2 1/2"	1
V90-S-75	3/4"	40	V90-S-300	3"	1
V90-S-100	1"	50	V90-S-350	3 1/2"	1
V90-S-125	1 1/4"	25	V90-S-400	4"	1
V90-S-150	1 1/2"	20	V90-S-500	5"	1
V90-S-200	2"	15	V90-S-600	6"	1

PVC 45° STANDARD RADIUS ELBOWS

Use to change the direction of a conduit run by 45° degrees



Features: Indoor/outdoor use, suitable for aboveground or buried
Material: Schedule 40 PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
V45-S-50	1/2"	50	V45-S-250	2 1/2"	1
V45-S-75	3/4"	50	V45-S-300	3"	1
V45-S-100	1"	50	V45-S-350	3 1/2"	1
V45-S-125	1 1/4"	35	V45-S-400	4"	1
V45-S-150	1 1/2"	20	V45-S-500	5"	1
V45-S-200	2"	15	V45-S-600	6"	1

PVC EXPANSION JOINTS

Allows for expansion and contraction in PVC conduit runs



Features: Watertight Seal
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VEJ-50	1/2"	25	VEJ-250	2 1/2"	12
VEJ-75	3/4"	10	VEJ-300	3"	12
VEJ-100	1"	10	VEJ-350	3 1/2"	9
VEJ-125	1 1/4"	5	VEJ-400	4"	6
VEJ-150	1 1/2"	5			
VEJ-200	2"	25			

PVC MAST ENTRANCE HEADS

Install on a vertical conduit to receive open wires from an electrical service line



Features: Weather resistant
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.
VMH-125	1 1/4"	20
VMH-150	1 1/2"	20
VMH-200	2"	5
VMH-250	2 1/2"	5
VMH-300	3"	5
VMH-350	3 1/2"	5
VMH-400	4"	1

PVC SERVICE CABLE CAPS

Use as a connecting point in an overhead service entrance for SEU cable



Features: Snap-on cover
Material: PVC

Catalog Number	Trade Size	Standard Pkg.
4P	3 No. 8-6-4-2	50
4XL	3 No. 3/0-4/0	10

PVC TYPE C CONDUIT BODIES

Use as a connector in straight line installations that allow access for wire pulling



Features: Rectangular shaped conduit body with a removable cover
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VC-50	1/2"	25	VC-200	2"	5
VC-75	3/4"	15	VC-250	2 1/2"	5
VC-100	1"	10	VC-300	3"	5
VC-125	1 1/4"	10	VC-350	3 1/2"	4
VC-150	1 1/2"	10	VC-400	4"	4

PVC TYPE LB CONDUIT BODIES

Use for a change of direction of the conduit run with the back hub usually exiting through a wall



Features: Rectangular shaped conduit body with a removable cover
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VLB-50	1/2"	25	VLB-200	2"	5
VLB-75	3/4"	15	VLB-250	2 1/2"	5
VLB-100	1"	10	VLB-300	3"	5
VLB-125	1 1/4"	10	VLB-350	3 1/2"	4
VLB-150	1 1/2"	10	VLB-400	4"	4

PVC TYPE LL CONDUIT BODIES



Use for a 90° change of direction of the conduit run

Features: Rectangular shaped conduit body with a removable cover
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VLL-50	1/2"	25	VLL-200	2"	5
VLL-75	3/4"	15	VLL-250	2 1/2"	5
VLL-100	1"	10	VLL-300	3"	5
VLL-125	1 1/4"	10	VLL-350	3 1/2"	4
VLL-150	1 1/2"	10	VLL-400	4"	4

PVC TYPE LR CONDUIT BODIES



Use for a 90° change of direction of the conduit run

Features: Rectangular shaped conduit body with a removable cover
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VLR-50	1/2"	25	VLR-200	2"	5
VLR-75	3/4"	15	VLR-250	2 1/2"	5
VLR-100	1"	10	VLR-300	3"	5
VLR-125	1 1/4"	10	VLR-350	3 1/2"	4
VLR-150	1 1/2"	10	VLR-400	4"	4

PVC TYPE T CONDUIT BODIES



Allows 3-way inline access in conduit systems

Features: Rectangular shaped conduit body with a removable cover
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VT-50	1/2"	25	VT-200	2"	5
VT-75	3/4"	15	VT-250	2 1/2"	2
VT-100	1"	10	VT-300	3"	2
VT-125	1 1/4"	10	VT-350	3 1/2"	1
VT-150	1 1/2"	10	VT-400	4"	1

PVC TERMINAL MALE ADAPTERS



Connects PVC conduit to a threaded PVC or steel conduit bell or terminate raceway to a box or enclosure

Features: Fitting consists of one solvent female end and one threaded male end
Material: PVC
Certifications: cULus

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VTA-50	1/2"	200	VTA-250	2 1/2"	20
VTA-75	3/4"	125	VTA-300	3"	40
VTA-100	1"	70	VTA-350	3 1/2"	30
VTA-125	1 1/4"	40	VTA-400	4"	20
VTA-150	1 1/2"	30	VTA-500	5"	10
VTA-200	2"	40	VTA-600	6"	8

PVC FEMALE ADAPTERS



A connector used to transition threaded metal conduit to PVC conduit

Features: Fitting consists of two female ends, one is threaded and the other is solvent weld
Material: PVC
Certifications: cULus

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VFA-50	1/2"	200	VFA-250	2 1/2"	20
VFA-75	3/4"	125	VFA-300	3"	40
VFA-100	1"	70	VFA-350	3 1/2"	30
VFA-125	1 1/4"	40	VFA-400	4"	20
VFA-150	1 1/2"	30	VFA-500	5"	10
VFA-200	2"	40	VFA-600	6"	8

PVC JUNCTION BOX ADAPTERS



For use with hub inside box or enclosure

Features: Solvent welded connection for a watertight fit
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VBA-50	1/2"	100	VBA-200	2"	25
VBA-75	3/4"	100	VBA-250	2 1/2"	10
VBA-100	1"	100	VBA-300	3"	10
VBA-125	1 1/4"	50	VBA-350	3 1/2"	10
VBA-150	1 1/2"	50	VBA-400	4"	10

PVC COUPLINGS

Connects two lengths of PVC conduit



Features: Fitting consists of two female ends and a center stop
Material: PVC
Certifications: cULus

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VCPL-50	1/2"	200	VCPL-250	2 1/2"	20
VCPL-75	3/4"	125	VCPL-300	3"	40
VCPL-100	1"	70	VCPL-350	3 1/2"	30
VCPL-125	1 1/4"	40	VCPL-400	4"	20
VCPL-150	1 1/2"	30	VCPL-500	5"	10
VCPL-200	2"	40	VCPL-600	6"	8

PVC MOLDED REDUCERS

Bushing designed to fit into a bell end or female fitting to reduce knockout diameter



Features: All connections are solvent weld
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VMR-61	3/4" x 1/2"	100	VMR-81	2 1/2" x 2"	25
VMR-63	1" x 3/4"	100	VMR-88	3" x 2 1/2"	25
VMR-66	1 1/4" x 1"	50	VMR-404	4" x 3"	20
VMR-70	1 1/2" x 1 1/4"	50	VMR-405	4" x 3 1/2"	20
VMR-75	2" x 1 1/2"	25			

PVC MOLDED END BELLS

Use in concrete vault walls to provide a smooth, safe entrance to conduit outside



Features: Protects wiring being pulled through the vault wall
Material: PVC
Certifications: cULus

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VEB-50	1/2"	100	VEB-250	2 1/2"	30
VEB-75	3/4"	100	VEB-300	3"	50
VEB-100	1"	50	VEB-350	3 1/2"	50
VEB-125	1 1/4"	50	VEB-400	4"	50
VEB-150	1 1/2"	50	VEB-500	5"	25
VEB-200	2"	40	VEB-600	6"	15

PVC END CAPS

Caps off pipe openings, allows access for future expansion or service



Features: Easy to install slip fit
Material: PVC
Certifications: cULus

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VEC-50	1/2"	50	VEC-200	2"	50
VEC-75	3/4"	50	VEC-250	2 1/2"	50
VEC-100	1"	50	VEC-300	3"	50
VEC-125	1 1/4"	40	VEC-350	3 1/2"	25
VEC-150	1 1/2"	30	VEC-400	4"	25

PVC ELECTRICAL CONDUIT BOXES - TYPE FSE

Intended for conduit termination with one conduit hub and no outlet



Features: For indoor and outdoor locations where boxes are exposed and subject to environmental conditions
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.
VFS-50	1/2"	10
VFS-75	3/4"	10
VFS-100	1"	10

PVC ELECTRICAL CONDUIT BOXES - TYPE FSC

Intended for straight line conduit runs with one hub on each of the short walls of the box



Features: For indoor and outdoor locations where boxes are exposed and subject to environmental conditions
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.
VFSC-50	1/2"	10
VFSC-75	3/4"	10
VFSC-100	1"	10

PVC ELECTRICAL CONDUIT BOXES - TYPE FSCC

Intended for straight line conduit runs with two conduit hubs on one end and the conduit hub on the opposite side



Features: For indoor and outdoor locations where boxes are exposed and subject to environmental conditions
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.
VFSCC-50	1/2"	10
VFSCC-75	3/4"	10
VFSCC-100	1"	10

PVC ELECTRICAL CONDUIT BOXES - TYPE FSS

Intended for conduit termination with two conduit hubs on one end and no outlet



Features: For indoor and outdoor locations where boxes are exposed and subject to environmental conditions
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.
VFSS-50	1/2"	10
VFSS-75	3/4"	10
VFSS-100	1"	10

PVC ELECTRICAL CONDUIT BOXES - TYPE FDB



Designed to allow for a hub opening to be cut into the box depending on application

Features: For indoor and outdoor locations where boxes are exposed and subject to environmental conditions
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.
VFD	-	10

PVC JUNCTION BOXES



Designed to support electrical devices and fixtures

Features: Enclosure allows multiple conduits to be connected and wire splice made within
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VJB-442	4" x 4" x 2"	10	VJB-886	8" x 8" x 6"	4
VJB-444	4" x 4" x 4"	10	VJB-887	8" x 8" x 7"	4
VJB-664	6" x 6" x 4"	10	VJB-12124	12" x 12" x 4"	2
VJB-666	6" x 6" x 6"	5	VJB-12126	12" x 12" x 6"	2
VJB-884	8" x 8" x 4"	5			

PVC BLANK COVERS



Covers wiring devices inside box after installation

Features: Includes gasket and screws
Material: PVC
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.
VBC	-	50

PVC TWO HOLE PIPE STRAPS



Conduit support device used to anchor conduit to interior or exterior surfaces

Features: Two hole construction enables greater load bearing capacity
Material: PVC
Certifications: cULus

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
VTH-50	1/2"	300	VTH-200	2"	200
VTH-75	3/4"	200	VTH-250	2 1/2"	100
VTH-100	1"	200	VTH-300	3"	100
VTH-125	1 1/4"	200	VTH-400	4"	100
VTH-150	1 1/2"	200			

PVC FLOOR BOX BASE



Designed to be embedded in concrete floor giving access to power and data lines

Features: PVC molded parts and reducer plugs included
Material: PVC
Certifications: UL

Catalog Number	Description	Standard Pkg.
VFB	Floor Box w/temporary protective cap	9

PVC FLOOR BOX DUPLEX RECEPTACLE COVER



Bronze color PVC cover with duplex cut out

Features: Includes corrosion resistant hardware
Material: PVC
Certifications: UL

Catalog Number	Description	Standard Pkg.
VFBDRC	Floor Box Cover Bronze color	9

PVC CONDUIT SOLVENT CEMENT



For use on duct and conduit PVC pipe

Features: Medium body, medium set clear cement

Catalog Number	Size	Standard Pkg.
VCEM-1/2PT	1/2 Pint	24
VCEM-PT	1 Pint	12
VCEM-QT	1 Quart	12

CLEAR PRIMER FOR PVC CEMENT



Removes dirt, oils and other contaminants from the surface of PVC pipe

Features: Multi-purpose

Catalog Number	Size	Standard Pkg.
VPRIM-PT	1 Pint	12

PECO
PRODUCTO ELECTRIC CORP

WEATHERPROOF PRODUCTS

- PAR LAMPHOLDER
- CLOSURE PLUGS
- BOXES
- COVERS
- OUTLET COVERS



PT-11

WEATHERPROOF LAMPHOLDERS

Suitable for wet locations



Features: Available in gray or white with powder coat finish
Material: Aluminum
Certifications: cULus

Catalog Number	Description	Standard Pkg.
PAR-1	Gray	50
PAR-1W	White	50

CLOSURE PLUGS

To safely seal unused hubs in metallic outlet boxes



Features: UL listed for wet locations
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
P-1	1/2" Gray	100	1,000
P-1W	1/2" White	100	1,000
P-2	3/4" Gray	50	500
P-2W	3/4" White	50	500
P-3	1" Gray	50	500
P-3W	1" White	50	500

SINGLE GANG WEATHERPROOF BOXES

For wall or pole mounting of outdoor outlets, switches, or floodlights



Features: Boxes include closure plugs, grounding screws, and mounting lug hardware
Material: Aluminum
Certifications: cULus

Catalog Number	Hub Size	No. Outlets	Color	Unit Pkg.	Standard Pkg.	Catalog Number	Hub Size	No. Outlets	Color	Unit Pkg.	Standard Pkg.
PL-11	1/2"	3	Gray	10	50	PL-14W	3/4"	3	White	10	50
PL-11W	1/2"	3	White	10	50	PL-14-2	3/4"	4	Gray	10	50
PL-11-2	1/2"	4	Gray	10	50	PL-14-2W	3/4"	4	White	10	50
PL-11-2W	1/2"	4	White	10	50	PL-14-22	3/4"	5	Gray	10	50
PL-11-22	1/2"	5	Gray	10	50	PL-14-22W	3/4"	5	White	10	50
PL-11-22W	1/2"	5	White	10	50	PL-15	1"	3	Gray	10	50
PL-14	3/4"	3	Gray	10	50	PL-15-22	1"	5	Gray	10	50

DOUBLE GANG WEATHERPROOF BOXES

For wall or pole mounting of outdoor outlets, switches, or floodlights



Features: Boxes include closure plugs, grounding screws, and mounting lug hardware
Material: Aluminum
Certifications: cULus

Catalog Number	Hub Size	No. Outlets	Color	Unit Pkg.	Standard Pkg.	Catalog Number	Hub Size	No. Outlets	Color	Unit Pkg.	Standard Pkg.
PT-11	1/2"	3	Gray	10	40	PT-14W	3/4"	3	White	10	40
PT-11W	1/2"	3	White	10	40	PT-14-22	3/4"	4	Gray	10	40
PT-11-22	1/2"	4	Gray	10	40	PT-14-22W	3/4"	4	White	10	40
PT-11-22W	1/2"	4	White	10	40	PT-15	1"	3	Gray	10	40
PT-14	3/4"	5	Gray	10	40	PT-15-22	1"	5	Gray	10	40

4" ROUND WEATHERPROOF BOXES

For use with all round outlet box and outlet covers



Features: For wall or ceiling mounting
Material: Aluminum
Certifications: cULus

Catalog Number	Hub Size	No. Outlets	Color	Unit Pkg.	Standard Pkg.
PR11-4	1/2"	5	Gray	10	40
PR11-4W	1/2"	5	White	10	40
PR14-4	3/4"	5	Gray	10	40
PR14-4W	3/4"	5	White	10	40

BLANK WEATHERPROOF COVERS

For use with single or double gang outdoor boxes



Features: Weather seal gasket to block moisture
Material: Aluminum
Certifications: cULus

Catalog Number	Type	Color	Unit Pkg.	Standard Pkg.
PC-0	Single	Gray	20	100
PC-0W	Single	White	20	100
PC-02	Double	Gray	10	50
PC-02W	Double	White	10	50

4" ROUND WEATHERPROOF COVERS

For use with round outdoor device box



Features: Weather seal gasket to block moisture
Material: Aluminum
Certifications: cULus

Catalog Number	Hub Size	No. Outlets	Color	Unit Pkg.	Standard Pkg.
PR-1	1/2"	1	Gray	10	50
PR-1W	1/2"	1	White	10	50
PR-2	1/2"	2	Gray	10	50
PR-2W	1/2"	2	White	10	50
PR-3	1/2"	3	Gray	10	50
PR-3W	1/2"	3	White	10	50

G.F.I. WEATHERPROOF COVERS

For use with single gang outdoor box



Features: Aluminum die-cast cover with a spring loaded lid
Material: Aluminum
Certifications: cULus

Catalog Number	Hub Size	Orientation	Color	Unit Pkg.	Standard Pkg.
FG-1DC	Single	Horizontal	Gray	5	50
FG-1DCW	Single	Horizontal	White	5	50

POWER OUTLET WEATHERPROOF COVERS

For use with single or double gang outdoor box



Features: Aluminum die-cast cover with a spring loaded lid
Material: Aluminum
Certifications: cULus

Catalog Number	Size	Orientation	Ampere	Unit Pkg.	Standard Pkg.
PO-50	Single	Vertical	30-50	10	50
TPO-50V	Double	-	20-30-50	10	50

SINGLE RECEPTACLE WEATHERPROOF COVERS

For use with 1.406 diameter receptacle in a single outlet box



Features: Aluminum die-cast cover with a spring loaded lid
Material: Aluminum
Certifications: cULus

Catalog Number	Size	Orientation	Color	Unit Pkg.	Standard Pkg.
PC-71	Single	Vertical	Gray	10	50
PC-71W	Single	Vertical	White	10	50

SINGLE GANG DUPLEX RECEPTACLE WEATHERPROOF COVERS

Will fit all duplex receptacles in single outlet boxes



Features: Aluminum die-cast cover with a spring loaded lid
Material: Aluminum
Certifications: cULus

Catalog Number	Size	Orientation	Color	Unit Pkg.	Standard Pkg.
PC-81	Single	Horizontal	Gray	10	50
PC-81W	Single	Horizontal	White	10	50

DOUBLE GANG DUPLEX RECEPTACLE WEATHERPROOF COVERS

For use with double gang outdoor device box



Features: Aluminum die-cast cover with a spring loaded lid
Material: Aluminum
Certifications: cULus

Catalog Number	Size	Color	Unit Pkg.	Standard Pkg.
PC-271	Double	Gray	10	50
PC-271W	Double	White	10	50

DOUBLE GANG DUAL DUPLEX WEATHERPROOF COVERS

For use with double gang outdoor device box



Features: Aluminum die-cast cover with a spring loaded lid
Material: Aluminum
Certifications: cULus

Catalog Number	Size	Color	Unit Pkg.	Standard Pkg.
PC-261	Double	Gray	10	50
PC-261W	Double	White	10	50

RECTANGULAR WEATHERPROOF COVERS

Fits FS device boxes and listed for wet locations



Features: Available with 1, 2 or 3 hole configurations
Material: Aluminum
Certifications: cULus

Catalog Number	Hub Size	No. Outlets	Color	Unit Pkg.	Standard Pkg.
PC-1	1/2"	1	Gray	10	50
PC-1W	1/2"	1	White	10	50
PC-2	1/2"	2	Gray	10	50
PC-2W	1/2"	2	White	10	50
PC-3	1/2"	3	Gray	10	50
PC-3W	1/2"	3	White	10	50

SERVICE ENTRANCE

- ENTRANCE HEADS
- MAST KITS
- ENTRANCE ELLS - SLB
- WATERTIGHT CONNECTORS
- UF CONNECTORS
- STRAPS
- ROOF FLASHING



705

CLAMP ON ENTRANCE HEADS

Provides water resistant cap to protect service entrance cables



Features: Mounts on top of Rigid/IMC conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
700	1/2"	10	50	705	2"	-	5
701	3/4"	10	50	706	2 1/2"	-	2
702	1"	5	25	707	3"	-	2
703	1 1/4"	5	25	708	3 1/2"	-	1
704	1 1/2"	-	10	709	4"	-	1

THREADED SERVICE ENTRANCE HEADS

Provides water resistant cap to protect service entrance cables



Features: Mounts on top of Rigid/IMC conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
26	1/2"	10	50	32	2 1/2"	-	2
27	3/4"	10	50	33	3"	-	1
28	1"	10	50	34	3 1/2"	-	1
29	1 1/4"	5	25	35	4"	-	1
30	1 1/2"	-	10	36	5"	-	1
31	2"	-	5	37	6"	-	1

MAST ENTRANCE HEADS

Caps overhead service entrance



Features: Eliminates sharp edges to protect wire
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
712	2" X 1 1/4"	10	80
713	2" X 1 1/2"	10	80
715	2 1/2" X 1 1/4"	5	80
717	2" X 2"	5	180

SERVICE CABLE CAPS

Caps overhead services that utilize SEU cable



Features: Provides water resistant cap when mounted on conduit
Material: Aluminum
Certifications: cULus

Catalog Number	Cable Size	Standard Pkg.
4L	3 #8 to 3 #1	50
4XL-AL	1/0 - 4/0	10

ENTRANCE ELLS (SLB)

Enables effortless wire pulling when raceway alters direction



Features: Allows access for inspection, pulling and maintenance
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
730	1/2"	10	50	734	1 1/2"	-	10
731	3/4"	10	50	735	2"	-	10
732	1"	5	25	733-XL	1 1/4"	-	10
733	1 1/4"	-	10	735-XL	2"	-	10

SERVICE ENTRANCE MAST KITS

Provides an assortment of SE mast components for the installation of overhead service drops



Features: Kits eliminate the need to purchase and stock additional components

Catalog Number	Kit Contents	Standard Pkg.
MK-200	1 - 2" Clamp-on entrance head 1 - Roof flange & neoprene seal 1 - Pipe mounting wireholder 2 - 2" Two hole pipe straps	1
MK-250	1 - 2 1/2" Clamp-on entrance head 1 - Roof flange & neoprene seal 1 - Pipe mounting wireholder 2 - 2 1/2" Two hole pipe straps	1

ROOF FLASHING

Watertight protection for service entrance conduit or ventilation pipes



Features: Strong galvanized steel with neoprene seal
Material: Steel/Neoprene
Certifications: UL

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
RF2	2"	25	250
RF25	2 1/2"	25	250

ROMEX AND SEU STRAPS

Supports service entrance cable, types SE & SEU to mounting surface



Features: Heavy gauge steel for extra strength
Material: Steel
Certifications: cULus

Catalog Number	Cable Size	Unit Pkg.	Standard Pkg.
188A	14-2, 12-2	200	2,000
188B	14-3, 12-3	200	2,000

UF CONNECTORS

Use to secure SE/SEU cable to a metal enclosure



Features: For underground feeder cable
Material: Zinc
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
UF-50	1/2"	25	250
UF-75	3/4"	25	250

INSTALLATION SUPPORTS

- CONDUIT HANGERS
- BEAM CLAMPS
- CEILING BOX SUPPORTS
- SWITCH BOX SUPPORTS
- ADJUSTABLE PIPE WIREHOLDERS
- PIPE WIREHOLDERS
- PORCELAIN WIREHOLDERS
- PORCELAIN SPLIT INSULATORS



H50WB

CONDUIT HANGERS

Secures EMT or Rigid conduit to threaded rod, insulator supports, or mounting surface



Features: Assembled with nut and bolt
Material: Steel
Certifications: cULus

Catalog Number	Rigid	EMT	Unit Pkg.	Standard Pkg.	Catalog Number	Rigid	EMT	Unit Pkg.	Standard Pkg.
H50WB	1/2"	1/2"	100	500	H200WB	2"	2"	-	50
H75WB	3/4"	3/4"	-	100	H250WB	2 1/2"	2 1/2"	-	50
H100WB	1"	1"	-	100	H300WB	3"	3"	-	50
H125AWB	-	1 1/4"	-	100	H350WB	3 1/2"	3 1/2"	-	25
H125WB	1 1/4"	1 1/2"	-	100	H400WB	4"	4"	-	25
H150WB	1 1/2"	-	-	100					

BEAM CLAMPS MALLEABLE IRON

Supports threaded rod, threaded brindle rings and electrical boxes



Features: Body will not distort or slip when tightened
Material: Malleable Iron
Certifications: cULus

Catalog Number	Trade Size	Tap Size	Standard Pkg.	Catalog Number	Trade Size	Tap Size	Standard Pkg.
902	3/4"	1/4-20	100	904	2"	3/8-16	50
903	3/4"	3/8-16	100	905	2 1/2"	1/2-13	25

BEAM CLAMPS - STEEL

Supports threaded rod, threaded brindle rings and electrical boxes



Features: Single screw, 2 hole assembly
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Tap Size	Standard Pkg.
902S	3/4"	1/4-20	100
904S	3/4"	3/8-16	100

CEILING BOX SUPPORTS

Use for box installations where space and access may be limited



Features: Steel bars ensure performance and longevity
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Standard Pkg.
CBS	1" to 2"	50

SWIVEL FIXTURE HANGERS

Permits fixture to swing freely, allowing easy removal



Features: Supports weight up to 50 lbs.
Material: Steel
Certifications: cULus

Catalog Number	Size	Standard Pkg.	Use
SWV-4R	1/2" or 3/4" Round	25	Fits 4" Octagon Box
SWV-4S	1/2" or 3/4" Square	25	Fits 4" Square Box

ADJUSTABLE PIPE WIREHOLDERS

Protects sheathing and ensures performance



Features: Corrosion resistant for secure installation
Material: Porcelain/Steel

Catalog Number	Trade Size	Porcelain Opening	Standard Pkg.
AWH-300	1 1/4" - 3"	7/8" - 1"	20

PORCELAIN WIREHOLDERS

Secures wires before entry into a mast or SE cap



Features: Includes lag bolt
Material: Porcelain/Steel

Catalog Number	Trade Size	Porcelain Opening	Standard Pkg.
B63-C	2"	7/8" - 1"	25
B73-C	2 1/2"	7/8" - 1"	10

PIPE MOUNTING WIREHOLDERS

Secures wires before entry into a mast or SE cap



Features: Protects sheathing
Material: Porcelain/Steel

Catalog Number	Trade Size	Porcelain Opening	Standard Pkg.
B3625	1/4" x 2"	3/8" - 1/2"	100
B3627	3/8" x 2 1/2"	7/8" - 1"	50

PORCELAIN SPLIT INSULATOR

Utilized for enhanced power transmission



Features: Highest quality electrical grade material
Material: Porcelain
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
SI-100	1"	10	100	SI-150	1 1/2"	5	50

GROUNDING

- GROUND CLAMPS
- CONDUIT HUBS & ROD CLAMPS
- LUGS
- TERMINAL LUGS
- GREEN PIGTAILS
- SPLIT BOLT CONNECTORS



12C

GROUND CLAMPS BARE WIRE - BRONZE

Use to ground bare wire to galvanized steel pipes or copper tubing



Features: Rotational movement of clamps permit fast approval when required
Material: Bronze
Certifications: cULus
* Brass screws

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
19B	1/2" to 1"	25	250
*B19B	1/2" to 1"	25	250
59B	1 1/4" to 2"	-	50
*B59B	1 1/4" to 2"	-	50
56B	2 1/2" to 4"	-	10
*B56B	2 1/2" to 4"	-	10
57B	4" to 6"	-	5

GROUND CLAMPS BARE WIRE - ZINC

Use to ground bare wire to galvanized steel pipes or copper tubing



Features: Rotational movement of clamps permit fast approval when required
Material: Zinc
Certifications: cULus
* Brass finish
** Bright zinc finish

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
*19BZ	1/2" to 1"	25	250
**19Z	1/2" to 1"	25	250

GROUND CLAMPS ARMORED CABLE - BRONZE

Use to ground armored cable to galvanized steel pipes or copper tubing



Features: Structural clamp securely holds armor
Material: Bronze
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
39B	1/2" to 1"	25	250
49B	1 1/4" to 2"	-	50

REBAR GROUND CLAMPS

For securing bare copper ground to rebar



Features: Bronze with stainless steel screws
Material: Bronze
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
369D	3/8" to 1"	25	100

GROUND CLAMPS W/HUB FOR RIGID CONDUIT BRONZE

Use to ground bare copper wire to galvanized steel water pipes, ground rods or other structural members



Features: Assemble with threaded hub for use on rigid conduit pipe
Material: Bronze
Certifications: cULus
* Brass screws

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.	Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
7C	1/2" to 1" - 1/2" Hub	10	100	13C	1 1/4" to 2" - 3/4" Hub	10	50
*B7C	1/2" to 1" - 1/2" Hub	10	100	14C	2 1/2" to 4" - 3/4" Hub	-	10
9C	1 1/4" to 2" - 1/2" Hub	10	50	15C	4" to 6" - 3/4" Hub	-	5
10C	2 1/2" to 4" - 1/2" Hub	-	10	240	1/2" to 1" - 1" Hub	10	50
11C	4" to 6" - 1/2" Hub	-	5	241	1 1/4" to 2" - 1" Hub	-	25
12C	1/2" to 1" - 3/4" Hub	10	100	242	2 1/2" to 4" - 1" Hub	-	10
*B12C	1/2" to 1" - 3/4" Hub	10	100	243	4" to 6" - 1" Hub	-	10

GROUND HUBS - BRONZE

Use with grounding pipe clamps to connect rigid conduit to water pipes for grounding



Features: Assemble with threaded hub for use on rigid conduit pipe
Material: Bronze
Certifications: cULus

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
875	1/2"	25	100
876	3/4"	25	100
877	1"	25	50

ROD CLAMPS - BRONZE

Securely connects a grounding connector to a drive



Features: Approved for direct burial in ground and concrete
Material: Bronze
Certifications: cULus
* Brass screw

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
52	1/2"	25	250
*52B	1/2"	25	250
53	5/8"	-	100
*53B	5/8"	-	100
*54B	3/4"	-	50

LAY-IN GROUNDING LUGS ALUMINUM

For use with aluminum or copper conductor



Features: Provides positive grounding points in load centers or enclosures
Material: Aluminum
Certifications: cULus

Catalog Number	Trade Size	Standard Pkg.
GL-144	14-4	100
GL-1410	14 1/0	100
GL-630	6-3/0	50
GL-6250	6-250MCM	50

SOLDERLESS CONNECTORS ALUMINUM

Terminates an electrical conductor to facilitate mechanical connection



Features: Two conductor design
Material: Aluminum
Certifications: cULus

Catalog Number	Wire Range	Unit Pkg.	Standard Pkg.
RA-6A	4-14	100	1,000
RA-2A	2-14	100	1,000
RA-0	1/0-14	50	500
RA-2/0	2/0-14	50	500

GROUNDING PIGTAIL

Use to ground receptacles to steel boxes



Features: Plated green to ensure proper identification
Material: Copper/Steel Screw

Catalog Number	Description	Unit Pkg.	Standard Pkg.
GP	10-32 x 3/8" w/#12 wire	100	1,000

SPLIT BOLT SERVICE CONNECTORS

For copper to copper connections including copper weld wire



Features: Resistant to corrosion and cracking
Material: Bronze
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
SB-10	16 Str. -10 Str.	100	SB-2/0	2 Sol. - 2/0 Str.	25
SB-8	12 Sol. - 8 Str.	100	SB-3/0	2 Sol. - 3/0 Str.	25
SB-6	10 Sol. - 6 Str.	100	SB-4/0-250	1/0 Sol. - 250MCM	25
SB-4	8 Sol. - 4 Str.	100	SB-350	4/0 Sol. - 350MCM	12
SB-2	6 Sol. - 2 Str.	100	SB-500	250-500 MCM	12
SB-1/0	4 Sol. - 1/0 Str.	50			

SPLIT BOLT SERVICE CONNECTORS W/SPACER BAR

For copper to copper, copper to aluminum, aluminum to aluminum



Features: Electro tin-plated, high strength alloy with spacer
Material: Bronze
Certifications: UL

Catalog Number	Trade Size	Standard Pkg.	Catalog Number	Trade Size	Standard Pkg.
SB-10-SP	16 Str. -10 Str.	100	SB-2/0-SP	6 Str. - 2/0 Str.	25
SB-8-SP	16 Str.- 8 Str.	100	SB-3/0-SP	4 Str. - 3/0 Str.	25
SB-6-SP	14 Str. - 6 Sol.	100	SB-4/0-250-SP	4 Str. - 250MCM	25
SB-4-SP	10 Sol. - 4 Str.	100	SB-350-SP	3/0 Str. - 350MCM	12
SB-2-SP	8 Sol. - 2 Str.	100	SB-500-SP	3/0 Str. - 500MCM	12
SB-1/0-SP	6 Sol. - 1/0 Str.	50			

MISCELLANEOUS

- KNOCKOUT SEALS
- ANTI-SHORT BUSHINGS
- DUCT-SEAL COMPOUND
- BLANK CEILING OUTLET COVERS
- ROUND FLAT BOX COVERS



20

KNOCKOUT SEALS

Provides a safe barrier for the protection of exposed wires



Features: Easily installs into unused box knockouts
Material: Steel

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
20	1/2"	200	2,000
21	3/4"	100	1,000
22	1"	100	1,000
23	1 1/4"	50	500
24	1 1/2"	50	500
25	2"	25	250

ANTI-SHORT BUSHINGS

Inserted to protect conductors from the sharp edges of the raceway where cut



Features: Plastic construction compatible with AC and FMC
Material: Polyethylene
Certifications: UL

Catalog Number	Trade Size	Unit Pkg.	Standard Pkg.
383	0	14/2, 14/3, 12/2	100
384	1	14/4, 12/3, 6/1, 4/1	100
385	2	12/4, 10/2, 10,3, 2/1	100
386	3	10/4, 8/2, 8/3, 1/1	100
387	4	8/4, 6/2, 6/3, 6/4, 4/2, 4/3	100

DUCT-SEAL WEATHERPROOF COMPOUND

Use to seal around junction boxes, flashings, and service entrances



Features: Soft and non-toxic
Material: Non-drying synthetic polymer
Certifications: UL

Catalog Number	Unit Pkg.	Standard Pkg.
DX-1	1	50
DX-5	1	10

CEILING BOX OUTLET COVER

To close an outlet box or mount a device



Features: Steel construction with white powder coat finish
Material: Steel

Catalog Number	Trade Size	Standard Pkg.
CC-4W	4"	50

ROUND FLAT BOX COVER

Use to cover 4" round octagon boxes



Features: 1/2" knockout, galvanized
Material: Steel
Certifications: cULus

Catalog Number	Trade Size	Standard Pkg.
54C6	4"	100

INDEX

Part No.	Page Number
4L	45
4XL-AL	45
4P	37
4XL	37
6	32
8	32
7C	49
B7C	49
9C	49
10C	49
11C	49
12C	49
B12C	49
13C	49
14C	49
15C	49
19B	49
B19B	49
19BZ	49
19Z	49
20	52
21	52
22	52
23	52
24	52
25	52
26	45
27	45
28	45
29	45
30	45
31	45
32	45
33	45
34	45
35	45
36	45
37	45
39B	49
40	31
41	31
42	31
43	31
44	31
45	31
46	31
40M	31
41M	31
42M	31
43M	31
44M	31
45M	31
46M	31
47M	31
48M	31
49M	31
49M-A	31
49B	49
52	49
52B	49
53	49
53B	49
54B	49
54C6	52
56B	49
B56B	49
57B	49
59B	49
B59B	49
61ME	22
63ME	22
66ME	22
70ME	22
105R	31
106R	31
107R	31
108R	31
109R	31
108	31
109	31
130	32
132	32
135	31
135-C	31
162	20
163	20
164	20
165	20
166	20
167	20
168	20
169	20
170	20
171	20
160-S	20
161-S	20
162-S	20
163-S	20
164-S	20
165-S	20
166-S	20
167-S	20
168-S	10,20
169-S	10,20
170-S	10,20
171-S	10,20
180-S	10
181-S	10
182-S	10
183-S	10
184-S	10
185-S	10
188A	45
188B	45
199	21
200	21
201	21
202	21
203	21
204	21
205	21
206	21
207	21
208	21
209	21
210	21
212	21
213	21
201SL	21
202SL	21
203SL	21
204SL	21
205SL	21
206SL	21
207SL	21
208SL	21
209SL	21
210SL	21
220	31
222	31
223	31
225	31
226	31
227	31
228	31
220M	31
222M	31
223M	31
225M	31
226M	31
227M	31
228M	31
229M	31
230M	31
231M	31
232M	31
240	49
241	49
242	49
243	49
260	5
261	5
262	5
263	5
264	5
265	5
266	5
267	5
268	5
269	5
260ST	4
261ST	4
262ST	4
263ST	4
264ST	4
265ST	4
266ST	4
267ST	4
268ST	4
269ST	4
260RST	4
261RST	4
262RST	4
263RST	4
264RST	4
265RST	4
266RST	4
267RST	4
268RST	4
269RST	4
260BST	4
261BST	4
262BST	4
263BST	4
264BST	4
265BST	4
266BST	4
267BST	4
268BST	4
269BST	4
260RBST	4
261RBST	4
262RBST	4
263RBST	4
264RBST	4
265RBST	4
266RBST	4
267RBST	4
268RBST	4
269RBST	4
260-90	5
261-90	5
282	20
283	20
284	20
285	20
286	20
287	20
288	20
289	20

Part No.	Page Number
290	20
291	20
300	5
301	5
302	5
303	5
304	5
305	5
306	5
307	5
308	5
309	5
300-OC	5
301-OC	5
302-OC	5
300ST	4
301ST	4
302ST	4
303ST	4
304ST	4
305ST	4
306ST	4
307ST	4
308ST	4
309ST	4
300BST	4
301BST	4
302BST	4
303BST	4
304BST	4
305BST	4
306BST	4
307BST	4
308BST	4
309BST	4
300-90	5
301-90	5
310	5
311	5
312	5
313	5
314	5
315	5
316	5
317	5
318	5
319	5
310ST	4
311ST	4
312ST	4
313ST	4
314ST	4
315ST	4
316ST	4
317ST	4
318ST	4
319ST	4
320	5
321	5
322	5
323	5
324	5
325	5
326	5
327	5
328	5
329	5
320ST	4
321ST	4
322ST	4
323ST	4
324ST	4
325ST	4
326ST	4
327ST	4
328ST	4
329ST	4
320RST	4
321RST	4
322RST	4
323RST	4
324RST	4
325RST	4
326RST	4
327RST	4
328RST	4
329RST	4
332	22
333	22
334	22
335	22
336	22
337	22
338	22
339	22
340	22
341	22
332M	22
333M	22
334M	22
335M	22
336M	22
337M	22
338M	22
339M	22
340M	22
341M	22
343M	22
344M	22
369D	49
370	17
371	17
372	17
373	17
374	17
375	17
376	17
377	17
378	17
379	17
381	17
382	17
375SPC	17
376SPC	17
377SPC	17
378SPC	17
379SPC	17
381SPC	17
382SPC	17
383	52
384	52
385	52
386	52
387	52
501	20
502	20
503	20
504	20
505	20
506	20
507	20
508	20
509	20
510	20
512	20
513	20
650	21
651	21
650EMT	6
651EMT	6
670	21
671	21
672	21
673	21
670EMT	6
671EMT	6
672EMT	6
680EMT	6
681EMT	6
685	5,32
686	5,32
687	5,32
700	45
701	45
702	45
703	45
704	45
705	45
706	45
707	45
708	45
709	45
712	45
713	45
715	45
717	45
730	45
731	45
732	45
733	45
734	45
735	45
733-XL	45
735-XL	45
780-DC	22
781-DC	22
800	22
801	22
802	22
803	22
830	22
831	22
832	22
833	22
834	22
835	22
836	22
837	22
850	22
851	22
852	22
853	22
854	22
855	22
875	49
876	49
877	49
902	47
903	47
904	47
905	47
902S	47
904S	47
938	32
960	16
961	16
962	16
963	16
964	16
965	16

INDEX

Part No.	Page Number
960RT	16
961RT	16
962RT	16
963RT	16
964RT	16
965RT	16
966MART	16
967MART	16
968MART	16
969MART	16
960MA	16
961MA	16
962MA	16
963MA	16
964MA	16
965MA	16
966MA	16
967MA	16
968MA	16
969MA	16
970MA	16
971MA	16
972MA	16
973MA	16
974MA	16
975MA	16
976MA	16
977MA	16
978MA	16
979MA	16
980	16
981	16
982	16
983	16
984	16
985	16
980RT	16
981RT	16
982RT	16
983RT	16
984RT	16
985RT	16
986MART	16
987MART	16
988MART	16
989MART	16
980MA	16
981MA	16
982MA	16
983MA	16
984MA	16
985MA	16
986MA	16
987MA	16
988MA	16

Part No.	Page Number
989MA	16
990MA	16
991MA	16
992MA	16
993MA	16
994MA	16
995MA	16
996MA	16
997MA	16
998MA	16
999MA	16
1015C	22
1016C	22
1017C	22
1018C	22
1019C	22
AC-50	8,15
AC-75	8,15
AC-100	8,15
AC-125	8,15
AC-200	8,15
AC-250	8,15
AC-350	8,15
AWH-300	47
B63-C	47
B73-C	47
B3625	47
B3627	47
BX-50	32
C-50A	12
C-75A	12
C-100A	12
C-125A	12
C-150A	12
C-200A	12
C-250A	12
C-300A	12
C-350A	12
C-400A	12
C-50AE	6
C-75AE	6
C-100AE	6
C-125AE	6
C-150AE	6
C-200AE	6
C-250AE	6
C-300AE	6
C-350AE	6
C-400AE	6
C-50CA	7,13
C-75CA	7,13
C-100CA	7,13
C-125CA	7,13
C-150CA	7,13
C-200CA	7,13

Part No.	Page Number
C-50M	14
C-75M	14
C-100M	14
C-125M	14
C-150M	14
C-200M	14
C-250M	14
C-300M	14
C-350M	14
C-400M	14
CBS	47
CC-50A	12
CC-75A	12
CC-100A	12
CC-125A	12
CC-150A	12
CC-200A	12
CC-250A	12
CC-300A	12
CC-350A	12
CC-400A	12
CC-50AE	7
CC-75AE	7
CC-100AE	7
CC-125AE	7
CC-150AE	7
CC-200AE	7
CC-250AE	7
CC-300AE	7
CC-350AE	7
CC-400AE	7
CC-4W	52
CG-50-A250	34
CG-50-A350	34
CG-50-A450	34
CG-50-A560	34
CG-50-A650	34
CG-75-A250	34
CG-75-A350	34
CG-75-A450	34
CG-75-A560	34
CG-75-A650	34
CG-75-B750	34
CG-75-B850	34
CG-100-B560	34
CG-100-B650	34
CG-100-B750	34
CG-100-B850	34
CG-100-C950	34
CG-100-C1050	34
CG-125-C850	34
CG-125-C950	34
CG-125-D1050	34
CG-125-D1150	34
CG-125-D1250	34

Part No.	Page Number
CG-125-D1375	34
CG-150-D1050	34
CG-150-D1150	34
CG-150-D1250	34
CG-150-D1375	34
CS-150B	2
CS-200B	2
CS-250B	2
CS-300B	2
CS-350B	2
CS-400B	2
CS-150PT1	2
CS-200PT1	2
CS-250PT1	2
CS-300PT1	2
CS-350PT1	2
CS-400PT1	2
CS-150PT2	2
CS-200PT2	2
CS-250PT2	2
CS-300PT2	2
CS-350PT2	2
CS-400PT2	2
CSR-200B	2
CSR-250B	2
CSR-300B	2
CSR-350B	2
CSR-400B	2
CSR-200PT1	2
CSR-250PT1	2
CSR-300PT1	2
CSR-350PT1	2
CSR-400PT1	2
CSR-200PT2	2
CSR-250PT2	2
CSR-300PT2	2
CSR-350PT2	2
CSR-400PT2	2
DX-1	52
DX-5	52
ELB-15125	10
ELB-15150	10
ELB-15200	10
ELB-15250	10
ELB-15300	10
ELB-15350	10
ELB-15400	10
ELB-22125	10
ELB-22150	10
ELB-22200	10
ELB-22250	10
ELB-22300	10
ELB-22350	10
ELB-22400	10
ELB-30125	10

Part No.	Page Number
ELB-30150	10
ELB-30200	10
ELB-30250	10
ELB-30300	10
ELB-30350	10
ELB-30400	10
ELB-4550	10
ELB-4575	10
ELB-45100	10
ELB-45125	10
ELB-45150	10
ELB-45200	10
ELB-45250	10
ELB-45300	10
ELB-45350	10
ELB-45400	10
ELB-9050	10
ELB-9075	10
ELB-90100	10
ELB-90125	10
ELB-90150	10
ELB-90200	10
ELB-90250	10
ELB-90300	10
ELB-90350	10
ELB-90400	10
EYA-50	26
EYA-75	26
EYA-100	26
EYA-50A	26
EYA-75A	26
EYA-100A	26
EYS-1	26
EYS-2	26
EYS-3	26
EYSC-8	26
EYSC-16	26
EYSC-80	26
EYSC-160	26
EYPF-4	26
EYPF-8	26
EYPF-16	26
FC-14	24
FC-16	24
FC-18	24
FC-110	24
FC-112	24
FC-115	24
FC-118	24
FC-121	24
FC-124	24
FC-127	24
FC-130	24
FC-133	24
FC-136	24

Part No.	Page Number
FC-24	24
FC-26	24
FC-28	24
FC-210	24
FC-212	24
FC-215	24
FC-218	24
FC-221	24
FC-224	24
FC-227	24
FC-230	24
FC-233	24
FC-236	24
FC-36	24
FC-38	24
FC-310	24
FC-312	24
FC-315	24
FC-318	24
FC-321	24
FC-324	24
FC-327	24
FC-330	24
FC-333	24
FC-336	24
FC-412	24
FC-415	24
FC-418	24
FC-421	24
FC-424	24
FC-427	24
FC-430	24
FC-433	24
FC-436	24
FC-512	24
FC-515	24
FC-518	24
FC-521	24
FC-524	24
FC-527	24
FC-530	24
FC-533	24
FC-536	24
FC-612	24
FC-615	24
FC-618	24
FC-621	24
FC-624	24
FC-627	24
FC-630	24
FC-633	24
FC-636	24
FCPE-50	6,21
FCPE-75	6,21
FCPE-100	6,21

Part No.	Page Number
FCPE-125	6,21
FG-1DC	43
FG-1DCW	43
GL-50	21
GL-75	21
GL-100	21
GL-125	21
GL-150	21
GL-200	21
GL-250	21
GL-300	21
GL-350	21
GL-400	21
GL-500	21
GL-144	50
GL-1410	50
GL-630	50
GL-6250	50
GP	50
GUAB-50A	25
GUAB-75A	25
GUAB-100A	25
GUAC-50A	25
GUAC-75A	25
GUAC-100A	25
GUAL-50A	25
GUAL-75A	25
GUAL-100A	25
GUAT-50A	25
GUAT-75A	25
GUAT-100A	25
GWS-8	32
H50WB	47
H75WB	47
H100WB	47
H125AWB	47
H125WB	47
H150WB	47
H200WB	47
H250WB	47
H300WB	47
H350WB	47
H400WB	47
LB-50A	12
LB-75A	12
LB-100A	12
LB-125A	12
LB-150A	12
LB-200A	12
LB-250A	12
LB-300A	12
LB-350A	12
LB-400A	12
LB-50AE	6
LB-75AE	6

Part No.	Page Number
LB-100AE	6
LB-125AE	6
LB-150AE	6
LB-200AE	6
LB-250AE	6
LB-300AE	6
LB-350AE	6
LB-400AE	6
LB-50CA	8,13
LB-75CA	8,13
LB-100CA	8,13
LB-125CA	8,13
LB-150CA	8,13
LB-200CA	8,13
LB-50M	14
LB-75M	14
LB-100M	14
LB-125M	14
LB-150M	14
LB-200M	14
LB-250M	14
LB-300M	14
LB-350M	14
LB-400M	14
LBC-50A	13
LBC-75A	13
LBC-100A	13
LBC-125A	13
LBC-150A	13
LBC-200A	13
LBC-250A	13
LBC-300A	13
LBC-350A	13
LBC-400A	13
LBC-50AE	7
LBC-75AE	7
LBC-100AE	7
LBC-125AE	7
LBC-150AE	7
LBC-200AE	7
LBC-250AE	7
LBC-300AE	7
LBC-350AE	7
LBC-400AE	7
LL-50A	12
LL-75A	12
LL-100A	12
LL-125A	12
LL-150A	12
LL-200A	12
LL-250A	12
LL-300A	12
LL-350A	12
LL-400A	12
LL-50AE	6

INDEX

Part No.	Page Number
LL-75AE	6
LL-100AE	6
LL-125AE	6
LL-150AE	6
LL-200AE	6
LL-250AE	6
LL-300AE	6
LL-350AE	6
LL-400AE	6
LL-50CA	8,14
LL-75CA	8,14
LL-100CA	8,14
LL-125CA	8,14
LL-150CA	8,14
LL-200CA	8,14
LL-50M	14
LL-75M	14
LL-100M	14
LL-125M	14
LL-150M	14
LL-200M	14
LL-250M	14
LL-300M	14
LL-350M	14
LL-400M	14
LLC-50A	13
LLC-75A	13
LLC-100A	13
LLC-125A	13
LLC-150A	13
LLC-200A	13
LLC-250A	13
LLC-300A	13
LLC-350A	13
LLC-400A	13
LLC-50AE	7
LLC-75AE	7
LLC-100AE	7
LLC-125AE	7
LLC-150AE	7
LLC-200AE	7
LLC-250AE	7
LLC-300AE	7
LLC-350AE	7
LLC-400AE	7
LR-50A	12
LR-75A	12
LR-100A	12
LR-125A	12
LR-150A	12
LR-200A	12
LR-250A	12
LR-300A	12
LR-350A	12
LR-400A	12

Part No.	Page Number
LR-50AE	7
LR-75AE	7
LR-100AE	7
LR-125AE	7
LR-150AE	7
LR-200AE	7
LR-250AE	7
LR-300AE	7
LR-350AE	7
LR-400AE	7
LR-50CA	8,14
LR-75CA	8,14
LR-100CA	8,14
LR-125CA	8,14
LR-150CA	8,14
LR-200CA	8,14
LR-50M	14
LR-75M	14
LR-100M	14
LR-125M	14
LR-150M	14
LR-200M	14
LR-250M	14
LR-300M	14
LR-350M	14
LR-400M	14
LRC-50A	13
LRC-75A	13
LRC-100A	13
LRC-125A	13
LRC-150A	13
LRC-200A	13
LRC-250A	13
LRC-300A	13
LRC-350A	13
LRC-400A	13
LRC-50AE	7
LRC-75AE	7
LRC-100AE	7
LRC-125AE	7
LRC-150AE	7
LRC-200AE	7
LRC-250AE	7
LRC-300AE	7
LRC-350AE	7
LRC-400AE	7
MC-50	32
MC-50D	32
MCPE-50	6,22
MCPE-75	6,22
MCPE-100	6,22
MCPE-125	6,22
MIB-90M	20
MIB-91M	20
MIB-92M	20

Part No.	Page Number
MIB-93M	20
MIB-94M	20
MIB-95M	20
MIB-96M	20
MIB-97M	20
MIB-98M	20
MIB-99M	20
MIB-101M	20
MIB-102M	20
MIGB-80M	19
MIGB-81M	19
MIGB-82M	19
MIGB-83M	19
MIGB-84M	19
MIGB-85M	19
MIGB-86M	19
MIGB-87M	19
MIGB-88M	19
MIGB-89M	19
MIGB-101M	19
MIGB-102M	19
MK-200	45
MK-250	45
NMLC-50	29
NMLC-50R	29
NMLC-75	29
NMLC-75R	29
NMLC-100	29
NMLC-100R	29
NMLC-125	29
NMLC-150	29
NMLC-200	29
NMLT-38	29
NMLT-50	29
NMLT-75	29
NMLT-100	29
NMLT-125	29
NMLT-150	29
NMLT-200	29
NMLT-90-38	29
NMLT-90-50	29
NMLT-90-75	29
NMLT-90-100	29
NMLT-90-125	29
NMLT-90-150	29
NMLT-90-200	29
P105	17
P107	17
P110	17
P112	17
P115	17
P120	17
P125	17
P130	17
P135	17

Part No.	Page Number
P140	17
P10500	18
P10515	18
P10520	18
P10525	18
P10530	18
P10540	18
P10550	18
P10560	18
P10580	18
P10510	18
P10512	18
P10700	18
P10715	18
P10720	18
P10725	18
P10730	18
P10740	18
P10750	18
P10760	18
P10780	18
P10710	18
P10712	18
P11000	18
P11020	18
P11030	18
P11040	18
P11050	18
P11060	18
P11080	18
P11010	18
P11012	18
P11200	18
P11220	18
P11230	18
P11240	18
P11250	18
P11260	18
P11280	18
P11210	18
P11212	18
P11500	19
P11520	18
P11530	18
P11540	18
P11550	19
P11560	19
P11580	19
P11510	19
P11512	19
P12000	19
P12025	19
P12030	19
P12040	19
P12050	19

Part No.	Page Number
P12060	19
P12080	19
P12010	19
P12012	19
P12500	19
P12530	19
P12540	19
P12550	19
P12560	19
P12580	19
P12510	19
P12512	19
P13000	19
P13030	19
P13040	19
P13050	19
P13060	19
P13080	19
P13010	19
P13012	19
P13500	19
P13540	19
P13550	19
P13560	19
P13580	19
P13510	19
P13512	19
P14000	19
P14040	19
P14050	19
P14060	19
P14080	19
P14010	19
P14012	19
P-1	42
P-1W	42
P-2	42
P-2W	42
P-3	42
P-3W	42
PAR-1	42
PAR-1W	42
PC-0	42
PC-0W	42
PC-02	42
PC-02W	43
PC-1	43
PC-1W	43
PC-2	43
PC-2W	43
PC-3	43
PC-3W	43
PC-71	43
PC-71W	43
PC-81	43

Part No.	Page Number
PC-81W	43
PC-261	43
PC-261W	43
PC-271	43
PC-271W	43
PL-11	42
PL-11W	42
PL-11-2	42
PL-11-2W	42
PL-11-22	42
PL-11-22W	42
PL-14	42
PL-14W	42
PL-14-2	42
PL-14-2W	42
PL-14-22	42
PL-14-22W	42
PL-15	42
PL-15-22	42
PLBY-50	25
PLBY-75	25
PLBY-100	25
PLBY-125	25
PO-50	43
PR-1	43
PR-1W	43
PR-2	43
PR-2W	43
PR-3	43
PR-3W	43
PR11-4	42
PR11-4W	42
PR14-4	42
PR14-4W	42
PT-11	42
PT-11W	42
PT-11-22	42
PT-11-22W	42
PT-14	42
PT-14W	42
PT-14-22	42
PT-14-22W	42
PT-15	42
PT-15-22	42
RA-6A	50
RA-2A	50
RA-0	50
RA-2/0	50
RB50-38	20
RB75-50	20
RB100-50	20
RB100-75	20
RB125-50	20
RB125-75	20
RB125-100	20

Part No.	Page Number
RB150-50	20
RB150-75	20
RB150-100	20
RB150-125	20
RB200-50	20
RB200-75	20
RB200-100	20
RB200-125	20
RB200-150	20
RB250-100	20
RB250-125	20
RB250-150	20
RB250-200	20
RB300-100	20
RB300-125	20
RB300-150	20
RB300-200	20
RB300-250	20
RB350-200	20
RB350-250	20
RB350-300	20
RB400-200	20
RB400-250	20
RB400-300	20
RB400-350	20
RF2	45
RF25	45
RLB-15125	18
RLB-15150	18
RLB-15200	18
RLB-15250	18
RLB-15300	18
RLB-15350	18
RLB-15400	18
RLB-22125	18
RLB-22150	18
RLB-22200	18
RLB-22250	18
RLB-22300	18
RLB-22350	18
RLB-22400	18
RLB-30125	18
RLB-30150	18
RLB-30200	18
RLB-30250	18
RLB-30300	18
RLB-30350	18
RLB-30400	18
RLB-4550	18
RLB-4575	18
RLB-45100	18
RLB-45125	18
RLB-45150	18
RLB-45200	18
RLB-45250	18

Part No.	Page Number
RLB-45300	18
RLB-45350	18
RLB-45400	18
RLB-9050	17
RLB-9075	17
RLB-90100	17
RLB-90125	17
RLB-90150	17
RLB-90200	17
RLB-90250	17
RLB-90300	17
RLB-90350	17
RLB-90400	17
RT-260	6,29
RT-261	6,29
RT-38	28
RT-50	28
RT-75	28
RT-100	28
RT-125	28
RT-150	28
RT-200	28
RT-250	28
RT-300	28
RT-350	28
RT-400	28
RT-90-38	28
RT-90-50	28
RT-90-75	28
RT-90-100	28
RT-90-125	28
RT-90-150	28
RT-90-200	28
RT-90-250	28
RT-90-300	28
RT-90-350	28
RT-90-400	28
RT-38S	28
RT-50S	28
RT-75S	28
RT-100S	28
RT-125S	28
RT-150S	28
RT-200S	28
RT-38MA	28
RT-50MA	28
RT-75MA	28
RT-100MA	28
RT-125MA	28
RT-150MA	28
RT-200MA	28
RT-250MA	28
RT-300MA	28
RT-350MA	28
RT-400MA	28

INDEX

Part No.	Page Number
RT-45-38MA	28
RT-45-50MA	28
RT-45-75MA	28
RT-45-100MA	28
RT-45-125MA	28
RT-45-150MA	28
RT-45-200MA	28
RT-45-250MA	28
RT-45-300MA	28
RT-45-350MA	28
RT-45-400MA	28
RT-90-38MA	28
RT-90-50MA	28
RT-90-75MA	28
RT-90-100MA	28
RT-90-125MA	28
RT-90-150MA	28
RT-90-200MA	28
RT-90-250MA	28
RT-90-300MA	28
RT-90-350MA	28
RT-90-400MA	28
RTCC-50	17,29
RTCC-75	17,29
RW75-50	21
RW100-50	21
RW100-75	21
RW125-50	21
RW125-75	21
RW125-100	21
RW150-50	21
RW150-75	21
RW150-100	21
RW150-125	21
RW200-50	21
RW200-75	21
RW200-100	21
RW200-125	21
RW200-150	21
RW250-50	21
RW250-75	21
RW250-100	21
RW250-125	21
RW250-150	21
RW250-200	21
RW300-50	21
RW300-75	21
RW300-100	21
RW300-125	21
RW300-150	21
RW300-200	21
RW300-250	21
RW350-50	21
RW350-75	21
RW350-100	21
RW350-125	21
RW350-150	21
RW350-200	21
RW350-250	21
RW350-300	21
RW400-50	21
RW400-75	21
RW400-100	21
RW400-125	21
RW400-150	21
RW400-200	21
RW400-250	21
RW400-300	21
RW400-350	21
SB-10	50
SB-8	50
SB-6	50
SB-4	50
SB-2	50
SB-1/0	50
SB-2/0	50
SB-3/0	50
SB-4/0-250	50
SB-350	50
SB-500	50
SB-10-SP	50
SB-8-SP	50
SB-6-SP	50
SB-4-SP	50
SB-2-SP	50
SB-1/0-SP	50
SB-2/0-SP	50
SB-3/0-SP	50
SB-4/0-250-SP	50
SB-350-SP	50
SB-500-SP	50
SC-50	8,15
SC-75	8,15
SC-100	8,15
SC-125	8,15
SC-200	8,15
SC-250	8,15
SC-350	8,15
SI-100	47
SI-150	47
SWV-4R	47
SWV-4S	47
T-50A	12
T-75A	12
T-100A	12
T-125A	12
T-150A	12
T-200A	12
T-250A	12
T-300A	12
T-350A	12
T-400A	12
T-50AE	7
T-75AE	7
T-100AE	7
T-125AE	7
T-150AE	7
T-200AE	7
T-250AE	7
T-300AE	7
T-350AE	7
T-400AE	7
T-50CA	8,14
T-75CA	8,14
T-100CA	8,14
T-125CA	8,14
T-150CA	8,14
T-200CA	8,14
T-50M	14
T-75M	14
T-100M	14
T-125M	14
T-150M	14
T-200M	14
T-250M	14
T-300M	14
T-350M	14
T-400M	14
TC-50A	13
TC-75A	13
TC-100A	13
TC-125A	13
TC-150A	13
TC-200A	13
TC-250A	13
TC-300A	13
TC-350A	13
TC-400A	13
TC-50AE	7
TC-75AE	7
TC-100AE	7
TC-125AE	7
TC-150AE	7
TC-200AE	7
TC-250AE	7
TC-300AE	7
TC-350AE	7
TC-400AE	7
TAC-50	32
TAC-75	32
TAC-100	32
TAC-125	32
TAC-150	32
TAC-200	32
TH-161S	20
TH-162S	20
TH-163S	20
TH-164S	20
TH-165S	20
TH-166S	20
TH-167S	20
TH-168S	10,20
TH-169S	10,20
TH-170S	10,20
TH-171S	10,20
TH-173S	20
TH-174S	20
TH-180S	10
TH-181S	10
TH-182S	10
TH-183S	10
TH-184S	10
TH-185S	10
TPO-50V	43
UF-50	45
UF-75	45
UNF-50	25
UNF-75	25
UNF-100	25
V45-S-50	37
V45-S-75	37
V45-S-100	37
V45-S-125	37
V45-S-150	37
V45-S-200	37
V45-S-250	37
V45-S-300	37
V45-S-350	37
V45-S-400	37
V45-S-500	37
V45-S-600	37
V90-S-50	37
V90-S-75	37
V90-S-100	37
V90-S-125	37
V90-S-150	37
V90-S-200	37
V90-S-250	37
V90-S-300	37
V90-S-350	37
V90-S-400	37
V90-S-500	37
V90-S-600	37
VBA-50	38
VBA-75	38
VBA-100	38
VBA-125	38
VBA-150	38
VBA-200	38
VBA-250	38

CONTACT OUR FRIENDLY CUSTOMER SERVICE **845-359-4900 • CUSTOMERSERVICE@PECO-ELECTRIC.COM**

Part No.	Page Number
VBA-300	38
VBA-350	38
VBA-400	38
VBC	40
VC-50	37
VC-75	37
VC-100	37
VC-125	37
VC-150	37
VC-200	37
VC-250	37
VC-300	37
VC-350	37
VC-400	37
VCEM-1/2PT	40
VCEM-PT	40
VCEM-QT	40
VPRIM-PT	40
VCPL-50	39
VCPL-75	39
VCPL-100	39
VCPL-125	39
VCPL-150	39
VCPL-200	39
VCPL-250	39
VCPL-300	39
VCPL-350	39
VCPL-400	39
VCPL-500	39
VCPL-600	39
VEB-50	39
VEB-75	39
VEB-100	39
VEB-125	39
VEB-150	39
VEB-200	39
VEB-250	39
VEB-300	39
VEB-350	39
VEB-400	39
VEB-500	39
VEB-600	39
VEC-50	39
VEC-75	39
VEC-100	39
VEC-125	39
VEC-150	39
VEC-200	39
VEC-250	39
VEC-300	39
VEC-350	39
VEC-400	39
VEJ-50	37
VEJ-75	37
VEJ-100	37
VEJ-125	37
VEJ-150	37
VEJ-200	37
VEJ-250	37
VEJ-300	37
VEJ-350	37
VEJ-400	37
VEJ-500	37
VEJ-600	37
VFA-50	38
VFA-75	38
VFA-100	38
VFA-125	38
VFA-150	38
VFA-200	38
VFA-250	38
VFA-300	38
VFA-350	38
VFA-400	38
VFA-500	38
VFA-600	38
VFB	40
VFBDRC	40
VFD	40
VFS-50	39
VFS-75	39
VFS-100	39
VFSC-50	39
VFSC-75	39
VFSC-100	39
VFSCC-50	39
VFSCC-75	39
VFSCC-100	39
VFSS-50	39
VFSS-75	39
VFSS-100	39
VG-50	8,15
VG-75	8,15
VG-100	8,15
VG-125	8,15
VG-200	8,15
VG-250	8,15
VG-350	8,15
VJB-442	40
VJB-444	40
VJB-664	40
VJB-666	40
VJB-884	40
VJB-886	40
VJB-887	40
VJB-12124	40
VJB-12126	40
VLB-50	37
VLB-75	37
VLB-100	37
VLB-125	37
VLB-150	37
VLB-200	37
VLB-250	37
VLB-300	37
VLB-350	37
VLB-400	37
VLL-50	38
VLL-75	38
VLL-100	38
VLL-125	38
VLL-150	38
VLL-200	38
VLL-250	38
VLL-300	38
VLL-350	38
VLL-400	38
VLR-50	38
VLR-75	38
VLR-100	38
VLR-125	38
VLR-150	38
VLR-200	38
VLR-250	38
VLR-300	38
VLR-350	38
VLR-400	38
VMH-125	37
VMH-150	37
VMH-200	37
VMH-250	37
VMH-300	37
VMH-350	37
VMH-400	37
VMR-61	39
VMR-63	39
VMR-66	39
VMR-70	39
VMR-75	39
VMR-81	39
VMR-88	39
VMR-404	39
VMR-405	39
VT-50	38
VT-75	38
VT-100	38
VT-125	38
VT-150	38
VT-200	38
VT-250	38
VT-300	38
VT-350	38
VT-400	38
VTA-50	38
VTA-75	38
VTA-100	38
VTA-125	38
VTA-150	38
VTA-200	38
VTA-250	38
VTA-300	38
VTA-350	38
VTA-400	38
VTA-500	38
VTA-600	38
VTH-50	40
VTH-75	40
VTH-100	40
VTH-125	40
VTH-150	40
VTH-200	40
VTH-250	40
VTH-300	40
VTH-400	40
WH-1	17
WH-2	17
WH-3	17
WH-4	17
WH-5	17
WH-6	17
WH-7	17
WH-8	17
WH-9	17
WH-10	17
WH-1M	17
WH-2M	17
WH-3M	17
WH-4M	17
WH-5M	17
WH-6M	17
WH-7M	17
WH-8M	17
WH-9M	17
WH-10M	17
XLB-50	25
XLB-75	25
XT-50	25
XT-75	25
ZIGB-50	19
ZIGB-75	19
ZIGB-100	19
ZIGB-125	19
ZIGB-150	19
ZIGB-200	19
ZIGB-250	19
ZIGB-300	19
ZIGB-350	19
ZIGB-400	19

Notes

Notes

Notes

Remembering Arthur LeMay (1926 – 2018)
A Pioneer in the Electrical Fittings Industry



As a member of PECO's founding family and PECO's leader beginning immediately after WWII, Arthur LeMay has given more to our current success than any single individual over the past 80+ years. Even in the years since his passing, his passion for product quality and service, generosity with people, and both personal and professional dedication to everyone around him - from the manufacturing team to his community and family - continue to help define our vibrant and collaborative work culture at PECO.

"Art" began his work at "The Shop" (the family's informal name for the business), located at 932 Rogers Place in the Bronx, as the Shipping Clerk with his mother and father, Louis and Minerva Levine, running the business.



When WWII arrived, he enlisted in the U.S. Army's Specialized Training Reserve Program. He was sent to NYU School of Engineering before serving on active duty from 1944 to 1946 as a Browning Automatic Rifleman (BAR) in key regional theaters, including the Philippines. Arthur distinguished himself in Advanced Infantry Training and was awarded the Expert Infantryman's Badge.

After his return to the United States, Art led PECO through the celebrations and crises of this American, family-owned business from 1946 to 2018. Customers today still remember him as "firmly at the helm" until the very last years of his life. He built strong personal relationships with our suppliers, agents and customers over the years and those same relationships carry over to his family today.



1991 NYC Marathon

Art served as a model to everyone around him by challenging himself throughout his lifetime. He completed a lifelong goal by returning to college and graduating with a Bachelor of Science from Columbia University at the age of 67. As an avid runner, he also completed 24 New York City Marathons up until he turned 77 years old.

Every time the PECO team completes a successful quality-control review, delivers to a customer faster than they expected due to our manufacturing process or large inventory, or contributes to another landmark high-rise building across our nation, many of us here remember "Mr. LeMay." We know that we are advancing his legacy and transforming the best of his life's work into products, projects and services vital to America's economy, culture and communities in the 21st century.

PECO
PRODUCTO ELECTRIC CORP

CONTACT OUR FRIENDLY CUSTOMER SERVICE

845-359-4900 • CUSTOMERSERVICE@PECO-ELECTRIC.COM

WWW.PECO-ELECTRIC.COM

Producto Electric Corporation
11 Kings Highway
Orangeburg, NY 10962

/company/producto-electric

NEMA NEMRA