POLES & BRACKETS



BULL 2



Gooseneck Bracket



30⁰ Swivel Bracket



ALED78 on pole

- Reinforced steel construction
- Polyester powder coat finish
- Poles have reinforced hand holes
- Galvanized anchor bolts & hardware
- 3/16" thick steel for slipfitters and wall brackets

Shipping Protection

RAB Poles are wrapped in heavy corrugated cardboard. Bases and ends have additional protection to prevent damage during shipment.

Shaft: 46,000 p.s.i. minimum yield
Base Plates: Slotted base plates 36,000 p.s.i.



Anchor Bolt

Template included



Quality tested



c UL US LISTED
SUITABLE FOR WET LOCATIONS

POLES

Catalog #	Shaft Size SQ(in)	Gauge	Pole Height (ft)	Hand Hole Dimensions	Anchor Belt Dimensions	POLE CAPACITY Max. EPAs (sf) / Max. Weights (lb) ft₂ with 1.3 gust 70 MPH	80 MPH	100 MPH
Tenon Poles								
PS4-11-10WT	4	11	10	3" x 5"	3/4" x 17"x3"	27.6 / 690	21.1 / 530	13.1 / 330
PS4-11-15WT	4	11	15	3" x 5"	3/4" x 17"x3"	14.0 / 400	10.2 / 295	5.6 / 165
PS4-07-20WT	4	7	20	3" x 5"	3/4" x 30"x3"	16.2 / 390	11.8 / 285	6.3 / 150
PS4-11-20WT	4	11	20	3" x 5"	3/4" x 17"x3"	8.3 / 240	5.6 / 165	2.2 / 75
PS4-07-25WT	4	7	25	3" x 5"	3/4" x 30"x3"	10.7 / 245	7.2 / 165	2.9 / 65
PS4-11-25WT	4	11	25	3" x 5"	3/4" x 17"x3"	4.5 / 135	2.3 / 80	---
PS5-07-20WT	5	7	20	3" x 5"	1" x 36"x3"	28.2 / 670	20.9 / 495	11.8 / 280
PS5-07-25WT	5	7	25	3" x 5"	1" x 36"x3"	19.6 / 450	13.9 / 320	6.7 / 155
PS5-07-30WT	5	7	30	3" x 5"	1" x 36"x3"	12.1 / 300	7.8 / 195	2.4 / 60
Drilled Poles								
PS4-11-10D2	4	11	10	3" x 5"	3/4" x 17"x3"	27.6 / 690	21.1 / 530	13.1 / 330
PS4-11-15D2	4	11	15	3" x 5"	3/4" x 17"x3"	14.0 / 400	10.2 / 295	5.6 / 165
PS4-11-20D2	4	11	20	3" x 5"	3/4" x 17"x3"	8.3 / 240	5.6 / 165	2.2 / 75
PS4-11-25D2	4	11	25	3" x 5"	3/4" x 17"x3"	4.5 / 135	2.3 / 80	0.8 / 35
PS4-07-25D2	4	7	25	3" x 5"	3/4" x 30"x3"	10.7 / 245	7.2 / 165	2.9 / 65
PS5-07-20D2	5	7	20	3" x 6"	1" x 36"x3"	28.2 / 670	20.9 / 495	11.8 / 280
PS5-07-25D2	5	7	25	3" x 6"	1" x 36"x3"	19.6 / 450	13.9 / 320	6.7 / 155
PS5-07-30D2	5	7	30	3" x 6"	1" x 36"x3"	12.1 / 300	7.8 / 195	2.4 / 60

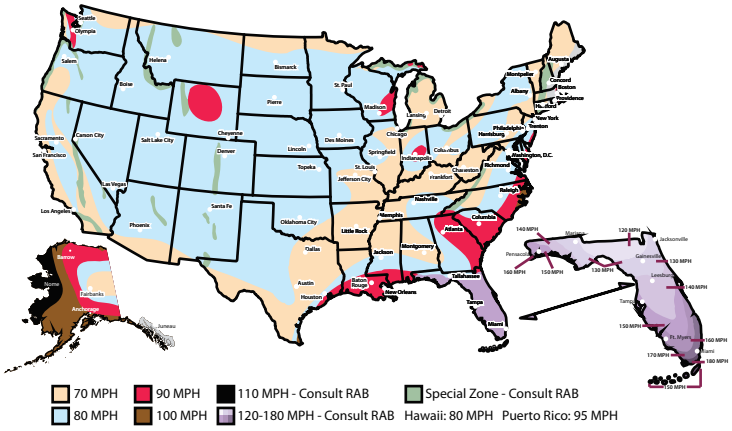

Specifications

Powder Coating:
Polyester powder coating resists chipping and scratching. It's electrostatically applied and oven cured to powder manufacturer's specifications. Excellent color retention.

Hand Holes:
Reinforced with steel cover. Powder coated hand hole covers. Finished interior to avoid hand scratches and cuts.

Shaft:
46,000 p.s.i. minimum yield

Base Plates: Slotted base plates 36,000 p.s.i.

BRACKETS

GOOSE1B Black
GOOSE1A Bronze
GOOSE1W White
Gooseneck Bracket

Mounts to: Wall
Accepts: 1/2" NPS thread
Max. Wt. Capacity: 7 lbs.



ARM24A Bronze
ARM24W White
Straight Arm Bracket

Mounts to: Wall
Accepts: 1/2" NPS thread
Max. Wt. Capacity: 7 lbs.



ARMSV24 Bronze
ARMSV24W White
30° Straight Arm w/ Swivel

Mounts to: Wall
Accepts: 1/2" NPS thread
Max. Wt. Capacity: 7 lbs.



SWIVEL30 Bronze
SWIVEL30W White
30° Swivel Bracket

Mounts to: Wall
Accepts: 1/2" NPS thread
Max. Wt. Capacity: 7 lbs.



BAD4 BAD5 BAD6 Bronze
Pole Adapter

Mounts to: Steel Pole
Accepts: Slipfitter & Bullhorns
BAD4: Mounts to 4" square pole
BAD5: Mounts to 5" square pole
BAD6: Mounts to 6" square pole



BCAT2 Galvanized Steel
Cross Arm Bracket

Mounts to: BSF, BWALL9, BWC18 & BWT12
Accepts: 2 Trunnion Floods
Spacing: 28"
Max. Wt. Capacity: 52 lbs. /fixture
MAX. EPA: 5



BTW12 Galvanized Steel
Trunnion Wall Bracket

Mounts to: Wall
Accepts: Trunnion Floods
Spacing: 12"
Max. Wt. Capacity: 105 lbs.
Max. EPA: 5



BWS7 Galvanized Steel
Slipfitter "S" Bracket

Mounts to: Wood Pole
Accepts: Slipfitter Floods
Spacing: 7"
Max. Wt. Capacity: 105 lbs.
Max. EPA: 5



BSF Bronze
Slipfitter Bracket

Mounts to: 2 3/8" Tenon
Accepts: Trunnion Floods
Max. Wt. : 40 lbs.
Bracket EPA: .2



BWALL9 Bronze
Wall Bracket

Mounts to: Wall
Accepts: Trunnion Floods
Spacing: 9"
Max. Wt. : 40 lbs.
Max. EPA: .3



BWC18 Galvanized Steel
Curved Bracket
for wood poles

Mounts to: Wood Pole
Accepts: Trunnion Floods
Spacing: 18"
Max. Wt. : 105 lbs.
Max. EPA: 5



BWC12 Galvanized Steel
Slipfitter Bracket
for wood poles

Mounts to: Wood Pole
Accepts: Slipfitter Floods
Spacing: 12"
Max. Wt. : 105 lbs.
Max. EPA: 5



BULL2 Bronze
Bullhorn Bracket

Accepts: Slipfitter Floods
Max. Wt. : 100 lbs. each
Max. EPA: 5.0 each
Bracket EPA: 1.35



BULL2W Galvanized Steel
Slipfitter Bracket

Accepts: Slipfitter Floods
Max. Wt. : 100 lbs. each
Max. EPA: 5.0 each
Bracket EPA: 1.35



BULL3 Bronze
Bullhorn Bracket

Accepts: Slipfitter Floods
Max. Wt. : 90 lbs. each
Max. EPA: 4.0 each
Bracket EPA: 2.0



BULL4 Bronze
90° Square Bullhorn Bracket

Accepts: Slipfitter Floods
Max. Wt. : 77 lbs. each
Max. EPA: 2.5 each
Bracket EPA: 3.3



MAB Bronze
90° Slipfitter Bracket

MCB Bronze
90° Curved Slipfitter Bracket

Mounts to: Wall
Max. Wt. Capacity: 90 lbs.
Max. EPA: 4.0



BGS Bronze
Surface Mount



BGC Bronze
Slipfitter Concrete Mount



BTA4 Bronze
Tenon Adapter



888 722 1000
rabweb.com
RAB®