V19



877.870.WAVE (9283) • www.wavelighting.com

TABLE OF CONTENTS













VISUAL INDEX

Visual Index	4-5

SUSTAINABLE TECHNOLOGY

Eco-Friendly Technologies	6-7
Product Designation Key	7

MATERIALS

Non-Corrosive Technologies	8

INDOOR LIGHTING

Oceana	10
Vanora	11
Noelani	11
Cascade	12

ENDURACAST

Villa	14
Cavalier	14
Chateau	15
Citadel	16, 60
Walkway	17, 59

EVERSTONE™

Companion Size Lanterns	18
Full Size Lanterns	19
Everstone Globes	20
Everstone Acorns	21
Wall Pack Lanterns	21
Turtle Friendly	22

MARLEX®

Turtle & Dark Sky Friendly	23
Luna	24
Nautical	24-27
Hawthorne	28
Park Point	29
Providence	30
New Town	31
Ashland	32
Brentwood	32
Townhouse	33
Guardian	34-35

TABLE OF CONTENTS

MARLEX®

Pocket	36
Colonial	37-38
Victorian	38
Saxony	39
Vanguard	40

GLOBES & ACORNS

Globe & Acorn Lighting	41

LIGHT COMMERCIAL POST TOPS

Colonial	44
Vanguard	45
Saxony	45
Globe & Acorn	46

COMMERCIAL LIGHTING

Contemporary	48
Park Place	49-54
High Street	55
Riverwalk	56
Town Hall	57
Village Square	58
Walkway	59
Citadel	60

LAMP POSTS & ACCESORIES

Residential Lamp Posts	62
Light Commercial Lamp Posts	63-65
3” Commercial Lamp Posts	66
4” Commercial Lamp Posts	67
Residential Post Accessories	68-69
Commercial Post Accessories	70

INDUSTRIAL

High Bay Lighting	72-73
Work Lights	74

LED RETROFITS

Retrofit Kits & LED Lamps	76-78

DIFFUSERS

Replacement Lenses & Diffusers	80
Replacement Globes & Acorns	81



VISUAL INDEX

INDOOR lighting


page 10

page 10

page 11

page 11

page 11

page 12

page 12

ENDURACAST


page 14

page 14

page 15

page 15

page 15

page 16, 60

page 16, 60

page 16, 60

page 17, 59

page 17, 59

EVERSTONE


page 18

page 18

page 18

page 19

page 19

page 19

page 20

page 20

page 20


page 21

page 21

page 21

page 22

Marlex


page 23

page 24

page 24

page 24

page 25

page 25

page 25

page 26

page 26

page 26

page 27

page 27

page 27

page 27

page 28

page 28

page 28

page 29

page 29

page 29

page 29

page 30

page 30

page 30

page 30

page 31

page 31

page 31

page 31

page 32

page 32

page 32

page 32

page 33

page 34

page 34

page 34

page 35

page 35

page 35

page 36

page 36

page 36

page 36

page 36

page 36

page 36

VISUAL INDEX

Marlex


page 37


page 37, 42, 44


page 38, 42, 44


page 38


page 39


page 39, 43, 45


page 40


page 40, 43, 45

GLOBES & ACORNS


page 41


page 41, 46


page 41, 46


page 41, 46


page 41, 46

COMMERCIAL LIGHTING


page 48


page 48


page 49


page 50


page 51


page 52


page 53, 54


page 55


page 55


page 56


page 56


page 56


page 57


page 57


page 58


page 58

Lamp Posts & Accessories


page 62


page 63


page 65


page 66, 67


page 68


page 69


page 69


page 70

INDUSTRIAL


page 72


page 73


page 74

LED RETROFITS

page 76

page 76

page 77

page 77

page 77

page 78

REPLACEMENT PARTS

page 80

page 80

page 80

page 81

page 81

page 81

page 81

SUSTAINABLE

Wave Lighting offers a complete line of LED fixture options as shown in the table below. Our line covers everything from 12V landscape, to 120V residential, to multi-volt commercial and industrial. Wave Lighting's LED lights are available in a wide range of color temperatures and wattages. In addition, we offer LED fixtures suitable for Type 3 and Dark Sky applications as well as fixtures with dimmable options. Wave Lighting's LED fixtures are the perfect solution for energy savings, performance and maintenance free operation.

Residential

PICTURE	SERIES	BASE/TYPE	VOLTAGE	DRIVER	DIMMABLE	LIFE	WARRANTY	CERTS
	LR	Dedicated LED	120V, 50/60 Hz	On-Board	Triac	50,000 L_{70}	5 Years	c UL us LISTED ASK ABOUT ENERGY STAR
	LE26	E26 Medium Base Socket	120V, 50/60 Hz	On-Board	Triac	15,000 L_{70}	3 Years	c UL us LISTED ASK ABOUT ENERGY STAR
	L	Dedicated LED	120-277V, 50/60 Hz	Remote	No	50,000 L_{70}	3 Years	c UL us LISTED ASK ABOUT ENERGY STAR
	LV	Screw Terminal Base	12V, 50/60 Hz	Remote Transformer Not Included	No	50,000 L_{70}	3 Years	LOW VOLTAGE SYSTEM N/A

Commercial

PICTURE	SERIES	BASE/TYPE	VOLTAGE	DRIVER	DIMMABLE	LIFE	WARRANTY	CERTS
	L	Dedicated LED	120-277V, 50/60 Hz	Remote	0-10V	50,000 L_{70}	5 Years	c UL us LISTED
	LC	E39 Mogul Base Socket	120-277V, 50/60 Hz	On-Board	No	50,000 L_{70}	5 Years	c UL us LISTED

TECHNOLOGY

ENERGY STAR® was introduced by the Environmental Protection Agency in 1992 as a voluntary market-based partnership to reduce greenhouse gas emissions through increased energy efficiency. Wave Lighting is an ENERGY STAR® partner committed to improving the energy efficiency of products for homes and businesses. All of our ENERGY STAR® qualified products meet the latest requirments for efficiency. For more information about ENERGY STAR®, visit www.energystar.gov. Look for the ENERGY STAR® icon for compliant products.

Wave Lighting is a proud member of The American Lighting Association (ALA). The ALA is a trade association that represents the lighting industry, their members and customers, and works to protect and advance the industry while promoting the sale and proper application of quality lighting products. It represents 1,500 leading lighting manufacturers, retailers, manufacturers' representatives and designers across North America.

Wave Lighting is proud to offer a wide range of lighting fixtures that meet the Buy American Act (BAA) requirements. The BAA was created to stimulate the economy by specifying how government agencies purchase products. Look for the "Buy American Act Compliant" icon for qualifying fixtures.



Sea turtles are an endangered species. Between March and October, sea turtle hatchlings are confused by the artificial light from coastal dwellings and head toward pools and streets instead of the safety of the sea. Wave Lighting's turtle-friendly lighting directs light to the ground and is not disruptive to the hatchling turtles.

Light pollution from outdoor lighting wastes billions of dollars and vast quantities of natural resources. Our night sky friendly fixtures and retrofits focus light downward reducing light pollution and safeguarding our wildlife in their natural environment. Wave Lighting offers night sky friendly outdoor lighting fixtures and retrofits for residential and commercial lighting applications.

PRODUCT DESIGNATION KEY

- Energy Star® Models Available
- Meets Buy American Act Requirements
- GU24 Models Available
- LED Models Available
- Occupancy Sensor Option Available
- Dark Sky Friendly Options Available
- Non-Corrosive Oceanside® Approved Models
- H.I.D. Models Available
- Listed for Damp Locations
- Listed for Direct Rain Wet Locations
- Turtle Friendly Models
- Meets Americans with Disabilities Act Requirements
- Meets RoHS Requirements
- UL® Listed Item
- Listed for Wet Locations
- Photocell Option Available
- IP85 Rated Item
- ETL Listed Item
- Lamp Included

World Leaders in Non-Corrosive Outdoor Lighting Technologies

WAVE LIGHTING *strives to exceed customer expectations as the lowest cost provider of residential and commercial lamp posts and outdoor lighting products with a special emphasis on new technologies in non-corrosive, energy efficient outdoor lighting. Our commitment to sustainability drives us to develop new and exciting products that meet today's energy consumption requirements and are built to last.*

INDOOR LIGHTING
Wave Lighting introduces a new line of ENERGY STAR® Certified LED indoor fixtures. Indoor Lighting adds a contemporary look to any indoor space withought breaking the bank. Wave Lighting's goal is to create a variety of indoor fixtures that reduce carbon footprint, save money, and increase comfort in your home.

ENDURACAST
Wave Lighting's Enduracast fixtures are constructed of sturdy, high-quality die cast aluminum. Powder coated for maximized protection. Perfect to withstand years of condesation and pollution caused by moisture, chemicals, ultra-violet light and harsh weather conditions.

EVERSTONE™
EverStone™ is a proprietary compression molded, non-metallic composite material that, when formed into our designs, provides a level of beauty and non-corrosive durability that is unavailable in traditional metallic lighting fixtures.
"Non-Corrosive Lights that Last."

MARLEX®
Marlex® is a non-metallic, injection molded polymer that offers long term, corrosion-resistant service at a very affordable price. This material is extremely UV stable and is an outstanding alternative to metallic fixtures of all types.

POST TOP GLOBES & ACORNS
Acrylic offers clarity and performance at an affordable price and is extremely UV resistant. Polycarbonate delivers beauty and durability, with the ability to accommodate higher temperatures and wattages and is extremely impact resistant.

COMMERCIAL LIGHTING FIXTURES
Wave Lighting proudly offers a wide vatiety of commercial HID lighting fixtures. All of our fixtures are constructed with the industry's finest Metal Halide or High Pressure Sodium ballasts and may be customized with a vast array of options from our Dark Sky Reflectors, glass refractors, to decorative finials. Wave Lighting's commercial product line provides safety and security for all types of applications including parks, pedestrian walkways, and parking areas.

RESIDENTIAL AND COMMERCIAL LAMP POSTS
Wave Lighting is the leading supplier of residential and commercial lamp posts and accessories. Our extruded aluminum posts are available in round or fluted and for direct burial or surface mount applications. Post lengths range from 7'-14' with wall thicknesses from 0.05"-0.125". We also offer accessories ranging from traditional ladder rests, photocells, to our new NEC compliant convenience outlet with in-use rain shield.

Lamp Posts & Accessories

INDOOR



OCEANA

- Direct/Indirect Light
- Uplight & Downlight
- Occupancy Sensors






SCAN FOR VIDEO

OPTIONAL MOUNTING KITS

Mounting kits ship in seperate packaging.
Assembly required.

168FM
Standard

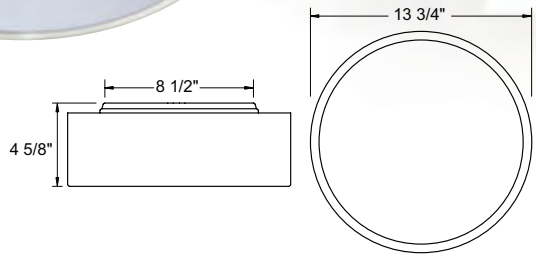

c UL us LISTED · DAMP · ASK ABOUT ENERGY STAR · LED · Occupancy Sensor available

GUIDE: 168FM-LR12C-BN-OS

ITEM #	LENS	LIGHT SOURCE		COLOR	OPTION
168FM	White	INCANDESCENT (2) 40W MAX Medium Base		**BN**-Brushed Nickel	**CK**-Cable Kit **PK**-Pendant Kit **OS**-Occupancy Sensor (CK & PK can not be combined)
		LED LIGHT SOURCE			
		120V LIGHTWAVE LED	CCT		
		LR15-15W 1400lm	**C**-4K		
		LR22-23W 1900lm	**W**-3K		
		E26 MEDIUM BASE LED			
		2LE26-(2) A19 800lm			

Title 24 Available
(call for details)

PENDANT KIT


6”/13” Pendant




CABLE KIT

36” Max Cable







c UL us LISTED · DAMP · ASK ABOUT ENERGY STAR · LED

GUIDE: 178FM-LR24W-BN

ITEM #	LENS	LIGHT SOURCE		COLOR	OPTION
178FM	White	**LED LIGHT SOURCE**		**BN**-Brushed Nickel	**PK**-Pendant Kit
		120V LIGHTWAVE LED	CCT		
		LR24-24W 1850lm	**W**-3K		



178FM
Low Profile

Lamp Included
Energy Star Qualified Product

VANORA


INDOOR lighting

GUIDE: 170FM-LR15W-WH-OS


ITEM #	LENS	LIGHT SOURCE	COLOR	OPTION
170FM	ACRYLIC White	INCANDESCENT (1) 40W MAX Medium Base	**WH**-White	**OS**-Occupancy Sensor
		LED LIGHT SOURCE		
		120V LIGHTWAVE LED — CCT: **C**-4K, **W**-3K **LR12**-13W 1000lm **LR15**-15W 1400lm		
		E26 MEDIUM BASE LED **LE26**-(1) A19 800lm		
172FM	ACRYLIC White	INCANDESCENT (2) 40W MAX Medium Base		
		LED LIGHT SOURCE		
		120V LIGHTWAVE LED — CCT: **C**-4K, **W**-3K **LR15**-15W 1400lm **LR22**-23W 1900lm		
		E26 MEDIUM BASE LED **2LE26**-(2) A19 800lm		



170FM
Small




172FM
Large



Title 24 Available
(call for details)

NOELANI

160FM
Small






GUIDE: 160FM-LR15W-WH-OS

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTION
160FM **161FM**	ACRYLIC White	INCANDESCENT (1) 40W MAX Medium Base	**WH**-White	**OS**-Occupancy Sensor
		LED LIGHT SOURCE		
		120V LIGHTWAVE LED — CCT: **C**-4K, **W**-3K **LR12**-13W 1000lm **LR15**-15W 1400lm		
		E26 MEDIUM BASE LED **LE26**-(1) A19 800lm		
		120-277V MULTI-VOLT LED — CCT: 3K **L17**-17W 1278lm		
162FM **163FM**	ACRYLIC White	INCANDESCENT (2) 40W MAX Medium Base		
		LED LIGHT SOURCE		
		120V LIGHTWAVE LED — CCT: **C**-4K, **W**-3K **LR15**-15W 1400lm **LR22**-23W 1900lm		
		E26 MEDIUM BASE LED **2LE26**-(2) A19 800lm		
		120-277V MULTI-VOLT LED — CCT: 3K **L22**-22W 1704lm		


162FM
Large




Title 24 Available
(call for details)



161FM
Small




163FM
Large







173FM

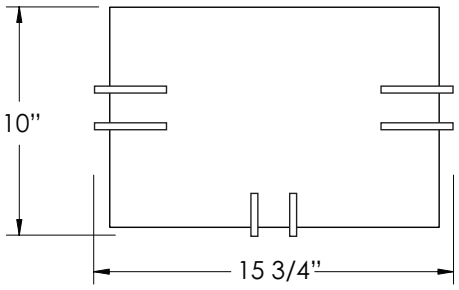


EXTENDS: 4"
H/CTR: 6 1/2"

GUIDE: 173FM-L17-BN

ITEM #	LENS	LIGHT SOURCE		COLOR
		LED LIGHT SOURCE		
173FM	GLASS Frost	120-277V MULTI-VOLT LED **L22**-22W 1704lm	CCT 3K	**BN**-Brushed Nickel

174FM

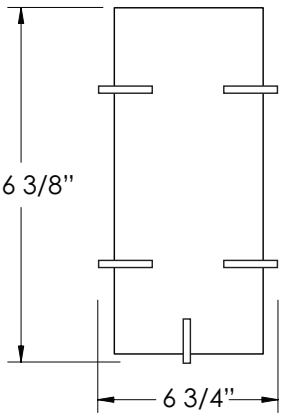

EXTENDS: 4"
H/CTR: 8 3/8"



GUIDE: 174FM-L17-BN

ITEM #	LENS	LIGHT SOURCE		COLOR
		LED LIGHT SOURCE		
174FM	GLASS Frost	120-277V MULTI-VOLT LED **L22**-22W 1704lm	CCT 3K	**BN**-Brushed Nickel

Energy Star Qualified Product

OUTDOOR



ENDURACAST

Specification Grade!

- Die-Cast Aluminum
- Extreme Durability
- Powdercoated Finish


Wave Lighting's Enduracast fixtures are constructed of sturdy, high-quality die cast aluminum. Each fixture is powder coated for maximized protection. Perfect to withstand years of condensation and pollution caused by moisture, chemicals, ultra-violet light and harsh weather conditions.




VILLA



549S
Large

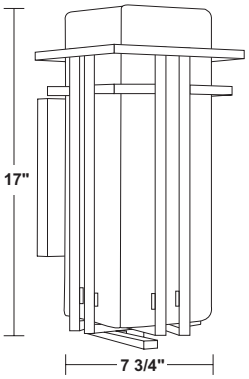

EXTENDS: 9 1/2"
H/CTR: 7"
BACKPLATE: 7" x 4 3/4"

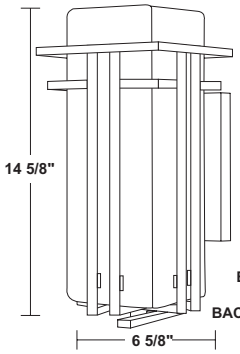

549V
Small

EXTENDS: 8 1/4"
H/CTR: 7"
BACKPLATE: 7" x 4 3/4"



GUIDE: 549SF-BZ

ITEM #	LENS	LIGHT SOURCE	COLOR
549S **549V**	GLASS **F**-Frosted	INCANDESCENT (1) 75W MAX Medium Base	**BZ**-Bronze
		LED LIGHT SOURCE	
		E26 MEDIUM BASE LED	CCT
		LE26-A19 800lm	**C**-4K **W**-3K

Title 24 Available
(call for details)


CAVALIER

GUIDE: 561FMF-BZ

ITEM #	LENS	LIGHT SOURCE	COLOR
561FM	GLASS **F**-Frosted	INCANDESCENT (2) 40W MAX Medium Base	**BZ**-Bronze
		LED LIGHT SOURCE	
		E26 MEDIUM BASE LED	CCT
		2LE26-(2) A19 800lm	**C**-4K **W**-3K


Title 24 Available
(call for details)

561FM





Lamp Included
Energy Star Qualified Product

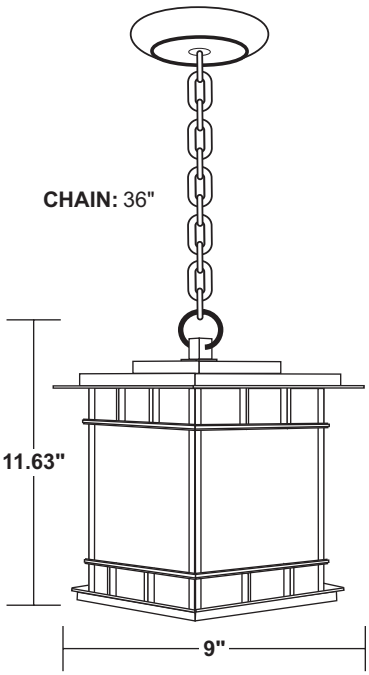


544HC






544S

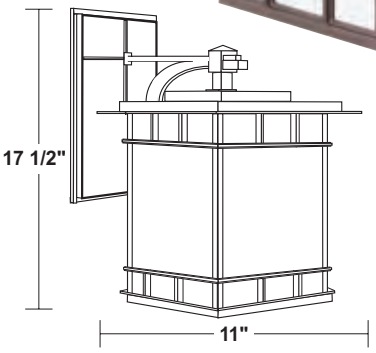


EXTENDS: 13 1/2"
H/CTR: 4"
BACKPLATE: 6 1/4" x 10 1/4"



544T

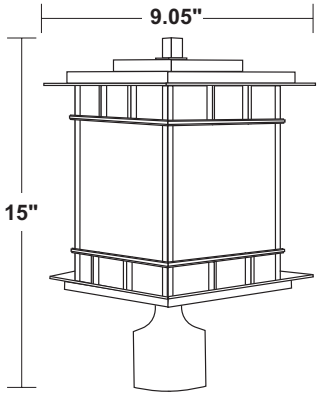





544V

EXTENDS: 11 1/2"
H/CTR: 4"
BACKPLATE: 6 1/4" x 10 1/4"

GUIDE: 549SF-BZ


ITEM #	LENS	LIGHT SOURCE	COLOR
544HC **544S** **544T** **544V**	GLASS **F**-Frosted	INCANDESCENT (1) 75W MAX Medium Base **LED LIGHT SOURCE** E26 MEDIUM BASE LED: **LE26**-A19 800lm CCT: **C**-4K, **W**-3K	**BZ**-Bronze

Title 24 Available
(call for details)

*Energy Star not available on Post Top Fixtures.

- *WALL OR CEILING MOUNT*
- *ENCLOSED & GASKETED*
- *HOSE DOWN*
- *INSECT & DUST PROOF*
- *DIE CAST ALUMINUM*
- *IP65 RATED*



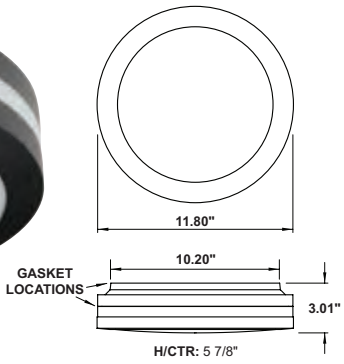


166FM
Ring

SCAN FOR VIDEO



169FM
Eyelid

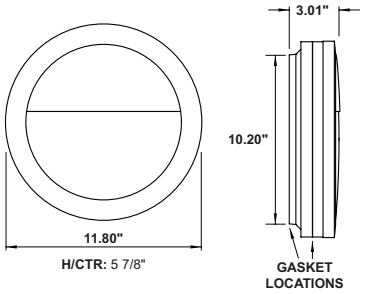


GUIDE: 166FMF-LR15C-BK

ITEM #	DIFFUSER	LIGHT SOURCE		COLOR	OPTION
		LED LIGHT SOURCE			
166FM **169FM**	POLYCARBONATE **F**-Frosted	120V LIGHTWAVE LED **LR15**-15W 1400lm **LR22**-23W 1900lm	CCT **C**-4K **W**-3K	**BK**-Black **WH**-White	**EB**-Emergency Backup **O**-Occupancy Sensor

(options can not be combined)

- *WALL MOUNT*
- *ENCLOSED & GASKETED*
- *HOSE DOWN*
- *INSECT & DUST PROOF*
- *PHOTOCELL INCLUDED*
- *IP65 RATED*

266FM





GUIDE: 266FMF-LR12-BZ


ITEM #	DIFFUSER/HOUSING	LIGHT SOURCE		COLOR
		LED LIGHT SOURCE		
266FM	POLYCARBONATE **F**-Frosted	120V LIGHTWAVE LED **LR12**-13W 1000lm	CCT **C**-4K	**BZ**-Bronze

Energy Star Qualified Product

502VF

- *DOWNLIGHT*
- *DIE CAST ALUMINUM*





EXTENDS: 5 7/8"
H/CTR: 2 1/4"
BACKPLATE: 4 1/2" x 4 1/2"

See Page 23 for Non-Metallic Version


GUIDE: 502VF-LR11W-BK

ITEM #	LENS	LIGHT SOURCE		COLOR
		LED LIGHT SOURCE		
502V	GLASS **F**-Frosted	120V LED **LR11**-11W, 870lm	CCT **C**-4K **W**-3K	**BK**-Black **BZ**-Bronze

502SF

- *UP & DOWNLIGHT*
- *DIE CAST ALUMINUM*




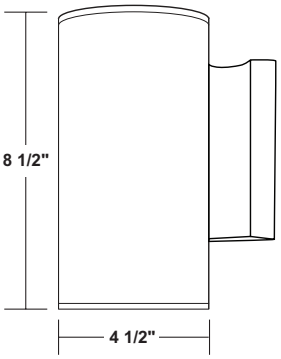


EXTENDS: 5 7/8"
H/CTR: 2 1/4"
BACKPLATE: 4 1/2" x 4 1/2"

GUIDE: 502SF-LR22W-BK

ITEM #	LENS	LIGHT SOURCE		COLOR
		LED LIGHT SOURCE		
502S	GLASS **F**-Frosted	120V LED **LR22**-22W, 1740lm	CCT **C**-4K **W**-3K	**BK**-Black **BZ**-Bronze

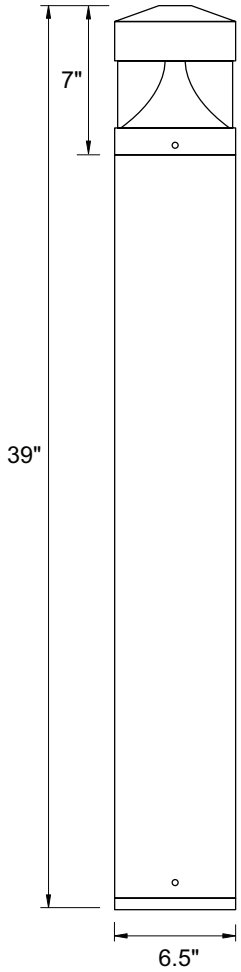



Anchor Bolt M10 x 6.7"
(3 anchor bolts and template included)



C200BC

GUIDE: C200BC-L10C-BK

ITEM #	LENS	LIGHT SOURCE		COLOR	OPTIONS
		LED LIGHT SOURCE			
C200B	POLYCARB **C**-Clear	100-277V MULTI-VOLT **L10**-10W, 937lm	CCT **C**-4K	**BK**-Black **BZ**-Bronze	**D**-0-10v Dimming


COMPANION SIZE LANTERNS

EVERSTONE®
NON-CORROSIVE

Built From The Inside-Out To Last!

SCAN FOR VIDEO

- Compression Molded
- Non-Corrosive Durabiltiy
- Limited Lifetime Warranty
- Non-Metallic Composite Material
- OceanSide® Approved
- Withstand Harsh Weather

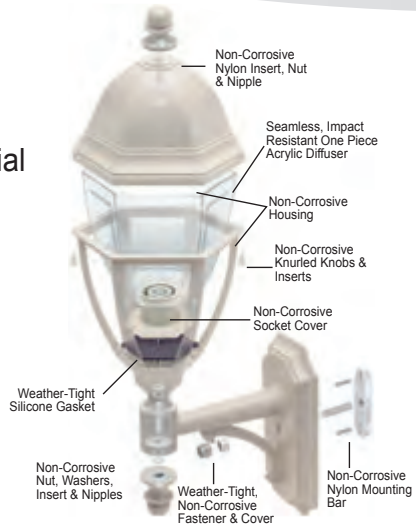

(**S11S** shown)

OCEANSIDE® APPROVED

The OceanSide® icon indicates that this product meets an uncompromising set of standards for low-maintenance durability and harsh weather performance.

Our advanced engineering, pleasing designs and leading-edge technologies allow us to eliminate components that can fail due to rust, corrosion or exposure to extreme climates. OceanSide® Approved products are specifically designed from the INSIDE-OUT to meet the rigors of Nature's harshest environment.




S21SC-GY


BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · ASK ABOUT ENERGY STAR · LED · GU24

GUIDE: S21VF-BZ-PC

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTION
S21S **S21V**	ACRYLIC **C**-Clear **F**-Frosted	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K, **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm * PC only available S21V	**BK**-Blackstone **WH**-Whitestone **SN**-Sandstone **GY**-Graystone **BZ**-Bronzestone	**PC**-Photocell (only available on S21V)



Title 24 & GU24 Available
(call for details)





S21VF-BZ


BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · LED · GU24

GUIDE: S21TC-LR12C-SN

ITEM #	LENS	LIGHT SOURCE	COLOR
S21T	ACRYLIC **C**-Clear **F**-Frosted	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K, **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm	**BK**-Blackstone **WH**-Whitestone **SN**-Sandstone **GY**-Graystone **BZ**-Bronzestone

Title 24 & GU24 Available
(call for details)

S21TC-SN





Title 24 Available
(call for details)

STONE COLORS



Lamp Included
Energy Star Qualified Product


SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

FULL SIZE LANTERNS

EVERSTONE® NON-CORROSIVE

S11VL-WH



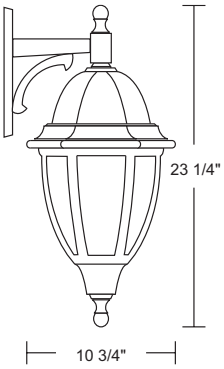


GUIDE: S11VC-LR12W-WH-PC

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTION
S11V	ACRYLIC **C**-Clear **F**-Frosted **L**-Opal	INCANDESCENT (1) 100W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K **LR15**-15W 1400lm — **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm	**BK**-Blackstone **WH**-Whitestone **SN**-Sandstone **GY**-Graystone **BZ**-Bronzestone	**PC**-Photocell (GU24 & LED only)

EXTENDS: 12 3/4"
H/CTR: 5 1/4"
BACKPLATE: 10 5/8" x 5 1/2"

Title 24 & GU24 Available
(call for details)

S11SC-SN

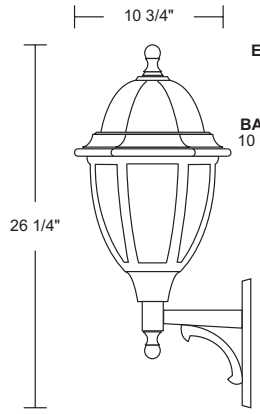

EXTENDS: 12 3/4"
H/CTR: 21 1/4"
BACKPLATE: 10 5/8" x 5 1/2"




GUIDE: S11SC-LR15C-SN

ITEM #	LENS	LIGHT SOURCE	COLOR
S11S	ACRYLIC **C**-Clear **F**-Frosted **L**-OpaL	INCANDESCENT (1) 100W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K **LR15**-15W 1400lm — **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm	**BK**-Blackstone **WH**-Whitestone **SN**-Sandstone **GY**-Graystone **BZ**-Bronzestone

Title 24 & GU24 Available
(call for details)

S11TF-BK



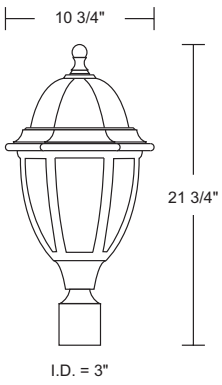

GUIDE: S11TC-LR12W-BK

ITEM #	LENS	LIGHT SOURCE	COLOR
S11T	ACRYLIC **C**-Clear **F**-Frosted **L**-Opal	INCANDESCENT (1) 100W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K **LR15**-15W 1400lm — **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm	**BK**-Blackstone **WH**-Whitestone **SN**-Sandstone **GY**-Graystone **BZ**-Bronzestone

Title 24 & GU24 Available
(call for details)

Photocell available — Posts accommodate Photo Control 320 or 688. See page 69. Posts sold separately.


EVERSTONE®
NON-CORROSIVE

GUIDE: S26SL-LE26-BK

ITEM #	GLOBE	LIGHT SOURCE	COLOR
S26S S26V	ACRYLIC **C**-Clear Prismatic **L**-Opal	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** E26 MEDIUM BASE LED **LE26**-A19 800lm CCT **C**-4K **W**-3K	**BK**-Blackstone **WH**-Whitestone **SN**-Sandstone **GY**-Graystone **BZ**-Bronzestone



S26SL-BK




EXTENDS: 9 1/4"
H/CTR: 8 3/4"
BACKPLATE: 7 1/4" x 5 3/8"



S26VC-SN

Title 24 & GU24 Available
(call for details)



EXTENDS: 9 1/4"
H/CTR: 3 5/8"
BACKPLATE: 7 1/4" x 5 3/8"



S26TC-WH

GUIDE: S26TC-WH

ITEM #	GLOBE	LIGHT SOURCE	COLOR
S26T	ACRYLIC **C**-Clear Prismatic **L**-Opal	INCANDESCENT (1) 100W MAX Medium Base **LED LIGHT SOURCE** E26 MEDIUM BASE LED **LE26**-A19 800lm CCT **C**-4K **W**-3K	**BK**-Blackstone **WH**-Whitestone **SN**-Sandstone **GY**-Graystone **BZ**-Bronzestone

Title 24 & GU24 Available
(call for details)

STONE COLORS



Photocell available Posts accommodate Photo Control 320 or 688. See page 69. Posts sold separately.

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

EVERSTONE ACORNS

EVERSTONE® NON-CORROSIVE


GUIDE: S27SC-BK

ITEM #	GLOBE	LIGHT SOURCE	COLOR
S27SC	POLYCARBONATE Clear Textured	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** E26 MEDIUM BASE LED **LE26**-A19 800lm CCT **C**-4K **W**-3K	**BK**-Blackstone **WH**-Whitestone **SN**-Sandstone **GY**-Graystone **BZ**-Bronzestone

Title 24 & GU24 Available
(call for details)




S27SC-BK



EXTENDS: 9 1/4"
H/CTR: 13 3/4"
BACKPLATE: 7 1/4" x 5 3/8"



S27TC-GY



I.D. = 3"

GUIDE: S27TC-WH

ITEM #	GLOBE	LIGHT SOURCE	COLOR
S27TC	POLYCARBONATE Clear Textured	INCANDESCENT (1) 100W MAX Medium Base **LED LIGHT SOURCE** E26 MEDIUM BASE LED **LE26**-A19 800lm CCT **C**-4K **W**-3K	**BK**-Blackstone **WH**-Whitestone **SN**-Sandstone **GY**-Graystone **BZ**-Bronzestone

Title 24 & GU24 Available
(call for details)


WALL PACK LANTERNS

GUIDE: S32WC-LR12C-BK-PC

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR
S32W	ACRYLIC **C**-Clear Prismatic **L**-Opal	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm **LR15**-15W 1400lm CCT **C**-4K **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm 120-277V MULTI-VOLT LED **L11**-11W 912lm CCT 4K	**BK**-Blackstone **WH**-Whitestone **SN**-Sandstone **GY**-Graystone **BZ**-Bronzestone

Title 24 & GU24 Available
(call for details)

S32WC-BK



EXTENDS: 4"
H/CTR: 7 1/2"
BACKPLATE: 13 7/8" x 6 3/4"



Lamp Included
Energy Star Qualified Product

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

EVERSTONE®
NON-CORROSIVE

TURTLE & DARK SKY FRIENDLY




(N) No Insignia | (L) Lighthouse | (T) Turtle | *Custom (consult factory for details)

- Florida Wildlife Certified with Amber LED Light Source
- Meets Standards for Beachfront, Turtle Safe Lighting
- 100% Cut-Off - Complies with Dark Sky Standards
- Available with No Insignia, Lighthouse, Turtle, or Custom Insignia
- Non-Corrosive Hardware



S33WL-L9-SN



GUIDE: S33WL-L9-SN-PC

ITEM #	INSIGNIA	LIGHT SOURCE		COLOR
S33W	**N**-No Insignia **L**-Lighthouse **T**-Turtle	INCANDESCENT (1) 60W MAX Medium Base		**BK**-Blackstone **WH**-Whitestone **SN**-Sandstone **GY**-Graystone **BZ**-Bronzestone
		LED LIGHT SOURCE		
		120V LIGHTWAVE LED **LR12**-13W 1000lm	CCT **C**-4K **W**-3K	
		E26 MEDIUM BASE LED **LE26**-A19 800lm (1)		
		120-277V MULTI-VOLT LED **L11**-11W 912lm	CCT 3K	
		120-277V AMBER LED **L9***-10W 470lm, 585-595nm		

Customizable Insignia Available. Consult factory for details.

Title 24 & GU24 Available
(call for details)

(1) **Lamp Included**
Energy Star Qualified Product

WILDLIFE LIGHTING — THROUGH RESPONSIBLE LIGHTING PRACTICES PROTECTING WILDLIFE

FLORIDA WILDLIFE CERTIFIED LIGHTING

TURTLE & DARK SKY FRIENDLY

Marlex

NON-CORROSIVE

- Available in Two Lengths
- Turtle Safe & Dark Sky Friendly Lighting
- Non-Corrosive Construction
- Baffle Included


GUIDE: S34W-BK


ITEM #	LIGHT SOURCE		COLOR
S34W **S35W**	INCANDESCENT (1) 75W MAX Par 30 Lamp		**BK**-Black **WH**-White
	LED LIGHT SOURCE		
	E26 MEDIUM BASE LED **LE26**- (1) A19 800lm	CCT **C**-4K **W**-3K	


Title 24 Available
(call for details)



S35W-WH
Tall








S34W-BK
Short

See Page 17 for Cast Aluminum Version!

CEILING MOUNT



167FM-BK



BUY AMERICAN ACT COMPLIANT · c UL us LISTED · DAMP · ENERGY STAR ASK ABOUT ENERGY STAR · LED · GU24

GUIDE: 167FM-WH

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR
167FM	ACRYLIC **F**-Frosted	INCANDESCENT (1) 75W MAX Medium Base	**BK**-Black **WH**-White
		LED LIGHT SOURCE	
		120V LIGHTWAVE LED / CCT **LR12**-13W 1000lm · **C**-4K **LR15**-15W 1400lm · **W**-3K **LR22**-23W 1900lm	
		E26 MEDIUM BASE LED **LE26**-(1) A19 800lm	

Title 24 & GU24 Available
(call for details)

NAUTICAL

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · ENERGY STAR ASK ABOUT ENERGY STAR · LED · GU24 · Photocell available


GUIDE: S759VF-LR12W-BK-PC

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION
S759V	ACRYLIC **F**-Frosted	INCANDESCENT (1) 60W MAX Medium Base	**BK**-Black	**PC**-Photocell
		LED LIGHT SOURCE		
		120V LIGHTWAVE LED / CCT **LR12**-13W 1000lm · **C**-4K E26 MEDUM BASE LED · **W**-3K **LE26**-(1) A19 800lm		

Title 24 & GU24 Available
(call for details)

S759VF-BK



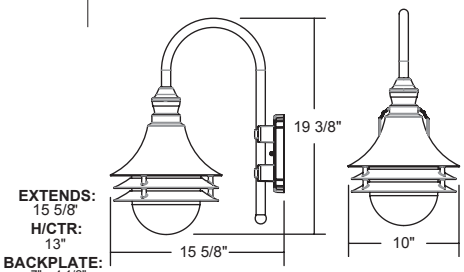




S75VC-BK

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · ENERGY STAR ASK ABOUT ENERGY STAR · LED · GU24 · Photocell available

GUIDE: S75VC-WH-PC

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION
S75V	ACRYLIC **C**-Clear Prismatic **L**-Opal	INCANDESCENT (1) 60W MAX Medium Base	**BK**-Black **WH**-White	**PC**-Photocell
		LED LIGHT SOURCE		
		120V LIGHTWAVE LED / CCT **LR12**-13W 1000lm · **C**-4K E26 MEDIUM BASE LED · **W**-3K **LE26**-A19 800lm		
		120-277V MULTI-VOLT LED / CCT **L11**-11W 912lm · 4K		

Title 24 & GU24 Available
(call for details)




BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | LED | GU24 | Photocell available

GUIDE: S75TC-1-LR12C-WH-PC

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION
S75TC-1	ACRYLIC Clear Prismatic	INCANDESCENT (1) 60W MAX Medium Base	**BK**-Black **WH**-White	**PC**-Photocell
S75TL-1	ACRYLIC Opal	**LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm (CCT: **C**-4K, **W**-3K) E26 MEDIUM BASE LED **LE26**-A19 800lm [1] 120-277V MULTI-VOLT LED **L11**-11W 912lm (CCT: 4K)		

Title 24 & GU24 Available
(call for details)





S75TC-1-WH




S75TC-2-BK

BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | LED | GU24 | Photocell available

GUIDE: S75TC-2-WH-PC

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION
S75TC-2	ACRYLIC Clear Prismatic	INCANDESCENT (2) 60W MAX Medium Base	**BK**-Black **WH**-White	**PC**-Photocell
S75TL-2	ACRYLIC Opal	**LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-(2)13W 1000lm (CCT: **C**-4K, **W**-3K) E26 MEDIUM BASE LED **LE26**-(2)A19 800lm [1] 120-277V MULTI-VOLT LED **L22**-22W 1824lm (CCT: 4K)		

Title 24 & GU24 Available
(call for details)

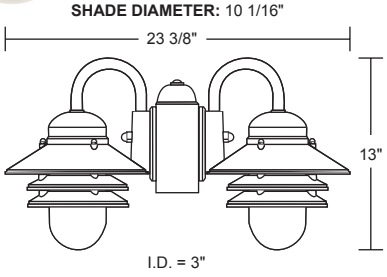


BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | LED | GU24 | Photocell available

GUIDE: S75TC-BK-PC


ITEM #	DIFFUSER	LIGHT SOURCE	COLOR
S75TC	ACRYLIC Clear Prismatic	INCANDESCENT (1) 60W MAX Medium Base	**BK**-Black **WH**-White
		LED LIGHT SOURCE 120V LIGHTWAVE LED **LR12**-13W 1000lm (CCT: **C**-4K, **W**-3K) E26 MEDIUM BASE LED **LE26**-A19 800lm [1]	


Title 24 & GU24 Available
(call for details)



Pier Mount Adaptors Available
(page 69)

S75TC-WH



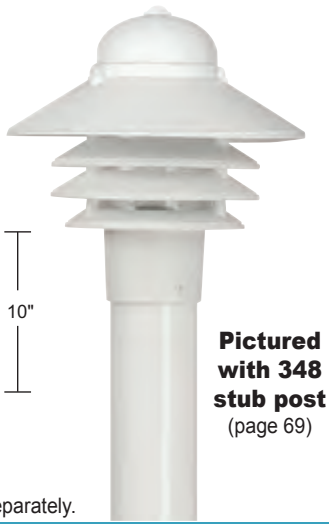

Pictured with 348 stub post
(page 69)

Posts sold separately.

[1] **Lamp Included**
Energy Star Qualified Product

- WALL OR CEILING MOUNT
- STANDARD BULKHEAD DESIGN
- PHOTOCELL ON SELECT MODELS
- LED OPTIONS AVAILABLE

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · ASK ABOUT ENERGY STAR · LED · GU24 · Photocell available




GUIDE: S761WF-LR12W-WH-PC

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION
S761WF **S772WF** **S791WF**	POLYCARBONATE Frosted Ribbed	**POLYCARBONATE BACK PAN - MEDIUM BASE SOCKET**		
		INCANDESCENT (1) 60W MAX Medium Base	**BK**-Black **WH**-White	
		LED LIGHT SOURCE E26 MEDIUM BASE LED: **LE26**-A19 800lm — CCT: **C**-4K, **W**-3K		
		ALUMINUM BACK PAN - DEDICATED LED		
		LED LIGHT SOURCE 120V LIGHTWAVE LED: **LR12**-13W 1000lm, **LR15**-15W 1400lm, **LR22**-23W 1900lm — CCT: **C**-4K, **W**-3K 120-277V MULTI-VOLT LED: **L22**-22W 1824lm — CCT: 4K	**BK**-Black **WH**-White	**PC**-Photocell

Title 24 & GU24 Available
(call for details)



S761WF-WH

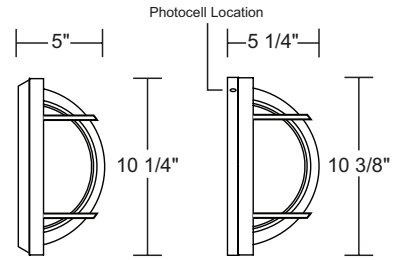


POLYCARBONATE BACK PAN — **H/CTR:** 5 1/8"

ALUMINUM BACK PAN — **H/CTR:** 5 1/4"




S791WF-WH

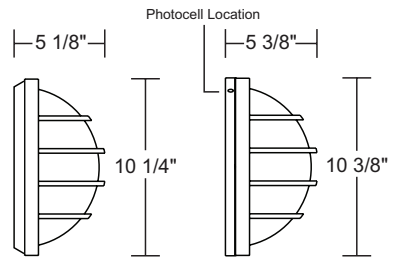


POLYCARBONATE BACK PAN — **H/CTR:** 5 1/8"

ALUMINUM BACK PAN — **H/CTR:** 5 1/4"

S772WF-BK

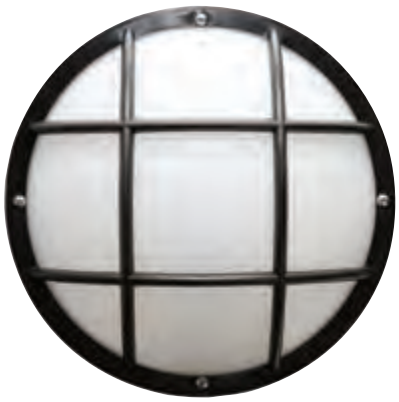


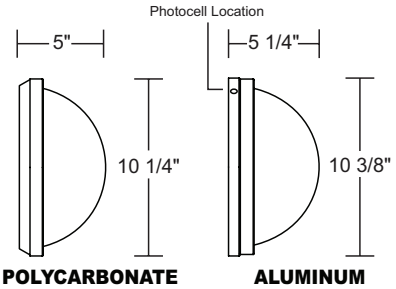


POLYCARBONATE BACK PAN — **H/CTR:** 5 1/8"

ALUMINUM BACK PAN — **H/CTR:** 5 1/4"

- WALL MOUNT
- STANDARD BULKHEAD DESIGN
- PHOTOCELL ON SELECT MODELS
- LED OPTIONS AVAILABLE



POLYCARBONATE BACK PAN




ALUMINUM BACK PAN




S771WF-BK



S76WF-WH



POLYCARBONATE BACK PAN



ALUMINUM BACK PAN

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · ENERGY STAR ASK ABOUT · LED · GU24 · Photocell available · ADA COMPLIANT


GUIDE: S76WF-WH-PC

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION
S76WF **S771WF** **S77WF** **S79WF**	POLYCARBONATE Frosted Ribbed	**POLYCARBONATE BACK PAN - MEDIUM BASE SOCKET**		
		INCANDESCENT (1) 60W MAX Medium Base	**BK**-Black **WH**-White	
		LED LIGHT SOURCE E26 MEDIUM BASE LED / CCT **LE26**-A19 800lm / **C**-4K, **W**-3K	**BK**-Black **WH**-White	
		ALUMINUM BACK PAN - DEDICATED LED		
		LED LIGHT SOURCE 120V LIGHTWAVE LED / CCT **LR12**-13W 1000lm / **C**-4K, **W**-3K	**BK**-Black **WH**-White	**PC**-Photocell
		120-277V MULTI-VOLT LED / CCT **L11**-11W 912lm / 4K		


Title 24 & GU24 Available
(call for details)

S77WF-WH






POLYCARBONATE BACK PAN




ALUMINUM BACK PAN

S79WF-BK





POLYCARBONATE BACK PAN



ALUMINUM BACK PAN


ADA NOTE: Only S79WF with Polycarbonate Back Pan is ADA compliant.

Lamp Included
Energy Star Qualified Product

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

206VC-WH





EXTENDS: 5 3/4"
H/CTR: 2 3/8"
BACKPLATE: 4 7/8" RD.

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · ASK ABOUT ENERGY STAR · LED · GU24 · Photocell available

GUIDE: 206VC-WH-PC

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTION
206VC	ACRYLIC Clear Glacier	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K, **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm	**BK**-Black **WH**-White	**PC**-Photocell (GU24 & LED only)

Title 24 & GU24 Available
(call for details)

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · ASK ABOUT ENERGY STAR · LED · GU24 · Photocell available


208SL-BK
(Opal Beveled Shown)



GUIDE: 208SC-LR12W-BK-PC

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTION
208S	ACRYLIC **C**-Clear Glacier **B**-Clear Beveled **L**-Opal Beveled	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K, **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm	**BK**-Black **WH**-White	**PC**-Photocell


Title 24 & GU24 Available
(call for details)



EXTENDS: 8 1/2"
H/CTR: 10 5/8"
BACKPLATE: 4 5/8" x 4 5/8"



208TC-WH
(Clear Glacier Shown)



I.D. = 3"

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · LED · GU24

GUIDE: 208TC-WH

ITEM #	LENS	LIGHT SOURCE	COLOR
208T	ACRYLIC **C**-Clear Glacier **B**-Clear Beveled **L**-Opal Beveled	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K, **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm	**BK**-Black **WH**-White

Title 24 & GU24 Available
(call for details)

Photocell available — Posts accommodate Photo Control 320 or 688. See page 69 Posts sold separately.


GUIDE: 785-LR12C-BK-PC

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION
785	ACRYLIC Opal	INCANDESCENT (1) 60W MAX Medium Base	**BK**-Black **WH**-White	**PC**-Photocell
		LED LIGHT SOURCE		
		120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K, **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm		
		120-277V MULTI-VOLT LED — CCT **L11**-11W 912lm — 4K		

Title 24 & GU24 Available
(call for details)


785-BK







204SC-WH




GUIDE: 204SC-WH-PC

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTION
204S 204V	ACRYLIC **C**-Clear Beveled **L**-Opal Beveled	INCANDESCENT (1) 60W MAX Medium Base	**BK**-Black **WH**-White	**PC**-Photocell
		LED LIGHT SOURCE		
		120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K, **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm		

Title 24 & GU24 Available
(call for details)



204VC-BK




GUIDE: 204TC-LR12C-WH

ITEM #	LENS	LIGHT SOURCE	COLOR
204T	ACRYLIC **C**-Clear Beveled **L**-Opal Beveled	INCANDESCENT (1) 60W MAX Medium Base	**BK**-Black **WH**-White
		LED LIGHT SOURCE	
		120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K, **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm	

Title 24 & GU24 Available
(call for details)

204TC-WH






Lamp Included
Energy Star Qualified Product

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

270SF-BK
(frosted beveled shown)



EXTENDS: 10 1/4"
H/CTR: 15"
BACKPLATE: 4 7/8" x 5 3/4"



BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | ASK ABOUT ENERGY STAR | LED | GU24

GUIDE: 270TC-LR12C-BK


ITEM #	LENS	LIGHT SOURCE	COLOR
270S 270T	ACRYLIC **C**-Clear Beveled w/Glass Chimney **F**-Frosted Beveled	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm * E26 MEDIUM BASE LED **LE26**-A19 800lm *	**BK**-Black

CCT: **C**-4K, **W**-3K

Title 24 & GU24 Available
(call for details)

*Energy Star not available on Post Top Fixtures.

Glass Chimney Included when ordered with Clear Beveled Lens




270TC-BK
(clear beveled w/glass chimney shown)





EXTENDS: 9"
H/CTR: 11 7/8"
BACKPLATE: 4 3/4" x 4 3/4"

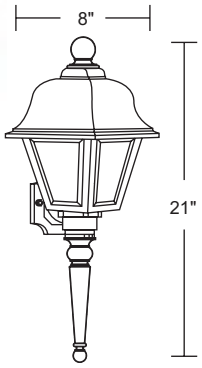


220SL-WH
Long & Short Tail Included

BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | ASK ABOUT ENERGY STAR | LED | GU24 | Photocell available

GUIDE: 220SC-LR12-WH-PC

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTION
220S	ACRYLIC **C**-Clear Beveled **L**-Opal Beveled	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm E26 MEDIUM BASE LED **LE26**-A19 800lm	**BK**-Black **WH**-White	**PC**-Photocell

CCT: **C**-4K, **W**-3K



Title 24 & GU24 Available
(call for details)



BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | LED | GU24


GUIDE: 220TC-BK

ITEM #	LENS	LIGHT SOURCE	COLOR
220T	ACRYLIC **C**-Clear Beveled **L**-Opal Beveled	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm E26 MEDIUM BASE LED **LE26**-A19 800lm	**BK**-Black **WH**-White

CCT: **C**-4K, **W**-3K

Title 24 & GU24 Available
(call for details)

220TC-BK



I.D. = 3"

Photocell available Posts accommodate Photo Control 320 or 688. See page 69 Posts sold separately.

BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | ASK ABOUT ENERGY STAR | LED | GU24 | Photocell available

GUIDE: 240SL-BK-PC


ITEM #	LENS	LIGHT SOURCE	COLOR	OPTION
240S **240V**	ACRYLIC **H**-Clear Hatch **R**-Frosted Hatch	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm E26 MEDIUM BASE LED **LE26**-A19 800lm (1)	**BK**-Black **WH**-White	**PC**-Photocell

CCT: **C**-4K, **W**-3K


Title 24 & GU24 Available
(call for details)



240SH-BK



EXTENDS: 8 1/2"
H/CTR: 13 1/4"
BACKPLATE: 5 1/2" RD.



EXTENDS: 8 1/2"
H/CTR: 2 3/4"
BACKPLATE: 5 1/2" RD.

240VH-WH



BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | LED | GU24


GUIDE: 240TR-LR12W-WH

ITEM #	LENS	LIGHT SOURCE	COLOR
240T	ACRYLIC **H**-Clear Hatch **R**-Frosted Hatch	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm E26 MEDIUM BASE LED **LE26**-A19 800lm (1)	**BK**-Black **WH**-White

CCT: **C**-4K, **W**-3K

Title 24 & GU24 Available
(call for details)

240TR-WH




I.D. = 3"



241VC-BK



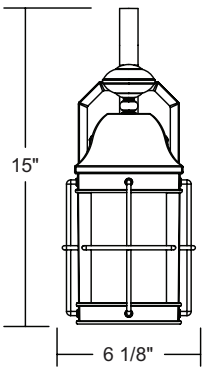

EXTENDS: 6 3/4"
H/CTR: 6 1/2"
BACKPLATE: 5 1/2" x 4 7/8"

AVAILABLE IN BRONZE

BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | ASK ABOUT ENERGY STAR | GU24 | LED

GUIDE: 241VC-BK

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTION
241V	ACRYLIC **C**-Clear **F**-Frost	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm E26 MEDIUM BASE LED **LE26**-A19 800lm (1)	**BK**-Black **WH**-White **BZ**-Bronze	**PC**-Photocell (Lightwave LED only)

CCT: **C**-4K, **W**-3K

Title 24 & GU24 Available
(call for details)

(1) **Lamp Included**
Energy Star Qualified Product

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

Marlex

NON-CORROSIVE

ASHLAND

BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | ASK ABOUT ENERGY STAR | LED | GU24 | Photocell available

GUIDE: 260SC-LR12W-WH-PC

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTION
260S **260T**	ACRYLIC **C**-Clear Beveled **L**-Opal Beveled	INCANDESCENT (1) 75W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm* — **C**-4K, **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm*	**BK**-Black **WH**-White	**PC**-Photocell (wall mount only)


*Energy Star only available on 260S.

Title 24 & GU24 Available
(call for details)


260SC-BK

Long & Short Tail Included




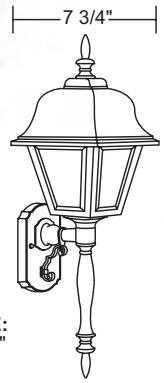

EXTENDS: 9"
H/CTR: 15 5/8"
BACKPLATE: 4 3/4" x 7 3/4"



260TC-WH



I.D. = 3"



BRENTWOOD

BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | ASK ABOUT ENERGY STAR | LED | GU24 | Photocell available

GUIDE: 230SC-BK-PC


ITEM #	LENS	LIGHT SOURCE	COLOR	OPTION
230S **230T**	ACRYLIC **C**-Clear Beveled	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm* — **C**-4K, **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm*	**BK**-Black **WH**-White	**PC**-Photocell (wall mount only)

*Energy Star only available on 230S.

Title 24 & GU24 Available
(call for details)

230TC-WH






I.D. = 3"

230SC-BK



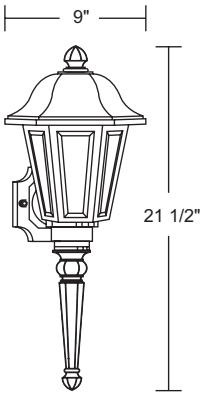

EXTENDS: 9"
H/CTR: 12 1/4"
BACKPLATE: 4 3/4" x 4 3/4"


Long & Short Tail Included

Photocell available Posts accommodate Photo Control 320 or 688. See page 69. Posts sold separately.

CEILING MOUNT



156FM-BK

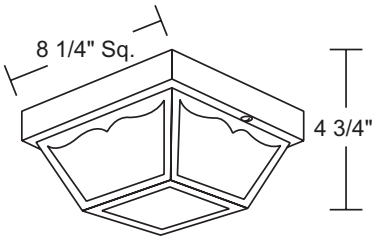

GUIDE: 156FM-LR12C-BK-PC


ITEM #	DIFFUSER	LIGHT SOURCE		COLOR
156FM	POLYPROPYLENE Frosted	**POLYCARBONATE BACK PAN - MEDIUM BASE SOCKET**		
		INCANDESCENT (1) 60W MAX Medium Base		**BK**-Black **WH**-White
		LED LIGHT SOURCE		
		E26 MEDIUM BASE LED **LE26**-A19 800lm	CCT **C**-4K **W**-3K	
		ALUMINUM BACK PAN - DEDICATED LED		
		LED LIGHT SOURCE		**BK**-Black **WH**-White
		120V LIGHTWAVE LED **LR12**-13W 1000lm **LR15**-15W 1400lm	CCT **C**-4K **W**-3K	
		120-277V MULTI-VOLT LED **L11**-11W 912lm	CCT 4K	

Title 24 & GU24 Available
(call for details)



157FM-WH

Title 24 & GU24 Available
(call for details)

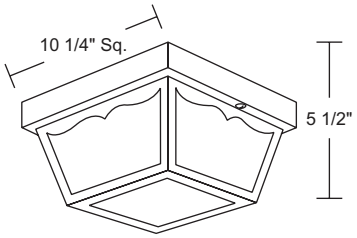

GUIDE: 157FM-WH


ITEM #	DIFFUSER	LIGHT SOURCE		COLOR	OPTION
157FM	POLYPROPYLENE Frosted	**POLYCARBONATE BACK PAN - MEDIUM BASE SOCKET**			
		INCANDESCENT (2) 60W MAX Medium Base		**BK**-Black **WH**-White	
		LED LIGHT SOURCE			
		E26 MEDIUM BASE LED **2LE26**-(2)A19 800lm	CCT **C**-4K **W**-3K		
		ALUMINUM BACK PAN - DEDICATED LED			
		LED LIGHT SOURCE		**BK**-Black **WH**-White	**O**-Occupancy Sensor
		120V LIGHTWAVE LED **LR12**-13W 1000lm **LR15**-15W 1400lm **LR22**-23W 1900lm	CCT **C**-4K **W**-3K		
		120-277V MULTI-VOLT LED **L22**-22W 1824lm	CCT 4K		

Lamp Included
Energy Star Qualified Product

- WALL OR CEILING MOUNT
- VANDAL & INSECT RESISTANT
- LED OPTIONS
- KNOCKOUTS FOR CONDUIT
- POLYCARBONATE BASE & DIFFUSER
- OCCUPANCY SENSOR AVAILABLE

164FM-BK





H/CTR: 5"
BACKPLATE: 8 3/8" sq


GUIDE: 164FM-BK-O

ITEM #	DIFFUSER	LIGHT SOURCE		COLOR	OPTION
164FM **165FM**	POLYCARBONATE Opal **F**-Frosted Prismatic	**LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm **LR15**-15W 1400lm E26 MEDIUM BASE LED **2LE26**-A19 800lm 120-277V MULTI-VOLT LED **L22**-22W 1824lm	CCT **C**-4K **W**-3K CCT 4K	**BK**-Black **WH**-White	**O**-Occupancy Sensor

Title 24 & GU24 Available
(call for details)

165FM-WH






H/CTR: 4 1/2"
BACKPLATE: 8 1/2" rd

15RP2-WH



(lamps not included)



EXTENDS: 6"
H/CTR: 2 1/2"
BACKPLATE: 9" x 5"

GUIDE: 15RP2-WH

ITEM #	LIGHT SOURCE	COLOR
15RP2	INCANDESCENT (2) 150W MAX Par 38 Lamps	**WH**-White

- *WALL OR CEILING MOUNT*
- *LED OPTIONS*






GUIDE: 263FM-LR12-WH


ITEM #	DIFFUSER	LIGHT SOURCE	COLOR
263FM **264FM**	ACRYLIC **F**-Frosted Prismatic	INCANDESCENT (1) 40W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K, **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm	**WH**-White

263FMF-WH




Title 24 Available
(call for details)


264FMF-WH







265FMF-WH



GUIDE: 265FM-LR12-WH-O

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION
265FM	ACRYLIC **F**-Frosted Prismatic	INCANDESCENT (2) 40W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR15**-15W 1400lm — **C**-4K, **W**-3K **LR22**-23W 1900lm E26 MEDIUM BASE LED **2LE26**-(2) A19 800lm	**WH**-White	**O**-Occupancy Sensor

Title 24 Available
(call for details)

Lamp Included
Energy Star Qualified Product

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.


NON-CORROSIVE

209-WH



210-BK






EXTENDS: 5 3/4"
H/CTR: 2 3/8"
BACKPLATE: 4 3/4" x 4 1/2"

211-BK-PC





EXTENDS: 6 1/2"
H/CTR: 2 3/8"
BACKPLATE: 4 3/4" x 4 1/2"

212-WH



BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | ASK ABOUT ENERGY STAR | LED | GU24 | Photocell available

GUIDE: 209-WH-LR12W-PC

ITEM #	GLOBE/JAR	COLOR	LIGHT SOURCE	OPTION
209 211 216	ACRYLIC Clear Prism	BK-Black WH-White	INCANDESCENT (1) 60W MAX Medium Base	PC-Photocell
210 212 217	ACRYLIC Opal		LED LIGHT SOURCE 120V LIGHTWAVE LED — CCT LR12-13W 1000lm — C-4K, W-3K E26 MEDIUM BASE LED LE26-A19 800lm	
215	POLYCARBONATE Clear Ribbed		120-277V MULTI-VOLT LED — CCT L11-11W 912lm — 4K	

Title 24 & GU24 Available
(call for details)

216-WH




217-BK




215-BK





EXTENDS: 5 7/8"
H/CTR: 2 3/8"
BACKPLATE: 4 3/4" x 4 1/2"



EXTENDS: 5 3/4"
H/CTR: 2 3/8"
BACKPLATE: 4 3/4" x 4 1/2"

420L-BK




BUY AMERICAN ACT COMPLIANT | c UL us LISTED | DAMP | GU24 | Photocell available

GUIDE: 420-BK-PC

ITEM #	DIFFUSER	COLOR	LIGHT SOURCE	OPTION
420 421 422	ACRYLIC C-Clear Prismatic L-Opal	BK-Black WH-White	INCANDESCENT (1) 60W MAX Medium Base	PC-Photocell
			LED LIGHT SOURCE E26 MEDIUM BASE LED — CCT LE26-A19 800lm — C-4K, W-3K	


Title 24 & GU24 Available
(call for details)




Lamp Included
Energy Star Qualified Product



421C-WH









422C-BK







106

Long & Short Tail Included

EXTENDS: 9 3/4"
H/CTR: 11 1/2"
BACKPLATE: 5 1/2" x 5"


BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · ASK ABOUT ENERGY STAR · LED · GU24 · Photocell available

GUIDE: 106C-LR12C-PC

ITEM #	LENS	LIGHT SOURCE	OPTION
105-White **106**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K, **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm	**PC**-Photocell (GU24 & LED only)

Title 24 & GU24 Available
(call for details)





109F

I.D. = 3"

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · LED · GU24

GUIDE: 109F-LR12W


ITEM #	LENS	LIGHT SOURCE
109-White **110**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	INCANDESCENT (1) 75W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K, **W**-3K **LR15**-15W 1400lm — **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm

SEE PAGE 44 FOR HIGH WATTAGE LIGHT COMMERCIAL MODELS

Title 24 & GU24 Available
(call for details)



112



Glass Chimney Included

I.D. = 3"

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · LED · GU24

GUIDE: 112-LR15W

ITEM #	LENS	LIGHT SOURCE
111-White **112**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	INCANDESCENT (1) 75W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED — CCT **LR12**-13W 1000lm — **C**-4K, **W**-3K **LR15**-15W 1400lm — **W**-3K E26 MEDIUM BASE LED **LE26**-A19 800lm

Title 24 & GU24 Available
(call for details)

Photocell available — Posts accommodate Photo Control 320 or 688. See page 69. Posts sold separately.

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · LED · GU24


GUIDE: 114-LR12W

ITEM #	LENS	LIGHT SOURCE
113-White **114**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	INCANDESCENT (1) 75W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm **LR15**-15W 1400lm E26 MEDIUM BASE LED **LE26**-A19 800lm [1] CCT **C**-4K **W**-3K

GU24 Available
(call for details)




114



Glass Chimney Included



115C



BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · LED · GU24

GUIDE: 115C-LR15C

ITEM #	LENS	LIGHT SOURCE
115-White **116**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	INCANDESCENT (1) 75W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm **LR15**-15W 1400lm E26 MEDIUM BASE LED **LE26**-A19 800lm [1] CCT **C**-4K **W**-3K

SEE PAGE 44 FOR HIGH WATTAGE LIGHT COMMERCIAL MODELS

GU24 Available
(call for details)


VICTORIAN

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · GU24

GUIDE: 123-LR15C

ITEM #	LENS	LIGHT SOURCE
123-White **124**-Black	ACRYLIC Clear	INCANDESCENT (1) 75W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm **LR15**-15W 1400lm E26 MEDIUM BASE LED **LE26**-A19 800lm [1] CCT **C**-4K **W**-3K

GU24 Available
(call for details)

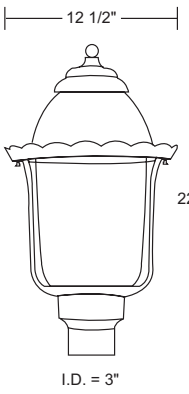



124

Glass Chimney Included




123

[1] **Lamp Included**


408

Long & Short Tail Included





EXTENDS: 9 3/8"
H/CTR: 12 1/4"
BACKPLATE: 5 1/2" x 5"



BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | ASK ABOUT ENERGY STAR | LED | GU24 | Photocell available

GUIDE: 408-PC

ITEM #	LENS	LIGHT SOURCE	OPTION
407-White **408**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm E26 MEDIUM BASE LED **LE26**-A19 800lm CCT **C**-4K **W**-3K	**PC**-Photocell (GU24 & LED only)

GU24 Available
(call for details)




BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | LED | GU24

GUIDE: 410F-LR12C

ITEM #	LENS	LIGHT SOURCE
409-White **410**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	INCANDESCENT (1) 75W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm **LR15**-15W 1400lm E26 MEDIUM BASE LED **LE26**-A19 800lm CCT **C**-4K **W**-3K

SEE PAGE 44 FOR HIGH WATTAGE LIGHT COMMERCIAL MODELS

GU24 Available
(call for details)




410F

I.D. = 3"



412

Glass Chimney Included



I.D. = 3"

BUY AMERICAN ACT COMPLIANT | c UL us LISTED | WET | LED | GU24

GUIDE: 412-LR15W

ITEM #	LENS	LIGHT SOURCE
411-White **412**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	INCANDESCENT (1) 75W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm **LR15**-15W 1400lm E26 MEDIUM BASE LED **LE26**-A19 800lm CCT **C**-4K **W**-3K

GU24 Available
(call for details)

Photocell available Posts accommodate Photo Control 320 or 688. See page 69. Posts sold separately.

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · ASK ABOUT ENERGY STAR · LED · GU24 · Photocell available


608C
Long & Short Tail Included




GUIDE: 608C-PC

ITEM #	LENS	LIGHT SOURCE	OPTION
607-White **608**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	INCANDESCENT (1) 60W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm E26 MEDIUM BASE LED **LE26**-A19 800lm (1)	CCT **C**-4K **W**-3K	**PC**-Photocell (GU24 & LED only)

GU24 Available
(call for details)






EXTENDS: 9 3/8"
H/CTR: 11 7/8"
BACKPLATE: 5 1/2" x 5"



609C

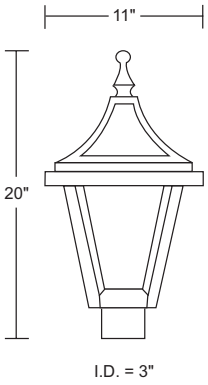

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · LED · GU24

GUIDE: 609C-LR12C

ITEM #	LENS	LIGHT SOURCE
609-White **610**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	INCANDESCENT (1) 75W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm **LR15**-15W 1400lm E26 MEDIUM BASE LED **LE26**-A19 800lm (1)	CCT **C**-4K **W**-3K

SEE PAGE 45 FOR HIGH WATTAGE LIGHT COMMERCIAL MODELS

GU24 Available
(call for details)

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · LED · GU24


GUIDE: 612-LR12C

ITEM #	LENS	LIGHT SOURCE
611-White **612**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	INCANDESCENT (1) 75W MAX Medium Base **LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**-13W 1000lm **LR15**-15W 1400lm E26 MEDIUM BASE LED **LE26**-A19 800lm (1)	CCT **C**-4K **W**-3K

GU24 Available
(call for details)

612





Glass Chimney Included


(1) **Lamp Included**
Energy Star Qualified Product

GLOBES &ACORNS

COMPLETE GLOBE FIXTURE WITH FITTER FOR 3" POST

- Cast Aluminum or Polycarbonate Fitters
- Polycarbonate or Acrylic Globes

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · GU24



GUIDE: 2002SM-LE26W-WH

ITEM #	GLOBE	LIGHT SOURCE	FITTER MATERIAL
2001*-12" DIA **2002***-14" DIA **2003***-16" DIA **2004**-18" DIA	POLYCARBONATE Opal **CL**-Clear **SM**-Smoke **PR**-Clear Prismatic	INCANDESCENT See "INCANDESCENT MAX WATTAGES" table for info **LED LIGHT SOURCE** E26 MEDIUM BASE LED **LE26**-A19 800lm ★1 CCT **C**-4K **W**-3K	POWDERCOATED CAST ALUMINUM Black **BZ**-Bronze **WH**-White POLYCARBONATE **BP**-Black **WP**-White
8000-10" DIA **8001**-12" DIA **8002***-14"DIA **8003**-16" DIA **8004**-18" DIA	ACRYLIC Opal **CL**-Clear **SM**-Smoke **PR**-Clear Prismatic		

*Not available in Clear Prismatic

ADD MG FOR MOGUL BASE

SEE PAGE 46 FOR HIGH WATTAGE LIGHT COMMERCIAL MODELS



RECOMMENDED EQUIVALENT INCANDESCENT MAX WATTAGES

DIA	POLYCARBONATE	ACRYLIC
10"	-	75W
12"	100W	100W
14"	150W	150W
16"	150W	150W
18"	150W	150W

COMPLETE ACORN FIXTURE WITH FITTER FOR 3" POST


- Cast Aluminum or Polycarbonate Fitters
- Polycarbonate, Acrylic, or Polyethylene Acorns

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · LED · GU24


GUIDE: 2017CL-LR12C-BP

8017FA









2018CL

ITEM #	GLOBE/JAR	LIGHT SOURCE	FITTER MATERIAL
2017 **2018**	POLYCARBONATE **CL**-Clear Textured	INCANDESCENT (1) 150W MAX Medium Base	POWDERCOATED CAST ALUMINUM Black **BZ**-Bronze **WH**-White
8017 **8018**	ACRYLIC **CL**-Clear Textured **FA**-Frost Textured	**LED LIGHT SOURCE** 120V LIGHTWAVE LED **LR12**- 13W 1000lm **LR15**- 15W 1400lm **LR22**- 22W 1800 E26 MEDIUM BASE LED **LE26**-A19 800lm ★1 CCT **C**-4K **W**-3K	POLYCARBONATE **BP**-Black **WP**-White
9017 **9018**	POLYETHYLENE Opal Textured		

ADD MG FOR MOGUL BASE

SEE PAGE 46 FOR HIGH WATTAGE LIGHT COMMERCIAL MODELS

Acorns & Globes have 5 1/4" Neckless Opening
See Page 80 for Replacements

Photocell available

Posts accommodate Photo Control 320 or 688. See page 69. Posts sold separately.

★1 **Lamp Included**

LOW VOLTAGE LED NON-CORROSIVE POST TOP LANTERNS

- 12V PAR 36 LED Lamp
- 50W Halogen Equivalent
- Estimated 50,000 hrs L_{70}
- Maintenance Free Non-Corrosive Housing
- Fits Most 3" O.D. Posts
- Use With 12V Transformers
- Screw Terminal Base Lamp Included
- 10' SPT-2 Wire Included
- 3 Year Warranty

COLONIAL




GUIDE: 110C-LV8W

ITEM #	LENS	LIGHT SOURCE	
		LED LIGHT SOURCE	
	ACRYLIC	PAR 36 LED 8-14VAC	CCT
109-White **110**-Black	Clear Beveled	**LV8**-8W 500lm	**W**-3K
115-White **116**-Black	**A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled		

110F


115F







610F

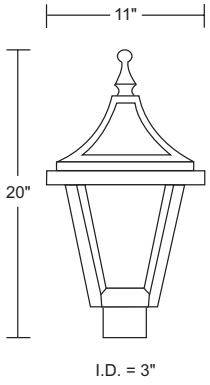

WET LED

GUIDE: 610C-LV8W

ITEM #	LENS	LIGHT SOURCE	
		LED LIGHT SOURCE	
	ACRYLIC	PAR 36 LED 8-14VAC	CCT
609-White **610**-Black	Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	**LV8**-8W 500lm ★	**W**-3K

SAXONY



WET LED

GUIDE: 410C-LV8W

ITEM #	LENS	LIGHT SOURCE	
		LED LIGHT SOURCE	
	ACRYLIC	PAR 36 LED 8-14VAC	CCT
409-White **410**-Black	Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	**LV8**-8W 500lm ★	**W**-3K

409F

★ **Lamp Included**

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

LED, METAL HALIDE, & HIGH PRESSURE SODIUM NON-CORROSIVE POST TOP LANTERNS

- Fits Most 3" O.D. Posts
- Maintenance Free Non-Corrosive Housing
- DLC Listed LED Lamp Option
- Lamp Included
- Made in the USA

COLONIAL



GUIDE: 110C-70H


ITEM #	LENS	LIGHT SOURCE
109-White **110**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	INTEGRAL BALLAST METAL HALIDE ELECTRONIC, UNIVERSAL 120-277V HPF **50MH**-(1) 50W 4Kv Medium Base **70MH**-(1) 70W 4Kv Medium Base HIGH PRESSURE SODIUM MAGNETIC, 120V HPF **35H**-(1) 35W 4Kv Medium Base **50H**-(1) 50W 4Kv Medium Base **70H**-(1) 70W 4Kv Medium Base
115-White **116**-Black		

LED LIGHT SOURCE	
E39 MOGUL BASE CORN COB 100-277v	CCT
LC5*-24W 3120lm, Type 5 **LC3***-20W 3000lm, Type 3 **LCD***-24W 2400lm, Dark Sky	**C**-4K

*DLC Listed Lamp

110C-70H

115C-50MH





Photocell available Posts accommodate Photo Control 320 or 688. See page 69. Posts sold separately.

VANGUARD



GUIDE: 610C-70H


ITEM #	LENS	LIGHT SOURCE
609-White **610**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	INTEGRAL BALLAST METAL HALIDE ELECTRONIC, UNIVERSAL 120-277V HPF **50MH**-(1) 50W 4Kv Medium Base ★ **70MH**-(1) 70W 4Kv Medium Base ★ HIGH PRESSURE SODIUM MAGNETIC, 120V HPF **35H**-(1) 35W 4Kv Medium Base ★ **50H**-(1) 50W 4Kv Medium Base ★ **70H**-(1) 70W 4Kv Medium Base ★

LED LIGHT SOURCE

E39 MOGUL BASE CORN COB 100-277v	CCT
LC5*-24W 3120lm, Type 5 ★ **LC3***-20W 3000lm, Type 3 ★ **LCD***-24W 2400lm, Dark Sky ★	**C**-4K

*DLC Listed Lamp

610C-50MH



I.D. = 3"

SAXONY



GUIDE: 410C-70H

ITEM #	LENS	LIGHT SOURCE
409-White **410**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	INTEGRAL BALLAST METAL HALIDE ELECTRONIC, UNIVERSAL 120-277V HPF **50MH**-(1) 50W 4Kv Medium Base ★ **70MH**-(1) 70W 4Kv Medium Base ★ HIGH PRESSURE SODIUM MAGNETIC, 120V HPF **35H**-(1) 35W 4Kv Medium Base ★ **50H**-(1) 50W 4Kv Medium Base ★ **70H**-(1) 70W 4Kv Medium Base ★

LED LIGHT SOURCE

E39 MOGUL BASE CORN COB 100-277v	CCT
LC5*-24W 3120lm, Type 5 ★ **LC3***-20W 3000lm, Type 3 ★ **LCD***-24W 2400lm, Dark Sky ★	**C**-4K

*DLC Listed Lamp

409C-70MH

I.D. = 3"

★ **Lamp Included**

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

LIGHT COMMERCIAL GLOBE & ACORN

COMPLETE GLOBE FIXTURE WITH ALUMINUM FITTER FOR 3" POST

GUIDE: 8003SM-70H

ITEM #	GLOBE	LIGHT SOURCE	FITTER
2003*-16" DIA **2004**-18" DIA	POLYCARBONATE Opal **CL**-Clear **SM**-Smoke **PR**-Clear Prismatic	INTEGRAL BALLAST METAL HALIDE ELECTRONIC, UNIVERSAL 120-277V HPF **50MH**-(1) 50W 4Kv Medium Base ★1 **70MH**-(1) 70W 4Kv Medium Base ★1 HIGH PRESSURE SODIUM MAGNETIC, 120V HPF **35H**-(1) 35W 4Kv Medium Base ★1 **50H**-(1) 50W 4Kv Medium Base ★1 **70H**-(1) 70W 4Kv Medium Base ★1	POWDERCOATED CAST ALUMINUM Black **BZ**-Bronze **WH**-White
8003-16" DIA **8004**-18" DIA	ACRYLIC Opal **CL**-Clear **SM**-Smoke **PR**-Clear Prismatic		

*Not available in Clear Prismatic

LED LIGHT SOURCE	
E39 CORN COB LED 100-277v	CCT
LC5-24W 3120lm, Type 5 ★1 **LC3**-20W 3000lm, Type 3 ★1 **LCD**-24W 2400lm, Dark Sky ★1	**C**-4K

Globes have 5 1/4" Neckless Opening. See Page 80 for Replacements

2003

2 x **2003** Fixtures with **PB5-2** Post Bracket Kit shown below.
See page 70 for details.



COMPLETE ACORN FIXTURE WITH ALUMINUM FITTER FOR 3" POST




GUIDE: 2017CL-50MH

ITEM #	ACORN	LIGHT SOURCE	FITTER
2017 **2018**	POLYCARBONATE **CL**-Clear Textured	INTEGRAL BALLAST METAL HALIDE ELECTRONIC, UNIVERSAL 120-277V HPF **50MH**-(1) 50W 4Kv Medium Base ★1 **70MH**-(1) 70W 4Kv Medium Base ★1 HIGH PRESSURE SODIUM MAGNETIC, 120V HPF **35H**-(1) 35W 4Kv Medium Base ★1 **50H**-(1) 50W 4Kv Medium Base ★1 **70H**-(1) 70W 4Kv Medium Base ★1	POWDERCOATED CAST ALUMINUM Black **BZ**-Bronze **WH**-White
8017 **8018**	ACRYLIC **CL**-Clear Textured **FR**-Frost Textured		

LED LIGHT SOURCE	
E39 CORN COB LED 100-277v	CCT
LC5-24W 3120lm, Type 5 ★1 **LC3**-20W 3000lm, Type 3 ★1 **LCD**-24W 2400lm, Dark Sky ★1	**C**-4K


2017CL-50MH



Acorns have 5 1/4" Neckless Opening
See Page 80 for Replacements

★1 **Lamp Included**

2018CL-50MH






Photocell available — Posts accommodate Photo Control 320 or 688. See page 69. Posts sold separately.

COMMERCIAL



C40T-



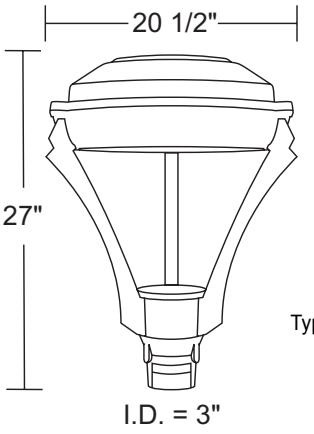

LED COMMERCIAL system

Commercial LED standard in 4000K,
Type V, other options available upon request.
Integral surge supression.
5 year warranty on LED components.


GUIDE: C40TL-L40C-BK

c UL us LISTED · WET · darkSky · LED

ITEM #	LENS	LIGHT SOURCE		COLOR
		LED LIGHT SOURCE		
C40T	ACRYLIC **L**-Opal Drop Lens **FF**-Frost Flat Lens	120-277v DEDICATED LED **L40**-40W 4000lm **L60**-60W 6000lm	CCT **C**-4K **W**-3K **B**-5K	**BK**-Black **BZ**-Bronze **WH**-White

C41T-



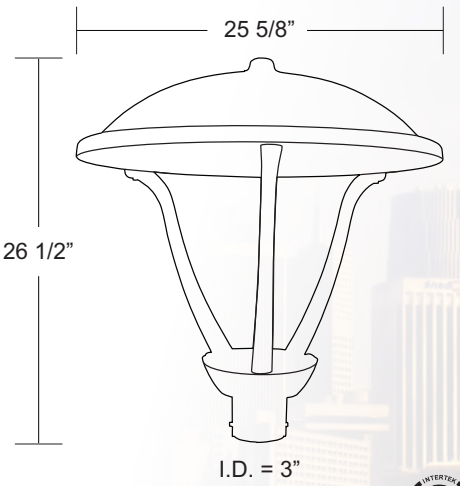

SCAN FOR VIDEO

GUIDE: C41TC-L40C-BK

c ETL us LISTED · WET · darkSky · LED


ITEM #	LENS	LIGHT SOURCE		COLOR	OPTION
		LED LIGHT SOURCE			
C41T	GLASS **C**-Clear Lens	120-277v DEDICATED LED **L40**-40W 3500lm **L80**-85W 6100lm	CCT **C**-4K	**BK**-Black **BZ**-Bronze **WH**-White	**T3**-Type III Distribution

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.


- LED & HID Models
- 0-10V Dimming LED Options
- DLC LED Available

C83TLA-
Style B Fitter



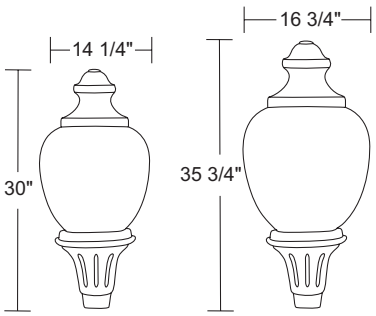

STYLE B FITTER

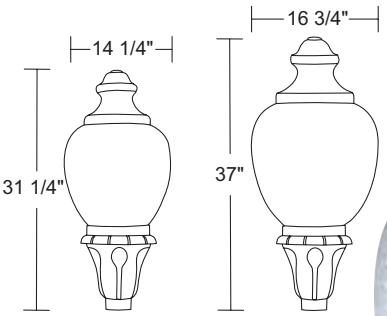

STYLE A FITTER

C85TC-
Style A Fitter



Acorns have 8" Neck
See Page 81 for Acorn Replacements & Measurements

AFB
Plastic Finial Topper
supplied with 1/4-20 x 1 1/4"
Stainless Steel Hex Screw



LED COMMERCIAL system

Commercial LED standard in 4000K,
Type V, other options available upon request.
Integral surge supression.
5 year warranty on LED components.

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · darkSky · LED

GUIDE: C84TC-L40C-BK-T3

ITEM #	ACORN	LIGHT SOURCE		COLOR	OPTIONS
C83T-Style B **C84T**-Style A **C85T**-Style A **C86T**-Style B	POLYCARBONATE **C**-Clear Textured ACRYLIC **LA**-Opal Textured **CA**-Clear Textured **FA**-Frost Textured	**LED LIGHT SOURCE** 120-277v DEDICATED LED **L40**-40W 4000lm **L60**-60W 6000lm	CCT **C**-4K(standard) **W**-3K(special order) **B**-5K(special order)	**BK**-Black **BZ**-Bronze **WH**-White	**AFB**-Acorn Finial Topper **D**- 0-10V Dimming (Dedicated LED Only) **T3**-Type III Distribution (Dedicated LED Only, T3 is Special Order, Type V Standard)
		E39 CORN COB LED 100-277v **LC5**-54W 7290lm, Type 5 ★1 **LC3**-40W 5600lm, Type 3 ★1 **LCD**-54W 5900lm, Dark Sky ★1	CCT **C**-4K(standard)		

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · darkSky · HID

GUIDE: C84TC-150MH-BK-HS

ITEM #	ACORN	LIGHT SOURCE	COLOR	OPTIONS
C83T-Style B **C84T**-Style A **C85T**-Style A **C86T**-Style B	POLYCARBONATE **C**-Clear Textured ACRYLIC **LA**-Opal Textured **CA**-Clear Textured **FA**-Frost Textured	INCANDESCENT (1) 200W MAX Medium Base HPF MAGNETIC BALLAST **100MH**-(1) 100W Metal Halide ★1 **150MH**-(1) 150W Metal Halide ★1 **100H**-(1) 100W HPS ★1 **150H**-(1) 150W HPS ★1	**BK**-Black **BZ**-Bronze **WH**-White	**AFB**-Acorn Finial Topper **DSR**-Dark Sky Reflector **HS**-House Shield **MG**-E39 Mogul Socket **MT208**-208v Multi-Tap **MT240**-240v Multi-Tap **MT277**-277v Multi-Tap **R3**-Type III Refractor **R5**-Type V Refractor (See Page 70 for Light Distribution)

4Kv medium base socket standard in HID, Mogul Upon Request.
120V HPF integral ballast standard in HID models, specify voltage for multi-tap.

★1 **Lamp Included**
Posts sold separately.


Not all options can be used in combination. Consult factory for details.

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

- LED & HID Models
- 0-10V Dimming LED Options
- DLC LED Available

C91TC-




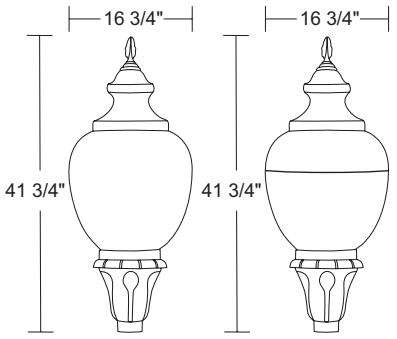

C91T Small Hood

C93T Large Hood

STYLE A FITTER

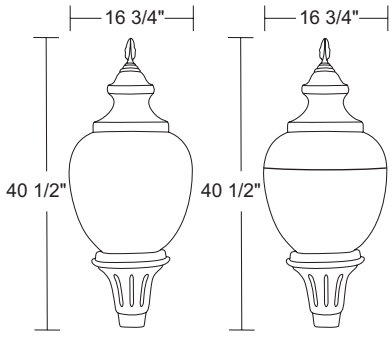

C92T Small Hood

C94T Large Hood

STYLE B FITTER

C94TC-



HS
House Shield



Acorns have 8" Neck
See Page 81
for Acorn
Replacements &
Measurements

LED COMMERCIAL system

Commercial LED standard in 4000K,
Type V, other options available upon request.
Integral surge supression.
5 year warranty on LED components.

GUIDE: C91TC-L40C-BK-T3

ITEM #	ACORN	LIGHT SOURCE		COLOR	OPTIONS
C91T-Style A **C92T**-Style B **C93T**-Style A **C94T**-Style B	POLYCARBONATE **C**-Clear Textured ACRYLIC **LA**-Opal Textured **CA**-Clear Textured **FA**-Frost Textured	LED LIGHT SOURCE 120-277v DEDICATED LED **L40**-40W 4000lm **L60**-60W 6000lm	CCT **C**-4K(standard) **W**-3K(special order) **B**-5K(special order)	**BK**-Black **BZ**-Bronze **WH**-White	**D**- 0-10V Dimming (Dedicated LED Only) **T3**-Type III Distribution (Dedicated LED Only, T3 is Special Order, Type V Standard)
		E39 CORN COB LED 100-277v **LC5**-54W 7290lm, Type 5 ★ **LC3**-40W 5600lm, Type 3 ★ **LCD**-54W 5900lm, Dark Sky ★	CCT **C**-4K(standard)		

GUIDE: C91TC-150MH-BK-HS

ITEM #	ACORN	LIGHT SOURCE	COLOR	OPTIONS
C91T-Style A **C92T**-Style B **C93T**-Style A **C94T**-Style B	POLYCARBONATE **C**-Clear Textured ACRYLIC **LA**-Opal Textured **CA**-Clear Textured **FA**-Frost Textured	INCANDESCENT (1) 200W MAX Medium Base HPF MAGNETIC BALLAST **100MH**-(1) 100W Metal Halide ★ **150MH**-(1) 150W Metal Halide ★ **100H**-(1) 100W HPS ★ **150H**-(1) 150W HPS ★	**BK**-Black **BZ**-Bronze **WH**-White	**DSR**-Dark Sky Reflector **HS**-House Shield **MG**-E39 Mogul Socket **MT208**-208v Multi-Tap **MT240**-240v Multi-Tap **MT277**-277v Multi-Tap **R3**-Type III Refractor **R5**-Type V Refractor (See Page 70 for Light Distribution)

4Kv medium base socket standard in HID, Mogul Upon Request.

120V HPF integral ballast standard in HID models, specify voltage for multi-tap.


★ **Lamp Included**

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

- LED & HID Models
- 0-10V Dimming LED Options
- DLC LED Available


C75TC-



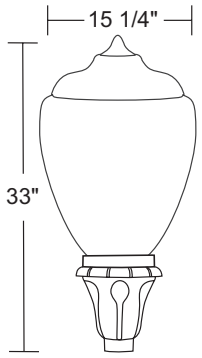

C75T

STYLE A FITTER

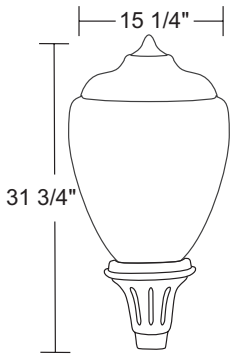

C76T

STYLE B FITTER

C76TC-



LED COMMERCIAL system

Commercial LED standard in 4000K,
Type V, other options available upon request.
Integral surge supression.
5 year warranty on LED components.

Acorns have 8" Neck
See Page 81 for Acorn Replacements & Measurements

Other Acorn styles available.
Contact Sales with questions.

GUIDE: C75TC-L40C-BK-T3

ITEM #	ACORN	LIGHT SOURCE		COLOR	OPTIONS
C75T-Style A **C76T**-Style B	POLYCARBONATE **C**-Clear Textured ACRYLIC **LA**-Opal Textured **CA**-Clear Textured **FA**-Frost Textured	LED LIGHT SOURCE		**BK**-Black **BZ**-Bronze **WH**-White	**D**- 0-10V Dimming (Dedicated LED Only) **T3**-Type III Distribution (Dedicated LED Only, T3 is Special Order, Type V Standard)
		120-277v DEDICATED LED **L40**-40W 4000lm **L60**-60W 6000lm	CCT **C**-4K(standard) **W**-3K(special order) **B**-5K(special order)		
		E39 CORN COB LED 100-277v **LC5**-54W 7290lm, Type 5 ★1 **LC3**-40W 5600lm, Type 3 ★1 **LCD**-54W 5900lm, Dark Sky ★1	CCT **C**-4K(standard)		

GUIDE: C75TC-150MH-BK-HS

ITEM #	ACORN	LIGHT SOURCE	COLOR	OPTIONS
C75T-Style A **C76T**-Style B	POLYCARBONATE **C**-Clear Textured ACRYLIC **LA**-Opal Textured **CA**-Clear Textured **FA**-Frost Textured	INCANDESCENT (1) 200W MAX Medium Base HPF MAGNETIC BALLAST **100MH**-(1) 100W Metal Halide ★1 **150MH**-(1) 150W Metal Halide ★1 **100H**-(1) 100W HPS ★1 **150H**-(1) 150W HPS ★1	**BK**-Black **BZ**-Bronze **WH**-White	**DSR**-Dark Sky Reflector **HS**-House Shield **MG**-E39 Mogul Socket **MT208**-208v Multi-Tap **MT240**-240v Multi-Tap **MT277**-277v Multi-Tap **R3**-Type III Refractor **R5**-Type V Refractor (See Page 70 for Light Distribution)

4Kv medium base socket standard in HID, Mogul Upon Request.

120V HPF integral ballast standard in HID models, specify voltage for multi-tap.


Posts sold separately.

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

- LED & HID Models
- 0-10V Dimming LED Options
- DLC LED Available


C77TC-





C77T

STYLE A FITTER



C78T

STYLE B FITTER

C78TC-



Other Acorn styles available.
Contact Sales with questions.

Acorns have 8" Neck
See Page 81 for Acorn Replacements & Measurements

LED COMMERCIAL system

Commercial LED standard in 4000K,
Type V, other options available upon request.
Integral surge supression.
5 year warranty on LED components.

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · darkSky · LED

GUIDE: C77TC-L40C-BK-T3

ITEM #	ACORN	LIGHT SOURCE		COLOR	OPTIONS
C77T-Style A **C78T**-Style B	POLYCARBONATE **C**-Clear Textured ACRYLIC **CA**-Clear Textured	**LED LIGHT SOURCE**		**BK**-Black **BZ**-Bronze **WH**-White	**AFB**-Acorn Finial Topper **D**- 0-10V Dimming (Dedicated LED Only) **T3**-Type III Distribution (Dedicated LED Only, T3 is Special Order, Type V Standard)
		120-277v DEDICATED LED **L40**-40W 4000lm **L60**-60W 6000lm	CCT **C**-4K(standard) **W**-3K(special order) **B**-5K(special order)		
		E39 CORN COB LED 100-277v **LC5**-54W 7290lm, Type 5 ★1 **LC3**-40W 5600lm, Type 3 ★1 **LCD**-54W 5900lm, Dark Sky ★1	CCT **C**-4K(standard)		

BUY AMERICAN ACT COMPLIANT · c UL us LISTED · WET · darkSky · HID

GUIDE: C78TC-150MH-BK-HS

ITEM #	ACORN	LIGHT SOURCE	COLOR	OPTIONS
C77T-Style A **C78T**-Style B	POLYCARBONATE **C**-Clear Textured ACRYLIC **CA**-Clear Textured	INCANDESCENT (1) 200W MAX Medium Base HPF MAGNETIC BALLAST **100MH**-(1) 100W Metal Halide ★1 **150MH**-(1) 150W Metal Halide ★1 **100H**-(1) 100W HPS ★1 **150H**-(1) 150W HPS ★1	**BK**-Black **BZ**-Bronze **WH**-White	**AFB**-Acorn Finial Topper **DSR**-Dark Sky Reflector **HS**-House Shield **MG**-E39 Mogul Socket **MT208**-208v Multi-Tap **MT240**-240v Multi-Tap **MT277**-277v Multi-Tap **R3**-Type III Refractor **R5**-Type V Refractor (See Page 70 for Light Distribution)

HID

4Kv medium base socket standard in HID, Mogul Upon Request.


120V HPF integral ballast standard in HID models, specify voltage for multi-tap.

★1 **Lamp Included**

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.


- LED & HID Models
- 0-10V Dimming LED Options
- DLC LED Available

C2015TL-



STYLE A FITTER

C2015T Polycarbonate Globe
C8015T Acrylic Globe



STYLE B FITTER

C2025T Polycarbonate Globe
C8025T Acrylic Globe

Globes have 8" Neck, See Page 81 for Replacements

24", 27", 30" & 36" Globes Available
Contact Sales for Details

LED COMMERCIAL system

Commercial LED standard in 4000K, Type V, other options available upon request.
Integral surge supression.
5 year warranty on LED components.



GUIDE: C2015TC-L40C-BK

ITEM #	ACORN	LIGHT SOURCE		COLOR	OPTIONS
C2015T-Style A **C2025T**-Style B	POLYCARBONATE **C**-Clear **L**-Opal **S**-Smoke **P**-Clear Prism	LED LIGHT SOURCE 120-277v DEDICATED LED **L40**-40W 4000lm **L60**-60W 6000lm	CCT **C**-4K(standard) **W**-3K(special order) **B**-5K(special order)	**BK**-Black **BZ**-Bronze **WH**-White	**D**- 0-10V Dimming (Dedicated LED Only) **T3**-Type III Distribution (Dedicated LED Only, T3 is Special Order, Type V Standard)
C8015T-Style A **C8025T**-Style B	ACRYLIC **C**-Clear **L**-Opal **S**-Smoke **P**-Clear Prism	E39 CORN COB LED 100-277v **LC5**-54W 7290lm, Type 5 ★1 **LC3**-40W 5600lm, Type 3 ★1 **LCD**-54W 5900lm, Dark Sky ★1	CCT **C**-4K(standard)		

GUIDE: C2015TC-150MH-BK-HS

ITEM #	ACORN	LIGHT SOURCE	COLOR	OPTIONS
C2015T-Style A **C2025T**-Style B	POLYCARBONATE **C**-Clear **L**-Opal **S**-Smoke **P**-Clear Prism	INCANDESCENT (1) 200W MAX Medium Base HPF MAGNETIC BALLAST **100MH**-(1) 100W Metal Halide ★1 **150MH**-(1) 150W Metal Halide ★1 **100H**-(1) 100W HPS ★1 **150H**-(1) 150W HPS ★1	**BK**-Black **BZ**-Bronze **WH**-White	**DSR**-Dark Sky Reflector **HS**-House Shield **MG**-E39 Mogul Socket **MT208**-208v Multi-Tap **MT240**-240v Multi-Tap **MT277**-277v Multi-Tap **R3**-Type III Refractor **R5**-Type V Refractor (See Page 70 for Light Distribution)
C8015T-Style A **C8025T**-Style B	ACRYLIC **C**-Clear **L**-Opal **S**-Smoke **P**-Clear Prism			

★1 **Lamp Included**

4Kv medium base socket standard in HID, Mogul Upon Request.


120V HPF integral ballast standard in HID models, specify voltage for multi-tap.

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

- LED & HID Models
- 0-10V Dimming LED Options
- DLC LED Available


C2014TP-





STYLE A FITTER

C2014T Polycarbonate Globe
C8014T Acrylic Globe



STYLE B FITTER

C2024T Polycarbonate Globe
C8024T Acrylic Globe

C8024TC-
(shown with **R3**)





***C**-CLEAR*



***S**-SMOKE*



***L**-OPAL*



***P**-CLEAR PRISMATIC*

Globes have 8" Neck. See Page 81 for Replacements

LED COMMERCIAL system

GUIDE: C2014TL-L40C-BK-T3

ITEM #	ACORN	LIGHT SOURCE		COLOR	OPTIONS
C2014T-Style A **C2024T**-Style B	POLYCARBONATE **C**-Clear **L**-Opal **S**-Smoke **P**-Clear Prism	LED LIGHT SOURCE 120-277v DEDICATED LED **L40**-40W 4000lm **L60**-60W 6000lm	CCT **C**-4K(standard) **W**-3K(special order) **B**-5K(special order)	**BK**-Black **BZ**-Bronze **WH**-White	**D**- 0-10V Dimming (Dedicated LED Only) **T3**-Type III Distribution (Dedicated LED Only, T3 is Special Order, Type V Standard)
C8014T-Style A **C8024T**-Style B	ACRYLIC **C**-Clear **L**-Opal **S**-Smoke **P**-Clear Prism	E39 CORN COB LED 100-277v **LC5**-54W 7290lm, Type 5 ★ **LC3**-40W 5600lm, Type 3 ★ **LCD**-54W 5900lm, Dark Sky ★	CCT **C**-4K(standard)		

Commercial LED standard in 4000K, Type V, other options available upon request.
Integral surge supression.
5 year warranty on LED components.

Posts sold separately.

HID

4Kv medium base socket standard in HID, Mogul Upon Request.

120V HPF integral ballast standard in HID models, specify voltage for multi-tap.

★ **Lamp Included**

GUIDE: C2014TL-150MH-BK-HS


ITEM #	ACORN	LIGHT SOURCE	COLOR	OPTIONS
C2014T-Style A **C2024T**-Style B	POLYCARBONATE **C**-Clear **L**-Opal **S**-Smoke **P**-Clear Prism	INCANDESCENT (1) 200W MAX Medium Base HPF MAGNETIC BALLAST **100MH**-(1) 100W Metal Halide ★ **150MH***-(1) 150W Metal Halide ★ **100H**-(1) 100W HPS ★ **150H***-(1) 150W HPS ★	**BK**-Black **BZ**-Bronze **WH**-White	**DSR**-Dark Sky Reflector **HS**-House Shield **MG**-E39 Mogul Socket **MT208**-208v Multi-Tap **MT240**-240v Multi-Tap **MT277**-277v Multi-Tap **R3**-Type III Refractor **R5**-Type V Refractor (See Page 70 for Light Distribution)
C8014T-Style A **C8024T**-Style B	ACRYLIC **C**-Clear **L**-Opal **S**-Smoke **P**-Clear Prism			

*Not available with C8014T or C8024T


SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

- LED & HID Models
- 0-10V Dimming LED Options
- DLC LED Lamp Available

C36TC-
(shown with **R3**)

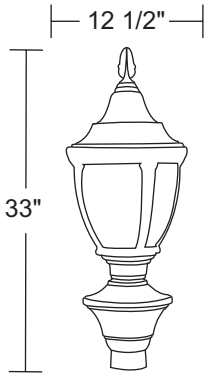



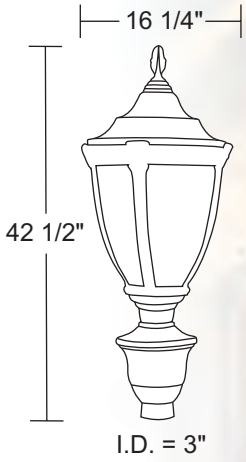

C37TL-

LED COMMERCIAL system

Commercial LED standard in 4000K, Type V, other options available upon request.
Integral surge supression.
5 year warranty on LED components.



GUIDE: C36TC-L40C-BK

c UL us LISTED · WET · darkSky · LED

ITEM #	LENS	LIGHT SOURCE		COLOR
C36T **C37T**	ACRYLIC **L**-Opal **C**-Clear	**LED LIGHT SOURCE**		**BK**-Black **BZ**-Bronze **WH**-White
		120-277v DEDICATED LED **L40**-40W 4000lm **L60**-60W 6000lm	CCT **C**-4K **W**-3K **B**-5K	
		E39 CORN COB LED 100-277v **LC5**-54W 7290lm, Type 5 ★ **LC3**-40W 5600lm, Type 3 ★ **LCD**-54W 5900lm, Dark Sky ★	CCT **C**-4K(standard)	

HID

4Kv medium base socket standard in HID, Mogul Upon Request.

120V HPF integral ballast standard in HID models, specify voltage for multi-tap.

GUIDE: C36TC-150MH-BK-R3

c UL us LISTED · WET · HID

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTIONS
C36T **C37T**	ACRYLIC **L**-Opal **C**-Clear	INCANDESCENT (1) 200W MAX Medium Base HPF MAGNETIC BALLAST **100MH**-(1) 100W Metal Halide ★ **150MH**-(1) 150W Metal Halide ★ **100H**-(1) 100W HPS ★ **150H**-(1) 150W HPS ★	**BK**-Black **BZ**-Bronze **WH**-White	**DSR**-Dark Sky Reflector **MG**-E39 Mogul Socket **MT208**-208v Multi-Tap **MT240**-240v Multi-Tap **MT277**-277v Multi-Tap **R3**-Type III Refractor **R5**-Type V Refractor (See Page 70 for Light Distribution)


★ **Lamp Included**

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

- LED & HID Models
- DLC LED Lamp Available




C59TF-






C32TP-

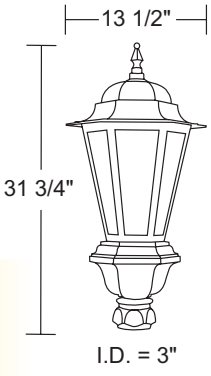



C33TP-

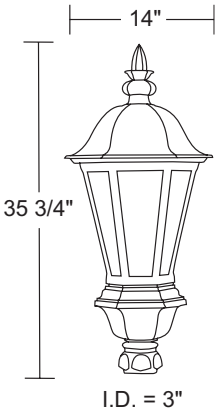

LED COMMERCIAL system

GUIDE: C32TC-L40C-BK-BP1

ITEM #	LENS	LIGHT SOURCE		COLOR	OPTIONS
		LED LIGHT SOURCE			
C32T **C33T**	ACRYLIC **L**-Opal **P**-Clear Prism	120-277v DEDICATED LED **L40**-40W 4000lm **L60**-60W 6000lm	CCT **C**-4K **W**-3K **B**-5K	**BK**-Black **BZ**-Bronze **WH**-White	ACRYLIC BLACK OUT PANELS **BP1**-One Panel **BP2**-Two Panels **BP3**-Three Panels
C59T	GLASS **F**-Frosted	E39 CORN COB LED 100-277v **LC5**-54W 7290lm, Type 5 ★1 **LC3**-40W 5600lm, Type 3 ★1 **LCD**-54W 5900lm, Dark Sky ★1	CCT **C**-4K(standard)		

Commercial LED standard in 4000K,
Type V, other options available upon request.
Integral surge supression.
5 year warranty on LED components.

GUIDE: C32TC-150MH-BK-R3

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTIONS
C32T **C33T**	ACRYLIC **L**-Opal **P**-Clear Prism	INCANDESCENT (1) 200W MAX Medium Base HPF MAGNETIC BALLAST **100MH**-(1) 100W Metal Halide ★1 **150MH**-(1) 150W Metal Halide ★1 **100H**-(1) 100W HPS ★1 **150H**-(1) 150W HPS ★1	**BK**-Black **BZ**-Bronze **WH**-White	**MG**-E39 Mogul Socket **MT208**-208v Multi-Tap **MT240**-240v Multi-Tap **MT277**-277v Multi-Tap **R3**-Type III Refractor **R5**-Type V Refractor (See Page 70 for Light Distribution) ACRYLIC BLACK OUT PANELS **BP1**-One Panel **BP2**-Two Panels **BP3**-Three Panels
C59T	GLASS **F**-Frosted	HPF MAGNETIC BALLAST **100MH**-(1) 100W Metal Halide ★1 **70H**-(1) 70W HPS ★1 **100H**-(1) 100W HPS ★1 **150H**-(1) 150W HPS ★1		

4Kv medium base socket standard in HID, Mogul Upon Request.


120V HPF integral ballast standard in HID models, specify voltage for multi-tap.

★1 **Lamp Included**


- LED & HID Models
- DLC LED Lamp Available



C30TC-

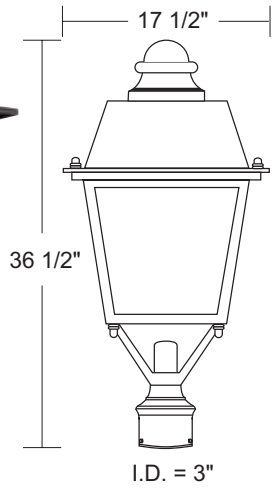

C31TP-

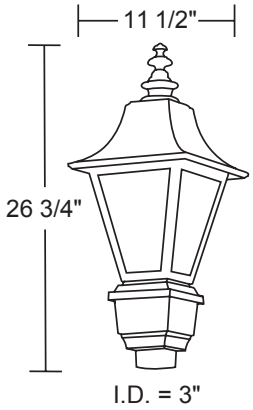



LED COMMERCIAL system

Commercial LED standard in 4000K, Type V, other options available upon request.
Integral surge supression.
5 year warranty on LED components.

GUIDE: C30TC-L40C-BK-T3

ITEM #	LENS	LIGHT SOURCE		COLOR	OPTIONS
C30T	GLASS COVER **C**-Clear	**LED LIGHT SOURCE** 120-277v DEDICATED LED **L40**-40W 4000lm **L60**-60W 6000lm	CCT **C**-4K	**BK**-Black **BZ**-Bronze **WH**-White	**T3**-Type III Distribution (Dedicated LED Only, T3 is Special Order, Type V Standard)
C31T	ACRYLIC **L**-Opal **P**-Clear Prism	120-277v DEDICATED LED **L40**-40W 4000lm **L60**-60W 6000lm	CCT **C**-4K **W**-3K **B**-5K	**BK**-Black **BZ**-Bronze **WH**-White	ACRYLIC BLACK OUT PANELS **BP1**-One Panel **BP2**-Two Panels **BP3**-Three Panels
		E39 CORN COB LED 100-277v **LC5**-24W 3120lm, Type 5 ★ **LC3**-20W 3000lm, Type 3 ★ **LCD**-24W 2400lm, Dark Sky ★	CCT **C**-4K(standard)		

GUIDE: C31TC-150MH-BK-HS

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTIONS
C31T	ACRYLIC **L**-Opal **P**-Clear Prism	INCANDESCENT (1) 200W MAX Medium Base HPF MAGNETIC BALLAST **100MH**-(1) 100W Metal Halide ★ **150MH**-(1) 150W Metal Halide ★ **100H**-(1) 100W HPS ★ **150H**-(1) 150W HPS ★	**BK**-Black **BZ**-Bronze **WH**-White	**MG**-E39 Mogul Socket **MT208**-208v Multi-Tap **MT240**-240v Multi-Tap **MT277**-277v Multi-Tap **R3**-Type III Refractor **R5**-Type V Refractor (See Page 70 for Light Distribution) ACRYLIC BLACK OUT PANELS **BP1**-One Panel **BP2**-Two Panels **BP3**-Three Panels

4Kv medium base socket standard in HID, Mogul Upon Request.

120V HPF integral ballast standard in HID models, specify voltage for multi-tap.

★ **Lamp Included**


SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

VILLAGE SQUARE


- LED & HID Models
- DLC LED Lamp Available



C35TF-

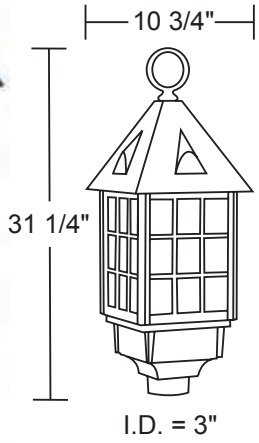

C34TF-

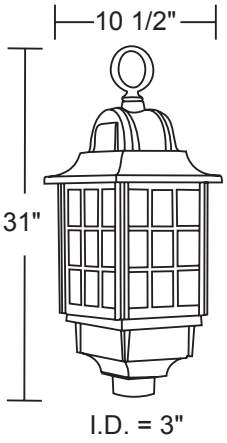



LED COMMERCIAL system

GUIDE: C34TC-L40C-BK

ITEM #	LENS	LIGHT SOURCE		COLOR	OPTIONS
C34T **C35T**	ACRYLIC **F**-Frosted	LED LIGHT SOURCE		**BK**-Black **BZ**-Bronze **WH**-White	ACRYLIC BLACK OUT PANELS **BP1**-One Panel **BP2**-Two Panels **BP3**-Three Panels
		120-277v DEDICATED LED **L40**-40W 4000lm	CCT **C**-4K **W**-3K **B**-5K		
		E39 CORN COB LED 100-277v **LC5**-54W 7290lm, Type 5 ★1 **LC3**-40W 5600lm, Type 3 ★1 **LCD**-54W 5900lm, Dark Sky ★1	CCT **C**-4K(standard)		

HID

4Kv medium base socket standard in HID, Mogul Upon Request.

120V HPF integral ballast standard in HID models, specify voltage for multi-tap.

★1 **Lamp Included**

GUIDE: C34TC-150MH-BK-R3


ITEM #	LENS	LIGHT SOURCE	COLOR	OPTIONS
C34T **C35T**	ACRYLIC **F**-Frosted	INCANDESCENT (1) 200W MAX Medium Base HPF MAGNETIC BALLAST **100MH**-(1) 100W Metal Halide ★1 **150MH**-(1) 150W Metal Halide ★1 **100H**-(1) 100W HPS ★1 **150H**-(1) 150W HPS ★1	**BK**-Black **BZ**-Bronze **WH**-White	**MG**-E39 Mogul Socket **MT208**-208v Multi-Tap **MT240**-240v Multi-Tap **MT277**-277v Multi-Tap **R3**-Type III Refractor **R5**-Type V Refractor (See Page 70 for Light Distribution) ACRYLIC BLACK OUT PANELS **BP1**-One Panel **BP2**-Two Panels **BP3**-Three Panels

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

502VF

- DOWNLIGHT
- DIE CAST ALUMINUM





EXTENDS: 5 7/8"
H/CTR: 2 1/4"
BACKPLATE: 4 1/2" x 4 1/2"

See Page 23 for Non-Metallic Version


GUIDE: 502VF-LR11W-BK

ITEM #	LENS	LIGHT SOURCE		COLOR
		LED LIGHT SOURCE		
502V	GLASS **F**-Frosted	120V LED **LR11**-11W, 870lm	CCT **C**-4K **W**-3K	**BK**-Black **BZ**-Bronze

502SF

- UP & DOWNLIGHT
- DIE CAST ALUMINUM




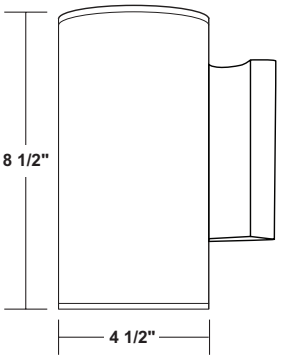


EXTENDS: 5 7/8"
H/CTR: 2 1/4"
BACKPLATE: 4 1/2" x 4 1/2"

GUIDE: 502SF-LR22W-BK

ITEM #	LENS	LIGHT SOURCE		COLOR
		LED LIGHT SOURCE		
502S	GLASS **F**-Frosted	120V LED **LR22**-22W, 1740lm	CCT **C**-4K **W**-3K	**BK**-Black **BZ**-Bronze

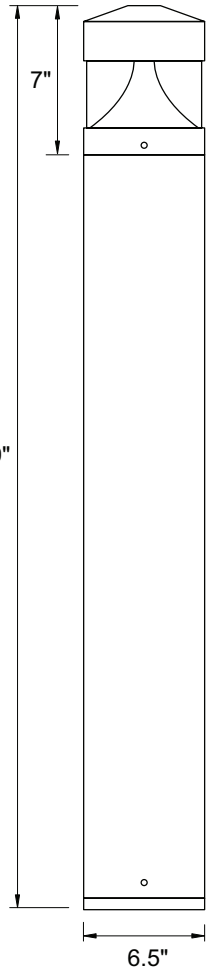



Anchor Bolt M10 x 6.7"
(3 anchor bolts and template included)



C200BC


GUIDE: C200BC-L10C-BK

ITEM #	LENS	LIGHT SOURCE		COLOR	OPTIONS
		LED LIGHT SOURCE			
C200B	POLYCARB **C**-Clear	100-277V MULTI-VOLT **L10**-10W, 937lm	CCT **C**-4K	**BK**-Black **BZ**-Bronze	**D**-0-10v Dimming

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

- WALL OR CEILING MOUNT
- ENCLOSED & GASKETED
- HOSE DOWN
- INSECT & DUST PROOF
- DIE CAST ALUMINUM
- IP65 RATED



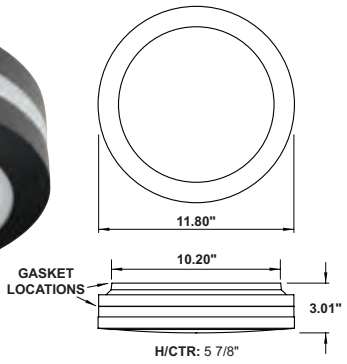


166FM
Ring



169FM
Eyelid

SCAN FOR VIDEO

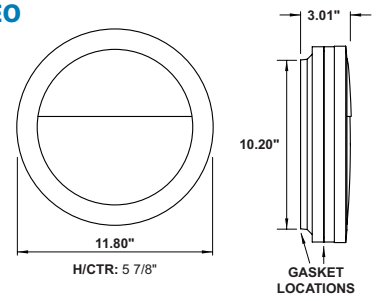

GUIDE: 166FMF-LR15C-BK


ITEM #	DIFFUSER	LIGHT SOURCE		COLOR	OPTION
		LED LIGHT SOURCE			
166FM 169FM	POLYCARBONATE **F**-Frosted	120V LIGHTWAVE LED	CCT	**BK**-Black **WH**-White	**EB**-Emergency Backup **O**-Occupancy Sensor
		LR15-15W 1400lm **LR22**-23W 1900lm	**C**-4K **W**-3K		

(options can not be combined)

- WALL MOUNT
- ENCLOSED & GASKETED
- HOSE DOWN
- INSECT & DUST PROOF
- PHOTOCELL INCLUDED
- IP65 RATED

266FM





GUIDE: 266FMF-LR12-BZ

ITEM #	DIFFUSER/HOUSING	LIGHT SOURCE		COLOR
		LED LIGHT SOURCE		
266FM	POLYCARBONATE **F**-Frosted	120V LIGHTWAVE LED	CCT	**BZ**-Bronze
		LR12-13W 1000lm	**C**-4K	

Energy Star Qualified Product

POSTS & ACCESSORIES



DIRECT BURIAL RESIDENTIAL POSTS



S11T
See page 19

POST LENGTH	SUGG. BURIAL DEPTH
7'	18"
8'	18"
10'	24"
12'	24"
14'	30"

SAFETY NOTE: Selecting posts and electrical accessories for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting these items is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post or electrical accessory without getting such assistance, you do so at your own risk.



2420
Decorative Base
See page 68

- Fits Most Standard 3" Post Top Fixtures
- Textured Powdercoated Aluminum
- Crossarm Included Unless Otherwise Specified
- Includes Inlet Hole
- Made In The USA

BUY AMERICAN ACT COMPLIANT


GUIDE: 295-320NCA-BK

Dimensions: O.D. = 2.950", I.D. = 2.850", Wall = .050"

ITEM #	OPTION	COLOR
295-7' Post	**C**-Conv. Outlet (338)	**BK**-Black
293-8' Post	**320**-Ezee Change Photo Control	**WH**-White
294-10' Post	**NCA**-No Crossarm	**BZ**-Bronze

NOTE: Crossarms available in black & white with gold balls, bronze posts ship with black crossarm. Posts with Crossarm, Photo Control, or Convenience Outlet come pre-punched for installation. Minor assembly required.

PUNCH LOCATIONS
(Side View)



BOLLARD & CUSTOM LENGTH POSTS (348) AVAILABLE ON Page 69

***BK**-BLACK*



7'
8'
10'

***WH**-WHITE*



7'
8'
10'

***BZ**-BRONZE*




- Fits Most Standard 3" Post Top Fixtures
- 2 Piece Snap Together System, No Tools Required
- Constructed of Sturdy Cast Aluminum
- Available in Black Only

GUIDE: C6P2-BK

ITEM #	COLOR
C6P2-6' **C8P2**-8' **C10P2**-10'	**BK**-Black



C6P2-HW
Hardware Kit



Anchor Bolt 3/8" x 7"


6'

C6P2-BK

Post Dimensions: O.D. = 3"
I.D. = 2.8", Wall = .100", L = 6'
Base Dimensions:
H = 21", W = 10 1/4"



C8P2-HW
Hardware Kit




Anchor Bolt 3/8" x 12"


8'

C8P2-BK

Post Dimensions: O.D. = 3"
I.D. = 2.8", Wall = .100", L = 8'
Base Dimensions:
H = 28 1/2", W = 11 5/8"
2"x4" Hand Hole

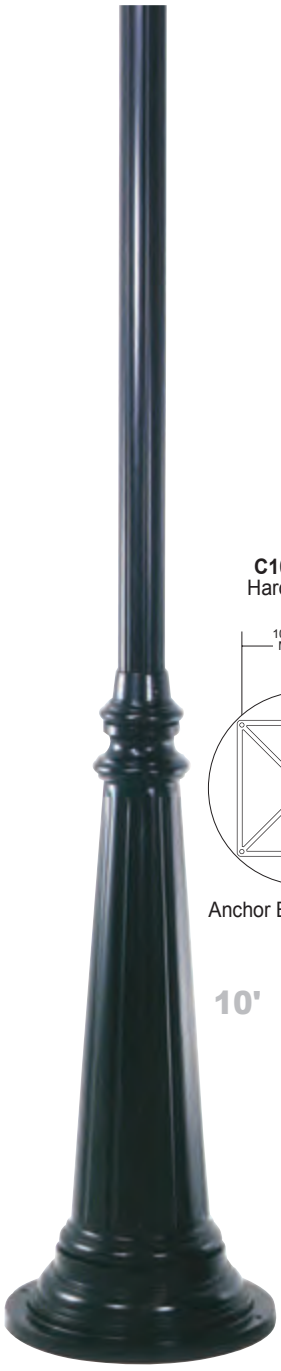

C10P2-HW
Hardware Kit



Anchor Bolt 3/8" x 12"

10'

C10P2-BK

Post Dimensions: O.D. = 3"
I.D. = 2.8", Wall = .100", L = 10'
Base Dimensions:
H = 37", W = 16 5/8"
2"x4" Hand Hole

NOTE: Includes anchor bolts and templates. Post and Base are two piece interlocking system that may ship separately. Post and Base Come as kit and cannot be sold seperately.

SAFETY NOTE: Selecting posts for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting these items is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post or electrical accessory without getting such assistance, you do so at your own risk.

Photocell available Posts accommodate Photo Control 688. See page 69. Photo Controls sold seperately.



DIRECT BURIAL ALUMINUM LAMP POSTS

BUY AMERICAN ACT COMPLIANT

- Fits Most Standard 3" Post Top Fixtures
- Textured Powdercoated Aluminum
- Includes Inlet Hole
- Made In The USA

GUIDE: 2514-BK-320

Post Dimensions: O.D. = 2.950", Wall = .072"


ITEM #	COLOR	OPTION
2500-8'	**BK**-Black	**C**-Convenience Outlet
2510-10'	**WH**-White	**320**-Ezee Change Photo Control
2512-12'	**BZ**-Bronze	**688**-Button Photo Control
2514-14'		**HH***-2"x4" Hand Hole


*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" **(HH)** Hand Hole and ground lug. **2512** & **2514** include Hand Hole unless otherwise specified.

SEE PAGE 66 FOR .125" WALL DIRECT BURIAL OPTIONS

DIRECT BURIAL

PUNCH LOCATIONS for 8', 10', & 12' Posts
(Side View)

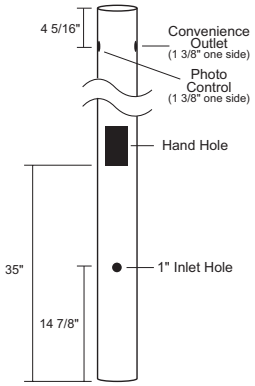




POST LENGTH	SUGG. BURIAL DEPTH
7'	18"
8'	18"
10'	24"
12'	24"
14'	30"

SAFETY NOTE: Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended.

Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.

PUNCH LOCATIONS for 14' Posts
(Side View)

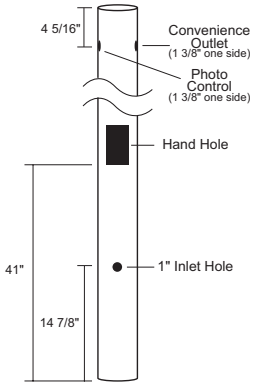

SURFACE MOUNT ALUMINUM LAMP POSTS

- Fits Most Standard 3" Post Top Fixtures
- Textured Powdercoated Aluminum
- Made In The USA

BUY AMERICAN ACT COMPLIANT



(shown with STV option)

SURFACE MOUNT
Optional Flange Base & Cover

GUIDE: 2600-STV-BZ

Post Dimensions: O.D. = 2.950", Wall = .072"

ITEM #	BASE TYPE	COLOR	OPTION
2600-8'	**ST**-Standard Base	**BK**-Black	**C**-Conv. Outlet
2610-10'	**STV**-ST Base w/Cover	**BZ**-Bronze	**320**-Ezee Change Photo Control
2612-12'	**HD**-Heavy Duty Base	**WH**-White	**688**-Button Photo Control
	HDV-HD Base w/Cover		**HH***-2"x4" Hand Hole

*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" **(HH)** Hand Hole and ground lug. **2610** and **2612** include Hand Hole unless otherwise specified.

SEE PAGE 68 FOR COMPONENT OFFERINGS

PLEASE NOTE: YOU MUST SPECIFY BASE AND COVER WHEN ORDERING IN ORDER TO RECIEVE BASE AND COVER



(shown with HDV option)

GUIDE: 2690-HDV-BZ-HH

Post Dimensions: O.D. = 2.950", Wall = .125"


ITEM #	BASE TYPE	COLOR	OPTION
2690-10'	**ST**-Standard Base	**BK**-Black	**C**-Conv. Outlet
2692-12'	**STV**-ST Base w/Cover	**BZ**-Bronze	**320**-Ezee Change Photo Control
	HD-Heavy Duty Base	**WH**-White	**688**-Button Photo Control
	HDV-HD Base w/Cover		**HH***-2"x4" Hand Hole

*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" **(HH)** Hand Hole and ground lug. **2690** and **2692** include Hand Hole unless otherwise specified.

SEE PAGE 68 FOR COMPONENT OFFERINGS


SURFACE MOUNT

PUNCH LOCATIONS
(Side View)





Spun Aluminum Base Cover for **ST** Base (2410)



Anchor Bolt M8 x 12"




Die Cast Aluminum Flange base with anchor bolts for up to 12' x 2.950" O.D. Posts

***ST**-STANDARD BASE (2403)*



Spun Aluminum Base Cover for **HD** Base (2411)



Anchor Bolt 3/8" x 12"



Heavy Duty Aluminum Flange base with anchor bolts for up to 14' x 2.950" O.D. Posts


***HD**-HEAVY DUTY BASE (2405)*


DIRECT BURIAL

Fits most 3" Post Top Fixtures
Includes Inlet Hole

BUY AMERICAN ACT COMPLIANT





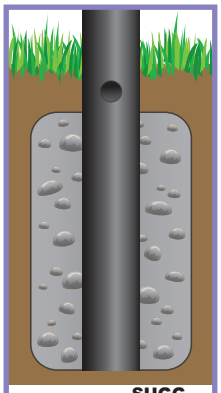

POST LENGTH	SUGG. BURIAL DEPTH
8'	18"
10'	24"
12'	24"
14'	30"

See Safety Note on page 67

SURFACE MOUNTED

Powdercoated Aluminum. Welded Flange with Optional Decorative Cover. Anchor bolts included. Fits most 3" Post Top Fixtures. EPA ratings available on spec sheets.

BUY AMERICAN ACT COMPLIANT



***AB**-AMERICANA*
2 PIECE COVER
(3BC1)

***DB**-DECOR*
2 PIECE COVER
(3BC6)

***HX**-HEXAGON*
2 PIECE COVER
(3BC2)

***RB**-ROUND*
1 PIECE COVER
(3BC9)

***VB**-VICTORIAN*
2 PIECE COVER
(3BC3)

3" ROUND ALUMINUM

.125 Wall Thickness

ITEM #	COLOR	OPTION
3588-8' **3590**-10' **3592**-12' **3594**-14'	**BK**-Black **BZ**-Bronze **WH**-White	**C**-Conv. Outlet **320**-Ezee Change Photo Control **688**-Button Photo Control **HH***

3" FLUTED ALUMINUM


.125 Wall Thickness

ITEM #	COLOR	OPTION
3588F-8' **3590F**-10' **3592F**-12' **3594F**-14'	**BK**-Black **BZ**-Bronze **WH**-White	**688**-Button Photo Control **HH***

3" ROUND ALUMINUM

.125 Wall Thickness

ITEM #	BASE TYPE	COLOR	OPTION
3688-8' **3690**-10' **3692**-12'	**AB**-Americana **DB**-Decor **HX**-Hexagon **RB**-Round Cover **VB**-Victorian	**BK**-Black **BZ**-Bronze **WH**-White	**C**-Conv. Outlet **320**-Ezee Change Photo Control **688**-Button Photo Control **HH***



Round **F**-Fluted





3" Round 3" Fluted

3" FLUTED ALUMINUM

.125 Wall Thickness

ITEM #	BASE TYPE	COLOR	OPTION
3688F-8' **3690F**-10' **3692F**-12'	**AB**-Americana **DB**-Decor **HX**-Hexagon **RB**-Round Cover **VB**-Victorian	**BK**-Black **BZ**-Bronze **WH**-White	**688**- Photo Control **HH***





Bolt Circle Pattern
For 3" Posts
Anchor Bolt 1/2" x 12"


*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" **(HH)** Hand Hole and ground lug. **3592**, **3594**, **3592F**, **3594F**, **3690**, **3692**, **3690F**, and **3692F** include Hand Hole unless otherwise specified.

DIRECT BURIAL

Fits most 3" Post Top Fixtures
Includes Inlet Hole

BUY AMERICAN ACT COMPLIANT





SAFETY NOTES

All surface mount posts are supplied with welded mounting bases.

Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.

See Suggested Burial Depth on page 66

4" ROUND ALUMINUM

.125 Wall Thickness

ITEM #	COLOR	OPTION
4590-10'	**BK**-Black	**HH***
4592-12'	**BZ**-Bronze	
4594-14'	**WH**-White	

4" FLUTED ALUMINUM

.125 Wall Thickness

ITEM #	COLOR	OPTION
4590F-10'	**BK**-Black	**HH***
4592F-12'	**BZ**-Bronze	
4594F-14'	**WH**-White	

SURFACE MOUNTED

Powdercoated Aluminum. Welded Flange & 3" Tenon with Optional Decorative Cover.
Anchor bolts included. Fits most 3" Post Top Fixtures. EPA ratings available on spec sheets.

BUY AMERICAN ACT COMPLIANT



***AB*-AMERICANA**
2 PIECE COVER
(4BC1)

***DB*-DECOR**
2 PIECE COVER
(4BC6)

***RB*-ROUND**
1 PIECE COVER
(4BC9)

***VB*-VICTORIAN**
2 PIECE COVER
(4BC3)

4" ROUND ALUMINUM


.125 Wall Thickness


ITEM #	BASE TYPE	COLOR	OPTION
4688-8'	**AB**-Americana	**BK**-Black	**HH***
4690-10'	**DB**-Decor	**BZ**-Bronze	
4692-12'	**RB**-Round Cover	**WH**-White	
4694-14'	**VB**-Victorian		


4" FLUTED ALUMINUM

.125 Wall Thickness

ITEM #	BASE TYPE	COLOR	OPTION
4688F-8'	**AB**-Americana	**BK**-Black	**HH***
4690F-10'	**DB**-Decor	**BZ**-Bronze	
4692F-12'	**RB**-Round Cover	**WH**-White	
4694F-14'	**VB**-Victorian		







Bolt Circle Pattern
For 4" Posts
Anchor Bolt 3/4" x 18"

*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" **(HH)** Hand Hole and ground lug. **4592**, **4594**, **4592F**, **4594F**, **4690**, **4692**, **4694**, **4690F**, **4692F**, and **4694F** include Hand Hole unless otherwise specified.

CAST ALUMINUM & POLYCARBONATE POST TOP FITTERS

Die Cast Aluminum

Medium Base Porcelain Socket, 4Kv Upon Request
Specify Option: (MG) Mogul Socket, **(G)** GU24 Socket
Example: 1721-MG




1721 Black
1721B Bronze
1720 White
For 10"-16" Globes and
11" x 17" Acorns with 5 1/4" Opening
Powdercoated Finish
I.D. = 3"



1724 Black
1724B Bronze
1724W White
For 18" Globes with 5 1/4" Opening
Powdercoated Finish
I.D. = 3"

Polycarbonate

Medium Base Phenolic Socket
Specify Option: (G) GU24 Socket
Example: 1721P-G




BUY AMERICAN ACT COMPLIANT

1721P Black
1720P White
For 10"-16" Globes with 5 1/4" Opening
I.D. = 3"

MOUNTING HARDWARE INCLUDED
Consult factory when ordering replacement fitters for fixtures with options: Refractors, Cylinders, etc.


FLANGE BASES & COVERS

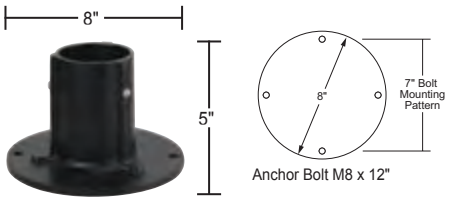

2403
Die Cast Aluminum Flange base, Powdercoated Finish
Anchor Bolts Included, for 8' -12' x 2.950" O.D. Posts only
SPECIFY: Black, **(B)** Bronze, or **(W)** White



2410
Spun Aluminum Base Cover for **2403**
Powdercoated Finish
SPECIFY: Black,
(B) Bronze, or **(W)** White

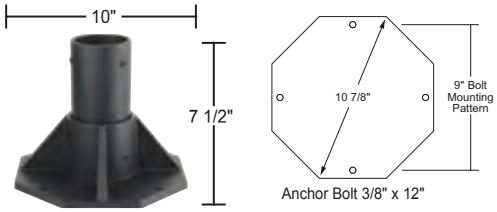

2405
Heavy Duty Aluminum Flange base, Powdercoated Finish
Anchor Bolts Included, for up to 14' x 2.950" O.D. Posts
SPECIFY: Black, **(B)** Bronze, or **(W)** White



2411
Spun Aluminum Base Cover for **2405**
Powdercoated Finish
SPECIFY: Black,
(B) Bronze, or **(W)** White

Slip-On Polymer Decorative Post Cover



2420
Polyethylene Decorative Slip On Base Cover for Standard 3" Post
I.D. = 3"
SPECIFY: (B) Black **(W)** White
No Hardware Included

BUY AMERICAN ACT COMPLIANT


Specifications subject to change without notice.


POST FIXTURE ADAPTERS



.050" Wall Thickness

348
3" Custom Length Post for use with **347** Surface Mount Adapter
SPECIFY:
Color: **(BK)** Black, **(WH)** White or **(BZ)** Bronze
Length: **(XX)** must be in 6" intervals
Example Part Number: **348-12**

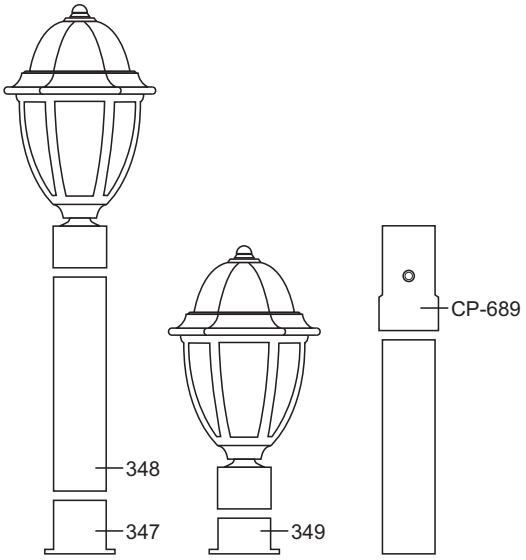



347
Pier Mount Adapter for use with **348** Stub Post
SPECIFY:
(BK) Black
(WH) White
(BZ) Bronze



349
Pier Mount Adapter for 3" Post Mount Fixtures
SPECIFY:
(BK) Black
(WH) White
(BZ) Bronze




CP-689
688 120V Photo Control in hardware bag (assembly required) with Adaptor for 3" Posts
Not for use with commercial fixtures
SPECIFY:
(BK) Black
(WH) White

POST ACCESSORIES




335
15" Aluminum Crossarm with Gold End Caps
3/4" Dia. mounting hole required
SPECIFY: Black or **(WH)** White



HH
2" x 4" Hand Hole Cover for 3" posts (includes mounting hardware)
SPECIFY: Black, **(B)** Bronze, or **(W)** White




0500662 Black
0500663 White
Crossarm Plugs for 3/4" Dia. hole




HH4
2" x 4" Hand Hole Cover for 4" posts (includes mounting hardware)
SPECIFY: Black, **(B)** Bronze, or **(W)** White


PHOTOCONTROLS & OUTLETS FOR POST APPLICATIONS

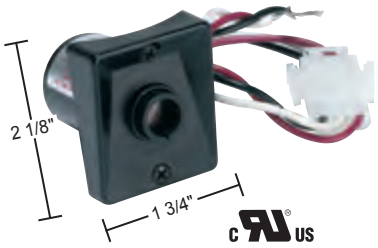

320
120V for 3" Post with Ezee Change Plug, 1 3/8" Dia. mounting hole required
Up to 300W Inc., 54W LED
39W Fluor., 100W H.I.D.
SPECIFY: Black or **(W)** White



688
120V Button Photo Control
11/16" Dia. mounting hole required
Up to 300W Inc., 54W LED
39W Fluor., 100W H.I.D.
SPECIFY: Black

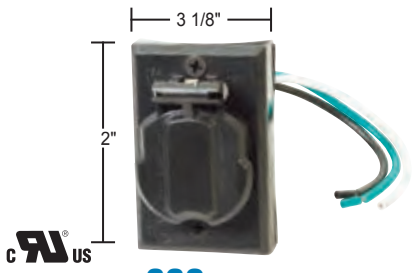

338
120V Grounded Convenience Outlet
1 3/8" Dia. mounting hole required
SPECIFY: Black or **(W)** White

SEE SAFETY NOTE ON PAGE 62

Specifications subject to change without notice.

CAST ALUMINUM BRACKETS



WB5
Contemporary Wall Bracket pre-wired w/20" pigtail for easy installation with 3" Post Mount Fixture
Max. Fixture Width: 16". I.D. =3"
H = 6", W = 4 1/2", E = 12 1/2"
Powdercoated Finish
SPECIFY: (BK) Black **(WH)** White or **(BZ)** Bronze



PB5
Post Bracket pre-wired w/20" pigtail for easy installation with 3" Post Mount Fixture. Designed to mount to Wave Lighting's 3" Commercial Posts. PB5-CAP Included.
Max. Fixture Width: 16". I.D. =3"
H = 9 1/2", W = 4 1/2", E = 16 1/2"
Powdercoated Finish
SPECIFY: (BK) Black **(WH)** White or **(BZ)** Bronze

SEE PAGE 46



PB5-2
Post Bracket pre-wired w/20" pigtail for easy installation with 3" Post Mount Fixtures. Designed to mount 2 Fixtures to Wave Lighting's 3" Commercial Posts. PB5-CAP Incl.
Max. Fixture Width: 16". I.D. =3"
H = 9 1/2", W = 4 1/2", E = 29"
Powdercoated Finish
SPECIFY: (BK) Black **(WH)** White or **(BZ)** Bronze



PB5-3
Post Bracket pre-wired w/20" pigtail for easy installation with 3" Post Mount Fixtures. Designed to mount 3 Fixtures to Wave Lighting's 3" Commercial Posts
Max. Fixture Width: 14". I.D. =3"
H = 9", W = 4 1/2", E = 29"
Powdercoated Finish
SPECIFY: (BK) Black **(WH)** White or **(BZ)** Bronze



PB5-CAP
Cap for 3" Post I.D. =3" Powdercoated Finish
SPECIFY: (BK) Black **(WH)** White or **(BZ)** Bronze

See Safety Note on page 55

CAST ALUMINUM FITTERS



1784
Style A Fitter for Globes & Acorns with 8" Neck
H = 11", W = 10 1/4", I.D. = 3"




1785
Style B Fitter for Globes & Acorns with 8" Neck
H = 10 1/2", W = 10 1/4", I.D. = 3"

4Kv Medium Base Porcelain Socket Standard
Specify Option: (MG) Mogul Socket
Powdercoated Finish **Specify: (BK)** Black, **(BZ)** Bronze or **(WH)** White

GLASS REFRACTORS







1000135
for Mogul Base Socket
Type V Distribution
H = 6 5/8", Dia. = 6 1/8"
Top I.D. = 5 1/4"
Bottom I.D. = 3 1/4"

1000137
for Mogul Base Socket
Type III Distribution
H = 6 5/8", Dia. = 6 1/8"
Top I.D. = 5 1/4"
Bottom I.D. = 3 1/4"

1000138
for Medium Base Socket
Type V Distribution
H = 4 7/8", Dia. = 4 3/4"
Top I.D. = 4"
Bottom I.D. = 3"

DARK SKY REFLECTORS



DS120
Bottom Mount Kit for Mogul Base Sockets

DS130
Bottom Mount Kit for Medium Base Sockets



DS140
Bottom Mount Kit for 6" Glass Refractors (refractor not included)

CAST ALUMINUM DECORATIVE BASE COVERS

Decorative Base Covers come as a two piece system, and can be installed over existing Surface Mounted Posts. **3BC9** and **4BC9** are one piece system.

FOR MOST 3" DIAMETER POSTS



3BC1 Dia.: 13 1/8" Height: 24 1/8"
3BC2 Dia.: 11 1/2" Height: 13 5/8"
3BC3 Dia.: 11" Height: 26 3/8"
3BC6 Dia.: 11" Height: 9 5/8"
3BC9 Dia.: 10" Height: 3 1/2" Top I.D.: 4 1/8"

FOR MOST 4" DIAMETER POSTS



4BC1 Dia.: 15" Height: 27 5/8"
4BC3 Dia.: 12 1/8" Height: 29"
4BC6 Dia.: 12" Height: 9 5/8"
4BC9 Dia.: 11" Height: 3 1/2" Top I.D.: 5 3/8"

Powdercoated Finish - **SPECIFY: (BK)** Black, **(BZ)** Bronze or **(WH)** White

Posts sold separately.

Specifications subject to change without notice.

INDUSTRIAL



LED HIGH BAY FIXTURES

- 120-277VAC
- 110W or 220W Available
- Estimated 50,000 hrs L_{70}
- White or Glare Free Reflectors
- Optional Dome or Flat Lenses
- Suspended Mount Design
- Over 120 Lumens Per Watt
- Available in 5000k, 80 CRI
- 0-10V Dimming
- Spring Hook Included
- 5 Year Warranty
- UL Listed

SCAN FOR VIDEO




C51H-
(reflective white reflector with optional frosted flat lens shown)


GUIDE: C51HR-L100B-FF


c UL us LISTED · DAMP · LED

ITEM #	REFLECTOR	LIGHT SOURCE		OPTIONS
C51H	POLYCARBONATE **R**-Reflective White (special order) ACRYLIC **F**-LED Frost	LED LIGHT SOURCE 100-277v DEDICATED LED **L100**-116W 14800lm	CCT **B**-5K	OPEN No Lens Option ENCLOSED **CD**-Clear Dome Lens **FD**-Frosted Dome Lens **CF**-Clear Flat Lens **FF**-Frosted Flat Lens

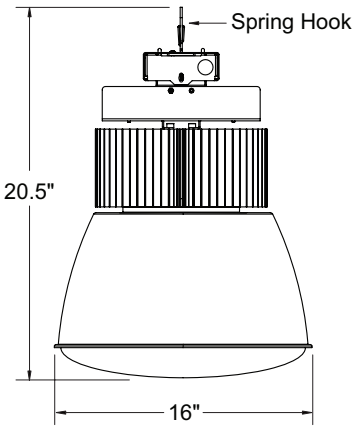

C51HR-L100B PHOTOMETRICS SHOWN

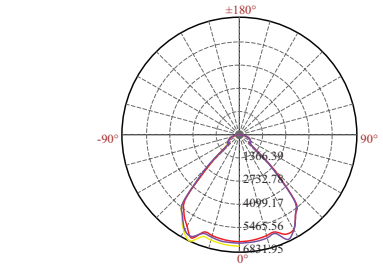

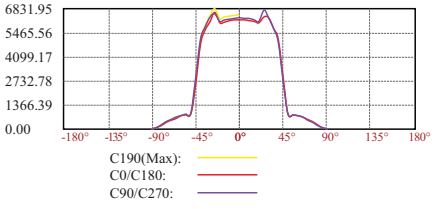

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice.




Open

Shown Without Lens Option



C52H-

(frost reflector with optional frosted dome lens shown)

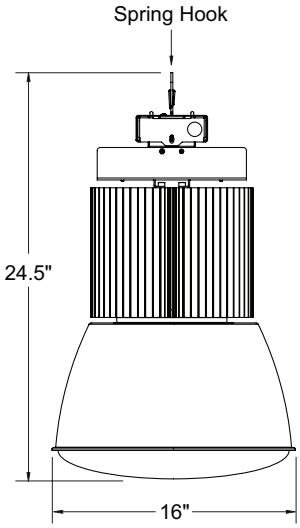



Dome Lens

CD-Clear Dome Lens
FD-Frosted Dome Lens



Flat Lens

CF-Clear Flat Lens
FF-Frosted Flat Lens

GUIDE: C52HF-L200B-FD

ITEM #	DIFFUSER	LIGHT SOURCE		OPTIONS
C52H	POLYCARBONATE **R**-Reflective White (special order) ACRYLIC **F**-LED Frost	LED LIGHT SOURCE 100-277v DEDICATED LED **L200**-209W 26800lm	CCT **B**-5K	OPEN No Lens Option ENCLOSED **CD**-Clear Dome Lens **FD**-Frosted Dome Lens **CF**-Clear Flat Lens **FF**-Frosted Flat Lens

LED TEMPORARY WORK LIGHT


- 120-277VAC
- Estimated 50,000 hrs L_{70}
- 60W or 100W Available
- 6' 18AWG Cord w/NEMA 5-15 Plug
- Omni-Directional Light
- OSHA Compliant
- Powdercoated Steel Lamp Guard
- Spring Hook Included
- Over 115 Lumens Per Watt
- Available in 5000k, 80 CRI
- UL Listed Dry & Damp
- 5 Year Warranty



c UL us LISTED DAMP LED

GUIDE: C90H-LT60B

ITEM #	LIGHT SOURCE	
C90H	LED LIGHT SOURCE	
	100-277v DEDICATED LED	CCT
	LT60-60W 7000lm **LT100**-100W 13000lm	**B**-5K

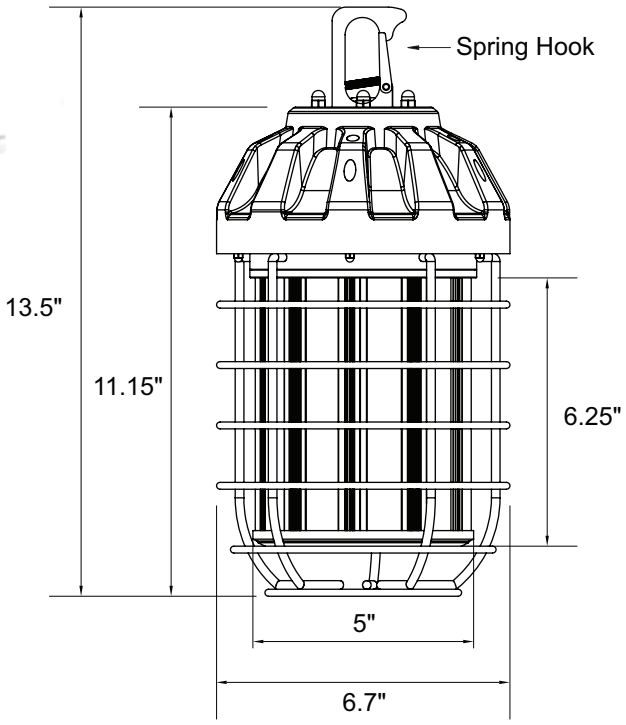

LED RETROFITS



LED RETROFITS

LED RETROFIT KITS for In-The-Field Installation

Easily Convert Existing Fixtures to LED with UL 1598C Classified Kits

- **AC Driver-OnBoard**
- **13W, 15W, & 23W Models**
- **Available in 3000K or 4000K**
- **Standard Mounting Options for Easy Install**
- **Optical Grade Polycarbonate Lens**
- **Input Voltage:** 120VAC, 50/60hz
- **Constant Current Design**
- **High Power Factor >0.98**
- **Estimated 50,000 hrs L_{70}**
- **Data Per NVLAP Laboratory**
- **On Board Line Surge & MOV Ground Surge Protection**
- **TRIAC Dimmable To 5%** (forward & reverse phase)
- **Mounting Hardware Available**
- **18" 18AWG Leads**
- **5 Year Limited Warranty**
- **FCC compliance Class B**
- **Energy Star CSD**

GENERAL PURPOSE - For Open Residential Fixtures with Minimal Heat

LRG6




Low Flicker
Title 24 Available
(call for details)



LRG8


SCAN FOR VIDEO

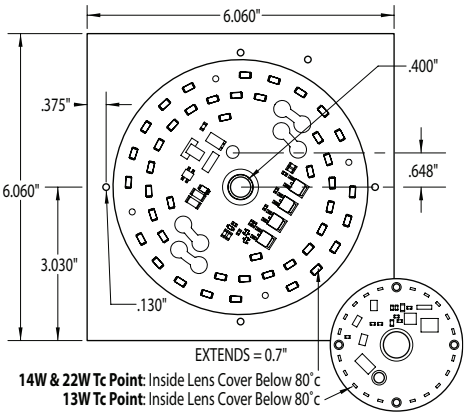

OPTIONAL HARDWARE PART # 10-278

GUIDE: LRG6-LR12C


ITEM #	LIGHT SOURCE		OPTION
LRG6 LRG8	120V LIGHTWAVE LED **LR12**-13W 1000lm **LR15**-15W 1400lm **LR22**-23W 1900lm	CCT **C**-4K **W**-3K	**H**-Hardware

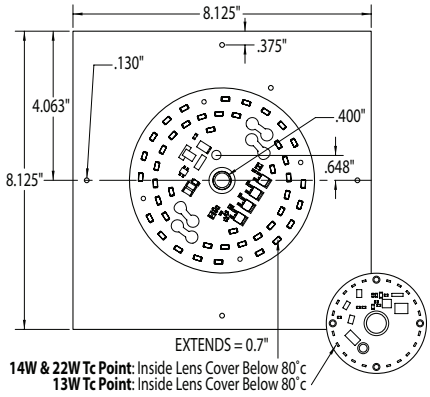

OPTIONAL HARDWARE PART # 10-278

LRG10



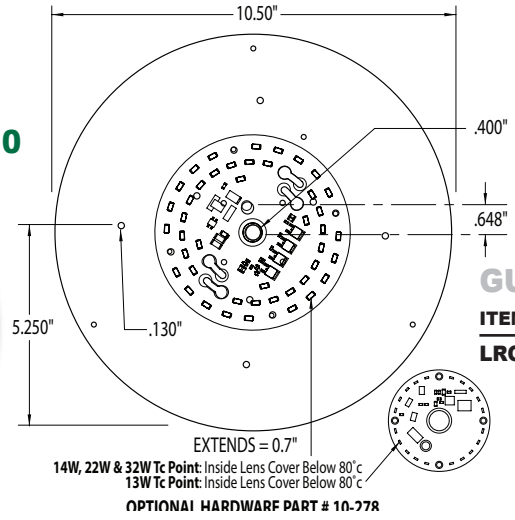

OPTIONAL HARDWARE PART # 10-278

Low Flicker
Title 24 Available
(call for details)

GUIDE: LRG10-LR32C

ITEM #	LIGHT SOURCE		OPTION
LRG10	120V LIGHTWAVE LED **LR12**-13W 1000lm **LR15**-15W 1400lm **LR22**-23W 1900lm **LR32**-32W 2700lm	CCT **C**-4K **W**-3K	**H**-Hardware

HIGH HEAT - For Enclosed Residential Fixtures with Heat Concerns


LRH3




GUIDE: LRH3-LR12C

ITEM #	LIGHT SOURCE		OPTION
LRH3	120V LIGHTWAVE LED **LR12**-13W 1000lm	CCT **C**-4K **W**-3K	**H**-Hardware
LRH6	120V LIGHTWAVE LED **LR15**-15W 1400lm **LR22**-23W 1900lm		

Low Flicker Title 24 Available
(call for details)

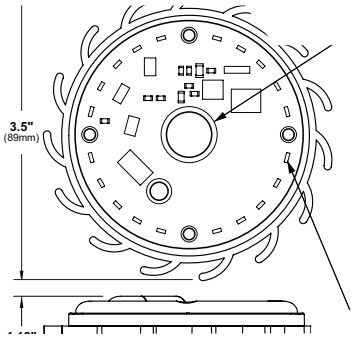





OPTIONAL HARDWARE PART # 10-278
HARDWARE SOLD SEPERATELY - SEE PAGE 109

LRH6



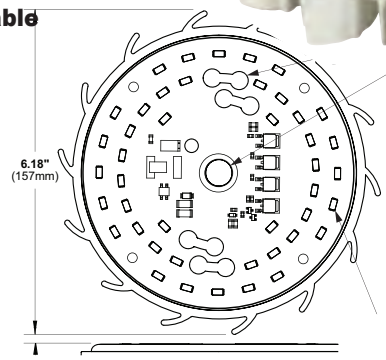





COMMERCIAL RETROFIT KITS
For Post Top Acorn Fixtures



LRC

LED COMMERCIAL system

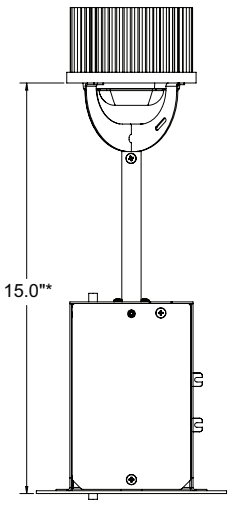

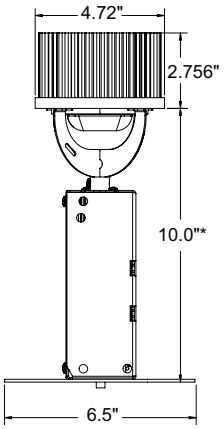

*Height adjustable from 15" down to 10"

- **Replaces Up To 250W Metal Halide**
- **For Enclosed Fixtures**
- **Telescoping Bracket**
- **Estimated 70,000 hrs L_{80}**
- **Input Voltage:** 100-277VAC, 50/60hz
- **0-10V Dimming Available**
- **Surge Protection**
- **3000K*, 4000K or 5000K*, CRI 80**
- **Type 3 & Type 5 Models Available**
- **Universal Mounting Plate**
- **20” 18AWG Leads**
- **5 Year Limited Warranty**
- **UL 1598C Classified**

GUIDE: LRCL40C

ITEM #	LIGHT SOURCE		OPTION
LRC	120-277V LED **L40**-40W 4000lm **L60**-60W 6000lm	CCT **C**-4K (Standard) **W**-3K (Special Order) **B**-5K (Special Order)	**D**- 0-10V Dimming **T3**-Type III Distribution (T3 is Special Order, Type V is Standard)

E26 MEDIUM BASE LAMPS For Residential Fixtures



LCE26-9W
A19 LED Lamp
9.5 Watt, 3000K, 800lm
Replaces up to 60W Incandescent



LCE26-9C
A19 LED Lamp
9.5 Watt, 4000K, 800lm
Replaces up to 60W Incandescent


- **Replaces Up To 60W Incandescent**
- **For Enclosed Fixtures**
- **Dimmable**
- **E26 Medium Base for Easy Install**
- **Estimated 15,000 hrs L_{70}**
- **Input Voltage:** 120VAC, 50/60hz
- **Surge Protection**
- **3000K CCT 90CRI or 4000K CCT 80CRI**
- **3 Year Limited Warranty**
- **UL Listed, Energy Star Certified & T24 Compliant** (3K only)

CORN COB LAMPS For Commercial & Light Commercial Fixtures


- **Replaces Up To 250W Metal halide**
- **For Enclosed Fixtures**
- **E39 Mogul Base for Easy Install**
- **Estimated 50,000 hrs L_{70}**
- **Input Voltage:** 100-277VAC, 50/60hz
- **Surge Protection**
- **4000K, CRI 80**
- **Type 3, Type 5, & Dark Sky Models Available**
- **5 Year Limited Warranty**



LCE39-24C-T5
Type 5 LED Lamp
24Watt, 4000K, 3120lm
Replaces up to 100W MH
360˚ Beam Angle




LCE39-20C-T3
Type 3 LED Lamp
20Watt, 4000K, 3000lm
Replaces up to 100W MH
180˚ Adjustable Beam Angle




LCE39-24C-DS
Dark Sky LED Lamp
24Watt, 4000K, 2400lm
Replaces up to 100W MH
180˚ Down Beam Angle



LCE39-54C-T5
Type 5 LED Lamp
54Watt, 4000K, 7290lm
Replaces up to 250W MH
360˚ Beam Angle



LCE39-40C-T3
Type 3 LED Lamp
40Watt, 4000K, 5600lm
Replaces up to 250W MH
180˚ Adjustable Beam Angle



LCE39-54C-DS
Dark Sky LED Lamp
54Watt, 4000K, 5900lm
Replaces up to 250W MH
180˚ Down Beam Angle

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

DIFFUSERS



LENSES & DIFFUSERS

ENDURACAST GLASS

544XF-LENS
Frosted
use with 544VF, 544HCF, & 544TF

544SF-LENS
Frosted
use with 544SF


549VF-LENS
Frosted
use with 549VF

549SF-LENS
Frosted
use with 549SF


561FMF-LENS
Frosted
use with 561FMF

C200BC-LENS
Frosted
use with C200BC

502XF-LENS
Frosted
use with 502SF & 502VF




COLONIAL, SAXONY & VANGUARD WALL MOUNT
ACRYLIC
*144-Clear Bvl Dia 145-Amber Bvl Dia
146-Clear Bvl 147-Frosted Bvl




COMPANION SIZE EVERSTONE™ LANTERNS
ACRYLIC
1301724-Clear 1301725-Opal
*1301726-Frosted




WALL PACK EVERSTONE™ LANTERNS
ACRYLIC
*1301727-Clear Prismatic
1301728-Opal



VICTORIAN LANTERN
ACRYLIC
*1300371-Opal
1300372-Black



COLONIAL, SAXONY & VANGUARD POST TOP
ACRYLIC
148-Clear Bvl 149-Frosted Bvl
*153-Amber Bvl Dia 154-Clear Bvl Dia



FULL SIZE EVERSTONE™ LANTERNS
ACRYLIC
1301733-Clear 1301734-Frosted
*1301735-Opal



LANTERN CHIMNEY
GLASS
*1300316-Frosted



VICTORIAN LANTERN
ACRYLIC
*1300373-Clear Lens w/Trim Ring (sold assembled)

*Item Shown

GLOBES & ACORNS W/5 1/4" NECKLESS OPENING



CLEAR
POLYCARBONATE
1256-12"
1456-14"
1656-16"
1856-18"

ACRYLIC
1066-10"
1266-12"
1466-14"
1666-16"
1866-18"

OPAL
POLYCARBONATE
1255-12"
1455-14"
1655-16"
1855-18"

ACRYLIC
1065-10"
1265-12"
1465-14"
1665-16"
1865-18"



SMOKE
POLYCARBONATE
1258-12"
1458-14"
1658-16"
1858-18"

ACRYLIC
1068-10"
1268-12"
1468-14"
1668-16"
1868-18"



CLEAR PRISMATIC
POLYCARBONATE
1859-18"

ACRYLIC
1069-10"
1269-12"
1669-16"
1869-18"



CLEAR TEXTURED
POLYCARBONATE
1756-For 2017CL
ACRYLIC
1766-For 8017CL

OPAL TEXTURED
POLYETHYLENE
1776-For 9017



CLEAR TEXTURED
POLYCARBONATE
2067-For 2018CL
ACRYLIC
2057-For 8018CL

OPAL TEXTURED
POLYETHYLENE
2077-For 9018

GLOBES & ACORNS W/4" FITTER NECK

ACRYLIC
0800407-8" Clear
0800408-8" Opal

ACRYLIC
0800411-12" Clear
0800410-12" Opal



POLYCARBONATE
1467-Clear

SUGGESTED MAX WATTAGES


SIZE	ACRYLIC			POLYCARBONATE			POLYETHYLENE		
GLOBES	INC.	FLUOR.	H.I.D.	INC.	FLUOR.	H.I.D.	INC.	FLUOR.	H.I.D.
10"	75W	18W	--	--	18W	--	--	--	--
12"	100W	26W	--	100W	26W	--	--	--	--
14"	150W	32W	--	150W	32W	--	--	--	--
16"	150W	32W	70W	150W	32W	70W	--	--	--
18"	150W	32W	100W	150W	32W	100W	--	--	--
ACORNS	INC.	FLUOR.	H.I.D.	INC.	FLUOR.	H.I.D.	INC.	FLUOR.	H.I.D.
1756	--	--	--	150W	32W	70W	--	--	--
2067	--	--	--	150W	32W	70W	--	--	--

Suggested Max Wattages is for use as a general reference chart only. No warranty or guarantee is expressed or implied, as product suitability is determined by installation.


COMMERCIAL REPLACEMENTS

BUY AMERICAN ACT COMPLIANT


ACRYLIC LENSES




C31T LANTERNS
ACRYLIC
C31TL-LENS-Opal
C31TP-LENS-Prismatic




C32T LANTERNS
ACRYLIC
C32TL-LENS-Opal
C32TP-LENS-Prismatic




C33T LANTERNS
ACRYLIC
C33TL-LENS-Opal
C33TP-LENS-Prismatic




C34T & C35T LANTERNS
ACRYLIC
C34TF-LENS-Frosted



C36T LANTERNS
ACRYLIC
C36TC-LENS-Clear
C36TL-LENS-Opal



C37T LANTERNS
ACRYLIC
C37TC-LENS-Clear
C37TL-LENS-Opal



C59T LANTERNS
ACRYLIC
C59TF-LENS-Frosted

8" FITTER NECK OPENING GLOBES

24", 27", 30" & 36" Globes Available
Contact Sales with Questions



CLEAR
POLYCARBONATE
1856-8N-18"
2056-8N-20"
ACRYLIC
1866-8N-18"
2066-8N-20"



OPAL
POLYCARBONATE
1855-8N-18"
2055-8N-20"
ACRYLIC
1865-8N-18"
2065-8N-20"



SMOKE
POLYCARBONATE
1858-8N-18"
2058-8N-20"
ACRYLIC
1868-8N-18"
2068-8N-20"



CLEAR PRISM.
POLYCARBONATE
1859-8N-18"
2059-8N-20"
ACRYLIC
1869-8N-18"
2069-8N-20"

SUGGESTED MAX WATTAGES

SIZE	ACRYLIC		POLYCARBONATE	
GLOBES	INC.	H.I.D.	INC.	H.I.D.
18"	150W	100W	150W	250W
20"	150W	150W	150W	250W
ACORNS	INC.	H.I.D.	INC.	H.I.D.
0801390	--	--	150W	250W
0801391	--	--	150W	250W
0801392	--	--	150W	250W
3467	--	--	150W	250W

Suggested Max Wattages is for use as a general reference chart only. No warranty or guarantee is expressed or implied, as product suitability is determined by installation.

8" FITTER NECK OPENING ACORNS



Acorn with 8" Necked Opening for C75T and C76T Fixtures
POLYCARBONATE
3467-Clear Textured
ACRYLIC
3468-Clear Textured
3469-Opal Textured
0801422-Frost Textured



Acorn with 8" Necked Opening for C83T and C84T Fixtures**
POLYCARBONATE
0801390*-Clear Textured
ACRYLIC
0801400*-Clear Textured
0801410*-Opal Textured
0801420*-Frost Textured



Acorn with 8" Necked Opening for C85T and C86T Fixtures**
POLYCARBONATE
0801391*-Clear Textured
ACRYLIC
0801401*-Clear Textured
0801411*-Opal Textured
0801421*-Frost Textured



Acorn with 8" Necked Opening for C77T and C78T Fixtures
POLYCARBONATE
0801392*-Clear Textured
ACRYLIC
0801402*-Clear Textured

* For Finial - **SPECIFY: (DR)** Drill Hole ** For Hood - **SPECIFY: (TR)** Trim Top For C91 and C92, **(TR2)** Trim Top For C93 and C94

Specifications subject to change without notice.

NUMERICAL INDEX

ITEM #	PAGE
AFB	49
CP-689	69
C6P2	63
C8P2	63
C10P2	63
C30T	57
C31T	57
C31T(P/L)-LENS	81
C32T	56
C32T(P/L)-LENS	81
C33T	56
C33T(P/L)-LENS	81
C34T	58
C34TF-LENS	81
C35T	58
C36T	55
C36T(C/L)-LENS	81
C37T	55
C37T(C/L)-LENS	81
C40T	48
C41T	48
C51H	72
C52H	73
C90H	74
C59T	56
C59TF-LENS	81
C75T	51
C76T	51
C77T	52
C78T	52
C83T	49
C84T	49
C85T	49
C86T	49
C91T	50
C92T	50
C93T	50
C94T	50
C200B	17, 59
C200BC-LENS	80
C2014T	54
C2015T	53
C2024T	54
C2025T	53

ITEM #	PAGE
C8014T	54
C8015T	53
C8024T	54
C8025T	53
DS120	70
DS130	70
DS140	70
HH	69
HH4	69
HS	50
LCE26	78
LCE39	78
LRC	77
LRG6	76
LRG8	76
LRG10	76
LRH3	77
LRH6	77
PB5-CAP	70
PB5	70
PB5-2	70
PB5-3	70
S11S	19
S11T	19
S11V	19
S21S	18
S21T	18
S21V	18
S26S	20
S26T	20
S26V	20
S27SC	21
S27TC	21
S32W	21
S33W	22
S34W	23
S35W	23
S75TC	25
S75TC-1/2	25
S75TL-1/2	25
S75VC	24
S75VL	24
S759V	24
S76WF	27

ITEM #	PAGE
S761WF	26
S77WF	27
S771WF	27
S772WF	26
S79WF	27
S791WF	26
WB5	70
3BC1	70
3BC2	70
3BC3	70
3BC6	70
3BC9	70
4BC1	70
4BC3	70
4BC6	70
4BC9	70
15RP2	34
105	37
106	37
109	37, 42, 44
110	37, 42, 44
111	37
112	37
113	38
114	38
115	38, 42, 44
116	38, 42, 44
123	38
124	38
144	80
145	80
146	80
147	80
148	80
149	80
153	80
154	80
156FM	33
157FM	33
160FM	11
161FM	11
162FM	11
163FM	11
164FM	34

ITEM #	PAGE
165FM	34
166FM	16, 60
167FM	24
168FM	10
169FM	16, 60
170FM	11
172FM	11
173FM	12
174FM	12
178FM	10
204S	29
204T	29
204V	29
206VC	28
208S	28
208T	28
209	36
210	36
211	36
212	36
215	36
216	36
217	36
220S	30
220T	30
230S	32
230T	32
240S	31
240T	31
240V	31
241VC	31
260S	32
260T	32
263FM	35
264FM	35
265FM	35
270S	30
270T	30
293	62
294	62
295	62
320	69
335	69
338	69

NUMERICAL INDEX

ITEM #	PAGE
347	69
348	69
349	69
407	39
408	39
409	39, 43, 45
410	39, 43, 45
411	39
412	39
420	36
421	36
422	36
502SF	17
502VF	17
502XF-LENS	80
544HC	15
544S	15
544XF-LENS	80
544T	15
544V	15
549S	14
549SF-LENS	80
549V	14
549VF-LENS	80
561FM	14
561FMF-LENS	80
607	40
608	40
609	40, 43, 45
610	40, 43, 45
611	40
612	40
688	69
785	29
1065	80
1066	80
1068	80
1069	80
1255	80
1256	80
1258	80
1265	80
1266	80
1268	80

ITEM #	PAGE
1269	80
1455	80
1456	80
1458	80
1465	80
1466	80
1468	80
1655	80
1656	80
1658	80
1665	80
1666	80
1668	80
1669	80
1720	68
1720P	68
1721	68
1721B	68
1721P	68
1724	68
1724B	68
1724W	68
1756	80
1766	80
1776	80
1784	70
1785	70
1855	80
1855-8N	81
1856	80
1856-8N	81
1858	80
1858-8N	81
1859	80
1859-8N	81
1865	80
1865-8N	81
1866	80
1866-8N	81
1868	80
1868-8N	81
1869	80
1869-8N	81
2001	41

ITEM #	PAGE
2002	41
2003	41, 46
2004	41, 46
2017CL	41, 46
2018CL	41, 46
2055-8N	81
2056-8N	81
2058-8N	81
2059-8N	81
2065-8N	81
2066-8N	81
2057	80
2067	80
2068-8N	81
2069-8N	81
2077	80
2403	68
2405	68
2410	68
2411	68
2420	68
2500	64
2510	64
2512	64
2514	64
2600	65
2610	65
2612	65
2690	65
2692	65
3467	81
3588	66
3588F	66
3590	66
3590F	66
3592	66
3592F	66
3594	66
3594F	66
3688	66
3688F	66
3690	66
3690F	66
3692	66

ITEM #	PAGE
3692F	66
4590	67
4590F	67
4592	67
4592F	67
4594	67
4594F	67
4688	67
4688F	67
4690	67
4690F	67
4692	67
4692F	67
4694	67
4694F	67
8000	41
8001	41
8002	41
8003	41, 46
8004	41, 46
8017CL	41, 46
8018CL	41, 46
9017	41
9018	41
801390	81
801391	81
801392	81
500662	69
500663	69
1000135	70
1000137	70
1000138	70
1300316	80
1300371	80
1300372	80
1300373	80
1301724	80
1301725	80
1301726	80
1301727	80
1301728	80
1301733	80
1301734	80
1301735	80

phone: 330.630.9187 • fax: 330.630.1994

877.870.WAVE (9283)

www.wavelighting.com



© 2019 Wave Lighting