WAVE®
LIGHTING



PRODUCT CATALOG

COMMERCIAL & RESIDENTIAL



COMMERCIAL & RESIDENTIAL


LIGHTING EXPERTS



World Leaders in Non-Corrosive Outdoor Lighting Technologies

New technologies for light engines and materials are paramount for manufacturing quality, energy efficient lighting.

We strive to exceed customer expectations with quality products at competitive pricing for commercial, multi-family and residential community projects.

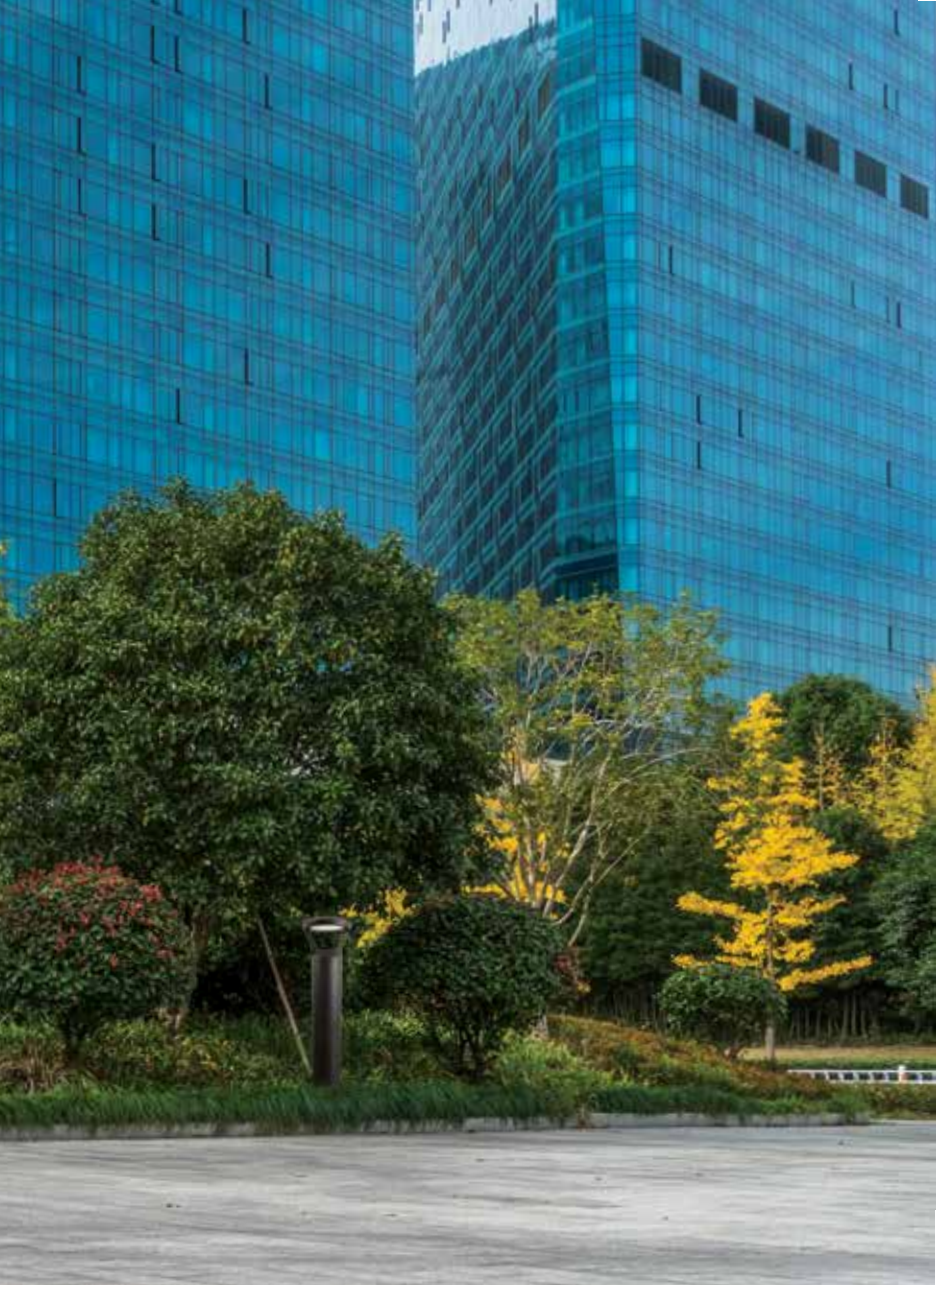

Wave Lighting's **commitment to sustainability** drives us to develop new and exciting products that meet today's energy consumption requirements and are built to last.

CONTENTS

Product Guide pg 4-5
Product Icon Key pg 6
LED Technology pg 96

Commercial Lighting pg 7

COMMERCIAL & STREET SIDE
Commercial product line provides safety and security for all types of applications including parks, pedestrian walkways, and parking areas.

LED Bollards pg 31

Traditional and tunable/switchable walkway bollard options.

Outdoor Decorative pg 38

MULTI-FAMILY & HOSPITALITY

Everstone™ pg 39
Provides a level of beauty and non-corrosive durability that is unavailable in traditional metallic lighting fixtures.

Marlex® pg 44
Non-metallic, injection molded polymer that offers long term, corrosion-resistant service at a very affordable price.

Globes & Acorns pg 58-59
Acrylic offers clarity and performance at an affordable price, and is extremely UV resistant.

Polycarbonate offers durability, and is extremely impact resistant.

Indoor Decorative pg 73

MULTI-FAMILY & HOSPITALITY

Adds a contemporary look to any indoor space. Offered in ceiling, pendant, and wall mount options with dimmable LEDs.

Posts & Accessories pg 80

Leading supplier of residential and commercial lamp posts and accessories.

LED Retrofits pg 96

LED retrofits and replacements E26 and E39 lamps.

Replacements pg 100

Residential and commercial lighting replacements available.


PRODUCT GUIDE

COMMERCIAL LIGHTING



pg 8 pg 9 pg 10 pg 11 pg 11 pg 12 pg 12 pg 13 pg 16 pg 18
pg 19 pg 19 pg 14 pg 20 pg 20 pg 15 pg 21 pg 21 pg 22 pg 22
pg 23 pg 24 pg 25-26 pg 25-26 pg 27 pg 27 pg 28 pg 28 pg 28 pg 28

BOLLARDS

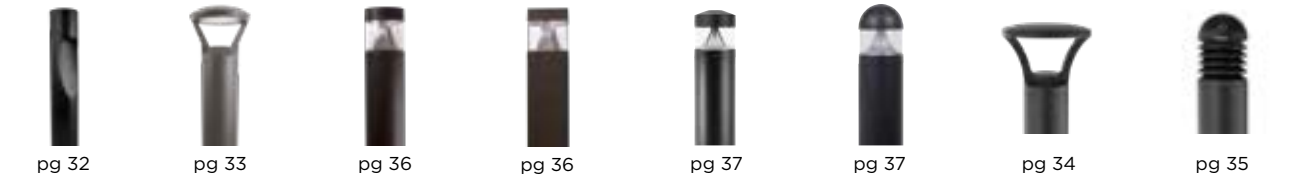

pg 32 pg 33 pg 36 pg 36 pg 37 pg 37 pg 34 pg 35

OUTDOOR DECORATIVE

Everstone



pg 39 pg 39 pg 39 pg 40 pg 40 pg 40 pg 41 pg 41 pg 41 pg 41 pg 42 pg 43

Marlex



pg 44 pg 44 pg 45 pg 45 pg 50 pg 50 pg 51 pg 51 pg 51 pg 47
pg 47 pg 47 pg 48 pg 48 pg 48 pg 49 pg 49 pg 52 pg 53
pg 53 pg 54 pg 54 pg 54 pg 55 pg 55 pg 55 pg 55
pg 56 pg 56 pg 63 pg 57 pg 57 pg 57 pg 57 pg 62

OUTDOOR DECORATIVE

Marlex


pg 62


pg 62


pg 63


pg 63


pg 63


pg 64


pg 64


pg 64


pg 64


pg 65


pg 65


pg 65


pg 66


pg 72


pg 71


pg 71


pg 71


pg 71


pg 71


pg 60


pg 60


pg 61


pg 61


pg 61


pg 56


pg 72


pg 72


pg 72


pg 68


pg 67, 69


pg 67, 69


pg 68, 70


pg 68, 70

Globes & Acorns


pg 58


pg 58


pg 59


pg 59


pg 59

INDOOR


pg 74


pg 74

pg 76

pg 77

pg 77

pg 75

pg 75

pg 78

POSTS & ACCESSORIES

comm. direct burial
pg 82, 84, 86

comm. surface mounted
pg 81, 83, 85

light commercial
pg 87, 88, 89

residential
pg 90-91

post accessories
pg 92-95

RETROFITS

pg 97

pg 97

pg 97

pg 97

pg 98

pg 99

pg 99

REP. PARTS

pg 101

pg 101

pg 101

pg 101-102

pg 101-102

pg 101-102

pg 102

Product Icon Key

- Non-Corrosive Oceanside™ Approved Models
- Security Sensor Option Available
- LED Models Available
- Photocell Option Available
- Dark Sky Friendly Options Available
- Turtle Friendly Models
- Meets Buy American Act Requirements
- Meets Americans with Disabilities Act Requirements
- IP65 Rated Item
- Meets RoHS Requirements
- ETL Listed Item
- Listed for Damp Locations
- Listed for Direct Rain Wet Locations
- UL® Listed Item
- Occupancy Sensor Option Available
- 90 CRI
- Energy Codes

COMMERCIAL LIGHTING

Commercial Area & Main Street



Wave Lighting proudly offers a wide variety of commercial lighting fixtures. All of our fixtures are constructed with the industry's finest materials and may be modified with a vast array of options from Type 5, Type 3, and Dark Sky distributions; color options, and decorative finials.

Wave Lighting's commercial product line provides safety and security for all types of applications including parks, pedestrian walkways, streets and parking areas.

Belle	8-9	Citadel	27
Promenade	10	Cylinder	28
Contemporary	11-13	Area Down Light	28
Town Hall	14-16, 18	Replacement Cast Aluminum Fitters	29
Riverwalk	19	Cast Aluminum Brackets	30
Hight Street	20		
Park Place	21-26		





C43T
I.D. = 3"




Belle LED Commercial System

- Cast Aluminum Housing
- 0-10V Dimming
- Cast Aluminum Arm Included
- T3 Options (Type 5 Standard)

GUIDE CODE: C43TC-L40C-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C43T	ACRYLIC **C**-Clear	120-277V DEDICATED LED		**BK**-Black **BZ**-Bronze **WH**-White	**T3**-Type 3 Distribution (Type 5 Standard)
		L40-30W; 4,000lm **L60**-40W; 6,000lm **L80**-60W; 9,000lm **L100**-80W; 11,000lm	**C**-4K **W**-3K **B**-5K		

Options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice.
LED option information on page 105. All posts and post options sold separately.

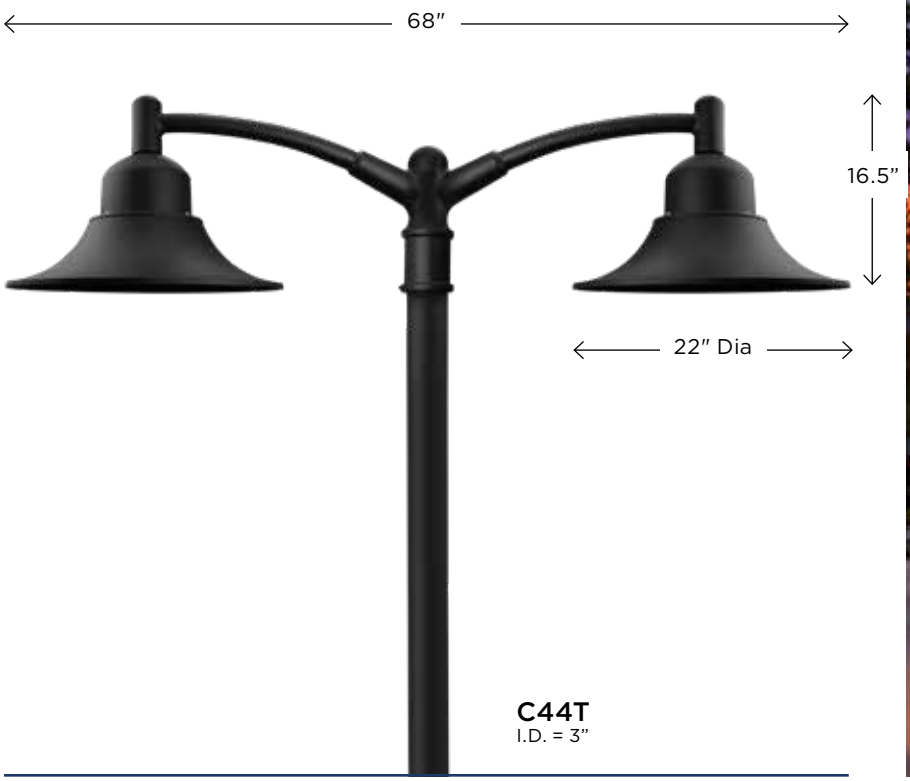



Double Belle LED Commercial System

- Cast Aluminum Housing
- 0-10V Dimming
- Cast Aluminum Arms Included
- T3 Options (Type 5 Standard)

GUIDE CODE: C44TC-L40C-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C44T	ACRYLIC **C**-Clear	120-277V DEDICATED LED		**BK**-Black **BZ**-Bronze **WH**-White	**T3**-Type 3 Distribution (Type 5 Standard)
		L40-60W; 8,000lm **L60**-80W; 12,000lm **L80**-120W; 18,000lm **L100**-160W; 22,000lm	**C**-4K **W**-3K **B**-5K		

Options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice.
LED option information on page 105. All posts and post options sold separately.





Promenade LED Commercial System

- Cast Aluminum Housing
- 0-10V Dimming
- Multi-Volt Options
- T3 Options (Type 5 Standard)

GUIDE CODE: C45TC-L40C-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C45T	GLASS **C**-Clear	120-277V DEDICATED LED		**BK**-Black **BZ**-Bronze **WH**-White	**T3**-Type 3 Distribution (Type 5 Standard)
		L40-30W; 4,000lm **L60**-40W; 6,000lm **L80**-60W; 9,000lm **L100**-80W; 11,000lm	**C**-4K **W**-3K **B**-5K		

Options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice.
LED option information on page 105. All posts and post options sold separately.



COMPANION

WB6 Wall Mount Bracket
Convert any large post top fixture into a decorative wall mount fixture
(see page 30)



COMPANION

C206
Iliad
Bollard
(see page 34)





Contemporary LED Commercial System

- Cast Aluminum Housing
- Universal Mount (C42S) for Wave Lighting Poles
- 0-10V Dimming
- T3 Options (Type 5 Standard)

GUIDE CODE: C42TC-L40C -BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C42S **C42T**	GLASS **C**-Clear	120-277V DEDICATED LED		**BK**-Black **BZ**-Bronze **WH**-White	**T3**-Type 3 Distribution (Type 5 Standard)
		L40-40W; 4,000lm **L60**-60W; 6,000lm	**C**-4K **W**-3K **B**-5K		

Options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice.
LED option information on page 105. All posts and post options sold separately.



Round & Square Caps Available
(see pages 30, 95)



COMPANION
C205 Odyssey Bollard
(see page 33)



C40TL
I.D. = 3"

C40TFF
I.D. = 3"



Contemporary LED Commercial System

- Cast Aluminum Housing
- 0-10V Dimming
- High Lumen Output
- T3 Options (Type 5 Standard)

GUIDE CODE: C40TL-L40C-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C40T	ACRYLIC **L-**Opal Drop Lens **FF-**Frost Flat Lens	120-277V DEDICATED LED		**BK**-Black **BZ**-Bronze **WH**-White	**T3**-Type 3 Distribution (Type 5 Standard)
		L40-30W; 4,000lm **L60**-40W; 6,000lm **L80**-60W; 9,000lm **L100**-80W; 11,000lm	**C**-4K **W**-3K **B**-5K		

Options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice.
LED option information on page 105. All posts and post options sold separately.



COMPANION
C201 Pathway Bollard
(see page 37)



C47TC
I.D. = 3"



Contemporary LED Commercial System

- Cast Aluminum Housing
- 0-10V Dimming
- Field Adjustable Wattage/Lumen
- High Lumen Output
- T3 Options (Type 5 Standard Switchable)
- Photocell Included
- Selectable CCT

GUIDE CODE: C47TC-L80C-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C47T	ACRYLIC **C-**Clear Lens	120-277V DEDICATED LED (Selectable CCT)		**BK**-Black **BZ**-Bronze **WH**-White	**T3**-Type 3 Distribution (Type 5 Standard)
		L80-80W; 10,000lm **L100**-100W; 14,000lm **L120**-120W; 15,000lm	**C**-4K **W**-3K **B**-5K		

Options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice.
LED option information on page 105. All posts and post options sold separately.



COMPANION
C206
Iliad
Bollard
(see page 34)



C59T
I.D. = 3"



Town Hall LED Commercial System

- Cast Aluminum Housing
- 0-10V Dimming (Dedicated LED only)
- High Lumen Output
- T3 Options (Type 5 Standard)

GUIDE CODE: C59TF-L40C-BK-T3

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C59T	ACRYLIC **L**-Opal **P**-Clear Prism GLASS (C59T only) **F**-Frosted	E26 MEDIUM BASE		**BK**-Black **BZ**-Bronze **WH**-White	**MG**-E39 Mogul Socket **T3**-Type 3 Distribution (Type 5 Standard)
		(1) 200W MAX Medium Base			
		120-277V DEDICATED LED			
		L40-30W; 4,000lm **L60**-40W; 6,000lm **L80**-60W; 9,000lm **L100**-80W; 11,000lm	**C**-4K **W**-3K **B**-5K		
		E39 RETRO-FIT LED 120-277V			
		LC5-27W; 3,120lm, Type 5 ✦ **LC3**-20W; 3,000lm, Type 3 ✦ **LCD**-24W; 2,400lm, Dark Sky ✦	**C**-4K		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. All posts and post options sold separately. ✦ Lamp included



COMPANION

WB6 Wall Mount Bracket
Convert any large post top fixture into a decorative wall mount fixture
(see page 30)





Town Hall LED Commercial System

- Cast Aluminum Housing
- 0-10V Dimming
- Field Adjustable Wattage/Lumen
- High Lumen Output
- T3 Options (Type 5 Standard)
- Selectable CCT

GUIDE CODE: C38TC-L60C-BK-T3

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C38TC	FLAT GLASS COVER **C**-Clear	120-277V DEDICATED LED (Selectable CCT)		**BK**-Black **BZ**-Bronze **WH**-White	**T3**-Type 3 Distribution (Type 5 Standard)
		L60-60W; 8,000lm **L80**-80W; 11,000lm **L100**-100W; 13,000lm	**C**-4K **W**-3K **B**-5K		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. All posts and post options sold separately. ✦ Lamp included



COMPANION

WB6 Wall Mount Bracket
Convert any large post top fixture into a decorative wall mount fixture
(see page 30)



COMPANION

C203B Walkway Bollard
(see page 36)



C31T
I.D. = 3"



Town Hall LED Commercial System

- Cast Aluminum Housing
- 0-10V Dimming (Dedicated LED only)
- High Lumen Output
- T3 Options (Type 5 Standard)

GUIDE CODE: C31TP-L40C-BK-T3

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C31T	ACRYLIC **L**-Opal **P**-Clear Prism	E26 MEDIUM BASE		**BK**-Black **BZ**-Bronze **WH**-White	**MG**-E39 Mogul Socket **T3**-Type 3 Distribution (Type 5 Standard)
		(1) 200W MAX Medium Base			
		120-277V DEDICATED LED			
		L40-30W; 4,000lm **L60**-40W; 6,000lm **L80**-60W; 9,000lm	**C**-4K **W**-3K **B**-5K		
		E39 RETRO-FIT LED 120-277V			
		LC5-27W; 3,120lm, Type 5 ✦ **LC3**-20W; 3,000lm, Type 3 ✦ **LCD**-24W; 2,400lm, Dark Sky ✦	**C**-4K		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. All posts and post options sold separately. ✦ Lamp included



COMPANION

WB6 Wall Mount Bracket
Convert any large post top fixture into a decorative wall mount fixture
(see page 28)







Town Hall LED Commercial System

- Cast Aluminum Housing
- LED Retro-Fit Available
- Field Adjustable Wattage/Lumen for dedicated LED only
- Photocell Included
- T3 Options (Type 5 Standard)
- High Lumen Output
- 0-10V Dimming (Dedicated LED only)
- Selectable CCT for dedicated LED only

GUIDE CODE: C39TF-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C39T	ACRYLIC **F**-Frosted	E39 MOGUL BASE		**BK**-Black	**T3**-Type 3 Distribution (Type 5 Standard)
		(1) 200W MAX Mogul Base			
		120-277V DEDICATED LED (Selectable CCT)			
		L60-60W; 8,000lm **L80**-80W; 11,000lm **L100**-100W; 13,000lm	**C**-4K **W**-3K **B**-5K		
		E39 RETRO-FIT LED 120-277V			
		LC5-54W; 7,290lm, Type 5 ✦ **LC3**-40W; 5,600lm, Type 3 ✦	**C**-4K		

Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.
All posts and post options sold separately. ✦ Lamp included



COMPANION
C203B Walkway Bollard
(see page 36)





Riverwalk LED Commercial System

- Cast Aluminum Housing
- 0-10V Dimming (Dedicated LED only)
- Dedicated LED & LED Retro-Fit Available
- T3 Options (Type 5 Standard)

GUIDE CODE: C32TP-L40C-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
C32T **C33T**	ACRYLIC **L**-Opal **P**-Clear Prism	E26 MEDIUM BASE		**BK**-Black **BZ**-Bronze **WH**-White	**MG**-E39 Mogul Socket **T3**-Type 3 Distribution (Type 5 Standard)
		(1) 200W MAX Medium Base			
		120-277V DEDICATED LED			
		L40-30W; 4,000lm **L60**-40W; 6,000lm **L80**-60W; 9,000lm **L100**-80W; 11,000lm	**C**-4K **W**-3K **B**-5K		
		E39 RETRO-FIT LED 120-277V			
		LC5-54W; 7,290lm, Type 5 ✦ **LC3**-40W; 5,600lm, Type 3 ✦ **LCD**-54W; 5,900lm, Dark Sky ✦	**C**-4K		

Some options can not be combined. Spec sheets and IES files available online.
Specifications subject to change without notice.
LED option information on page 105.
All posts and post options sold separately. ✦ Lamp included



COMPANION

WB6 Wall Mount Bracket
Convert any large post top fixture into a decorative wall mount fixture
(see page 30)





High Street LED Commercial System

- Cast Aluminum Housing
- 0-10V Dimming (Dedicated LED only)
- Dedicated LED & Retro-Fit Available
- T3 Options (Type 5 Standard)

GUIDE CODE: C36TC-L40C-BK

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
C36T **C37T**	ACRYLIC **L**-Opal **C**-Clear	E26 MEDIUM BASE		**BK**-Black **BZ**-Bronze **WH**-White	**MG**-E39 Mogul Socket **T3**-Type 3 Distribution (Type 5 Standard)
		(1) 200W MAX Medium Base			
		120-277V DEDICATED LED			
		L40-30W; 4,000lm **L60**-40W; 6,000lm **L80**-60W; 9,000lm **L100**-80W; 11,000lm	**C**-4K **W**-3K **B**-5K		
		E39 RETRO-FIT LED 120-277V			
		LC5-54W; 7,290lm, Type 5 ✦ **LC3**-40W; 5,600lm, Type 3 ✦ **LCD**-54W; 5,900lm, Dark Sky ✦	**C**-4K		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. All posts and post options sold separately. ✦ Lamp included.



COMPANION

WB6 Wall Mount Bracket
Convert any large post top fixture into a decorative wall mount fixture
(see page 30)



Park Place LED Commercial System


- Cast Aluminum Fitter & Canopy
- 0-10V Dimming
- Integrated LED & LED Retro-Fit Available
- Selectable CCT on Integrated LED versions
- Acorns Have 8" Neck *(Replacements page 102)*
- Type 5 Standard
- Street side lighting available (LC3)


GUIDE CODE: C91TC-L40C-BK

ITEM #	ACORN	LIGHT SOURCE	CCT	COLOR	OPTIONS
C91T-Style A **C92T**-Style B **C93T**-Style A **C94T**-Style B	POLYCARBONATE **C**-Clear Textured ACRYLIC **LA**-Opal Textured **CA**-Clear Textured **FA**-Frost Textured	E26 MEDIUM BASE		**BK**-Black **BZ**-Bronze **WH**-White	**MG**-E39 Mogul Socket
		(1) 200W MAX Medium Base			
		120-277V INTEGRATED LED (Selectable CCT)			
		L40-40W; 4,000lm **L60**-54W; 5,700lm	**C**-4K **W**-3K **B**-5K		
		E39 RETRO-FIT LED 120-277V			
		LC5-54W; 7,290lm, Type 5 ✦ **LC3**-40W; 5,600lm, Type 3 ✦ **LCD-**54W; 5,900lm, Dark Sky ✦	**C**-4K		

Some options can not be combined. Spec sheets and IES files available online.
Specifications subject to change without notice.
LED option information on page 105.
All posts and post options sold separately. ✦ Lamp included.





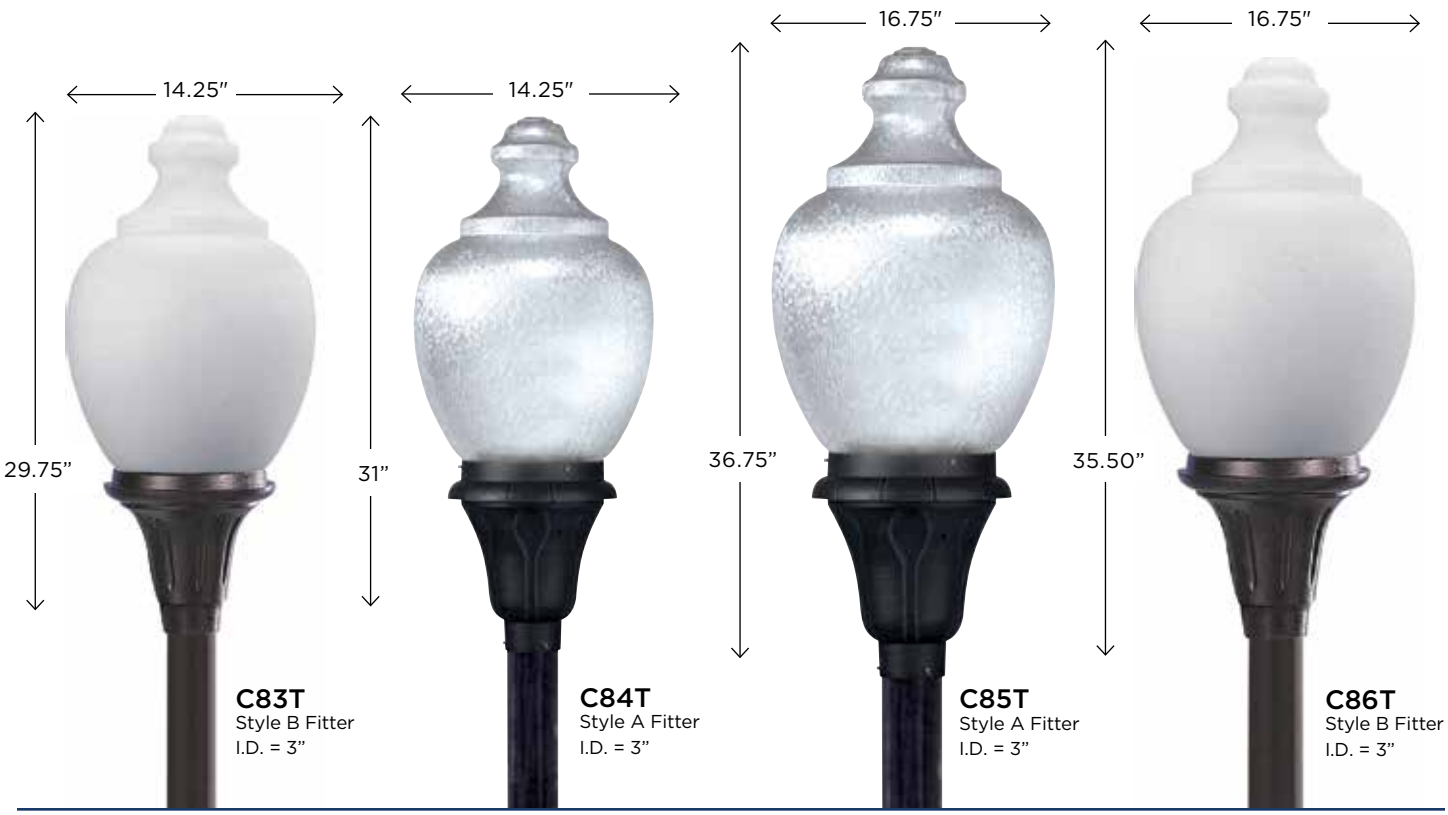

Park Place LED Commercial System

- Cast Aluminum Fitter
- 0-10V Dimming Options
- Dedicated LED & LED Retro-Fit Available
- Selectable CCT on Integrated LED versions
- Acorns Have 8" Neck *(Replacements page 102)*
- Type 5 Standard
- Street side lighting available (LC3)



ACCESSORY
AFB
Plastic Finial Topper with 1/4-20 x 1 1/4" Stainless Steel Hex Screw.

GUIDE CODE: C84TC-L40C-BK

ITEM #	ACORN	LIGHT SOURCE	CCT	COLOR	OPTIONS
C83T-Style B **C84T**-Style A **C85T**-Style A **C86T**-Style B	POLYCARBONATE **C**-Clear Textured ACRYLIC **LA**-Opal Textured **CA**-Clear Textured **FA**-Frost Textured	E26 MEDIUM BASE		**BK**-Black **BZ**-Bronze **WH**-White	**AFB**-Acorn Finial Topper **MG**-E39 Mogul Socket
		(1) 200W MAX Medium Base			
		120-277V INTEGRATED LED (Selectable CCT)			
		L40-40W; 4,000lm **L60**-54W; 5,700lm	**C**-4K **W**-3K **B**-5K		
		E39 RETRO-FIT LED 120-277V			
		LC5-54W; 7,290lm, Type 5 ✦ **LC3**-40W; 5,600lm, Type 3 ✦ **LCD-**54W; 5,900lm, Dark Sky ✦	**C**-4K		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. All posts and post options sold separately. ✦ Lamp included.








Park Place LED Commercial System

- Cast Aluminum Fitter
- 0-10V Dimming
- Integrated LED & LED Retro-Fit Available
- Selectable CCT on Integrated LED versions
- Acorns Have 8" Neck *(Replacements page 102)*
- Type 5 Standard
- Street side lighting available (LC3)

GUIDE CODE: C77TC-L40C-BK

ITEM #	ACORN	LIGHT SOURCE	CCT	COLOR	OPTIONS
C77T-Style A **C78T**-Style B	POLYCARBONATE **C**-Clear Textured ACRYLIC **CA**-Clear Textured	E26 MEDIUM BASE		**BK**-Black **BZ**-Bronze **WH**-White	**AFB**-Acorn Finial Topper **MG**-E39 Mogul Socket
		(1) 200W MAX Medium Base			
		120-277V INTEGRATED LED (Selectable CCT)			
		L40-40W; 4,000lm **L60**-54W; 5,700lm	**C**-4K **W**-3K **B**-5K		
		E39 RETRO-FIT LED 120-277V			
		LC5-54W; 7,290lm, Type 5 ✦ **LC3**-40W; 5,600lm, Type 3 ✦ **LCD-**54W; 5,900lm, Dark Sky ✦	**C**-4K		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. All posts and post options sold separately. ✦ Lamp included. See page 85 for acorn replacements and measurements.


Style A Fitter


Style B Fitter





Park Place LED Commercial System

- Cast Aluminum Fitter
- 0-10V Dimming Options
- Integrated LED & LED Retro-Fit Available
- Selectable CCT on Integrated LED versions
- Acorns Have 8" Neck *(Replacements page 102)*
- Type 5 Standard
- Street side lighting available (LC3)

GUIDE CODE: C75TC-L40C-BK

ITEM #	ACORN	LIGHT SOURCE	CCT	COLOR	OPTIONS
C75T-Style A **C76T**-Style B	POLYCARBONATE **C**-Clear Textured ACRYLIC **LA**-Opal Textured **CA**-Clear Textured **FA**-Frost Textured	E26 MEDIUM BASE		**BK**-Black **BZ**-Bronze **WH**-White	**MG**-E39 Mogul Socket
		(1) 200W MAX Medium Base			
		120-277V INTEGRATED LED (Selectable CCT)			
		L40-40W; 4,000lm **L60**-54W; 5,700lm	**C**-4K **W**-3K **B**-5K		
		E39 RETRO-FIT LED 120-277V			
		LC5-54W; 7,290lm, Type 5 ✦ **LC3**-40W; 5,600lm, Type 3 ✦ **LCD-**54W; 5,900lm, Dark Sky ✦	**C**-4K		

Some options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. All posts and post options sold separately. ✦ Lamp included. See page 85 for acorn replacements and measurements.





C2014T
C8014T
Style A Fitter
I.D. = 3"

C2024T
C8024T
Style B Fitter
I.D. = 3"



Park Place LED Commercial System

- Cast Aluminum Fitter
- 0-10V Dimming
- Integrated LED & LED Retro-Fit Available
- Selectable CCT on Integrated LED versions
- Globes Have 8" Neck *(Replacements Page 102)*
- Type 5 Standard
- Street side lighting available (LC3)


GUIDE CODE: C2014TL-L40C-BK

ITEM #	GLOBE	LIGHT SOURCE	CCT	COLOR	OPTIONS
C2014T-Style A **C2024T**-Style B	POLYCARBONATE **C**-Clear **L**-Opal	E26 MEDIUM BASE (1) 200W MAX Medium Base		**BK**-Black **BZ**-Bronze **WH**-White	**MG**-E39 Mogul Socket
C8014T-Style A **C8024T**-Style B	ACRYLIC **C**-Clear **F**-Frost **L**-Opal	120-277V INTEGRATED LED (Selectable CCT) **L40**-40W; 4,000lm **L60**-54W; 5,700lm	**C**-4K **W**-3K **B**-5K		
		E39 RETRO-FIT LED 120-277V **LC5**-54W; 7,290lm, Type 5 ✦ **LC3**-40W; 5,600lm, Type 3 ✦ **LCD-**54W; 5,900lm, Dark Sky ✦	**C**-4K		

Some options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. All posts and post options sold separately. ✦ Lamp included.



C-Clear **F**-Frost **L**-Opal



Style A Fitter **Style B** Fitter

CUSTOM GLOBES
Custom globes available up to 36". **Call factory for details.**



C2015T
C8015T
Style A Fitter
I.D. = 3”

C2025T
C8025T
Style B Fitter
I.D. = 3”

See Page 20 for Color Options



Park Place LED Commercial System

- Cast Aluminum Fitter
- 0-10V Dimming
- Integrated LED & LED Retro-Fit Available
- Selectable CCT on Integrated LED versions
- Globes Have 8” Neck *(Replacements Page 102)*
- Type 5 Standard
- Street side lighting available (LC3)


GUIDE CODE: C2015TL-L40C-BK

ITEM #	GLOBE	LIGHT SOURCE	CCT	COLOR	OPTIONS
C2015T-Style A **C2025T**-Style B	POLYCARBONATE **C**-Clear **L**-Opal	E26 MEDIUM BASE (1) 200W MAX Medium Base		**BK**-Black **BZ**-Bronze **WH**-White	**MG**-E39 Mogul Socket
C8015T-Style A **C8025T**-Style B	ACRYLIC **C**-Clear **F**-Frost **L**-Opal	120-277V INTEGRATED LED (Selectable CCT)			
		L40-40W; 4,000lm **L60**-54W; 5,700lm	**C**-4K **W**-3K **B**-5K		
		E39 RETRO-FIT LED 120-277V			
		LC5-54W; 7,290lm, Type 5 ✦ **LC3**-40W; 5,600lm, Type 3 ✦ **LCD-**54W; 5,900lm, Dark Sky ✦	**C**-4K		

Some options cannot be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. All posts and post options sold separately. ✦ Lamp included.



C-Clear **F**-Frost **L**-Opal



Style A Fitter **Style B** Fitter

CUSTOM GLOBES

Custom globes available up to 36”. **Call factory for details.**

Citadel Enclosed & Gasketed

- Die Cast Aluminum
- Multi-Volt Options
- Security Sensor Available
- Emergency Backup Available
- IP65 Rated
- ADA Compliant






166FM
Ring

SCAN FOR VIDEO



169FM
Eyelid



GUIDE: 166FMF-LR15C-BK

ITEM #	DIFFUSER	LED LIGHT SOURCE	CCT	COLOR	OPTIONS
166FM **169FM**	POLYCARBONATE **F**-Frosted	120V LIGHTWAVE LED **LR15**-15W; 1,400lm 80CRI **LR22**-23W; 1,900lm 80CRI **LR32**-32W; 2,700lm 80CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 2,020lm 90CRI **LT32**-32W; 2,700lm 90CRI 120-277V MULTI-VOLT **L22**-22W; 1,824lm	**C**-4K **W**-3K 4K	**BK**-Black **WH**-White	**EB**-Emergency Backup **S**-Security Option Includes Motion Sensor & Photocell Combo options are not available with LR32 & LT32 light source

Options can not be combined. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.

BATTERY BACK UP SPECS

- 135 Min of Emergency Backup LED
- Test Switch/LED Change Indicator
- 4W LED Backup Array
- 500 lm
- NICD, 3.6 VDC Battery
- 24hr Recharge Time
- Ambient Temp: 0°C to 40°C
- 5yr Warranty

Cylinder Aluminum Housing

- Available in Downlight
- Available in Up/Downlight
- Aluminum Construction
- See Pages 44-45 for Composite Cylinders



S64W
Downlight
EXTENDS: 7.75”
H/CTR:2.38”
BACKPLATE: 4.63” X 4.63”



S64FM
Ceiling Mount



S65W
Up & Downlight
EXTENDS: 7.75”
H/CTR: 6.88”
BACKPLATE: 4.63” X 4.63”

GUIDE: S64W-LR12C-BK

ITEM #	LED LIGHT SOURCE	CCT	COLOR
S64W	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **BZ**-Bronze
	(1) 40W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦		
	120V LIGHTWAVE LED		
	LR12-13W; 1,000lm 80CRI	**C**-4K	
ITEM #	**LED LIGHT SOURCE**	**CCT**	**COLOR**
S64FM	120V LIGHTWAVE LED	**C**-4K	**BK**-Black **BZ**-Bronze
	LR12-2x13W; 2,000lm 80CRI		
ITEM #	**LED LIGHT SOURCE**	**CCT**	**COLOR**
S65W	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **BZ**-Bronze
	(2) 40W MAX Medium Base **2LE26**-(2) 9.5W; 800lm (E26 LED Lamp) ✦		
	120V LIGHTWAVE LED		
	LR12-2x13W; 2,000lm 80CRI	**C**-4K	

See page 37 for composite cylinders. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.

Area Down Light

- Bronze Powdercoated Aluminum Body
- Photocell Included
- High Lumen Output
- Wall Mount Only
- Non-Dimmable



530V
H/CTR: 2.75”
BACKPLATE: 4.5” x 5.5”

GUIDE CODE: 530VC-LR52C-BZ

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR
530V	ACRYLIC **C**-Clear	120V LIGHTWAVE LED	**C**-4K	**BZ**-Bronze
		LR52-52W; 5,000lm 80CRI		

Spec sheets and IES files available online.
Specifications subject to change without notice. LED option information on page 105.

Replacement Cast Aluminum Fitters

Diffuser Sold Separately

- Designed for Globes & Acorns with 8” Neck
- Fits Most 3” Poles
- Cast Aluminum Fitters Come Standard with 4KV Medium Base Porcelain Socket
- Option: **(MG)** Mogul Socket



Black, white & bronze color options





1784
Shown with Medium Base

Style A Fitter



1785
Shown with Mogul Base

Style B Fitter

GUIDE CODE: 1784-BK-MG

ITEM #	LIGHT SOURCE	COLOR	OPTIONS
1784-Style A **1785**-Style B	E26 MEDIUM BASE (1) 200W MAX Medium Base	**BK**-Black **BZ**-Bronze **WH**-White	**MG**-E39 Mogul Socket

Specifications subject to change without notice.

COMPANION GLOBES
(see pages 102)



C-Clear **F**-Frost **L**-Opal

COMPANION ACORNS
(see pages 102)



C-Clear **F**-Frost **L**-Opal

WB5 Series

Cast Aluminum Brackets

- Must Be Used with Wave Lighting's .125" Wall Thickness Commercial Posts
- Post Bracket Pre-Wired W/20"Lead for Easy Installation for 3" Post Mount Fixture(s)
- Specify: (BK) Black (WH) White or (BZ) Bronze



PB5-2

O.D. = 2.98"

- Double Fixture
- Max. Fixture Width: 18"
- Max. Fixture Weight: 100lbs Per Bracket
- H = 9.5", W = 4.5", E = 29"
- Includes 1 Cap & 2 Arm Brackets



PB5-3

O.D. = 2.98"

- Triple Fixture
- Max. Fixture Width: 12"
- Max. Fixture Weight: 100lbs Per Bracket
- H = 9.5", W = 4.5", E = 29"
- Includes 2 Arm Brackets, Cap Not Included

GUIDE CODE: PB5-2-BK

ITEM #	COLOR
PB5-2-Double Fixture & Cap **PB5-3**-Triple Fixture, Cap Not Included	**BK**-Black **BZ**-Bronze **WH**-White

Specifications subject to change without notice.



ACCESSORY
CAP-PB5
Cap for
3" Commercial Posts



WB6 Series

Commercial Wall Mount Bracket

- Mounts on a 3" or 4" Square or Octagonal Junction Box
- Wall Mount Bracket Pre-Wired W/20"Lead for Easy Installation for Most 3" Post Top Fixtures
- Wall Mount Only
- Specify: (BK) Black (WH) White or (BZ) Bronze



WB6

O.D. = 2.98"

- Wall Bracket
- Max. Fixture Width: 24"
- Max. Fixture Weight: 100lbs
- Distance From Wall 11" to Center of Fixture
- H = 7.25", W = 5.25", E = 12.65 "
- Includes 1 Arm Bracket

GUIDE CODE: WB6-BK

ITEM #	COLOR
WB6-Commercial Wall Bracket	**BK**-Black **BZ**-Bronze **WH**-White

Specifications subject to change without notice.

Black, white & bronze color options




BOLLARDS

Multi-Family & Hospitality

Architectural	32
Odyssey	33
Iliad	34
Lover	35
Walkway	36
Pathway	37








TYPE 3
DISTRIBUTION

C204BC



Anchor Bolt M10 x 6.0"
(3 anchor bolts and template included)

SELECTABLE
Color Temperature





Architectural Bollard

- 180° Lighting Distribution
- Selectable CCT
- 0-10V Dimming
- Aluminum Housing
- Multi-Volt
- Mounting Hardware Included


GUIDE CODE: C204BC-L20S-BK-T3

ITEM #	LED LIGHT SOURCE	CCT	COLOR	DISTRIBUTION
C204BC	120-277V MULTI-VOLT	**S**-Selectable 3K, 4K & 5K	**BK**-Black **BZ**-Bronze	**T3**-Type 3 Only
	L20-20W; 1,000lm			

Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.




C205BC



Anchor Bolt M10 x 6.7"
(3 anchor bolts and template included)

SELECTABLE
Color Temperature
& Lumen Output





Odyssey Bollard

- Selectable CCT
- Field Adjustable Lumen / Wattage
- 0-10V Dimming
- Aluminum Housing
- Multi-Volt
- Mounting Hardware Included


GUIDE CODE: C205BC-L24S-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
C205B	POLYCARBONATE **C**-Clear	120-277V MULTI-VOLT	**S**-Selectable 3K, 4K & 5K	**BK**-Black **BZ**-Bronze
		L24-Selectable 14W; 1,700lm; 19W; 2,300lm or 24W; 3,000lm		

Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.



C206BC



Anchor Bolt M10 x 6.7"
(3 anchor bolts and template included)

SELECTABLE
Color Temperature
& Lumen Output





Iliad Bollard

- Selectable CCT
- Field Adjustable Lumen / Wattage
- 0-10V Dimming
- Aluminum Housing
- Multi-Volt
- Mounting Hardware Included


GUIDE CODE: C206BC-L24S-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
C206BC	POLYCARBONATE **C**-Clear	120-277V MULTI-VOLT	**S**-Selectable 3K, 4K & 5K	**BK**-Black **BZ**-Bronze
		L24-Selectable 11W; 1,000lm; 16W; 1,500lm or 24W; 2,000lm		

Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.




C207BC



Anchor Bolt M10 x 6.7"
(3 anchor bolts and template included)

SELECTABLE
Color Temperature
& Lumen Output





Louver Bollard

- Selectable CCT
- Field Adjustable Lumen / Wattage
- 0-10V Dimming
- Aluminum Housing
- Multi-Volt
- Mounting Hardware Included

GUIDE CODE: C207BC-L25S-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
C207BC	POLYCARBONATE **C**-Clear	120-277V MULTI-VOLT	**S**-Selectable 3K, 4K & 5K	**BK**-Black **BZ**-Bronze
		L25-Selectable 10W; 500lm; 18W; 900lm or 25W; 1,100lm		

Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.





Walkway Bollards

- Selectable CCT
- Field Adjustable Lumen / Wattage
- 0-10V Dimming
- Aluminum Housing
- Multi-Volt
- Mounting Hardware Included


GUIDE CODE: C202BC-L22S-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
C202B **C203B**	POLYCARBONATE **C**-Clear	120-277V MULTI-VOLT	**S**-Selectable 3K, 4K & 5K	**BK**-Black **BZ**-Bronze
		L22-Selectable 12W; 1,600lm; 16W; 2,100lm or 22W; 3,000lm		

Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.



COMPANION
C39T
Town Hall Luminaire
(see page 18)

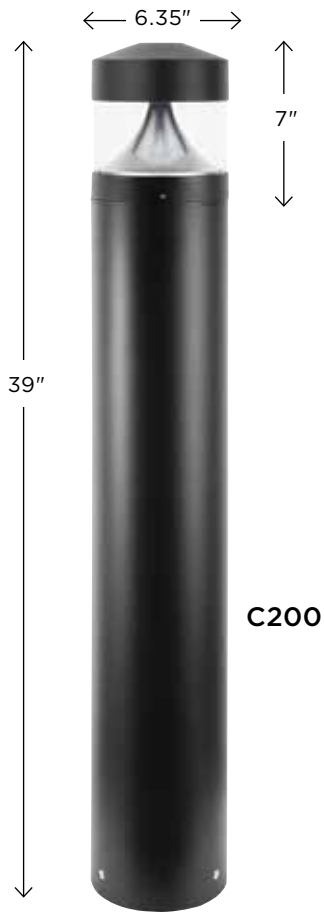

C200BC




C201BC



Pathway Bollards

- Aluminum Housing
- 0-10V Dimming
- Mounting Hardware Included
- Multi-Volt



Anchor Bolt M10 x 6.7"
(3 anchor bolts and template included)

GUIDE CODE: C200BC-L10C-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
C200B	POLYCARBONATE **C**-Clear	120-277V MULTI-VOLT **L10**-10W; 937lm	**C**-4K	**BK**-Black **BZ**-Bronze

GUIDE CODE: C201BC-L20C-BK

ITEM #	LENS	LED LIGHT SOURCE	CCT	COLOR
C201B	POLYCARBONATE **C**-Clear	120-277V MULTI-VOLT **L20**-20W; 1,400lm	**C**-4K **W**-3K	**BK**-Black **BZ**-Bronze

Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.

OUTDOOR DECORATIVE

Multi-family & Hospitality

NON-CORROSIVE

Everstone	39-43
Marlex	44-57, 60-72
Globes & Acorns	58-59



Companion-Size Lanterns

Built from the Inside-Out to Last!

- Compression Molded
- Non-Corrosive Durability
- Limited 5 Year Warranty
- Non-Metallic Composite Material
- OceanSide™ Approved
- Withstand Harsh Weather

SCAN FOR VIDEO

OCEANSIDE™ APPROVED

The OceanSide™ icon indicates that this product meets an uncompromising set of standards for low-maintenance durability and harsh weather performance.

Our advanced engineering, pleasing designs and leading-edge technologies allow us to eliminate components that can fail due to rust, corrosion or exposure to extreme climates. OceanSide™ Approved products are specifically designed from the INSIDE-OUT to meet the rigors of nature's harshest environment.

S11S shown





S21SC



S21VF



S21TC
I.D. = 3″

Lanterns Companion-Size, Non-Corrosive

GUIDE CODE: S21VF-BZ-PC

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
S21S **S21V** **S21T**	ACRYLIC **C**-Clear **F**-Frosted	E26 MEDIUM BASE (1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI	**C**-4K **W**-3K	**BK**-Blackstone **WH**-Whitestone **BZ**-Bronzestone	**PC**-Photocell (only available on S21V)

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.

BK WH BZ





Lanterns Full-Size, Non-Corrosive

GUIDE CODE: S11VC-LR12W-WH-PC

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
S11S **S11V** **S11T**	ACRYLIC **C**-Clear **F**-Frosted	E26 MEDIUM BASE (1) 100W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI	**C**-4K **W**-3K	**BK**-Blackstone **WH**-Whitestone	**PC**-Photocell (only available on S11V)

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.

BK WH



S26SL
EXTENDS: 9.25”
H/CTR: 8.75”
BACKPLATE:
7.25” X 5.375”



S26VC
EXTENDS: 9.25”
H/CTR: 3.625”
BACKPLATE:
7.25” X 5.375”



S27SC
EXTENDS: 9.25”
H/CTR: 13.75”
BACKPLATE:
7.25” X 5.375”



S32W
EXTENDS: 4”
H/CTR: 7.5”
BACKPLATE:
13.875” x 6.75”

Everstone Non-Corrosive

GUIDE CODE: S26SL-LE26C-BK

ITEM #	GLOBE	LIGHT SOURCE	CCT	COLOR
S26S **S26V**	ACRYLIC **C**-Clear Prismatic **L**-Opal	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Blackstone **WH**-Whitestone **BZ**-Bronzestone
		(1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦		
S27S	POLYCARBONATE **C**-Clear Textured			

GUIDE CODE: S32WL-LR12C-BK

ITEM #	GLOBE	LIGHT SOURCE	CCT	COLOR	OPTIONS
S32W	ACRYLIC **C**-Clear Prismatic **L**-Opal	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Blackstone **WH**-Whitestone **BZ**-Bronzestone	**S**-Security Option Includes Motion Sensor & Photocell Combo
		(1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		LR12-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI			
		120-277V MULTI-VOLT **LED**			
		L11-11W; 912lm	4K		

✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.

BK WH BZ



S26TC
I.D. = 3”



S27TC
I.D. = 3”



Everstone Post Mount Non-Corrosive

- Non-Metallic Composite Material
- Compression Molded
- Fits Most 3” Diameter Posts
- Non-Corrosive Hardware

GUIDE CODE: S27TC-WH

ITEM #	GLOBE	LIGHT SOURCE	CCT	COLOR
S26T	ACRYLIC **C**-Clear Prismatic **F**-Frost **L**-Opal	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Blackstone **WH**-Whitestone **BZ**-Bronzestone
S27T	POLYCARBONATE **C**-Clear Textured	(1) 100W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦		

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.

BK WH BZ



COMPARABLE
2018
Acorn with Aluminum Fitter
(see page 58)



COMPARABLE
8001
Globe with Aluminum Fitter
(see page 59)



S33WL-BK
EXTENDS: 4"
H/CTR: 7.75"
BACKPLATE:
14.125" x 6.75"



Available with No Insignia, Lighthouse, or Turtle



(shown with amber lamp)

Turtle & Dark Sky Friendly

- Florida Wildlife Certified with Amber LED Light Source (2025:008)
- Meets Standards for Beachfront, Turtle Safe Lighting
- 100% Cut-Off - Complies with Dark Sky Standards
- Non-Corrosive Hardware

GUIDE CODE: S33WL-LCE-26-12A-T5-WH


ITEM #	INSIGNIA	LIGHT SOURCE	CCT	COLOR	OPTIONS
S33W	**N**-No Insignia **L**-Lighthouse **T**-Turtle	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Blackstone **WH**-Whitestone **BZ**-Bronzestone	**S**-Security Option Includes Motion Sensor & Photocell Combo
		(1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		LR12-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI			
		120-277V E26 AMBER LED			
		LCE-26-12A-T5-11W; 336lm (E26 LED Lamp) ✦■	596nm		

✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Consult factory for details. Florida wildlife certified lighting. Security Sensor option information on page 103.

BK WH BZ

■ The required options and bulleted caveats for the **S33W** (Certification Number:2025-005) fixture with **LCE-26-12A-T5** bulb must be followed for this fixture to be certified through the Wildlife Lighting Program:

- Must be installed in a downward directed position
- Maximum mounting height of 8-feet above finished floor
- Not recommended above the ground floor when located on the beach or shore perpendicular sides of the structure

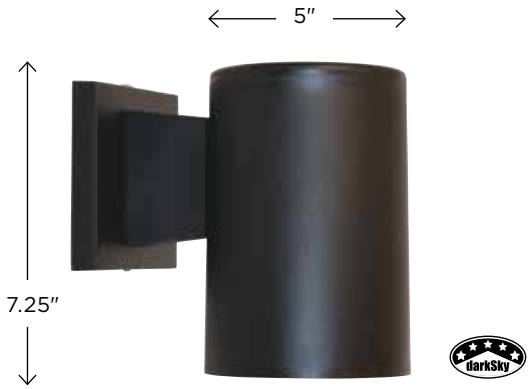

S34W
(Downlight Only)
EXTENDS: 7.75”
H/CTR: 2.375”
BACKPLATE:
4.625” x 4.625”



S35W
(Downlight Only)
EXTENDS: 7.75”
H/CTR: 4.825”
BACKPLATE:
4.625” x 4.625”



Cylinder Composite Housing

- Florida Wildlife Certified with Amber LED Light Source (2025:008)
- Turtle Safe
- Dark Sky Friendly Lighting
- Composite Construction

GUIDE CODE: S34W-LCE-26-12A-T5-BK

ITEM #	LIGHT SOURCE	CCT	COLOR	OPTIONS
S34W **S35W**	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White	**PC**-Photocell (S35W only)
	(1) 40W MAX Par 30 Lamp **LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
	120-277V E26 AMBER LED			
	LCE-26-12A-T5-11W; 336lm (E26 LED Lamp) ✦ ■	596nm		

See page 28 for aluminum cylinders. ✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.

■ The required options and bulleted caveats for the **S34W** (Certification Number:2025-006) and **S35W** (Certification Number: 2025-007) fixtures with **LCE-26-12A-T5** bulb must be followed for these fixtures to be certified through the Wildlife Lighting Program:


- Must be installed in a downward directed position
- Maximum mounting height of 8-feet above finished floor
- Not recommended above the ground floor when located on the beach or shore perpendicular sides of the structure

S35W ADDITIONAL REQUIREMENT:

- Must be used with a long wavelength light source that does not emit any light below 560 nm



COMPARABLE
Aluminum Cylinders Available
(see page 24)

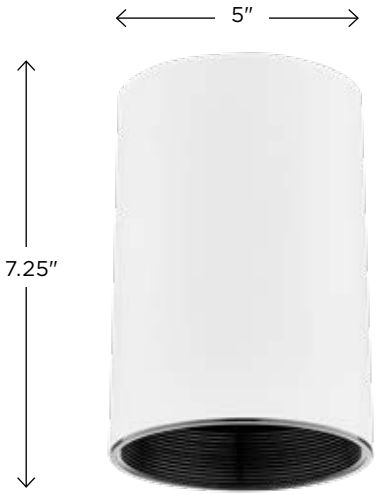

S37FM
(Downlight Only)



S36W
(Up/Down)
EXTENDS: 7.75”
H/CTR: 6.875”
BACKPLATE:
4.625” x 4.625”

Cylinder Composite Housing

- Available in Down Light & Up/Down (S36W)
- Ceiling Mount (S37FM)
- Turtle Friendly (Amber LED Lamp Available)
- Dark Sky Friendly Lighting (S37FM)
- Composite Construction

GUIDE CODE: S36W-BK-G

ITEM #	LIGHT SOURCE	CCT	COLOR	LENS
S36W	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White	**G**-Glass Top Lens
	(2) 75W MAX Par 30 Lamp **2LE26**-(2) 9.5W; 800lm (E26 LED Lamps) ✦			

See page 28 for aluminum cylinders. ✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.

GUIDE CODE: S37FM-WH

ITEM #	LIGHT SOURCE	CCT	COLOR
S37FM	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White
	(1) 40W MAX Par 30 Lamp **LE26**-9.5W; 800lm (E26 LED Lamp) ✦		
	120-277V E26 AMBER LED		
	LCE-26-12A-T5-11W; 336lm (E26 LED Lamp) ✦	596nm	

See page 28 for aluminum cylinders. ✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.



COMPANION
LCE-26-12A LED Amber Lamp
(see page 99)





S50T
I.D. = 3”



S50S
EXTENDS: 6.875”
H/CTR: 3.5”
BACKPLATE:
6.875” x 4.5”



S50V
EXTENDS: 9”
H/CTR: 4.5”
BACKPLATE:
8.5” x 5.875”

Artisan Non-Corrosive

GUIDE CODE: S50VF-BK-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
S50S **S50T** **S50V**	ACRYLIC **C**-Clear **F**-Frosted	E26 MEDIUM BASE (1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI	**C**-4K **W**-3K	**BK**-Black **WH**-White **BZ**-Bronze	**PC**-Photocell (wall mount only) **S**-Security Option Includes Motion Sensor & Photocell Combo (wall mount only)

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.





Artisan Non-Corrosive

GUIDE CODE: S51VF-BK-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
S51S **S51T** **S51V**	ACRYLIC **C**-Clear **F**-Frosted	E26 MEDIUM BASE (1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI	**C**-4K **W**-3K	**BK**-Black **WH**-White **BZ**-Bronze	**PC**-Photocell (wall mount only) **S**-Security Option Includes Motion Sensor & Photocell Combo (wall mount only)

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.



S52V
EXTENDS: 8.5”
H/CTR: 4”
BACKPLATE: 6” x 8.75”



S52T
I.D. = 3”



Artisan Non-Corrosive

GUIDE CODE: S52VF-BK-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
S52T **S52V**	ACRYLIC **C**-Clear **F**-Frosted	E26 MEDIUM BASE (1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI	**C**-4K **W**-3K	**BK**-Black **WH**-White **BZ**-Bronze	**PC**-Photocell (wall mount only) **S**-Security Option Includes Motion Sensor & Photocell Combo (wall mount only)

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.



S85V
EXTENDS: 9.4"
H/CTR: 4"
BACKPLATE:
9" x 4.5" x 1.4"



S85T
I.D. = 3"



Designer

- Non-Corrosive
- Composite Construction
- Optional Photocell or Security Sensor (S85V Only)
- Mounting Hardware Included


GUIDE CODE: S85VF-BK-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
S85V	ACRYLIC **C**-Clear **F**-Frost	E26 MEDIUM BASE (1) 40W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **(Frost lens only)** **LR12**-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI	**C**-4K **W**-3K	**BK**-Black **WH**-White **BZ**-Bronze	**PC**-Photocell **S**-Security Option Includes Motion Sensor & Photocell Combo

GUIDE CODE: S85TC-BZ

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR
S85T	ACRYLIC **C**-Clear **F**-Frost	E26 MEDIUM BASE (1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **(Frost lens only)** **LR12**-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI	**C**-4K **W**-3K	**BK**-Black **WH**-White **BZ**-Bronze

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 6. Security Sensor option information on page 103.




COMPANION
349 Pier Mount Adaptor Available
(see page 95)



S80V
EXTENDS: 9”
H/CTR: 6”
BACKPLATE: 5” x 5”



S82V
EXTENDS: 9”
H/CTR: 6”
BACKPLATE: 5” x 5”

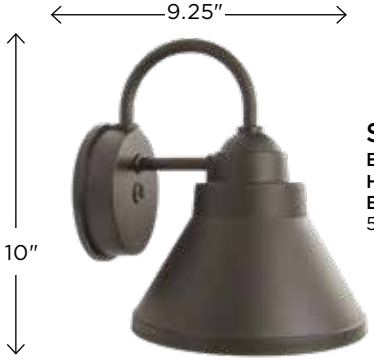

S81V
EXTENDS: 9”
H/CTR: 6”
BACKPLATE: 5” x 5”



Goose

- Non-Corrosive
- Composite Construction
- Dark Sky Friendly
- Mounting Hardware Included

GUIDE CODE: S80VL-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
S80V	ACRYLIC **L**-Opal **C**-Clear Prismatic	E26 MEDIUM BASE (1) 40W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦	**C**-4K **W**-3K	**BK**-Black **WH**-White **BZ**-Bronze	**PC**-Photocell **S**-Security Option Includes Motion Sensor & Photocell Combo

GUIDE CODE: S81V-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
S81V **S82V**	N/A (Open Bottom)	E26 MEDIUM BASE (1) 40W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-7W; 700lm 80CRI	**C**-4K **W**-3K	**BK**-Black **WH**-White **BZ**-Bronze	**PC**-Photocell **S**-Security Option Includes Motion Sensor & Photocell Combo

✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 6. Security Sensor option information on page 103.



COMPANION
LCE-26-12A LED Amber Lamp
(see page 99)



S75V
NAUTICAL
EXTENDS: 11”
H/CTR: 5.25”
BACKPLATE: 5” x 5”



Nautical

GUIDE CODE: S75VC-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
S75V	ACRYLIC **C**-Clear Prismatic **L**-Opal	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White	**PC**-Photocell (120V only) **S**-Security Option Includes Motion Sensor & Photocell Combo
		(1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		LR12-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI			
		120-277V MULTI-VOLT LED			
		L11-11W; 912lm	4K		

✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.





S75T
I.D. = 3″
Pictured with 348 stub post *(not included see page 95).*



S75T-2
I.D. = 3″
Pictured with 348 stub post *(not included see page 95).*



Nautical

GUIDE CODE: S75TC-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR
S75T	ACRYLIC **C**-Clear Prismatic	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White
		(1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦		
		120V LIGHTWAVE LED		
		LR12-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI		

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.

GUIDE CODE: S75TC-2-LR12C-WH-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
S75TC-2 **S75TL-2**	ACRYLIC C-2-Clear Prismatic L-2-Opal	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White	**PC**-Photocell (120V only)
		(2) 60W MAX Medium Base **2LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		LR12-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI			
		120-277V MULTI-VOLT LED			
		L22-22W; 1,824lm	4K		



COMPANION
Stub Posts Available in 6” Increments
(see page 95)



COMPANION
347 Pier Mount Adaptor Available
(see page 95)



S761W
Polycarbonate Back Pan
H/CTR: 5.13”
Depth: 5.13”
Aluminum Back Pan
H/CTR: 5.25”
10.38” x 5.38”
Depth: 5.38”



S791W
Polycarbonate Back Pan
H/CTR: 5.13”
Depth: 5”
Aluminum Back Pan
H/CTR: 5.25”
10.38” x 5.25”
Depth: 5.25”



S772W
Polycarbonate Back Pan
H/CTR: 5.13”
Depth: 5”
Aluminum Back Pan
H/CTR: 5.25”
10.38” x 5.25”
Depth: 5.38”



Nautical

- Wall Or Ceiling Mount
- Standard Bulkhead Design
- Sensors On Select Models
- LED Options Available

GUIDE CODE: S761WF-LR12W-WH-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
S761W **S772W** **S791W**	POLYCARBONATE **F**-Frosted Ribbon	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White	**PC**-Photocell (120V Lightwave LED only) **S**-Security Option Includes Motion Sensor & Photocell Combo
		POLYCARBONATE BACK PAN (1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		ALUMINUM BACK PAN **LR12**-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LR22**-23W; 1,900lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 2,020lm 90CRI			
		120-277V MULTI-VOLT LED			
		ALUMINUM BACK PAN **L22**-22W; 1,824lm	4K		

✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.



S76W
Polycarbonate Back Pan
H/CTR: 2.75”
Depth: 4.25”
Aluminum Back Pan
H/CTR: 3”
10.63” x 6”
Depth: 4.5”



S771W
Polycarbonate Back Pan
H/CTR: 2.75”
Depth: 4.25”
Aluminum Back Pan
H/CTR: 3”
10.63” x 6”
Depth: 4.5”



S77W
H/CTR: 2.75”
Polycarbonate Back Pan
H/CTR: 2.75”
Depth: 4.25”
Aluminum Back Pan
H/CTR: 3”
10.63” x 6”
Depth: 4.5”



S79W
H/CTR: 2.75”
Polycarbonate Back Pan (ADA version)
H/CTR: 2.75”
Depth: 4”
Aluminum Back Pan
H/CTR: 3”
10.63” x 6”
Depth: 4.5”

Nautical

- Wall Mount
- Standard Bulkhead Design
- Sensors On Select Models
- LED Options Available

GUIDE CODE: S76WF-LR12W-WH-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
S76W **S771W** **S77W** **S79W**	POLYCARBONATE **F**-Frosted Ribbon	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White	**PC**-Photocell (120V Lightwave LED only) **S**-Security Option Includes Motion Sensor & Photocell Combo
		POLYCARBONATE BACK PAN (1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		ALUMINUM BACK PAN **LR12**-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI			
		120-277V MULTI-VOLT LED			
		ALUMINUM BACK PAN **L11**-11W; 912lm	4K		

✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. ADA NOTE: Only S79WF with Polycarbonate Back Pan is ADA compliant. Security Sensor option information on page 103.

S79WF



220FM
EXTENDS: 4"
H/CTR: 5.5"
BACKPLATE:
7.25" x 9.5"

230FM
EXTENDS: 4"
H/CTR: 5.5"
BACKPLATE:
6.5" x 10.75"



Sedona


GUIDE CODE: 230FMF-BK-PC

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
220FM **230FM**	ACRYLIC **F**-Frost	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White **BZ**-Bronze	**PC**-Photocell **S**-Security Option Includes Motion Sensor & Photocell Combo
		(1) 40W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		LR9-9W; 700lm			

Security Sensor option information on page 103.

Address Light

- 120V Integrated LED
- Customizable
- Includes Peel-N-Stick House Numbers (3 of each number)
- Increase Address Visibility

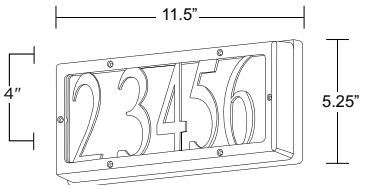

100FM
EXTENDS: 2"
H/CTR: 2"




GUIDE CODE: 100FM-L5C-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR
100FM	ACRYLIC White	120V INTEGRATED LED	**C**-4K	**BK**-Black
		L5-300lm		

Spec sheets and IES files available online. Specifications subject to change without notice.



230S
Long and short tail included
EXTENDS: 9”
H/CTR: 12.25”
BACKPLATE:
4.75” x4.75”





230T
I.D. = 3”



260S
EXTENDS: 9”
H/CTR: 15.63”
BACKPLATE:
4.75” x 7.75”



260T
I.D. = 3”

Ashland


GUIDE CODE: 230SC-BK-PC

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
230S **230T**	ACRYLIC **C**-Clear Beveled	E26 MEDIUM BASE (1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI	**C**-4K **W**-3K	**BK**-Black **WH**-White	**PC**-Photocell **S**-Security Option Includes Motion Sensor & Photocell Combo (wall mount only)

GUIDE CODE: 260TC-WH

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
260S **260T**	ACRYLIC **C**-Clear Beveled **L**-Opal Beveled	E26 MEDIUM BASE (1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI	**C**-4K **W**-3K	**BK**-Black **WH**-White	**PC**-Photocell **S**-Security Option Includes Motion Sensor & Photocell Combo (wall mount only)

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.



COMPANION
349 Pier Mount Adaptor Available
(see page 95)





Acorn Lighting

- Cast Aluminum or Polycarbonate Fitters
- Polycarbonate, Polyethylene or Acrylic Acorns
- Complete acorn fixture with fitter for 3” post


Clear Frost Opal

GUIDE CODE: 2017CL-LR12C-BP

ITEM #	LENS	LIGHT SOURCE	CCT	FITTER MATERIAL	OPTIONS
2017-Acorn **2018**-Flame Tip	POLYCARBONATE **CL**-Clear Textured	E26 MEDIUM BASE (1) 75W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦	**C**-4K **W**-3K	CAST ALUMINUM Black **WH**-White **BZ**-Bronze POLYCARBONATE **BP**-Black **WP**-White	**MG**-E39 Mogul Socket
8017-Acorn **8018**-Flame Tip	ACRYLIC **CL**-Clear Textured **FA**-Frost Textured	120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LR22**-23W; 1,900lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 2,020lm 90CRI			
9017-Acorn **9018**-Flame Tip	POLYETHYLENE Opal Textured	E39 RETRO-FIT LED 120-277V **LC5**-24W; 3,120lm, Type 5 ✦ **LC3**-20W; 3,000lm, Type 3 ✦ **LCD**-24W; 2,400lm, Dark Sky ✦	**C**-4K		

✦ Lamp included. All posts and post options sold separately. Acorns have 5 1/4” neckless opening. See page 101 for replacements.

COMPANION
CP-689 Photocell Adaptor
(see page 95)

COMPARABLE
Commercial Acorns Available
(see page 22)





Globe Lighting

- Cast Aluminum or Polycarbonate Fitters
- Polycarbonate or Acrylic
- Complete globe fixture with fitter for 3" post
- Commercial Globes see page 25 & 26



GUIDE CODE: 2001CL-LR12C-BP

ITEM #	LENS	LIGHT SOURCE	CCT	FITTER MATERIAL	OPTIONS
2001*-12" DIA **2002***-14" DIA **2003***-16" DIA **2004**-18" DIA	POLYCARBONATE Opal **CL**-Clear **PR**-Clear Prismatic	E26 MEDIUM BASE (1) 75W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦	**C**-4K **W**-3K	CAST ALUMINUM Black **WH**-White **BZ**-Bronze POLYCARBONATE **BP**-Black **WP**-White	**MG**-E39 Mogul Socket
8000-10" DIA **8001**-12" DIA **8002***-14" DIA **8003**-16" DIA **8004**-18" DIA	ACRYLIC Opal **CL**-Clear **FA**-Frost **PR**-Clear Prismatic	120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI E39 RETRO-FIT LED 120-277V **LC5**-24W; 3,120lm, Type 5 ✦ **LC3**-20W; 3,000lm, Type 3 ✦ **LCD**-24W; 2,400lm, Dark Sky ✦	**C**-4K		

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. Globes have 5 1/4" neckless opening. See page 101 for replacements. *Not available in clear prismatic.

CUSTOM GLOBES

Custom globes available up to 36". **Call factory for details.**



COMPANION


CP-689 Photocell Adaptor *(see page 95)*



COMPARABLE

Commercial Globes Available *(see page 25-26)*



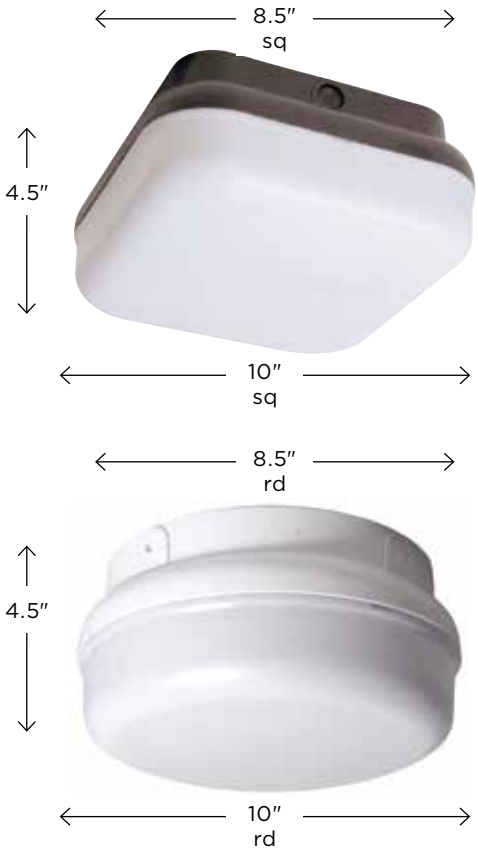

164FM
H/CTR: 5”
BACKPLATE: 8.5” sq

165FM
H/CTR: 4.5”
BACKPLATE: 8.5” rd

Guardian

- Wall Or Ceiling Mount
- Vandal & Insect Resistant
- Knockouts For Conduit
- Polycarbonate Base & Diffuser
- 90 CRI Options Available
- Multi-Volt Options Available
- Photocell Options Available
- Security Sensor Available
- Emergency Backup Available

GUIDE CODE: 164FM-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
164FM **165FM**	POLYCARBONATE Opal	E26 MEDIUM BASE LED	**C**-4K **W**-3K	**BK**-Black **WH**-White	**EB**-Emergency Backup (EB for 120V Lightwave & 120-277 Multi-Volt LED only) (options cannot be combined) **S**-Security Option Includes Motion Sensor & Photocell Combo
		(2) 40W MAX Medium Base **2LE26**- (2) 9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		LR12-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LR22-**23W; 1,900lm 80CRI **LT12**-12W; 1,000lm 90CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 1,900lm 90CRI			
		120-277V MULTI-VOLT LED			
		L22-22W; 1,824lm			

✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.

BATTERY BACK UP SPECS


- 135 Min of Emergency Backup LED
- Test Switch/LED Change Indicator
- 4W LED Backup Array
- 500 lm
- NICD, 3.6 VDC Battery
- 24hr Recharge Time
- Ambient Temp: 0°C to 40°C
- 5yr Warranty



264FM
H/CTR: 3.88”
BACKPLATE: 4.5”



263FM
H/CTR: 10.5”
BACKPLATE: 6”

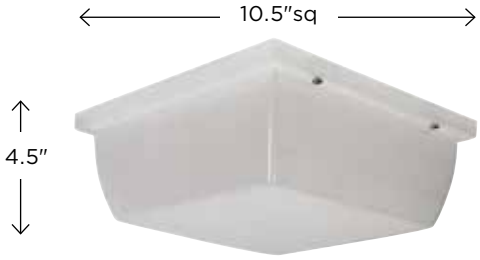

265FM
H/CTR: 5.25”
BACKPLATE: 10.25”



Guardian

- Wall Or Ceiling Mount
- LED Options
- Stainless Steel Screws
- Gasket Included
- Indoor or Outdoor
- Security Sensor Options

GUIDE CODE: 263FMF-LR12W-WH

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
263FM **264FM**	ACRYLIC **F**-Frosted Prismatic	E26 MEDIUM BASE	**C**-4K **W**-3K	**WH**-White	**S**-Security Option Includes Motion Sensor & Photocell Combo (264FM only)
		(1) 40W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		LR12-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI			

GUIDE CODE: 265FMF-LR12C-WH-S

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
265FM	ACRYLIC **F**-Frosted Prismatic	E26 MEDIUM BASE	**C**-4K **W**-3K	**WH**-White	**EB**-Emergency Backup (EB for 120V Lightwave & 120-277 Multi-Volt LED only) **S**-Security Option Includes Motion Sensor & Photocell Combo
		(2) 40W MAX Medium Base **2LE26**-(2) 9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		LR15-15W; 1,400lm 80CRI **LR22**-23W; 1,900lm 80CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 2,020lm 90CRI			

✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.



208T
(Clear Glacier Shown)
I.D. = 3”



208S
(Opal Beveled Shown)
EXTENDS: 8.5”
H/CTR: 10.63”
BACKPLATE: 4.63” x 4.63”



Hawthorne

GUIDE CODE: 208TC-WH

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
208S **208T**	ACRYLIC **C**-Clear Glacier **B**-Clear Beveled **L**-Opal Beveled	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White	**PC**-Photocell (wall mount only) **S**-Security Option Includes Motion Sensor & Photocell Combo (wall mount only)
		(1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		LR12-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI			

GUIDE CODE: 206VC-WH-PC

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
206V	ACRYLIC **C**-Clear Glacier	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White	**PC**-Photocell
		(1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		LR12-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI			

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.



206VC
EXTENDS: 5.75”
H/CTR: 2.375”
BACKPLATE: 4.875” RD.



204S
EXTENDS: 8.5”
H/CTR: 10.88”
BACKPLATE:
4.75” x 4.75”



204T
I.D. = 3”



204V
EXTENDS: 8.5”
H/CTR: 10.88”
BACKPLATE:
4.75” x 4.75”

Park Point

GUIDE CODE: 204SC-WH-PC

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
204S **204T** **204V**	ACRYLIC **C**-Clear Beveled **L**-Opal Beveled	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White	**PC**-Photocell (wall mount only) **S**-Security Option Includes Motion Sensor & Photocell Combo (wall mount only)
		(1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		LR12-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI			

✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.

GUIDE CODE: 241VC-BK-PC


ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
241V	ACRYLIC **C**-Clear **F**-Frost	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White **BZ**-Bronze	**PC**-Photocell **S**-Security Option Includes Motion Sensor & Photocell Combo
		(1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		LR12-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI			

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.



241V
EXTENDS: 6.75”
H/CTR: 6.5”
BACKPLATE:
5.5” x 4.88”





220S
(Long & Short Tail Included)
EXTENDS: 9”
H/CTR: 11.88”
BACKPLATE: 4.75” x 4.75”



220T
I.D. = 3”



270S
(frosted beveled shown)
EXTENDS: 10.25”
H/CTR: 15”
BACKPLATE: 4.88” x 5.75”



270T
I.D. = 3”
(clear beveled with chimney shown)

Providence

GUIDE CODE: 220SC-LR12W-WH-PC

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
220S **220T**	ACRYLIC **C**-Clear Beveled **F**-Frosted Beveled **L**-Opal Beveled	E26 MEDIUM BASE (1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI	**C**-4K **W**-3K	**BK**-Black **WH**-White	**PC**-Photocell (wall mount only) **S**-Security Option Includes Motion Sensor & Photocell Combo (wall mount only)


GUIDE CODE: 270TC-LR12W-BK

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
270S **270T**	ACRYLIC **C**-Clear Beveled w/Chimney **F**-Frosted Beveled	E26 MEDIUM BASE (1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI	**C**-4K **W**-3K	**BK**-Black	**S**-Security Option Includes Motion Sensor & Photocell Combo (wall mount only)

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.



240S
EXTENDS: 8.5”
H/CTR: 13.25”
BACKPLATE:
5.25” RD.

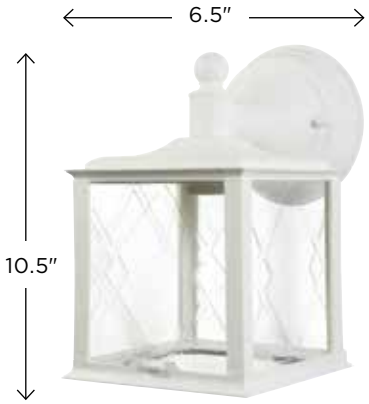

240V
EXTENDS: 8.5”
H/CTR: 2.75”
BACKPLATE:
5.5” RD.



240T
I.D. = 3”

New Town

GUIDE CODE: 240SH-LR12W-WH-PC

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
240S **240V** **240T**	ACRYLIC **H**-Clear Hatch **R**-Frosted Hatch	E26 MEDIUM BASE (1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI	**C**-4K **W**-3K	**WH**-White	**PC**-Photocell (wall mount only) **S**-Security Option Includes Motion Sensor & Photocell Combo (wall mount only)

Security Sensor option information on page 103.





156FM
EXTENDS: 8.5”
H/CTR: 13.25”
BACKPLATE: 5.25” SQ.



157FM
EXTENDS: 8.5”
H/CTR: 2.75”
BACKPLATE: 5.5” SQ.

Townhouse

GUIDE CODE: 156FM-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
156FM	POLYPROPYLENE Frosted	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White	**S**-Security Option Includes Motion Sensor & Photocell Combo (120V LED & Multi-Volt LED Only)
		POLYCARBONATE BACK PAN (2) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		ALUMINUM BACK PAN **LR12**-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI			
		120-277V MULTI-VOLT LED			
		L11-11W; 9121lm	4K		

✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.

GUIDE CODE: 157FM-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR	OPTIONS
157FM	POLYPROPYLENE Frosted	E26 MEDIUM BASE	**C**-4K **W**-3K	**BK**-Black **WH**-White	**S**-Security Option Includes Motion Sensor & Photocell Combo (120V LED & Multi-Volt LED Only)
		POLYCARBONATE BACK PAN (2) 60W MAX Medium Base **2LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		ALUMINUM BACK PAN **LR12**-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LR22**-23W; 1,900lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 2,020lm 90CRI			
		120-277V MULTI-VOLT LED			
		L22-22W; 1824lm	4K		

✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.



Colonial & Victorian Post Tops

CHIMNEY INCLUDED

GUIDE CODE: 114-LR12W

ITEM #	LENS	LIGHT SOURCE	CCT
111-White **112**-Black **113**-White **114**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	E26 MEDIUM BASE (1) 75W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LR22**-23W; 1,900lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 2,020lm 90CRI	**C**-4K **W**-3K

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 5.





412



612



123

Saxony & Victorian Post Tops

CHIMNEY INCLUDED

GUIDE CODE: 412-LR12W

ITEM #	LENS	LIGHT SOURCE	CCT
412-Black **612**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	E26 MEDIUM BASE (1) 75W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LR22**-23W; 1,900lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 2,020lm 90CRI	**C**-4K **W**-3K

GUIDE CODE: 123-LR12W

ITEM #	LENS	LIGHT SOURCE	CCT
123-White	ACRYLIC Clear	E26 MEDIUM BASE (1) 75W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LR22**-23W; 1,900lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 2,020lm 90CRI	**C**-4K **W**-3K

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.



109



110



115




116

Colonial Post Tops

GUIDE CODE: 110-LR15W

ITEM #	LENS	LIGHT SOURCE	CCT
109-White **110**-Black **115**-White **116**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	E26 MEDIUM BASE	**C**-4K **W**-3K
		(1) 75W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦	
		120V LIGHTWAVE LED	
		LR12-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LR22**-23W; 1,900lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 2,020lm 90CRI	
		E39 RETRO-FIT LED 120-277V	
		LC5-24W; 3,120lm, Type 5 ✦ **LC3**-20W; 3,000lm, Type 3 ✦ **LCD**-24W; 2,400lm, Dark Sky ✦	**C**-4K

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.



COMPANION
349 Pier Mount Adaptor Available
(see page 95)





Vanguard & Saxony Post Tops

GUIDE CODE: 610-LR15W

ITEM #	LENS	LIGHT SOURCE	CCT
410-Black **610**-Black	ACRYLIC Clear Beveled **A**-Amber Beveled Diamond **C**-Clear Beveled Diamond **F**-Frosted Beveled	E26 MEDIUM BASE	**C**-4K **W**-3K
		(1) 75W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦	
		120V LIGHTWAVE LED	
		LR12-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LR22**-23W; 1,900lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 2,020lm 90CRI	
		E39 RETRO-FIT LED 120-277V	
		LC5-24W; 3,120lm, Type 5 ✦ **LC3**-20W; 3,000lm, Type 3 ✦ **LCD**-24W; 2,400lm, Dark Sky ✦	**C**-4K


✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.



209
EXTENDS: 5.75”
H/CTR: 2.38”
BACKPLATE:
4.75” x 4.5”



210
EXTENDS: 5.75”
H/CTR: 2.38”
BACKPLATE:
4.75” x 4.5”

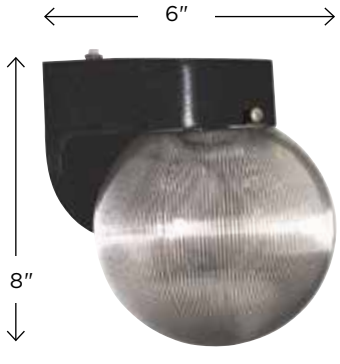

211
EXTENDS: 9.38”
H/CTR: 2.38”
BACKPLATE:
4.75” x 4.5”



212
EXTENDS: 9.38”
H/CTR: 11.88”
BACKPLATE:
5.5” x 5”



215
EXTENDS: 5.88”
H/CTR: 2.38”
BACKPLATE:
4.75” x 4.5”



216
EXTENDS: 5.75”
H/CTR: 2.38”
BACKPLATE:
4.75” x 4.5”



217
EXTENDS: 5.75”
H/CTR: 2.38”
BACKPLATE:
4.75” x 4.5”



785
EXTENDS: 7”
H/CTR: 4.25”
BACKPLATE:
5.25” x 4.5”

Pocket

GUIDE CODE: 209-WH-LR12C-PC

ITEM #	GLOBE/JAR	COLOR	LIGHT SOURCE	CCT	OPTIONS
209 **211** **216**	ACRYLIC Clear Prism	**BK**-Black **WH**-White	E26 MEDIUM BASE	**C**-4K **W**-3K	**PC**-Photocell (120V only) **S**-Security Option Includes Motion Sensor & Photocell Combo
			(1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦		
210 **212** **217** **785**	ACRYLIC Opal		120V LIGHTWAVE LED		
			LR12-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI		
215	GLASS Clear Ribbed		120-277V MULTI-VOLT LED		
			L11-11W; 912lm	4K	

✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Security Sensor option information on page 103.



420
BACKPLATE: 4.38”



421
BACKPLATE: 4.38”



422
BACKPLATE: 4.38

Pocket Ceiling

GUIDE CODE: 420L-BK

ITEM #	LENS	COLOR	LIGHT SOURCE	CCT
420 **421** **422**	ACRYLIC **C**-Clear Prismatic **L**-Opal	**BK**-Black **WH**-White	E26 MEDIUM BASE LED (1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦	**C**-4K **W**-3K

✦ Lamp included.

GUIDE CODE: 167FM-BK

ITEM #	DIFFUSER	LIGHT SOURCE	CCT	COLOR
167FM	ACRYLIC Frosted	E26 MEDIUM BASE (1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦ 120V LIGHTWAVE LED **LR12**-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LR22**-23W; 1,900lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 2,020lm 90CRI	**C**-4K **W**-3K	**BK**-Black **WH**-White

✦ Lamp included. All posts and post options sold separately. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.



167FM

INDOOR DECORATIVE

Multi-family & Hospitality

Wave Lighting's Indoor lighting adds a contemporary look to any indoor space without breaking the bank.

Wave Lighting's goal is to create a variety of indoor fixtures that reduce carbon footprint, save money, and increase comfort in your home.

Oceana	74
Noelani	75
LED Vanity Strips	76-77
Motion Closet	77
Globe Pendants	78






168FM
Standard

OPTIONAL PENDANT KIT
6”/13” PENDANT





168FM

SCAN FOR VIDEO

Oceana


- Direct/Indirect Light
- Triac Dimmable
- Occupancy Sensor Option
- Aluminum Housing

GUIDE CODE: 168FM-LR12C-BN-OS

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
168FM	ACRYLIC White	E26 MEDIUM BASE LED	**C**-4K **W**-3K	**BN**-Brush Nickel	**PK**-Pendant Kit **OS**-Occupancy Sensor (options not available with LR32 or LT32) **EB**-Emergency Backup (EB for 120V Lightwave & 120-277 Multi-Volt LED only) (options cannot be combined)
		2LE26-9.5W; 800lm (E26 LED Lamp) ✦ (2) 40W MAX Medium Base			
		120V LIGHTWAVE LED			
		LR15-15W; 1,400lm 80CRI **LR22**-23W; 1,900lm 80CRI **LR32**-32W; 2,700lm 80CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 2,020lm 90CRI **LT32**-32W; 2,700lm 90CRI			
		120-277V MULTI-VOLT LED			
		L22-22W; 1,704lm 80CRI	3K		



178FM
Low Profile




178FM

GUIDE CODE: 178FM-LR24W-BN

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
178FM	ACRYLIC White	120V LIGHTWAVE LED	**W**-3K	**BN**-Brush Nickel	**PK**-Pendant Kit
		LR24-24W; 1,850lm 80CRI			

✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105. Mounting kits ship in separate packaging. Assembly required.

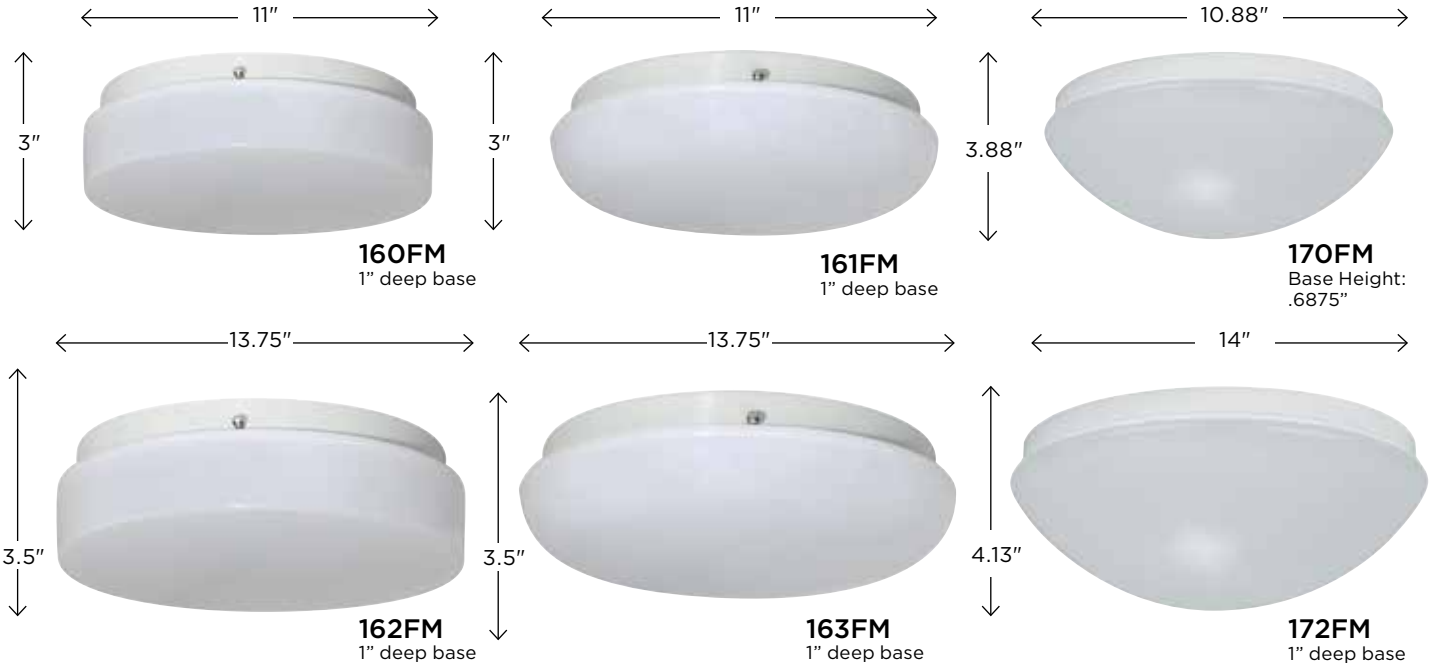

Noelani

- Triac Dimmable (120V Lightwave LED Only)
- 90 CRI Options Available
- Occupancy Sensor Available
- Emergency Backup Available


GUIDE CODE: 160FM-LR15W-WH-OS

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
160FM 11” **161FM** 11” **170FM** 11”	ACRYLIC White	E26 MEDIUM BASE	**C**-4K **W**-3K	**WH**-White	**OS**-Occupancy Sensor (160FM & 161FM only)
		(1) 40W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		LR12-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI			
		120-277V MULTI-VOLT LED			
		L17-17W; 1,278lm (160FM & 161FM only)	3K		

GUIDE CODE: 162FM-LR15W-WH-OS

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR	OPTIONS
162FM 14” **163FM** 14” **172FM** 14”	ACRYLIC White	E26 MEDIUM BASE	**C**-4K **W**-3K	**WH**-White	**OS**-Occupancy Sensor **EB**-Emergency Backup (options cannot be combined options not available with LR32 or LT32)
		(2) 40W MAX Medium Base **2LE26**-9.5W; 800lm (E26 LED Lamp) ✦			
		120V LIGHTWAVE LED			
		LR15-15W; 1,000lm 80CRI **LR22**-23W; 1,400lm 80CRI **LR32**-32W; 2,700lm 80CRI (162FM & 163FM only) **LT15**-16W; 1,040lm 90CRI **LT22**-24W; 2,020lm 90CRI **LT32**-32W; 2,700lm 90CRI (162FM & 163FM only)			
		120-277V MULTI-VOLT LED			
		L22-22W; 1,704lm ★ (162FM & 163FM only)	3K		

✦ Lamp included. Spec sheets and IES files available online. Specifications subject to change without notice. LED option information on page 105.

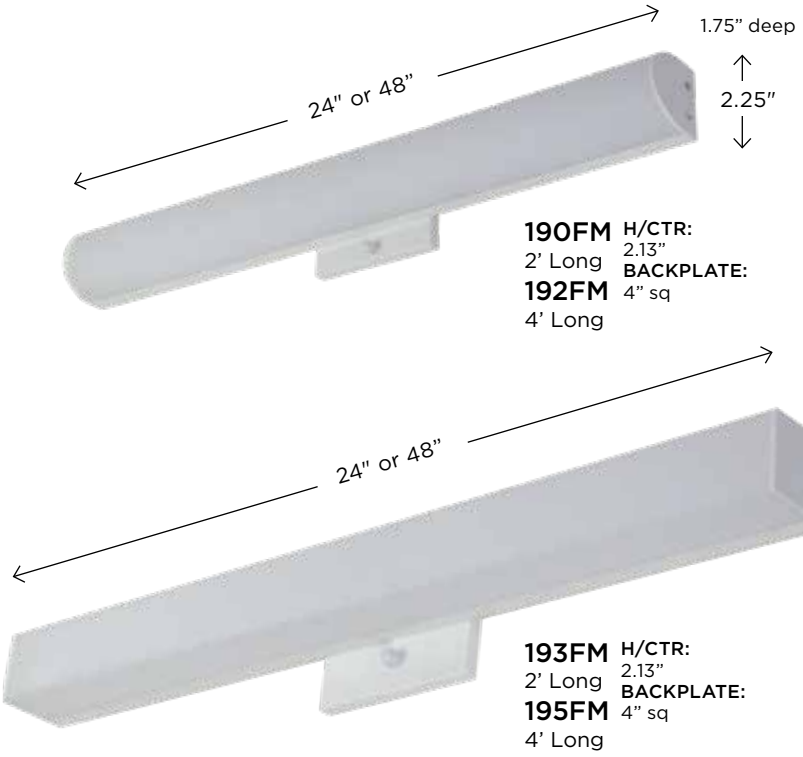



LED Vanity Strips

- Integrated LED
- 2′ or 4′ Lengths
- Triac Dimmable
- Wall Mount
- 3 Year Warranty
- ADA Compliant

GUIDE CODE: 190FM-L25-WH


ITEM #	LENS	LIGHT SOURCE	CCT	COLOR
190FM 2' **193FM** 2'	ACRYLIC White	120V INTEGRATED LED **L25**-25W; 1,700lm 80CRI	3K	**WH**-White
192FM 4' **195FM** 4'	ACRYLIC White	**L45**-45W; 3,000lm 80CRI		

Spec sheets and IES files available online. Specifications subject to change without notice.






180FM
2' Long
181FM
3' Long
182FM
4' Long

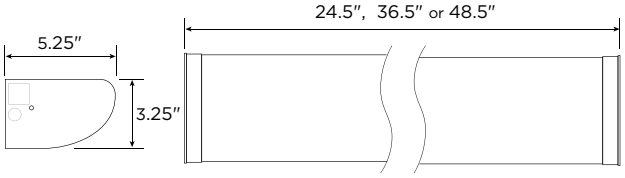



183FM
2' Long
184FM
3' Long
185FM
4' Long

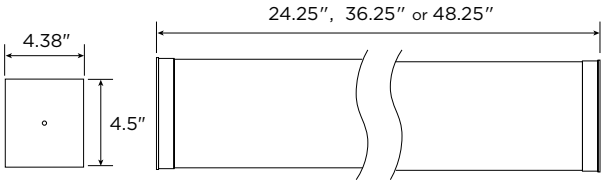

LED Vanity Strips

- 120-277V, 3000K
- T8 LED Replaceable Tube Lamps
- 2', 3', or 4' Lengths
- Non-Dimmable
- Wall or Ceiling Mount
- 3 Year Warranty

GUIDE CODE: 180FM-217T8WD-LED

ITEM #	LENS	LIGHT SOURCE	CCT
180FM 2' **183FM** 2'	ACRYLIC White	120-277V LED LAMPS	**WD-LED**-3K
		217T8-(2) 9W Lamps, 1800lm, Tube, 1800lm ✦ 80CRI	
181FM 3' **184FM** 3'		**225T8**-LED (2) 13W Lamps, Tube, 2600lm ✦ 80CRI	
182FM 4' **185FM** 4'		**232T8**-(2) 18W Lamps, Tube, 3600lm ✦ 80CRI	

✦ Lamp included.

Vanora

- 90 CRI/Low Flicker
- Occupancy Sensor Included (3 Minute Timer)
- 5 Year Warranty
- Non-Dimmable

GUIDE CODE: 155FM-LT12W-WH

ITEM #	LENS	LIGHT SOURCE	CCT	COLOR
155FM	POLYCARBONATE White	120V LIGHTWAVE LED	**W**-3K	**WH**-White
		LT12-12W; 1,040lm 90CRI		

Spec sheets and IES files available online. Specifications subject to change without notice.




155FM
Base Height:
.6875"



312



314

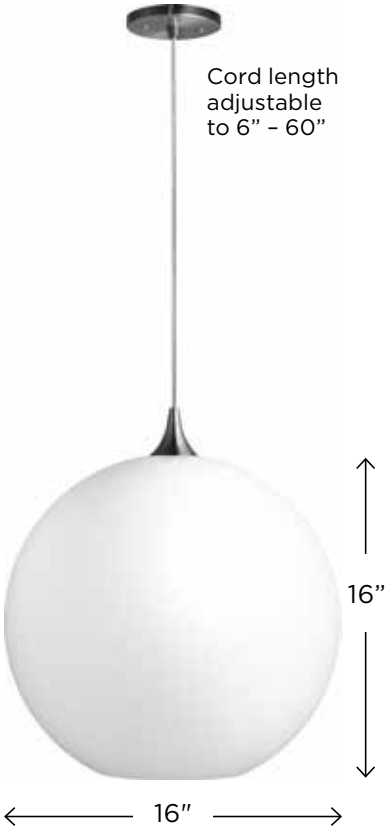

316

Pendant Globes

- Adjustable cord length up to 5’
- Canopy and cord available in black, white & brushed nickel
- Acrylic diffusers available in 12”, 14” & 16” sizes
- Open bottom design diffuser
- Mounting hardware included
- UL listed for damp locations

GUIDE CODE: 312L-BK


ITEM #	LENS	LIGHT SOURCE	CCT	COLOR
312-12″ DIA **314**-14” DIA **316**-16” DIA	ACRYLIC **L**-Opal	E26 MEDIUM BASE LED	**C**-4K **W**-3K	**BK**-Black **WH**-White **BN**-Brushed Nickel
		(1) 60W MAX Medium Base **LE26**-9.5W; 800lm (E26 LED Lamp) ✦		

✦ Lamp included.



POSTS & ACCESSORIES

3” Round Commercial Posts	81-82
4” Round Commercial Posts	83-84
4” Square Commercial Posts	85-86
3” Round Light Commercial Posts	87-89
3” Round Residential Posts	90-91
Light Commercial Bases & Covers	92
Residential Post Fitters	93
Decorative Base Covers	94
Residential Post Accessories	95

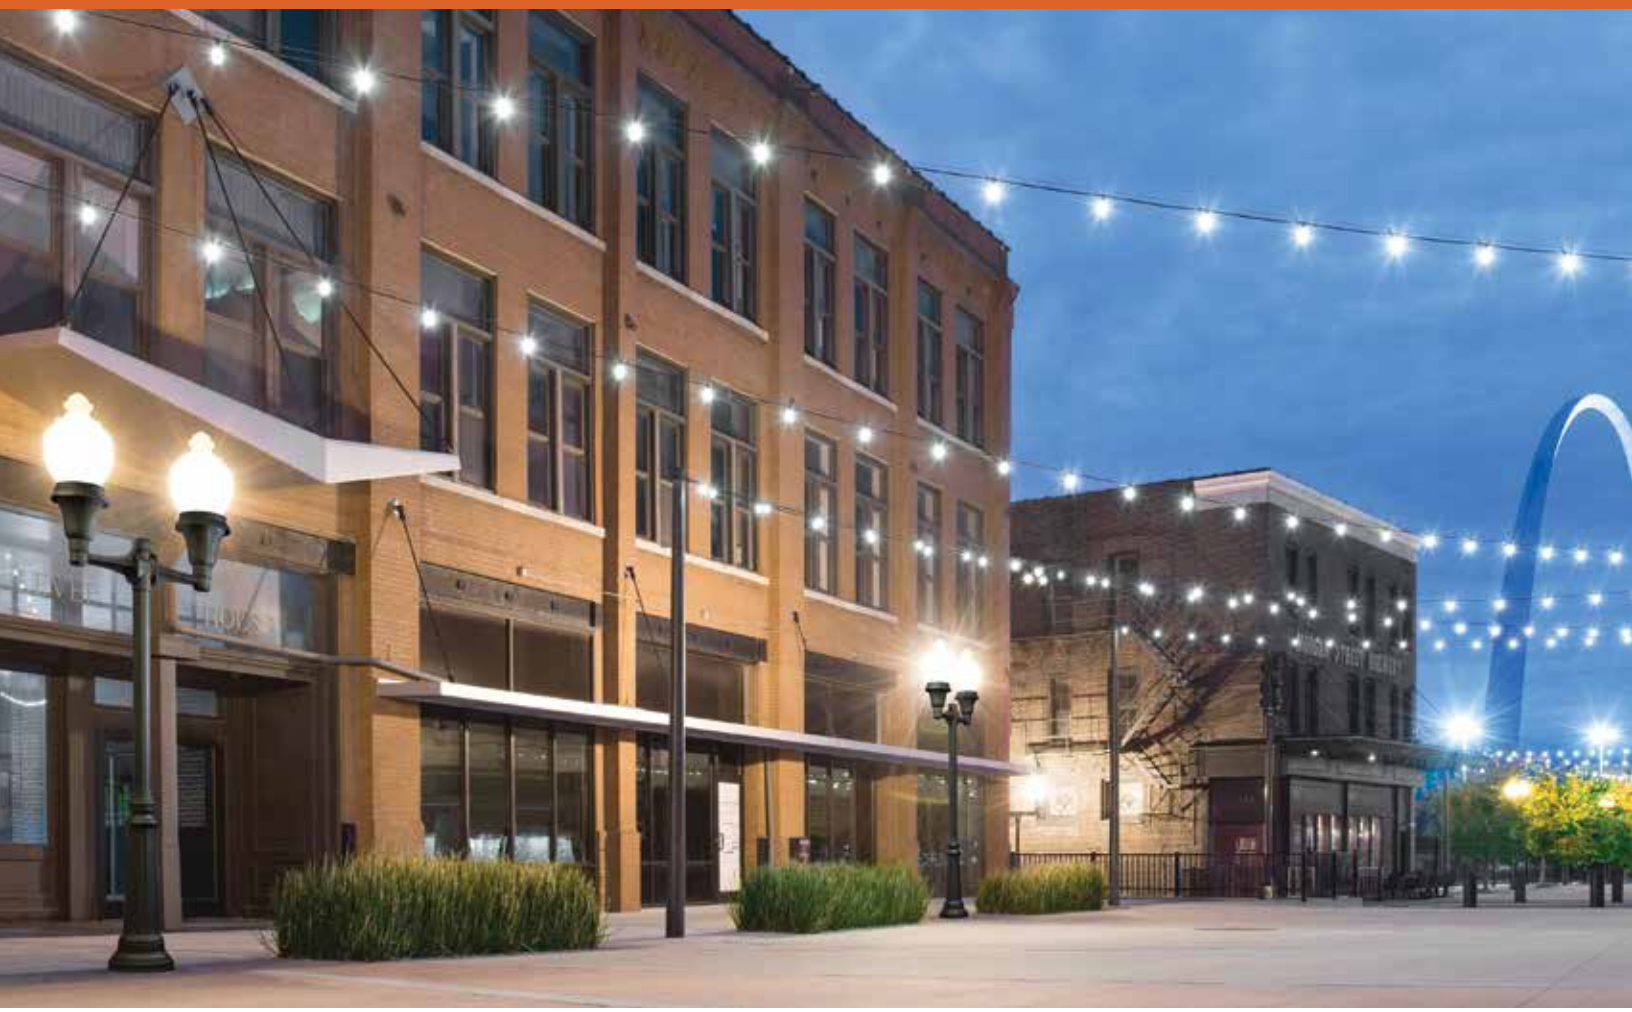

COMMERCIAL 3” ROUND SURFACE MOUNTED POSTS

BUY AMERICAN ACT COMPLIANT



NO DECORATIVE BASE SHOWN



AB-AMERICANA
2 PIECE COVER
(3BC1)



DB-DECOR
2 PIECE COVER
(3BC6)



HX-HEXAGON
2 PIECE COVER
(3BC2)




RB-ROUND
1 PIECE COVER
(3BC9)




VB-VICTORIAN
2 PIECE COVER
(3BC3)

Surface Mounted


- Powdercoated Aluminum
- Fits Most 3” Post Top Fixtures
- Welded Flange Base Included
- Optional Decorative Cover *(see measurements on page 94)*
- Anchor Bolts & Template Included



Round **F**-Fluted



Bolt Circle Pattern
For 3" Posts
Anchor Bolt 1/2" x 12"



GUIDE CODE: 3690AB-BK-HH
3” SMOOTH ROUND ALUMINUM .125” WALL THICKNESS

ITEM #	DECORATIVE COVER	COLOR	120V OPTIONS
3688-8’ **3690**-10’ **3692**-12’	**AB**-Americana **DB**-Decor **HX**-Hexagon **RB**-Round Cover **VB**-Victorian	**BK**-Black **BZ**-Bronze **WH**-White	**C**-Conv. Outlet (338) **320**-Ezee Change Photo Control **HH***
3” FLUTED ROUND ALUMINUM .125” WALL THICKNESS			
3688F-8’ **3690F**-10’ **3692F**-12’	**AB**-Americana **DB**-Decor **HX**-Hexagon **RB**-Round Cover **VB**-Victorian	**BK**-Black **BZ**-Bronze **WH**-White	**688**-Button Photo Control **HH***


Call factory for custom lengths & colors. *To meet U.L. and N.E.C. standards, any post designed to be mounted over 8’ above ground includes a 2” x 4” (HH) Hand Hole and ground lug. 3690, 3692, 3690F, and 3692F include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Specifications subject to change without notice. **See safety note on page 82.**

COMMERCIAL 3" DIRECT BURIAL ROUND POSTS

BUY AMERICAN ACT COMPLIANT



Suggested Direct Burial Installation




TOTAL POST LENGTH	SUGG. BURIAL DEPTH
8′	18″
10′	24″
12′	24″
14′	30″

SAFETY NOTE: Selecting posts for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting these items is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post or electrical accessory without getting such assistance, you do so at your own risk.





Direct Burial


- Powdercoated Aluminum
- Fits Most 3" Post Top Fixtures
- Includes Inlet Hole
- Decorative Bases Available *(see page 94)*



Round **F**-Fluted







GUIDE CODE: 3590F-BZ-HH
3" SMOOTH ROUND ALUMINUM .125" WALL THICKNESS

ITEM #	COLOR	120V OPTIONS
3588-8′ **3590**-10′ **3592**-12′ **3594**-14′	**BK**-Black **BZ**-Bronze **WH**-White	**C**-Conv. Outlet (338) **320**-Ezee Change Photo Control **HH***
3" FLUTED ROUND ALUMINUM .125" WALL THICKNESS		
3588F-8′ **3590F**-10′ **3592F**-12′ **3594F**-14′	**BK**-Black **BZ**-Bronze **WH**-White	**688**-Button Photo Control **HH***

Call factory for custom lengths & colors. *To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 3592, 3594, 3592F, and 3594F include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Specifications subject to change without notice.

COMMERCIAL 4" ROUND SURFACE MOUNTED POSTS

BUY AMERICAN ACT COMPLIANT



NO DECORATIVE BASE SHOWN



AB-AMERICANA
2 PIECE COVER
(4BC1)



DB-DECOR
2 PIECE COVER
(4BC6)




RB-ROUND
1 PIECE COVER
(4BC9)



VB-VICTORIAN
2 PIECE COVER
(4BC3)


Surface Mounted


- Powdercoated Aluminum
- Fits Most 3" Post Top Fixtures
- Welded 3" Tenon Included
- Welded Flange Base Included
- Anchor Bolts & Template Included
- Optional Decorative Cover *(see measurements on page 94)*
- Call factory for custom lengths & colors.



Round

F-Fluted





Bolt Circle Pattern
For 4" Posts
Anchor Bolt 3/4" x 18"

GUIDE CODE: 4694VB-BK-HH
4" SMOOTH ROUND ALUMINUM .125" WALL THICKNESS

ITEM #	DECORATIVE BASE	COLOR	120V OPTIONS
4688-8' **4690**-10' **4692**-12' **4694**-14'	**AB**-Americana **DB**-Decor **RB**-Round Cover **VB**-Victorian	**BK**-Black **BZ**-Bronze **WH**-White	**C**-Conv. Outlet (338) **320**-Ezee Change Photo Control **HH***
4" FLUTED ROUND ALUMINUM .125" WALL THICKNESS			
4688F-8' **4690F**-10' **4692F**-12' **4694F**-14'	**AB**-Americana **DB**-Decor **RB**-Round Cover **VB**-Victorian	**BK**-Black **BZ**-Bronze **WH**-White	**688**-Button Photo Control **HH***


*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 4690, 4692, 4694, 4690F, 4692F, and 4694F include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Fits most 3" post top fixtures includes inlet hole. Specifications subject to change without notice.
See safety note on page 84.

COMMERCIAL 4” ROUND DIRECT BURIAL POSTS

BUY AMERICAN ACT COMPLIANT



Suggested Direct Burial Installation




TOTAL POST LENGTH	SUGG. BURIAL DEPTH
10′	24″
12′	24″
14′	30”

SAFETY NOTES: All surface mount posts are supplied with welded mounting base. Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.




Direct Burial

- Powdercoated Aluminum
- Fits Most 3” Post Top Fixtures
- Welded 3” Tenon Included
- Includes Inlet Hole
- Decorative Bases Available *(see page 94)*
- Call factory for custom lengths & colors.



Round **F**-Fluted

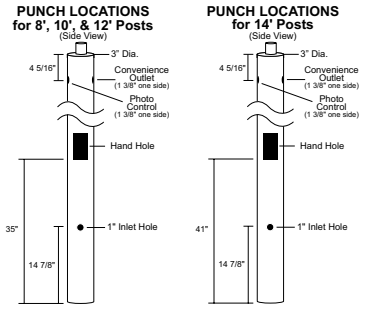

GUIDE CODE: 4592-WH-HH
4” ROUND ALUMINUM .125” WALL THICKNESS

ITEM #	COLOR	120V OPTIONS
4590-10’ **4592**-12’ **4594**-14’	**BK**-Black **BZ**-Bronze **WH**-White	**C**-Conv. Outlet (338) **320**-Ezee Change Photo Control **HH***
4” FLUTED ALUMINUM .125” WALL THICKNESS		
4590F-10’ **4592F**-12’ **4594F**-14’	**BK**-Black **BZ**-Bronze **WH**-White	**688**-Button Photo Control **HH***

(HH) Hand Hole comes standard with 4” square post. 4590, 4592, 4594, 4590F, 4592F, and 4594F include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Fits most 3” post top fixtures includes inlet hole. Specifications subject to change without notice.

COMMERCIAL 4" SQUARE SURFACE MOUNTED POSTS

BUY AMERICAN ACT COMPLIANT




POST ACCESSORIES



N2 2-3/8" Dia. Tenon



N3 3" Dia. Tenon



Flush Fit Bolt Covers Included



Hand Hole With Cover Included



Base Harware Plug Included




POST CAP
Included When Ordered Without Tenon



Surface Mounted

- Powdercoated Aluminum
- Welded Flange Base with Bolt Covers Included
- Anchor Bolts & Template Included
- Optional 3" or 2-3/8" Dia. Tenon
- Fits Most 3" Post Top Fixtures with 3" Dia. Tenon
- Bolt Pattern: 9 inches

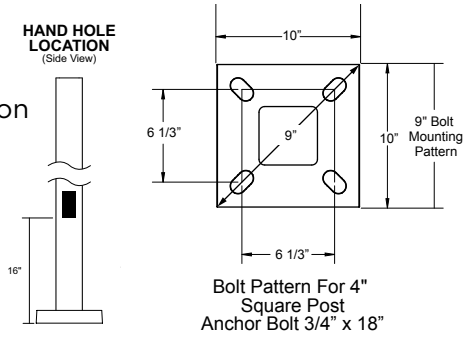

Bolt Pattern For 4" Square Post
Anchor Bolt 3/4" x 18"

GUIDE CODE: 5620-BZ-HH-N3
4" SQUARE ALUMINUM .188" WALL THICKNESS

ITEM #	COLOR	OPTIONS
5688-8' **5690**-10' **5692**-12' **5694**-14' **5696**-16' **5698**-18' **5620**-20'	**BK**-Black **BZ**-Bronze **WH**-White	**HH*** **N2**-2-3/8" OD Tenon (post cap not included w/tenon) **N3**-3" OD Tenon (post cap not included w/tenon)


(HH) Hand Hole comes standard with 4" square post. 5690, 5692, 5694, 5696, 5698, and 5620 include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Specifications subject to change without notice. **See safety note on page 86.** Use factory provided template for installation.

COMMERCIAL 4" SQUARE DIRECT BURIAL POSTS

BUY AMERICAN ACT COMPLIANT



Suggested Direct Burial Installation



TOTAL POST LENGTH	SUGG. BURIAL DEPTH
10′	24″
12′	24″
14′	30″
16′	38″
18′	48″
20′	55″

SAFETY NOTE: Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.

POST ACCESSORIES



N2 2-3/8″ Dia. Tenon



N3 3″ Dia. Tenon




POST CAP
Included When Ordered Without Tenon



Direct Burial

- Powdercoated Aluminum
- Optional 3" or 2-3/8" Dia. Tenon
- Fits Most 3" Post Top Fixtures with 3" Dia. Tenon
- Includes Inlet Hole

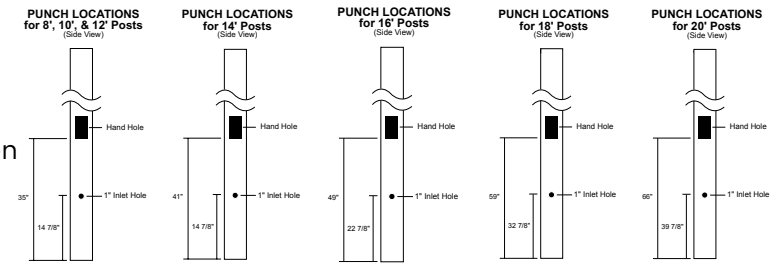

GUIDE CODE: 5592-BZ-HH
4" SQUARE ALUMINUM .188" WALL THICKNESS

ITEM #	COLOR	OPTIONS
5588-8′ **5590**-10′ **5592**-12′ **5594**-14′ **5596**-16′ **5598**-18′ **5520**-20′	**BK**-Black **BZ**-Bronze **WH**-White	**HH*** **N2**-2-3/8" OD Tenon (post cap not included w/tenon) **N3**-3" OD Tenon (post cap not included w/tenon)

Call factory for custom lengths & colors. *To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 5592 and 5594 include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Specifications subject to change without notice.

LIGHT COMMERCIAL 3” ROUND SURFACE MOUNTED POSTS

BUY AMERICAN ACT COMPLIANT




(STV shown)



(HDV shown)

ST Baseplate



Anchor Bolt
M8 x 12”



Die Cast Aluminum
Flange base with anchor bolts
ST-STANDARD BASE
2403




STV-STANDARD BASE
2403
WITH ALUMINUM COVER
2410



Heavy Duty Aluminum
Flange base with anchor bolts
HD-HEAVY DUTY BASE
2405

HD Baseplate



Anchor Bolt 3/8” x 12”



HDV-HEAVY DUTY BASE
2405
WITH ALUMINUM COVER
2411


PLEASE NOTE: YOU MUST SPECIFY BASE AND COVER TYPE WHEN ORDERING TO RECEIVE BASE AND COVER



Surface Mounted

- Powdercoated Aluminum
- Fits Most 3” Post Top Fixtures
- Light Duty & Heavy Duty Bases Available
- Optional Covers Available *(see measurements on page 92)*
- Anchor Bolts & Template Included

PUNCH LOCATIONS
(Side View)



GUIDE CODE: 2692-HDV-BK-HH
3” ROUND ALUMINUM .072” WALL THICKNESS

ITEM #	BASE & COVER TYPE	COLOR	120V OPTIONS
2600-8’ **2610**-10’ **2612**-12’	**ST**-Standard Base *(8’ & 10’ Posts Only)* **STV**-ST Base w/Cover *(8’ & 10’ Posts Only)* **HD**-Heavy Duty Base **HDV**-HD Base w/Cover	**BK**-Black **BZ**-Bronze **WH**-White	**C**-Conv. Outlet (338) **320**-Ezee Change Photo Control **HH***
3” ROUND ALUMINUM .125” WALL THICKNESS			
2690-10’ **2692**-12’	**HD**-Heavy Duty Base **HDV**-HD Base w/Cover	**BK**-Black **BZ**-Bronze **WH**-White	**C**-Conv. Outlet (338) **320**-Ezee Change Photo Control **HH***


Call factory for custom lengths & colors. *To meet U.L. and N.E.C. standards, any post designed to be mounted over 8’ above ground includes a 2” x 4” (HH) Hand Hole and ground lug. 2600, 2610, 2612, 2690, and 2692 include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Specifications subject to change without notice. **See safety note on page 88**.

LIGHT COMMERCIAL 3” ROUND DIRECT BURIAL POSTS

BUY AMERICAN ACT COMPLIANT



Suggested Direct Burial Installation




TOTAL POST LENGTH	SUGG. BURIAL DEPTH
8′	18″
10′	24″
12′	24″
14’	30”


SAFETY NOTE: Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.




Direct Burial

- Powdercoated Aluminum
- Fits Most 3” Post Top Fixtures
- Includes Inlet Hole
- See Page 92 & 94 for Base Options







GUIDE CODE: 2510-BK-320-HH
3” ROUND ALUMINUM .072” WALL THICKNESS

ITEM #	COLOR	120V OPTIONS
2500-8’ **2510**-10’ **2512**-12’ **2514**-14’	**BK**-Black **BZ**-Bronze **WH**-White	**C**-Conv. Outlet (338) **320**-Ezee Change Photo Control **HH***

Call factory for custom lengths & colors. *To meet U.L. and N.E.C. standards, any post designed to be mounted over 8’ above ground includes a 2” x 4” (HH) Hand Hole and ground lug. 2510, 2512, and 2514 include Hand Hole unless otherwise specified. EPA ratings available on spec sheets and website. Specifications subject to change without notice.

LIGHT COMMERCIAL 3” ROUND SURFACE MOUNTED POSTS



Anchor Bolt
3/8″ x 7″

C6P2-BK
Post Dimensions:
O.D. = 3″ **I.D.** = 2.8″,
Wall = .100″, **L** = 6′
Base Dimensions:
H = 21″, **Dia.** = 10 1/4″

Anchor Bolt
3/8″ x 12″

C8P2-BK
Post Dimensions:
O.D. = 3″ **I.D.** = 2.8″,
Wall = .100″, **L** = 8′
Base Dimensions:
H = 28 1/2″, **Dia.** = 11 5/8″
Hand Hole Included = 2″x4″

Anchor Bolt
3/8″ x 12″

C10P2-BK
Post Dimensions:
O.D. = 3″ **I.D.** = 2.8″,
Wall = .100″, **L** = 10′
Base Dimensions:
H = 37″, **Dia.** = 16 5/8″
Hand Hole Included = 2″x4″



Light Commercial Posts

- Powdercoated Aluminum
- Fits Most Standard 3” Post Top Fixtures
- 2 Piece Snap Together System
- Anchor Bolts & Template Included

GUIDE CODE: C10P2-BK-688

ITEM #	COLOR	120V OPTIONS
C6P2-6’ **C8P2-** 8’ **C10P2-**10’	**BK**-Black	**688**-Button Photo Control

NOTE: Includes anchor bolts and templates. Post and Base are two piece interlocking system that may ship separately. Post and Base come as kit and cannot be sold separately.


SAFETY NOTE: Selecting posts for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting these items is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post or electrical accessory without getting such assistance, you do so at your own risk.

3” ROUND DIRECT BURIAL RESIDENTIAL POSTS


BUY AMERICAN ACT COMPLIANT



Shown with 2420 Decorative Base



Suggested Direct Burial Installation



TOTAL POST LENGTH	SUGG. BURIAL DEPTH
7′	18″
8′	18″
10′	24″

SAFETY NOTE: Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.



BZ-BRONZE
Shown with 320 Photocell & 335 Crossarm



BK-BLACK
Shown NCA style



WH-WHITE
Shown with 338 Convenience Outlet & 335 Crossarm

POST ACCESSORY OPTIONS



320
Ezee Change Photocontrol



338
Convenience Outlet



335
Crossarm

Direct Burial

- Crossarm Included Unless Otherwise Specified
- Powdercoated Aluminum
- Fits Most 3” Post Top Fixtures
- Includes Inlet Hole
- See Page 92 for Decorative Bases

GUIDE CODE: 295-C320-WH
POST DIMENSIONS: O.D. = 2.950”, I.D. = 2.850”, WALL = .050”

ITEM #	120V OPTIONS	COLOR
295-7’ **293**-8’ **294**-10’	**C**-Conv. Outlet (338) **320**-Ezee Change Photo Control **NCA**-No Cross Arm	**BK**-Black **BZ**-Bronze **WH**-White

3” ROUND SURFACE MOUNTED RESIDENTIAL POSTS

BUY AMERICAN ACT COMPLIANT



(STP shown as NCA version)




(STV shown with crossarm)




(ST shown as NCA version)

ST Baseplate



Anchor Bolt
M8 x 12"

PUNCH LOCATIONS
(Side View)





Die Cast Aluminum
Flange base with anchor bolts
ST-STANDARD BASE
2403



STV-STANDARD BASE
2403
WITH ALUMINUM COVER
2410



STP-STANDARD BASE
2403
WITH POLYETHYLENE COVER
2420 (black only)

PLEASE NOTE: YOU MUST SPECIFY BASE AND COVER TYPE WHEN ORDERING TO RECEIVE BASE AND COVER



Surface Mounted

- Crossarm Included Unless Otherwise Specified
- Powdercoated Aluminum
- Fits Most 3” Post Top Fixtures
- Surface Mount Base Included
- Optional Covers Available *(see measurements on page 92)*
- Anchor Bolts & Template Included


GUIDE CODE: 285-STP-C320-BK
POST DIMENSIONS: O.D. = O.D. = 2.950”, I.D. = 2.850”, WALL = .050”

ITEM #	BASE & COVER TYPE	120V OPTIONS	COLOR
285-6’ **283**-8’	**ST**-Standard Base **STV**-ST Base w/Cover **STP**-Polyethylene Base w/Cover (black only)	**C**-Conv. Outlet (338) **320**-Ezee Change Photo Control **NCA**-No Cross Arm	**BK**-Black **BZ**-Bronze **WH**-White

NOTE: Posts with Crossarm, Photo Control, or Convenience Outlet come pre-punched for installation. Minor assembly required.
SAFETY NOTE: Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.

Light Commercial

SURFACE MOUNT BASES & COVERS




2403
Black
2403B
Bronze
2403W
White
I.D. = 3.0”

- Designed for 3” Diameter Posts
- Light Duty Aluminum Surface Mount Base
- Multiple Colors Available
- Anchor Bolts & Template Included
- For use up to 10’




2410
Black
2410B
Bronze
2410W
White
I.D. = 3.0”

- Spun Aluminum Base Cover
- Use with **2403**
- Multiple Colors Available




Anchor Bolt M8 x 12″




2405
Black
2405B
Bronze
2405W
White
I.D. = 3.0”

- Designed for 3” Diameter Posts
- Heavy Duty Aluminum Surface Mount Base
- Multiple Colors Available
- Anchor Bolts & Template Included
- For use up to 12’



2411
Black
2411B
Bronze
2411W
White
I.D. = 3.0”

- Spun Aluminum Base Cover
- Use with **2405**
- Multiple Colors Available



Anchor Bolt 3/8″ x 12″

SLIP-ON POLYMER DECORATIVE POST COVER



2420
I.D. = 3.0”

- Polyethylene Decorative Slip On Base Cover for Standard 3” Post
- Available in black only
- No Hardware Needed



CAP-PB5
I.D. = 3.0”

- Cap for 3” Post
- Powdercoated Finish
- Specify: **(BK)** Black **(WH)** White or **(BZ)** Bronze



HAND HOLE COVERS




HH

- 3” x 4.75” Hand Hole Cover for 3” round posts
- Includes tamper-proof mounting hardware
- Specify: **(BK)** Black **(WH)** White or **(BZ)** Bronze



HH4

- 4” x 4.75” Hand Hole Cover for 4” round posts
- Includes tamper-proof mounting hardware
- Specify: **(BK)** Black **(WH)** White or **(BZ)** Bronze



SHH

- 3” x 4.75” Hand Hole Cover for 4” square posts
- Includes tamper-proof mounting hardware
- Specify: **(BK)** Black **(WH)** White or **(BZ)** Bronze

Residential Post Fitters

Cast Aluminum & Polycarbonate Post Top Fitters




DIE CAST ALUMINUM

- E26 Medium Base 4KV Standard
- Optional Mogul Socket **(MG)**
- Porcelain Socket
- For Up to 18” Globes
- Multiple Colors Available
- Fits Most 3” Posts
- For use with globes and acorns with 5.25” neckless opening



1721
Black
1721B
Bronze
1720
White

For 10″-16″ Globes and 11″ x 17″ Acorns w/5.25″ Opening



1724
Black
1724B
Bronze
1724W
White

For 18″ Globes w/5.25″ Opening


GUIDE CODE: 1721-MG

ITEM #	LIGHT SOURCE	OPTIONS
1721-Black **1721B**-Bronze **1720**-White **1724**-Black **1724B**-Bronze **1724W**-White	E26 MEDIUM BASE	**MG**-E39 Mogul Socket
	(1) 200W MAX Medium Base	

Specifications subject to change without notice.

POLYCARBONATE

- E26 Medium Base
- Optional Mogul Socket **(MG)**
- Phenolic Socket (Medium Base Only)
- For 10”-16” Globes with 5.25” Opening
- Fits Most 3” Posts

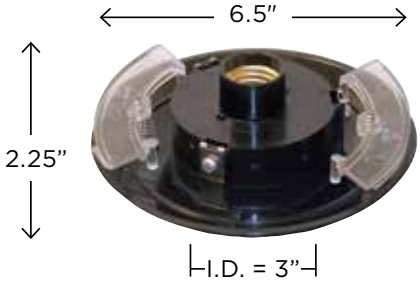

1721P
Black
1720P
White

GUIDE CODE: 1721P-MG

ITEM #	LIGHT SOURCE	OPTIONS
1721P-Black **1720P**-White	E26 MEDIUM BASE	**MG**-E39 Mogul Socket
	(1) 200W MAX Medium Base	

Specifications subject to change without notice.

Cast Aluminum Decorative Base Covers

- Decorative Base Covers come as a two piece system, and can be installed over existing posts
- 3BC9 and 4BC9 are one piece system.
- Specify: **(BK)** Black **(WH)** White or **(BZ)** Bronze

Black, white & bronze color options



FOR MOST 3" DIAMETER POSTS



AB-Americana
3BC1
Dia.: 13.1"
Height: 24.1"



HX-Hexagon
3BC2
Dia.: 11.5"
Height: 13.6"



VB-Victorian
3BC3
Dia.: 11"
Height: 26.4"



DB-Decor
3BC6
Dia.: 11"
Height: 9.6"



RB-Round
3BC9
Dia.: 10"
Height: 3.5"
Top I.D.: 4.1"

FOR MOST 4" DIAMETER POSTS



AB-Americana
4BC1
Dia.: 15"
Height: 27.6"



VB-Victoria
4BC3
Dia.: 12.1"
Height: 29"



DB-Decor
4BC6
Dia.: 12"
Height: 9.6"



RB-Round
4BC9
Dia.: 11"
Height: 3.5"
Top I.D.: 5.4"

Residential Post Accessories


POST FIXTURE ADAPTORS



348
Black
348BZ
Bronze
348WH
White

Stub Post

- Custom Length 3" Stub Post for use with **347** Surface Mount Adaptor
- .050" Wall Thickness
- Length: **(XX)** must be in 6" intervals Example Part Number: **348-12**
- Max Length 104"

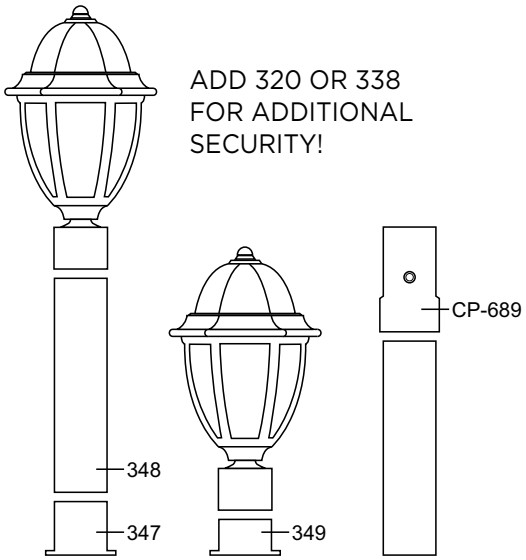


ADD 320 OR 338 FOR ADDITIONAL SECURITY!



347
Black
347B
Bronze
347W
White
I.D. = 2.42"
O.D. = 2.83"

- Pier Mount Adaptor for use with 348 Stub Post



349
Black
349B
Bronze
349W
White
I.D. = 2.38"
O.D. = 2.95"

- Pier Mount Adaptor for 3" Post Mount Fixtures

Black, white & bronze color options

POST ACCESSORIES



- 15" Aluminum Crossarm with Gold End Caps
- 3/4" Dia. mounting hole required

335
Black
335B
Bronze
335W
White



0500662
Black
0500663
White

- Crossarm Plugs for 3/4" Dia. hole




Top O.D. = 2.95"
Top I.D. = 2.83"

CP-689
Photocell Adaptor

Bottom O.D. = 3.18"
Bottom I.D. = 3.08"

- 688 120V Photo Control in hardware bag (assembly required) with Adaptor for 3" Posts
- Not for use with commercial fixtures
- Available in black only
- Up to 300W Incandescent, 60W LED, 39W Fluorescent, & 100W H.I.D.

PHOTOCONTROLS & OUTLETS FOR POST APPLICATIONS

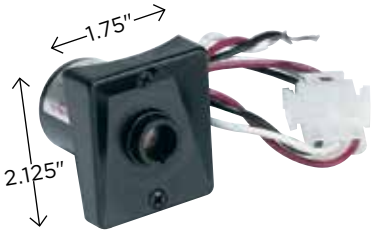


320
Black
320Z
Bronze
320W
White

- 120V for 3" Post with Ezee Change Plug
- 1 .375" Dia. mounting hole required
- Up to 300W Incandescent, 60W LED, 39W Fluorescent, & 100W H.I.D.



688

- 120V Button Photo Control
- .6875" Dia. mounting hole required
- Up to 300W Incandescent, 60W LED, 39W Fluorescent, & 100W H.I.D.
- Available in black only



338
Black
338B
Bronze
338W
White

- 120V Grounded Convenience Outlet
- 1.375" Dia. mounting hole required
- Polycarbonate housing

SEE SAFETY NOTE ON PAGE 82




LRC


- Easily Convert Existing Fixtures to LED with UL 1598C Classified Kits
- Estimated 50,000 hrs L70
- TRIAC Dimmable To 5% (forward & reverse phase)
- 5 Year Limited Warranty
- Energy Efficient
- Mounting Hardware Included



LRG6

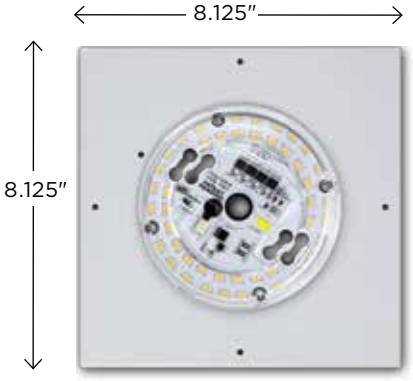

LRG8

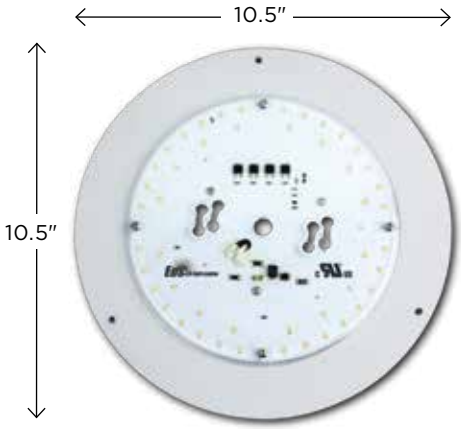

LRG10

GUIDE CODE: LRG6-LR12C

ITEM #	LIGHT SOURCE	CCT
LRG6 **LRG8** **LRG10**	120V LIGHTWAVE LED	**C**-4K **W**-3K
	LR12-13W; 1,000lm 80CRI **LR15**-15W; 1,400lm 80CRI **LR22**-23W; 1,900lm 80CRI **LT12**-12W; 1,040lm 90CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 2,020lm 90CRI **LR32**-32W; 2,700lm 80CRI (LRG10 only) **LT32**-32W; 2,700lm 90CRI (LRG10 only)	

SCAN FOR VIDEO



LRH3
(High Heat)



LRH6
(High Heat)

GUIDE CODE: LRH3-LR12C

ITEM #	LIGHT SOURCE	CCT
LRH3	120V LIGHTWAVE LED	**C**-4K **W**-3K
	LR12-13W; 1,000lm 80CRI **LT12**-12W; 1,040lm 90CRI	
LRH6	**LR15**-15W; 1,400lm 80CRI **LR22**-23W; 1,900lm 80CRI **LT15**-16W; 1,400lm 90CRI **LT22**-24W; 2,020lm 90CRI	

Spec sheets and IES files available online. Specifications subject to change without notice.

COMMERCIAL RETROFIT KITS

For Acorn & Globe Fixtures



LRC
Plate Size:
6.5” Diameter
0.08” Thickness



- For Enclosed Fixtures
- Input Voltage: 120-277VAC, 50/60hz
- Surge Protection
- Replaces Up To 250W Metal Halide
- Telescoping Bracket
- Universal Mounting Plate
- 0-10V Dimming
- Estimated 50,000 hrs L80
- 5 Year Limited Warranty
- Dark Sky Friendly
- UL 1598C Classified
- Switchable CCT (3K, 4K & 5K)

SCAN FOR VIDEO

GUIDE CODE: LRC-L40C

ITEM #	LIGHT SOURCE	SWITCHABLE CCT
LRC	RETROFIT LED 120-277V	**C**-4K **W**-3K **B**-5K
	L40-40W; 4,000lm **L60**-54W; 5,700lm	

Spec sheets and IES files available online. Specifications subject to change without notice.

E26 Medium Base Lamps For Enclosed Fixtures



LCE26-9W

- A19 LED Lamp
- 9.5 Watt, 3000K, 800lm, 90CRI
- 120v, 50/60Hz
- Replaces up to 60W
- E26 MEDIUM BASE
- Surge Protection
- Dimmable
- 15,000 Hrs L70
- 3 Year Limited Warranty
- Title 24 Compliant
- UL Listed



LCE26-9C

- A19 LED Lamp
- 9.5 Watt, 4000K, 800lm, 80CRI
- 120v, 50/60Hz
- Replaces up to 60W
- E26 MEDIUM BASE
- Surge Protection
- Dimmable
- 15,000 Hrs L70
- 3 Year Limited Warranty
- UL Listed



LCE26-12A-T5

- Amber LED Lamp
- 11 Watt, 1387K, 336lm, 596nm
- 120-277v, 50/60Hz
- 50,000 Hrs L70
- 5 Year Limited Warranty
- UL Listed
- FWC Certified
- Non-Dimmable

E39 Mogul Base Lamps For Commercial & Light Commercial Fixtures

- For Enclosed Fixtures
- Input Voltage: 120-277VAC, 50/60hz
- Replaces Up to 250W Metal Halide
- Non-Dimmable
- Type 3, Type 5, & Dark Sky Models Available
- 4000K, CRI 80
- Estimated 50,000 hrs L70
- 5 Year Limited Warranty




LCE39-24C-T5

- Type 5 LED Lamp
- 24Watt, 4000K, 3120lm
- Replaces up to 100W MH
- 360˚ Beam Angle



LCE39-20C-T3

- Type 3 LED Lamp
- 20Watt, 4000K, 3120lm
- Replaces up to 100W MH
- 180˚ Adjustable Beam Angle




LCE39-24C-DS

- Dark Sky LED Lamp
- 24Watt, 4000K, 2400lm
- Replaces up to 100W MH
- 180˚ Down Beam Angle




LCE39-54C-T5

- Type 5 LED Lamp
- 54Watt, 4000K, 7290lm
- Replaces up to 250W MH
- 360˚ Beam Angle



LCE39-40C-T3

- Type 3 LED Lamp
- 40Watt, 4000K, 5600lm
- Replaces up to 250W MH
- 180˚ Adjustable Beam Angle



LCE39-54C-DS

- Dark Sky LED Lamp
- 54Watt, 4000K, 5900lm
- Replaces up to 250W MH
- 180˚ Down Beam Angle

Spec sheets and IES files available online. Specifications subject to change without notice.

REPLACEMENTS

Residential Replacement Lenses & Diffusers	101
Residential Replacement Globes & Acorns	101
Commercial Replacement Lenses & Diffusers	102
Commercial Replacement Globes & Acorns	102



Residential Replacements


LENSES & DIFFUSERS

C200BC-LENS
Clear
Use with C200BC

C201BC-LENS
Clear
Use with C201BC

C202BC-LENS
Clear
Use with C202BC

C203BC-LENS
Clear
Use with C203BC




COMPANION SIZE EVERSTONE™ LANTERNS
ACRYLIC
1301724 - Clear
1301726 - Frosted (shown)




WALL PACK EVERSTONE™ LANTERNS
ACRYLIC
1301727 - Clear Prismatic (shown)
1301728 - Opal



VICTORIAN LANTERN
ACRYLIC
1300371 - Opal (shown)
1300372 - Black



COLONIAL, SAXONY & VANGUARD POST TOP
ACRYLIC
148 - Clear Bvl
149 - Frosted Bvl
153 - Amber Bvl Dia (shown)
154 - Clear Bvl Dia



FULL SIZE EVERSTONE™ LANTERNS
ACRYLIC
1301733 - Clear
1301734 - Frosted (shown)



LANTERN CHIMNEY
GLASS
1300316 - Frosted 2.875" bttm. width
PLASTIC
1300316P - Plastic 2.875" bttm. width



VICTORIAN LANTERN
ACRYLIC
1300373 - Clear Lens w/Trim Ring
(sold assembled)

GLOBES & ACORNS W/5 1/4" NECKLESS OPENING



CLEAR
POLYCARBONATE
1256-12"
1456-14"
1656-16"
1856-18"
ACRYLIC
1066-10"
1266-12"
1466-14"
1666-16"
1866-18"

FROST
ACRYLIC
1067-10"
1267-12"
1469-14"
1667-16"
1867-18"

OPAL
POLYCARBONATE
1255-12"
1455-14"
1655-16"
1855-18"
ACRYLIC
1065-10"
1265-12"
1465-14"
1665-16"
1865-18"



CLEAR PRISMATIC
ACRYLIC
1069-10"
1269-12"
1669-16"



CLEAR TEXTURED
POLYCARBONATE
1756-For 2017CL
ACRYLIC
1766-For 8017CL
OPAL TEXTURED
POLYETHYLENE
1776-For 9017



CLEAR TEXTURED
POLYCARBONATE
2067-For 2018CL
ACRYLIC
2057-For 8018CL
OPAL TEXTURED
POLYETHYLENE
2077-For 9018

GLOBES & ACORNS W/4" FITTER NECK

ACRYLIC
0800407-8" Clear
0800408-8" Opal


ACRYLIC
0800411-12" Clear
0800410-12" Opal




POLYCARBONATE
1467-Clear

Commercial Replacements


ACRYLIC LENSES




C31T LANTERNS
ACRYLIC
C31TL-LENS-Opal
C31TP-LENS- Prismatic




C32T LANTERNS
ACRYLIC
C32TL-LENS-Opal
C32TP-LENS-Prismatic




C33T LANTERNS
ACRYLIC
C33TL-LENS-Opal
C33TP-LENS-Prismatic



C36T LANTERNS
ACRYLIC
C36TC-LENS-Clear
C36TL-LENS-Opal



C37T LANTERNS
ACRYLIC
C37TC-LENS-Clear
C37TL-LENS-Opal



C59T LANTERNS
ACRYLIC
C59TF-LENS-Frosted

8” FITTER NECK OPENING GLOBES



CLEAR
POLYCARBONATE
1856-8N-18″
2056-8N-20″
ACRYLIC
1866-8N-18″
2066-8N-20″



OPAL
POLYCARBONATE
1855-8N-18″
2055-8N-20″
ACRYLIC
1865-8N-18″
2065-8N-20″



FROST
ACRYLIC
1867-8N-18”
2064-8N-20”

8” FITTER NECK OPENING ACORNS



Acorn with 8” Necked Opening for C75T and C76T Fixtures
POLYCARBONATE
3467-Clear Textured
ACRYLIC
3468-Clear Textured
3469-Opal Textured
0801422-Frost Textured



Acorn with 8” Necked Opening for C83T and C84T Fixtures**
POLYCARBONATE
0801390*-Clear Textured
ACRYLIC
0801400*-Clear Textured
0801410*-Opal Textured
0801420*-Frost Textured



Acorn with 8” Necked Opening for C85T and C86T Fixtures**
POLYCARBONATE
0801391*-Clear Textured
ACRYLIC
0801401*-Clear Textured
0801411*-Opal Textured
0801421*-Frost Textured



Acorn with 8” Necked Opening for C77T and C78T Fixtures
POLYCARBONATE
0801392*-Clear Textured
ACRYLIC
0801402*-Clear Textured

Security Sensor Features & Benefits

EFFORTLESS SECURITY & CONVENIENCE

- **Dusk to Dawn Sensor**
  Turns lights on/off (can be disabled).
- **Hidden Motion Sensor**
  Discreet and effective motion detection.
- **Adjustable Detection Range**
  20′ or 40’ range.
- **Flexible Timer**
  5 seconds to 30 minutes.
- **Reliable Year-Round**
  Unaffected by daylight savings or weather.
- **Easy Setup**
  No batteries, apps, or remotes needed.




Adjustable Sensitivity Activation



Adjustable Motion Detection Range




Custom Light Duration Settings

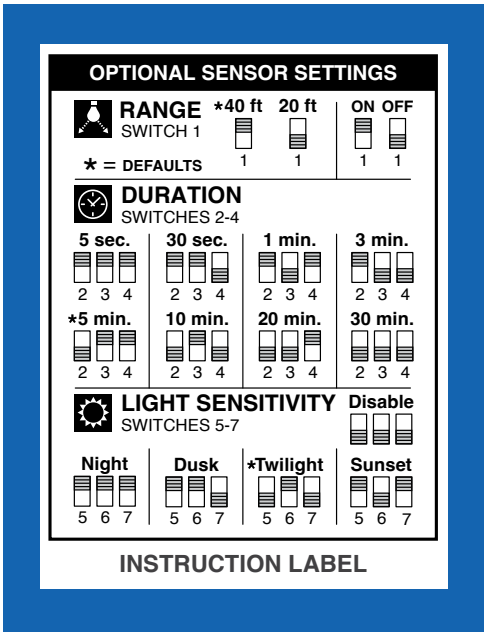

INSTRUCTION LABEL

NO APPS OR REMOTE NEEDED

Immediate functionality with intuitive manual switches.

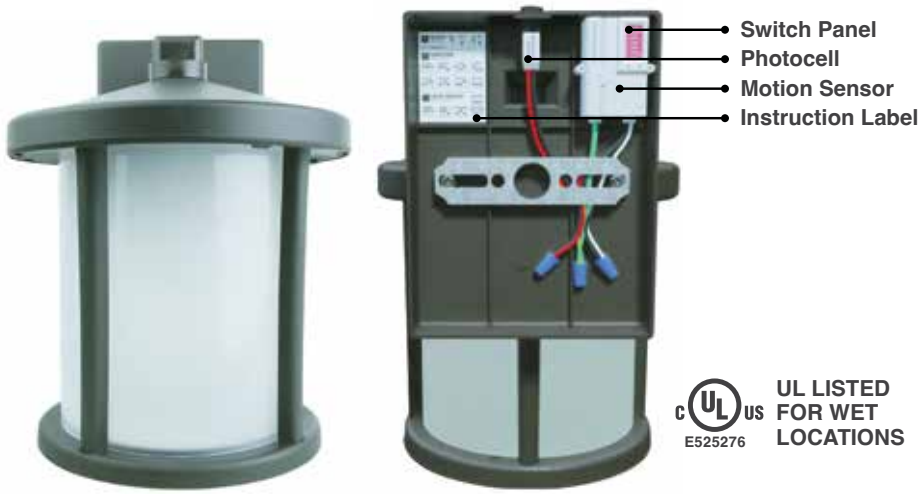

c UL us E525276 UL LISTED FOR WET LOCATIONS

LED Sustainable Technology

Wave Lighting offers a complete line of LED fixture options. Our line covers everything from 12V landscape, to 120V residential, to multi-volt commercial and industrial.



Wave Lighting is proud to offer a wide range of lighting fixtures that meet the **Buy American Act (BAA**) requirements. The BAA was created to stimulate the economy by specifying how government agencies purchase products. Look for the "Buy American Act Compliant" icon for qualifying fixtures.

Sea turtles are an endangered species. Between March and October, sea turtle hatchlings are confused by the artificial light from coastal dwellings and head toward pools and streets instead of the safety of the sea. Wave Lighting's turtle-friendly lighting directs light to the ground, is not disruptive to the hatchling turtles, and is available in 596nm (Amber).

Light pollution from outdoor lighting wastes billions of dollars and vast quantities of natural resources. Our **dark sky friendly** fixtures and retrofits focus light downward reducing light pollution and safeguarding our wildlife in their natural environment. Wave Lighting offers night sky friendly outdoor lighting fixtures and retrofits for residential and commercial lighting applications.

National and local energy codes is accomplished with efficient LED light engines. California JA8 & Title 24 are included on many products.


AVAILABLE IN A WIDE RANGE OF COLOR TEMPERATURES & WATTAGES.

Wave Lighting offers LED fixtures suitable for Type 5, Type 3, and Dark Sky applications; as well as fixtures with dimmable options. Wave Lighting's LED fixtures are the perfect solution for energy savings, performance and maintenance free operation.

Residential

PICTURE	SERIES	BASE/TYPE	VOLTAGE	DRIVER	DIMMABLE	LIFE	WARRANTY	CRI
	LR	Dedicated LED	120V, 50/60 Hz	On-Board	Triac	50,000 L70	5 Years	80
	LT	Dedicated LED	120V, 50/60 Hz	On-Board	Triac	50,000 L70	5 Years	90
	LE26	E26 Medium Base Socket	120V, 50/60 Hz	On-Board	Triac	15,000 L70	3 Years	3000K = 90 4000K = 80
	LE26A	E26 Medium Base Socket	120-277V, 50/60 Hz	On-Board	No	50,000 L70	5 Years	596nm
	L	Dedicated LED	120-277V, 50/60 Hz	Remote	No	50,000 L70	3 Years	80

Commercial

PICTURE	SERIES	BASE/TYPE	VOLTAGE	DRIVER	DIMMABLE	LIFE	WARRANTY	TYPES
	L (Globes & Acorns)	Dedicated LED	120-277V, 50/60 Hz	On-Board	0-10V	50,000 L70	5 Years	Type 5
	LC	E39 Mogul Base Socket	120-277V, 50/60 Hz	On-Board	No	50,000 L70	5 Years	Type 3, Type 5 & Dark Sky
	L	Dedicated LED	120-277V, 50/60 Hz	Remote	0-10V	50,000 L70	5 Years	Type 3 & Type 5

NUMERICAL INDEX

ITEM #	PAGE
AFB	22
CP-689	95
C6P2	89
C8P2	89
C10P2	89
C31T	16
C31T(P/L)-LENS	102
C32T	19
C32T(P/L)-LENS	102
C33T	19
C33T(P/L)-LENS	102
C36T	20
C36T(C/L)-LENS	102
C37T	20
C37T(C/L)-LENS	102
C38T	15
C39T	18
C40T	12
C42S	11
C42T	11
C43T	8
C44T	9
C45T	10
C47T	13
C59T	14
C59TF-LENS	102
C75T	24
C76T	24
C77T	23
C78T	23
C83T	22
C84T	22
C85T	22
C86T	22
C91T	21
C92T	21
C93T	21
C94T	21
C200BC	37
C200BC-LENS	101
C201BC	37
C201BC-LENS	101
C202BC	36
C202BC-LENS	101
C203BC	36
C203BC-LENS	101
C204BC	32
C205BC	33
C206BC	34
C207BC	35
C2014T	25
C2015T	26
C2024T	25
C2025T	26
C8014T	25
C8015T	26
C8024T	25
C8025T	26
HH	92
HH4	92
LCE26	99
LCE39	99
LRC	98
LRG10	97
LRG6	97
LRG8	97
LRH3	97
LRH6	97
PB5-2	30
PB5-3	30
CAP-PB5	30, 92
SHH	92
S11S	40
S11T	40
S11V	40
S21S	39
S21T	39
S21V	39
S26S	41
S26T	42
S26V	41
S27SC	41
S27TC	42
S32W	41
S33W	43
S34W	44
S35W	44
S36W	45
S37FM	45
S50S	47
S50T	47
S50V	47
S51S	48
S51T	48
S51V	48
S52T	49
S52V	49
S64FM	28
S64W	28
S65W	28
S75T	53
S75T-2	53
S75V	52
S761W	54
S76W	55
S771W	55
S772W	54
S77W	55
S791W	54
S79W	55
S80V	51
S81V	51
S82V	51
S85V	50
S85T	50
WB6	30
3BC1	94
3BC2	94
3BC3	94
3BC6	94
3BC9	94
4BC1	94
4BC3	94
4BC6	94
4BC9	94
100FM	56
109	69
110	69
111	67
112	67
113	67
114	67
115	69
116	69
123	68
148	101
149	101
153	101
154	101
155FM	77
156FM	66
157FM	66
160FM	75
161FM	75
162FM	75
163FM	75
164FM	60
165FM	60
166FM	27
167FM	72
168FM	74
169FM	27
170FM	75
172FM	75
178FM	74
180FM	77
181FM	77
182FM	77
183FM	77
184FM	77
185FM	77
190FM	76
192FM	76
193FM	76
195FM	76
204S	63
204T	63
204V	63
206VC	62
208S	62
208T	62
209	71
210	71
211	71
212	71
215	71
216	71
217	71
220FM	56
220S	64
220T	64
230FM	56
230S	57
230T	57
240S	65
240T	65
240V	65
241V	63
260S	57
260T	57
263FM	61
264FM	61
265FM	61
270S	64
270T	64
283	91

NUMERICAL INDEX

ITEM #	PAGE
285	91
293	90
294	90
295	90
312	78
314	78
316	78
320	95
335	95
338	95
347	95
348	95
349	95
410	70
412	68
420	72
421	72
422	72
530V	28
610	70
612	68
688	95
785	71
1065	101
1066	101
1067	101
1069	101
1255	101
1256	101
1265	101
1266	101
1267	101
1269	101
1455	101
1456	101
1465	101
1466	101
1467	101
1469	101
1655	101
1656	101
1665	101
1666	101
1667	101
1669	101
1720	93
1720P	93
1721	93
1721B	93
1721P	93
1724	93
1724B	93
1724W	93
1756	101
1766	101
1776	101
1784	29
1785	29
1855	101
1855-8N	102
1856	101
1856-8N	102
1865	101
1865-8N	102
1866	101
1866-8N	102
1867	101
1867-8N	102
2001	59
2002	59
2003	59
2004	59
2017	58
2018	58
2055-8N	102
2056-8N	102
2057	101
2064-8N	102
2065-8N	102
2066-8N	102
2067	101
2077	101
2403	92
2405	92
2410	92
2411	92
2420	92
2500	88
2510	88
2512	88
2514	88
2600	87
2610	87
2612	87
2690	87
2692	87
3467	102
3468	102
3469	102
3588	82
3588F	82
3590	82
3590F	82
3592	82
3592F	82
3594	82
3594F	82
3688	81
3688F	81
3690	81
3690F	81
3692	81
3692F	81
4590	84
4590F	84
4592	84
4592F	84
4594	84
4594F	84
4688	83
4688F	83
4690	83
4690F	83
4692	83
4692F	83
4694	83
4694F	83
5520	86
5588	86
5590	86
5592	86
5594	86
5596	86
5598	86
5620	85
5688	85
5690	85
5692	85
5694	85
5696	85
5698	85
8000	59
8001	59
8002	59
8003	59
8004	59
8017	58
8018	58
9017	58
9018	58
0500662	85
0500663	85
0800407	101
0800408	101
0800410	101
0800411	101
0801390	102
0801391	102
0801392	102
0801400	102
0801401	102
0801402	102
0801410	102
0801411	102
0801420	102
0801421	102
0801422	102
1300316	101
1300371	101
1300372	101
1300373	101
1301724	101
1301726	101
1301727	101
1301728	101
1301733	101
1301734	101



WAVE®
LIGHTING

wavelighting.com
877.870.WAVE (9283)
fax 330.630.1994