TEKTRON®

Reliable Engineering, Futuristic Design

TEKTRON®
Reliable Engineering, Futuristic Design

COMPANY PROFILE

Tektron is a brand under Techno USA LLC. We cater customized solutions of high power LED luminaries to fulfill the demand of a new stylish lighting world and support green environment systems. Techno USA provides services with new technology and a highly experienced workforce.

Established in 2011, Techno USA has grown to become a leading provider of innovative LED lighting solutions. We have offices in Atlanta and San Antonio with representatives at various locations throughout the USA.
We are recognized and widely accepted for our exceptionally high standards of service and business practices. Tektron offers a wide range of LED products and provides OEM services to top brands.

In today's world, energy conservation and environmental protection are critical challenges. LED—the green lighting source of the 21st century—is the standard for energy savings and environmental protection. At Tektron, we're committed to delivering solutions that meet these demands.



- LED Panel Lights
- LED Tube Lights
- LED Bulb and Lamps
- LED Down Lights
- LED Street Lights
- LED Flood Lights
- LED Well Glass
- LED Surface Mount Lights

OUR MISSION AND VISION

It’s enduring that our map of journey starts with our mission. Our mission is to serve commercial and domestic industry with customized solutions in order to save energy in the field of LED Lighting. Our vision is to deliver high quality products and anticipate the Tektron brand portfolio to the world with the satisfaction and long term relationship of customers.

Please reconfirm Specifications & Dimensions mentioned in this catalog, prior to order due to continuously improvement in our designs. We are not responsible for any unintended errors in the catalog.

TK-FDPL2™ SERIES

SLIM FLAT DISK PANEL LIGHT



STANDARDS & FEATURES

- High quality internal driver; Triac dimming; Flicker free. Frosted Lens and Non-IC, and rated for damp locations. SMD2835.
- Beam angle of 120º.
- It complies with Title24, cETL certification, Energy Star Rated, and FCC.
- LED recessed downlight retrofit is supplied with a quick connect-case and conduit to make an easy connection to an existing
- Recessed fixture frame junction box. Beam angle is 120º. Instant start w/NO humming.
- Luminous efficacy: 80 lm/w, 5CCT Colors: 30K / 40K / 50K and 27K / 30K / 35K / 40K / 50K
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	SIZE	WATT	LUMENS	VOLTAGE	CCT
TK-FDPL2-5-8W/11W	5”	8W / 11W	656 / 880	120V	27K / 30K / 35K / 40K / 50K
TK-FDPL2-7-14W	7”	14W	1,120	120V	27K / 30K / 35K / 40K / 50K
TK-FDPL2-9-20W	9”	20W	1,600	120V	27K / 30K / 35K / 40K / 50K
TK-FDPL2-12-25W	12”	25W	2,000	120V	27K / 30K / 35K / 40K / 50K

TKIEO-SML™ SERIES

LED 3 CCT FLAT DISK PANEL LIGHT



STANDARDS & FEATURES

- High quality internal driver; Triac dimming; Flicker free. Frosted Lens and Non-IC, and rated for damp locations. SMD2835.
- It complies with ETL, Wet location rated, Energy Star Rated, and FCC.
- LED recessed downlight retrofit is supplied with a quick connect-case and conduit to make an easy connection to an existing
- recessed fixture frame junction box. Beam angle is 120º. Instant start w/NO humming.
  CRI :Ra>80, Luminous efficacy: 100 lm/w, Colors: 35K / 42K / 52K
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TKIEO-SML8.6-SM-3W3CCTWH	9W / 14W / 18W	900 / 1400 / 1800	120 - 277V	3500K / 4200K / 5200K

Wall Mount Option



TK-CSC ™ SERIES

LED DISKLIGHT - CCT TUNABLE



STANDARDS & FEATURES

- High quality internal driver; Triac dimming; Flicker free. Frosted Lens and Non-IC, and rated for damp locations.
- It complies with ETL, and Energy Star Rated.
- Beam angle is 120º. Instant start w/NO humming.
- CRI :Ra>90, Luminous efficacy: 60 lm/w, Colors: 27K/30K/35K/40K/50K (Color Changeable).
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	SIZE	WATT	LUMENS	VOLTAGE	CCT
TK-CSC3030-LED-5CCTYY	4”	10W	600	120V	27K / 30K / 35K / 40K / 50K
TK-CSC3017-LED-5CCTYY	6”	15W	900	120V	27K / 30K / 35K / 40K / 50K
TK-CSC3017-LED-5CCTYY	8”	18W	1,080	120V	27K / 30K / 35K / 40K / 50K
TK-CSC3027LED-27W-5CCTYY	8”	27W	1,620	120V	27K / 30K / 35K / 40K / 50K

TK-CDLPEK SERIES

LED CAN LESS COMMERCIAL DOWN LIGHT - 5 CCT & 3 WATTS



STANDARDS & FEATURES

- High quality isolated driver; 0-10V dimming; Flicker free. Clear Lens and Non-IC, and rated for damp locations.
- Beam angle for CDLPEK-4 is 24°-45°, Beam angle for CDLPEK-6 is 30°-55°
- It complies with ETL & Energy certification, Energy Star Rated.
- It is easy to install with the help of a universal mounting plate preinstalled at the bottom. Instant start w/NO humming.
- Dimmable to 5% with most Lutron and Leviton 0-10V dimmers.
- CRI :Ra>90, Luminous efficacy : 880 to 4840 lumens, Size: 4in / 6in / 8in, Colors: 2700/3000/3500/4000/5000K
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	SIZE	WATT	LUMENS	VOLTAGE	CCT
TK-CDLPEK-4-20W-5CCT-9DUV	4” & 6”	10W/15W/20W	88lm/w	120-277 V	27K / 30K / 35K / 40K / 50K
TK-CDLPEK-4-30W-5CCT-9DUV	4” & 6”	20W/25W/30W	88lm/w	120-277 V	27K / 30K / 35K / 40K / 50K
TK-CDLPEK-6-55W-40K-9DUV	6” & 8”	30W/40/55W	88lm/w	120-277 V	4000K

TK-SPDL2ECO™ SERIES

LED SPLIT COMMERCIAL DOWN LIGHT 3 CCT



STANDARDS & FEATURES

- High quality isolated driver 0-10V Dimming; Flicker free. Frosted Lens and Non-IC, and rated for damp locations.
- It complies with ETL & cETL certification, Energy Star Rated, and FCC. Title 24 Compliant.
- LED recessed downlight retrofit is supplied with a quick connect-case and conduit to make an easy connection to an existing
- recessed fixture frame junction box. Instant start w/NO humming
- CRI: Ra>80, Luminous efficacy: 90lm/w, Colors: 3500K/ 4000K/ 5000K
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	SIZE	LUMENS	VOLTAGE	CCT
TK-SPDL2ECO	10W-40T 15W-40T	4”/ 6” / 8” /10”	90lm/w	120-347V 120-277V	3000K / 4000K / 5000K
TK-SPDL2ECO	20W-50E (10W/15W/20W)	4”/ 6” / 8” /10”	90lm/w	120-347V 120-277V	3000K / 4000K / 5000K
TK-SPDL2ECO	40W-35T (37W/34W/40W)	4”/ 6” / 8” /10”	90lm/w	120-347V 120-277V	3000K / 3500K / 4000K



Round trim



Square trim





Wall Wash Trim

TK-CDL2MAX™ SERIES

3CCT LED COMMERCIAL DOWNLIGHT




STANDARDS & FEATURES

- The high performance luminaire offers 900 up to 4000 lumens with color temperatures of 3000K,3500K,4000K and 5000K
- 90 CRI complies with ETL certification, ES & California Title 24, Suitable for using in Wet location.
- 50,000 Hrs burning hours.
- Beam angle is 80º. Instant start w/NO humming.
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	SIZE	WATT	LUMENS	VOLTAGE	CCT
TK-CDL2MAX-4	4”	9W/12W/15W	100lm/w	120-277V	3000K / 3500K / 4000K or 3000K / 4000K / 5000K
TK-CDL2MAX-6	6”	12W/18W/24W	100lm/w	120-277V	3000K / 3500K / 4000K or 3000K / 4000K / 5000K
TK-CDL2MAX-8	8”	12W/18W/24W	100lm/w	120-277V	3000K / 3500K / 4000K or 3000K / 4000K / 5000K
TK-CDL2MAX-8	8”	20W/25W/30W	100lm/w	120-277V	3000K / 3500K / 4000K or 3000K / 4000K / 5000K
TK-CDL2MAX-10	10”	20W/25W/40W	100lm/w	120-277V	3000K / 3500K / 4000K or 3000K / 4000K / 5000K







Round6"8"Trim Silver



Round6"8"Trim White



Round6"8"Trim Black



Round6"8"Trim electro nickelling

TK-RDX5™ SERIES

5CCT RESIDENTIAL BACKLIT DOWNLIGHT



STANDARDS & FEATURES

- High quality isolated driver; Triac dimming; Flicker free. Clear Lens and Non-IC, and rated for damp locations.
- It complies with ETL & FCC, Energy Star Rated.
- It is easy to install with the help of a universal mounting plate preinstalled at the bottom. Instant start w/NO humming.
- TRIAC 10-100% smooth dimming.
- CRI :Ra>80 & 90, Luminous efficacy : 800 to 1,760 lumens, Size: 4in / 6in / 8in, Colors: 2700/3000/3500/4000/5000K
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	SIZE	WATT	LUMENS	VOLTAGE	CCT
TK-RDX5R4-10-9SCCT	4“	10W	800	120V	27K / 30K / 35K / 40K / 50K
TK-RDX5R6-15-9SCCT	6”	15W	1,200	120V	27K / 30K / 35K / 40K / 50K
TK-RDX5R6-22-9SCCT	8”	22W	1,760	120V	27K / 30K / 35K / 40K / 50K

TK-CDX5™ SERIES

5CCT COMMERCIAL BACKLIT DOWNLIGHT



STANDARDS & FEATURES

- High quality isolated driver 0-10V Dimming; Flicker free. Frosted Lens and Non-IC, and rated for damp locations.
- Beam angle is 90º.
- It complies with ETL, Energy Star Rated, and FCC. Title 24 Compliant.
- LED recessed downlight retrofit is supplied with a quick connect-case and conduit to make an easy connection to an existing
- recessed fixture frame junction box. Instant start w/NO humming
- CRI: Ra>90, Luminous efficacy: 95lm/w, Colors: 2700K/3000K/3500K/4000K/5000K
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	SIZE	WATT	LUMENS	VOLTAGE	CCT
TK-RDX5R4-10-9SCCT	4“	10W	95Lm/W	120-277V	27K / 30K / 35K / 40K / 50K
TK-RDX5R6-15-9SCCT	6”	15W / 20W	95Lm/W	120-277V	27K / 30K / 35K / 40K / 50K
TK-RDX5R6-22-9SCCT	8”	22W	95Lm/W	120-277V	27K / 30K / 35K / 40K / 50K

TK-JXDL™ SERIES

5CCT TUNABLE COMMERCIAL LED DOWNLIGHT



STANDARDS & FEATURES

- High quality isolated driver 0-10V Dimming; Flicker free. Plenum & Type IC Rated: No housing Required. SMD2835 LED Chip
- Beam angle is 110º.
- It complies with ETL & cETL certification, Energy Star Rated, and FCC. Title 24 Compliant.
- LED commercial downlight retrofit is supplied with a quick connect-case and conduit to make an easy connection to an existing
- recessed fixture frame junction box. Instant start w/NO humming
- 277V Non Dimmable or 100-130V Traic Dimming,
- CRI: Ra>80, Luminous efficacy: 95lm/w-100lm/w, Colors: 2700K / 3000K /3500K/ 4000K/ 5000K
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-JXDL-6-20W-5CCT-XX	10W/15W/20W	1000lm/1500lm/2000lm	100-277V	27K / 30K / 35K / 40K / 50K
TK-JXDL-8-25W-5CCT-XX	15W/20W/25W	1425lm/1900lm/2375lm	100-277V	27K / 30K / 35K / 40K / 50K

Tektron Dba, Techno USA LLC, 1580 Boggs Road, Ste 500, Duluth, GA-30096. P: 678-456-4810 F: 678-456-4811 www.tektronled.com Sales@tektronled.com

TK-RDL1™ SERIES

LED 5CCT RETROFIT DOWNLIGHT




STANDARDS & FEATURES

- High quality internal driver; Triac dimming; Flicker free. Frosted Lens and Base with junction box, and Suitable for damp loca tions. SMD2835. Beam angle is 110º.
- It complies with UL certification, Energy Star Rated, and FCC Compliance
- LED wafer recessed downlight retrofit is supplied with a quick connect-case and conduit to make an easy connection to an exist ing recessed fixture frame junction box. Beam angle is 110º. Instant start w/NO humming. 35000+ burning hours
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	SIZE	WATT	LUMENS	VOLTAGE	CCT
TK-RDL1R4	4”	9W	720	120V	27K / 30K / 35K / 40K / 50K
TK-RDL1R6	6”	15W	1,200	120V	27K / 30K / 35K / 40K / 50K





TK-SPL1™ SERIES

LED 5CCT ULTRA SLIM PANEL DOWNLIGHT



STANDARDS & FEATURES

- High quality internal driver; Triac dimming; Flicker free. Frosted Lens and Base with junction box, and Suitable for damp locations.
- SMD2835. Beam angle is 110º. 35000+ burning hours.
- It complies with UL certification, Energy Star Rated, and FCC Compliance
- LED wafer recessed downlight retrofit is supplied with a quick connect-case and conduit to make an easy connection to an existing
- Recessed fixture frame junction box. Beam angle is 110º. Instant start without humming.
- 35000+ burning hours
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	SIZE	WATT	LUMENS	VOLTAGE	CCT
TK-SPL1R4	4” Retrofit	9W	680	120V	27K / 30K / 35K / 40K / 50K
TK-SPL1R6	6” Retrofit	12W	1,100	120V	27K / 30K / 35K / 40K / 50K

TK-SPL2™ SERIES

FIRERATED LED PANEL DOWNLIGHT



STANDARDS & FEATURES

- Two Hour Fire Rated without Additional Housing or Hardware
- It complies with UL certification, Energy Star Rated, and FCC Compliance
- LED wafer recessed downlight retrofit is supplied with a quick connect-case and conduit to make an easy connection to an existing
- Heat Resistant Steel Casing Provides up to 2 Hour Fire Protection
- 35000+ burning hours
- 5 CCT User Selectable Light Colors
- 5 Years Limited Warranty. See warranty documentation for more information

MODEL	SIZE	WATT	LUMENS	VOLTAGE	CCT
TK-SPL2	4”	9W	720	100-120V	27K / 30K / 35K / 40K / 50K
TK-SPL2	6”	12W	960	100-120V	27K / 30K / 35K / 40K / 50K

TK-GBX3™ SERIES

GIMBAL SPOT



STANDARDS & FEATURES

- TK-GBX3 Spot Gimbal comes complete with an Remote J-Box Isolated power supply. CRI90, 5CCT Selectable Tunable switch to adjust CCT output.
- It complies with ETL, FCC, ES and California Title 24.
- Housing less & Easy installation. Spring-action housing clips. Optional UL listed emergency battery pack. Optional New construction pan or Joist pan installation
- 120VAC, TRIAC 10-100% smooth dimming. 15/ 24 / 36 / 50° beam angle available. 30° tilt and 360° rotation
- Optional Features: Flexible and interchangeable lenses (Leadtime required)
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	SIZE	LUMENS	VOLTAGE	CCT
TK-GBX3-R02-5W-9SCT	5W	2”	350-1,050Lm	120V	27K / 30K / 35K / 40K / 50K
TK-GBX3-R03-9W-9SCT	9W	3”	350-1,050Lm	120V	27K / 30K / 35K / 40K / 50K
TK-GBX3-R04-14W-9SCT	14W	4”	350-1,050Lm	120V	27K / 30K / 35K / 40K / 50K

TKJXL-COB04™ SERIES

DEEP ANTI GLARE DOWNLIGHT 3CCT






STANDARDS & FEATURES

- LED anti-glare downlight comes complete with an external driver in a junction box. Commercial grade quality with architectural design.
- Diffusers Glass Tempered
- It complies with ETL and Energy Star certification
- It is easy to install with the help of a universal mounting plate preinstalled at the bottom. Instant start w/NO humming.
- Traic Dimming Die-cast Aluminum alloy for optimal heat dissipation.
- Flicker free. COB LED and Non-IC & damp location rated. Beam angle 24°/ 36°. 50,000 working hours
- Available Inner Cone Colors (Trims) ; White, Black, & Chrome (optional)
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	SIZE	LUMENS	VOLTAGE	CCT	TRIM
TKJXL-COB02-R8W-3CCT	8 W	2”	600	100-130V	30K / 40K / 50K	Round
TKJXL-COB04-R15W-3CCT	15W	4”	1,125	100-130V	30K / 40K / 50K	Round
TKJXL-COB02-S8W-3CCT	8 W	2”	600	100-130V	30K / 40K / 50K	Square
TKJXL-COB04-S15W-3CCT	15W	4”	1,125	100-130V	30K / 40K / 50K	Square

DOWNLIGHT ACCESORIES

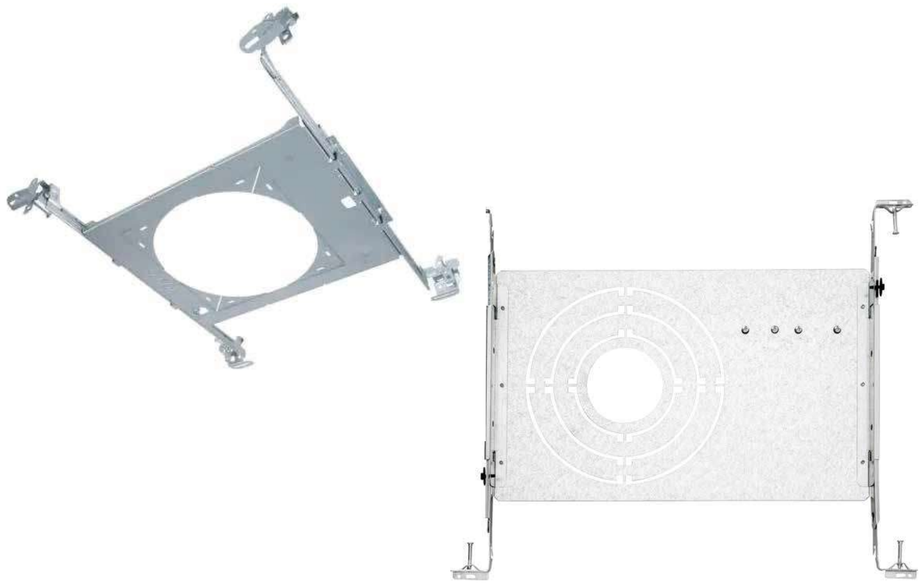

Downlight Frames



Connectors



Emergency Battery Backup

TK-BLFP1 ™ SERIES

LED BACKLIT FLAT PANEL - 3 CCT & 3 WATTAGE



STANDARDS & FEATURES

- High quality isolated driver; 0-10V dimming; Flicker free. Optional Motion sensor and Emergency Battery Backup available.
- It complies with UL certification. DLC Premium listed. IP20 Rated.
- Luminaire installs in Lay-in T-Bar Grid or Drop-In Ceiling Mount, Cable Install or Surface Mount (option available).
- Instant start w/NO humming
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-BLFP1-22-30W-WTCT-XXXX	20W / 25W / 30W	125 Lm/W	AC100-277 V	3500K / 4000K / 5000K (3CCT)
TK-BLFP1-24-40W-WTCT-XXXX	28W / 34W / 40W	125 Lm/W	AC100-277 V	3500K / 4000K / 5000K (3CCT)



Emergency battery back up





Surface Mount (option available)

TK-BLFP1 ™ SERIES

LED BACKLIT FLAT PANEL - 3 CCT & 3 WATTAGE (GEN2)



STANDARDS & FEATURES

- High quality isolated driver; 0-10V dimming; Flicker free. Optional Motion sensor and Emergency Battery Backup available.
- It complies with UL certification. DLC Premium listed. IP20 Rated.
- Luminaire installs in Lay-in T-Bar Grid or Drop-In Ceiling Mount, Cable Install or Surface Mount (option available).
- Instant start w/NO humming
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-BLFP1-22-40W-WTCT-XXXX	20W / 30W / 40W	130 Lm/W	AC100-277 V	3500K / 4000K / 5000K (3CCT)
TK-BLFP1-24-50W-WTCT-XXXX	30W / 40W / 50W	130 Lm/W	AC100-277 V	3500K / 4000K / 5000K (3CCT)



Emergency battery back up





Surface Mount (option available)

TK-CBT4 ™ SERIES

LED CENTER BASKET TROFFER 3 CCT & 3 WATTAGE








2x2

2x4

STANDARDS & FEATURES

- High quality isolated driver; 0-10V Dimmable; Flicker free. Motion Sensor & Bluetooth, Emergency Battery Backup, Surface
- Mount (option available)
- Heavy duty die-cast aluminum body, fully sealed, dirt & bug proof.
- It complies with ETL certification, DLC Premium listed. IP20 Rated
- CRI :Ra>80, Luminous efficacy : 130Lm/w (Standard) - 150Lm/w (Customize)
- 3-Wattages & 3 color selectable.
- Recessed T-Bar mount and Stackabe housing design,One box with 4-housing, 4-drivers,and 4-lens (4 Troffer)
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-CBT4-22-36W-TCT-XXXX	36 (24/30/36W)	125 - 150 Lm/W	AC100-277V	3500K / 4000K / 5000K (3CCT)
TK-CBT4-24-45W-TCT-XXXX	45 (24/36/45W)	125 - 150 Lm/W	AC100-277V	3500K / 4000K / 5000K (3CCT)





Motion Sensor & Bluetooth



Emergency battery back up



Surface Mount (option available)

Tektron Dba, Techno USA LLC, 1580 Boggs Road, Ste 500, Duluth, GA-30096. P: 678-456-4810 F: 678-456-4811 www.tektronled.com Sales@tektronled.com

TK-LSD1 SERIES

LED ARCHITECTURAL LINEAR STRIP UP & DOWN LIGHT



STANDARDS & FEATURES

- High quality isolated driver; 0-10V dimming; Flicker free. Optional sensor and Emergency Battery Backup available.
- It complies with ETL certification. DLC Premium listed. IP20 Rated.
- Suitable for indoor application, can be mounted on a wall as well as suspend mounted. Linkable up to 7 lights.
- Available in 4FT and 8FT in black, white and silver color.
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-LSD1-40W-4FT-30K/40K/50K-SLV	40	4,000	100-277 V	3000K / 4000K / 5000K
TK-LSD1-40W-4FT-30K/40K/50K-BLK	40	4,000	100-277 V	3000K / 4000K / 5000K
TK-LSD1-40W-4FT-30K/40K/50K-WHT	40	4,000	100-277 V	3000K / 4000K / 5000K

TK-LSUD2 SERIES


LED ARCHITECTURAL LINEAR STRIP DOWN LIGHT




STANDARDS & FEATURES

- High quality isolated driver; 0-10V dimming; Flicker free. Optional sensor and Emergency Battery Backup available.
- It complies with ETL certification. DLC listed. IP20 Rated.
- Suitable for indoor application, can be mounted on a wall as well as suspend mounted. Linkable up to 7 lights.
- Available in 4FT and 8FT in black, white and silver color
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-LSUD2-50W-4FT-30K/40K/50K-T-D-SLV	50	5,000	100-277 V	3000K / 4000K / 5000K
TK-LSUD2-50W-4FT-30K/40K/50K-T-D-BLK	50	5,000	100-277 V	3000K / 4000K / 5000K
TK-LSUD2-50W-4FT-30K/40K/50K-T-D-WHT	50	5,000	100-277 V	3000K / 4000K / 5000K



T-Shape (40W)



X-Cross (50W)




Linkable Brackets

ACCESSORIES


TK-LSD1 & TK-LSUD2 SERIES




Power Cables

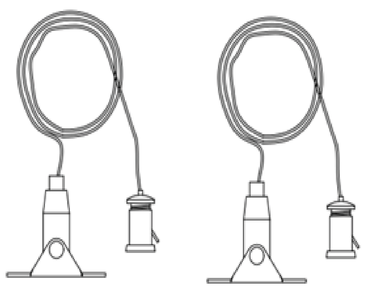


Air Cabel

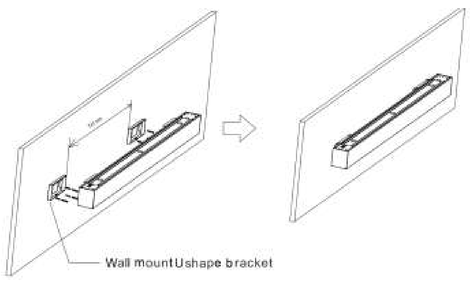

Wall Mounting Kits

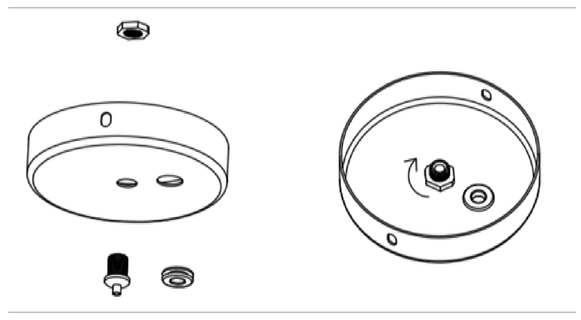

Canopy

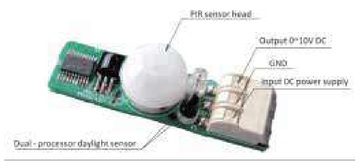

PIR Sensor



Motion Sensor



Emergency Backup

TK-LSD3 ™ RECESSED SERIES

GEN3 LED ARCHITECTURAL LINEAR DIRECT LIGHT (T-GRADE)





STANDARDS & FEATURES

- 0-10V dimming 10-100%, dim to off, Frost lens, Beam angle 120°. Optional Motion sensor and Emergency Battery Backup available.
- It complies with ETL Listings, DLC Listings, Damp and Dry Location Rated..
- The installation process is straightforward and offers a range of mounting possibilities. Frange recessed with T-grid & Frange recessed with clip.
- Instant start w/NO humming
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-LSD3-4FT-40W(30K-40K-50K)DUV-T-WH-RT	40 W	4,600	AC120-277 V	3000K / 4000K / 5000K (3CCT)
TK-LSD3-4FT-40W(30K-40K-50K)DUV-T-BK-RT	40 W	4,600	AC120-277 V	3000K / 4000K / 5000K (3CCT)

TK-LSD3 ™ SUSPENDED SERIES

GEN3 LED ARCHITECTURAL LINEAR DIRECT LIGHT (SUSPENDED)



STANDARDS & FEATURES

- 0-10V dimming 10-100%, dim to off, Frost lens, Beam angle 120°. Optional Motion sensor and Emergency Battery Backup available.
- It complies with ETL Listings, DLC Listings, Damp and Dry Location Rated..
- The installation process is straightforward and offers a range of mounting possibilities. Frange recessed with T-grid & Frange recessed with clip.
- Instant start w/NO humming
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-LSD3-4FT-40W(30K-40K-50K)DUV-T-WH	40 W	4,600	AC120-277 V	3000K / 4000K / 5000K (3CCT)
TK-LSD3-4FT-40W(30K-40K-50K)DUV-T-BK	40 W	4,600	AC120-277 V	3000K / 4000K / 5000K (3CCT)

TK-LSD3 ™ CEILING MOUNTED

LED ARCHITECTURAL LINEAR LIGHT (CEILING MOUNT)





STANDARDS & FEATURES

- 0-10V dimming 10-100%, dim to off, Frost lens, Beam angle 120°. Optional Motion sensor and Emergency Battery Backup available.
- It complies with ETL Listings, DLC Listings, Damp and Dry Location Rated..
- The installation process is straightforward and offers a range of mounting possibilities. Frange recessed with T-grid & Frange recessed with clip.
- Instant start w/NO humming
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-LSD3-4FT-40W(30K-40K-50K)DUV-T-WH-RS	40 W	4,600	AC120-277 V	3000K / 4000K / 5000K (3CCT)
TK-LSD3-4FT-40W(30K-40K-50K)DUV-T-BK-RS	40 W	4,600	AC120-277 V	3000K / 4000K / 5000K (3CCT)

TKIEO-2ST8/T5-4FT SERIES

T8/T5 LED TUBE



STANDARDS & FEATURES

- High-Quality Clear or Frosted (PC) Polycarbonate Lens Diffuser with aluminum Backing FA8 Tube. 100% Mercury Free and 100% Lead Free
- It complies with 80+,ETL, CE, RoHS.
- CRI: 140 to 80, Luminous efficacy: 180lm/w, Colors: 4K / 5K
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TKIEO-2ST8/T5-4FT-6W-4K-F	6W	170 Lm/w	120 -277V	4000K
TKIEO-2ST8/T5-4FT-10W-4K-F	10W	180 Lm/w	120 -277V	4000K
TKIEO-2ST8/T5-4FT-10W-4K-C	10W	180 Lm/w	120 -277V	4000K
TKIEO-2ST8/T5-4FT-16W-4K-C1	16W	180 Lm/w	120 -277V	4000K
TKIEO-2ST8/T5-4FT-17W-5K-C	17W	180 Lm/w	120 -277V	5000K

ZS-T8- 8FT SERIES

T8 LED TUBE (RETROFIT)



STANDARDS & FEATURES

- High-Quality Clear or Frosted (PC) Polycarbonate Lens Diffuser with aluminum Backing FA8 Tube. 100% Mercury Free and 100% Lead Free
- It complies with ETL Listed, CE, FCC, RoHS, & DLC
- CRI: Ra>80, Luminous efficacy: 180lm/w, Colors: 3k / 4K / 5K
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK- ZS-T8-8FT	36W / 40W	130/120 lm/W	100 -277V	3000K / 4000K / 5000K

TKZS-T8 SERIES

TKZS-T8 FREEZER / COOLER LED TUBE V SHAPE



STANDARDS & FEATURES

- High-Quality Clear or Frosted (PC) Polycarbonate Lens Diffuser with aluminum Backing FA8 Tube. 100% Mercury Free
- It complies with ETL.
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT	C
TKZS - T8 / 36P - 5FT - 36W - 6K - C	36W	120 Lm/w	100 -277V	6000K	Clear Lens
TKZS - T8 / 40P - 6FT - 40W - 6K - C	40W	120 Lm/w	100 -277V	6000K	Clear Lens

TKZS-T8 SERIES

TKZS-T8 LED INTEGRATED LINEAR LIGHT



STANDARDS & FEATURES

- High-Quality Clear or Frosted (PC) Polycarbonate Lens Diffuser with aluminum Backing FA8 Tube. 100% Mercury Free
- It complies with ETL.
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT	F
TKZS - T8 / 22P - 4FT - 22W - 6K - F	22W	120 Lm/w	120 -277V	6000K	Striped Lens
TKZS - T8 / 45P - 8FT - 45W - 6K - F	45W	120 Lm/w	120 -277V	6000K	Striped Lens

TK-LHB3- SERIES

LED LINEAR HIGHBAY GEN3




STANDARDS & FEATURES

- 0-10V dimming 10-100%, dim to off, Beam angle 120°, PIR and Motion Sensor Available.
- It complies with ETL Listings, DLC Premium, Damp and Dry Location Rated.
- It is easy to install. Standard mounts with various options include V-Hooks and Chains. Pendant and surface mount optional
- CRI :Ra>80, Colors: 50K / 40K. Luminous efficacy: 130 lm/w (±10%)
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	SIZE	LUMENS	VOLTAGE	CCT
TK-LHB3-110W-2FT-50K-DHV	100W	2F	13,000	UV-120-277 VAC / HV - 120-347VAC	4000K OR 5000K
TK-LHB3-160W-2FT-50K-DHV	160W	2F	20,800	UV-120-277 VAC / HV - 120-347VAC	4000K OR 5000K
TK-LHB3-220W-2FT-50K-DHV	220W	2F	28,600	UV-120-277 VAC / HV - 120-347VAC	4000K OR 5000K
TK-LHB3-220W-4FT-50K-DHV	320W	4F	41,600	UV-120-277 VAC / HV - 120-347VAC	4000K OR 5000K

TK-LHB4- SERIES

LED LINEAR HIGHBAY GEN4 3CCT & 3 WATTAGE

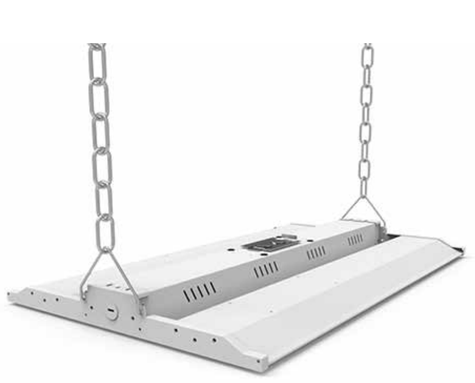



STANDARDS & FEATURES

- 0-10V dimming 10-100%, dim to off, Beam angle 120°, PIR and Motion Sensor Available.
- It complies with ETL Listings, DLC Premium Damp and Dry Location Rated.
- The installation process is straightforward and offers a range of mounting possibilities. V-Hooks and Chains. The pendant and surface mount were optional.
- CRI :Ra>80, Colors: 50K. Luminous efficacy: 190 lm/w (±10%)
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	SIZE	WATT	LUMENS	VOLTAGE	CCT
TK-LHB4-2FT-100W-50K	2FT	100W	19,000	100-277 VAC	5000K
TK-LHB4-2FT-100W/125W/150W-50K	2FT	110W/125W/150W	190 lm/w	100-277 VAC	5000K

TK-LHB5- SERIES

LED LINEAR HIGHBAY GEN4 3CCT & 3 WATTAGE



STANDARDS & FEATURES

- 0-10V dimming 10-100%, dim to off, Beam angle 120°, PIR and Motion Sensor Available.
- It complies with ETL Listings, DLC Premium Damp and Dry Location Rated.
- The installation process is straightforward and offers a range of mounting possibilities. V-Hooks and Chains. The pendant and surface mount were optional.
- CRI :Ra>80, Colors: 40K/50K. Luminous efficacy: 140-190lm/w (±10%)
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	SIZE	WATT	LUMENS	VOLTAGE	CCT
TK-LHB5	1.6FT	110W/135W/165W	140-150lm/W	120-277 VAC	4000K/5000K
TK-LHB5	1.9FT	155W/185W/210W	140-150lm/W	120-277 VAC	5000K
TK-LHB5	1.9FT	155W/185W/210W	170-190lm/w	120-277 VAC	5000K
TK-LHB5	2Ft	100W/125W/150W	170-190lm/w	120-277 VAC	5000K

ACCESSORIES

TK-LSB3 & TK-LHB4 SERIES



Emergency LED Driver



V-Hooks &Chain



Wire Guard



Junction Box

TK-LBS3-SERIES

LED STRIP FIXTURE / LOW BAY



STANDARDS & FEATURES

- PC Frosted lens Suspended Mount , 0-10V dimming Flicker free, Motion Sensor, Emergency Backup, PIR sensor. 50,000 working hours.
- It complies with ETL and DLC Certification, and 5 years warranty. See warranty documentation for more information.
- The installation process is straightforward and offers a range of mounting possibilities with the help of a universal mounting plate preinstalled at the bottom.
- Surface or Suspended mounts are optional.
- CRI: 80, Luminous efficacy: 130lm/w, CRI :Ra>80, Colors: 35K / 40K / 50K

MODEL	SIZE	WATT	LUMENS	VOLTAGE	CCT
TK-LBS3-4FT-40W-3CCT-A-T-X	4FT	20W/32W/40W	130 Lm/w	100 -277 VAC	35K / 40K / 50K (3CCT)
TK-LBS3-4FT-96W-3CCT-A-T-X	8FT	65W/96W	130 Lm/w	100 -277 VAC	35K / 40K / 50K (3CCT)

TK-ASTP™ SERIES

SMART LED VAPOR TIGHT / TRI- PROOF LIGHT



STANDARDS & FEATURES

- 0-10V dimming option. Motion & daylight sensor, ZigBee Bluetooth, Wireless Daintree compliant options. IP65 Rated.
- The installation process is straightforward and offers a range of mounting possibilities with a 1/2’NPT Pendant mount.
- It complies with ETL Listings, DLC Premium, and CE.
- CRI :Ra>80, Colors:50K. Luminous efficacy: 160 lm/w (±10%)
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	SIZE	LUMENS	VOLTAGE	CCT
TK-A-STP40-50-MS02	40W	4FT	6,400	120-277 VAC	5000K
TK-A-STP110-50-MS02	110W	8FT	17,600	120-277 VAC	5000K

*3000K and 4000K available upon request.

TK-RHB4™ SERIES

LED ROUND HIGH BAY



STANDARDS & FEATURES

- High efficiency LED Driver, with wide input voltage range from 100- 277 VAC.
- Professional light distribution optics, high light reflectivity reflectors, 90 /120 beam angle available; The lens pass rate is over 90%. Pure aluminum shell is lighter weight and provides better heat dissipation when compared to die-casting aluminum.
- CRI :Ra>80, Colors: 3000/4000/5000K (CCT Selectable).
- UFO comes standard with Hook hook-type mount mounting for quick and easy installation.
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-RHB4-240W-50K-WTCT	150W /200W / 240W	190 Lm/W	100-277 VAC	3000/4000/5000K (3CCT)



G Hook Mount



O Hook Mount (standard)



U Bracket



Safety Rope



Aluminum Reflector-Silver

ACCESSORIES


TK-ASTP & TK-RHB4 SERIES



Emergency LED Driver



Stell Rope

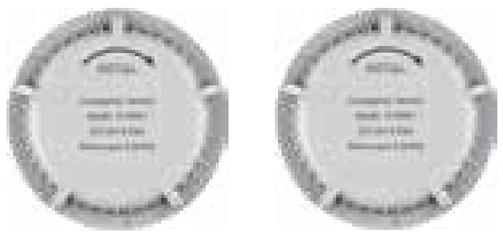

Motion Sensor



3/4” NPT Converter

TK-SAL4™ SERIES

LED STRIP FIXTURE / LOW BAY



75W/100W/120W 300W

STANDARDS & FEATURES

- 0-10V dimmable, They are made of Die-Cast Aluminum
- Optional High quality bi-level Motion sensor with increased energy savings, Photocell & Occupancy Sensor
- IP 66 Rated, CRI: Ra>80, Luminous efficacy: 145lm/w, Colors: 30K / 40K / 50K
- Input Voltages from 100-277VAC (standard) 480V- 347-480VAC (optional)
- Wet Location Certified, safe and reliable. ETL Intertek, CE, Rohs, DLC Premium
- 5 Years Limited Warranty. See warranty documentation for more information

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-SAL4-75W-50K-CCPC5	75 W	10,875	AC100-277 / 347-480 V	3CCT (3000K/4000K/5000K)
TK-SAL4-100W-40K-CCPC5	100 W	14,500	AC100-277 / 347-480 V	3CCT (3000K/4000K/5000K)
TK-SAL4-120W-50K-CCPC5	120 W	17,400	AC100-277 / 347-480 V	3CCT (3000K/4000K/5000K)
TK-SAL4-200W-50K-CCPC5	200 W	29,000	AC100-277 / 347-480 V	3CCT (3000K/4000K/5000K)
TK-SAL4-300W-50K-CCPC5	300 W	43,500	AC100-277 / 347-480 V	3CCT (3000K/4000K/5000K)

Optional Sensor's



Photocell



PIR Sensor



Shorting Cap



3 Pin NEMA Receptacle

Optional Mounting's



Trunnion Mount



Square Pole Arm Mount




Slip Fitter



Universal Mount

TK-SAL05™ SERIES

LED SHOEBOX / AREA LIGHT

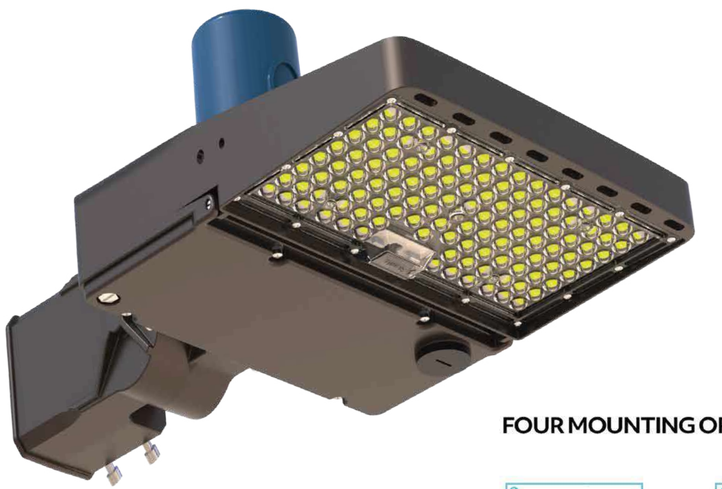

FOUR MOUNTING OPTIONS



Slip Fitter (SP)



Trunnion (TR)



U Bracket



Direct (DI)

STANDARDS & FEATURES

- High quality bi-level Motion sensor with increased energy savings (Optional) & Photocell
- CRI: Ra>70, Luminous efficacy: 130lm/w, Colors: 30K / 40K / 50K
- Imput Voltages from 100 to 480 (optional)
- Wet Location Certified, safe and reliable. DLC Premium, UL certified.
- 5 Years Limited Warranty. See warranty documentation for more information

*3000K and 4000K available upon request.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-SAL05-150W-50K-T3	150/200/240/300W	26,000	AC 100-240V, MAX 277V	40K/50K/57K
TK-SAL05-200W-50K-T3	150/200/240/300W	26,000	AC 100-240V, MAX 277V	40K/50K/57K
TK-SAL05-240W-50K-T3	150/200/240/300W	26,000	AC 100-240V, MAX 277V	40K/50K/57K
TK-SAL05-300W-50K-T3	150/200/240/300W	26,000	AC 100-240V, MAX 277V	40K/50K/57K

TKYR™ SERIES

LED STADIUM LIGHT / AREA LIGHT



STANDARDS & FEATURES

- High quality internal driver; Flicker free & non-dimmable. Long lifespan & superb heat dissipation.
- Fits many fixtures for simple replace of Metal Halide Lamps. Quick & Easy installation.
- CRI :Ra>70, Luminous efficacy: 86 lm/w, Colors: 5000K
- It complies with DLC, cETLus, FCC, CE, and IP65 Rated.
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TKYR-PL670D-5050-W400	400 W	34,400	AC100-277V	5000K
TKYR-PL670D-5050-W500	500 W	43,000	AC100-277V	5000K
TKYR-PL670D-5050-W600	600W	51,600	AC100-277V	5000K

TK-WP06™ SERIES


LED SLIM WALL PACK



STANDARDS & FEATURES

- 0-10V dimmable, IK08 borosilicate prismatic glass witl die-cast aluminum housing
- Optional High quality bi-level Motion sensor with increased energy savings, Photocell & 8W Emergency Driver
- IP 65 Rated, CRI: Ra>70, Luminous efficacy: 145lm/w, Colors: 30K / 40K / 50K; 3000K - 6500K (single color temperature optional)
- Input Voltages from 100-277VAC (standard) 100V- 347 VAC (optional)
- It complies with IP65 Rated. UL, cUL, DLC 5.1 Premium Pending.
- 5 Years Limited Warranty. See warranty documentation for more information

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-WP06-100W-3CCT-CS	60W / 80W / 100W	125lm/w	AC100-277 / 100-347 V	3CCT (3000K/4000K/5000K)
TK-WP06-120W-3CCT-CS	80W / 100W / 120W	125lm/w	AC100-277 / 100-347 V	3CCT (3000K/4000K/5000K)



Optional Sensor's



Intergrated Photocell



Haisen Photocell



Haisen Motion sensor



Emergency battery Backup

TK-WP01™ SERIES

LED WALL PACK




STANDARDS & FEATURES

- 0-10V dimmable, They are made of Die-Cast Aluminum, Glass Diffuser, PC Diffuser
- High quality bi-level Motion sensor with increased energy savings (Optional), Photocell
- IP 65 Rated, CRI: Ra>70, Luminous efficacy: 130lm/w, Colors: 30K / 40K / 50K
- Input Voltages from 100-277VAC (standard)
- It complies with ETL Listings, DLC Premium.
- 5 Years Limited Warranty. See warranty documentation for more informatio

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-WP01-72L-DUV-30/40/50K-T	72W / 96W / 120W	130lm/w	AC100-277	3CCT (3000K/4000K/5000K)
TK-WP01-96L-DUV-30/40/50K-T	72W / 96W / 120W	130lm/w	AC100-277	3CCT (3000K/4000K/5000K)
TK-WP01-120L-DUV-30/40/50K-T	72W / 96W / 120W	130lm/w	AC100-277	3CCT (3000K/4000K/5000K)








TK-WP05™ SERIES

LED ADJUSTABLE WALL PACK

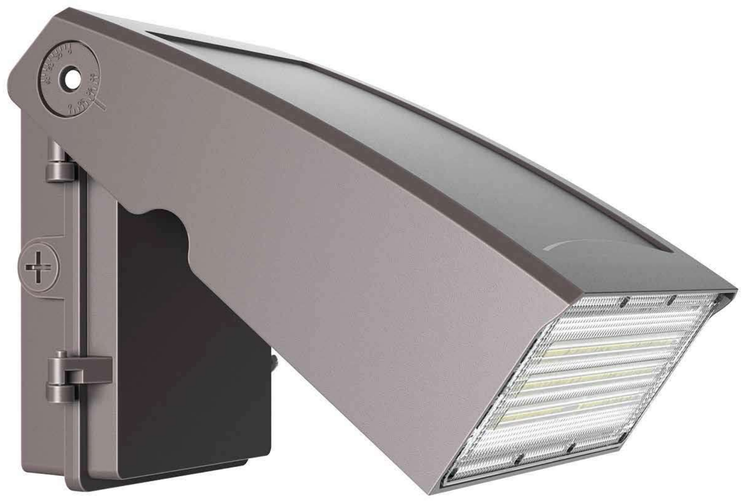

STANDARDS & FEATURES

- 0-10V dimmable, They are made of Die-Cast Aluminum
- High quality bi-level Motion sensor with increased energy savings (Optional), Photocell & Occupancy Sensor
- IP 65 Rated, CRI: Ra>80, Luminous efficacy: 140lm/w, Colors: 40K / 50K
- Input Voltages from 120-277VAC (standard)
- Wet Location Certified, safe and reliable. ETL Lisited & DLC Premium
- 5 Years Limited Warranty. See warranty documentation for more information

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-WP05-80L-D-50	80W	140lm/w	AC120-277	3CCT (4000K/5000K/5700K)



TK-WP X2™ SERIES

CCT & WATT SELECTION FULL CUT-OFF WALLPACK




STANDARDS & FEATURES

- 0-10V dimmable, IK08 borosilicate prismatic glass witl die-cast aluminum housing
- Optional High quality bi-level Motion sensor with increased energy savings, Photocell & 8W Emergency Driver
- IP 65 Rated, CRI: Ra>70, Luminous efficacy: 145lm/w, Colors: 30K / 40K / 50K; 3000K - 6500K (single color temperature optional)
- Input Voltages from 100-277VAC (standard) 120V- 347 VAC (optional)
- It complies with ETL Listing, DLC Premium, TITILE24.
- 5 Years Limited Warranty. See warranty documentation for more information

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-WPX2M-60-830/40/50-MS	60W / 80W / 100W	120 - 140lm/w	120-277 VAC / 120-347	3CCT (3000K/4000K/5000K)
TK-WPX2M-80-830/40/50-MS	60W / 80W / 100W	120 - 140lm/w	120-277 VAC / 120-347	3CCT (3000K/4000K/5000K)
TK-WPX2M-100-830/40/50-MS	60W / 80W / 100W	120 - 140lm/w	120-277 VAC / 120-347	3CCT (3000K/4000K/5000K)







TK-MWP2™ SERIES

MINI LED WALL PACK


STANDARDS & FEATURES

- 1-10V Dimming. UV-stabilized PC lens resist corrosion and environmental conditions.
- A built-in photocell that activates at duskand deactivates at dawn.
- IP 65 Rated, CRI: Ra>80, Luminous efficacy: 130lm/w, Colors: 30K / 40K / 50K; 3000K (Color Selectable)
- Input Voltages from 100-277V.
- It complies with UL Listing, and FCC.
- 5 Years Limited Warranty. See warranty documentation for more information

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-MWP2-15W-3CS-S	15W/20W/25W	130lm/w	120-277 V	3CCT (3000K/4000K/5000K)
TK-MWP2-20W-3CS-S	15W/20W/25W	130lm/w	120-277 V	3CCT (3000K/4000K/5000K)
TK-MWP2-25W-3CS-S	15W/20W/25W	130lm/w	120-277 V	3CCT (3000K/4000K/5000K)







TKYR™ SERIES

LED UFO TOP AREA LIGHT




STANDARDS & FEATURES

- Type V optics produce a round distribution which is perfect for parking lots and pathways.
- LED luminaires have been tested by an independent laboratory in accordance with IESNALM-79 and LM-80.
- It complies with DLC, cETLus, RoHS, CE, FCC and IP65.
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TKYR-TP421-W60-MCTP	60W/80W/100W	130lm/w	AC100-277V	3000K / 4000K / 5000K
TKYR-TP421-W80-MCTP	60W/80W/100W	130lm/w	AC100-277V	3000K / 4000K / 5000K
TKYR-TP421-W100-MCTP	60W/80W/100W	130lm/w	AC100-277V	3000K / 4000K / 5000K







TK-CP02G™ SERIES


LED GARAGE CANOPY LIGHT




STANDARDS & FEATURES

- 0-10V dimmable, Durable die cast aluminum housing for long-lasting use.
- Optional High quality bi-level Motion sensor with increased energy savings, Photocell & 8W Emergency Driver
- IP 65 Rated, CRI: Ra>70, Luminous efficacy: 135lm/w, Colors: 30K / 40K / 50K; 3000K - 6500K (single color temperature optional)
- Input Voltages from 100-277VAC (standard) 120V- 347 VAC (optional)
- 5 Years Limited Warranty. See warranty documentation for more information

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-CP02G-40W-3CCT-CS-Z	40W / 60W / 75W	120 - 140lm/w	120-277 VAC / 120-347	3CCT (3000K/4000K/5000K)
TK-CP02G-60W-3CCT-CS-Z	40W / 60W / 75W	120 - 140lm/w	120-277 VAC / 120-347	3CCT (3000K/4000K/5000K)
TK-CP02G-75W-3CCT-CS-Z	40W / 60W / 75W	120 - 140lm/w	120-277 VAC / 120-347	3CCT (3000K/4000K/5000K)







TKYR-CP-380™ SERIES

LED CANOPY



STANDARDS & FEATURES

- 0-10V Dimmable. Professional light distribution technique, high light reflectivity reflectors,110° beam angle available;
- IP 65 Rated, CRI: Ra>80, Luminous efficacy: 135lm/w, Colors: 50K
- Input Voltages from 100-277VAC (standard)
- Wet Location Certified, safe and reliable. ETL Lisited & DLC Premium
- 5 Years Limited Warranty. See warranty documentation for more information

MODEL	WATT	LUMENS	VOLTAGE	CCT
TKYR-CP-380-150W-50K	150W	20250	AC100-277	5000K



TK-CAN3TNC™ SERIES

LED CANOPY LIGHT




STANDARDS & FEATURES

- 0-10V Dimming Precision die-cast aluminum housing. Formulated for high-durability and long lasting color.
- Mounts to all square and round poles if optional Universal Pole Adaptor is used.Quick & Easy installation.
- Clear Polycarbonate lens with Shat terproof , Non-Yellowing, Self-Sealing Gasket
- CRI :Ra>70, Luminous efficacy: 137 lm/w, Colors: 4000K / 5000K / 5700K
- It complies with UL certification, safe and reliable. IP65 Rated. DLC Listed.

  5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TK-CAN3TNC	150 W	20,550	AC120~277, 347-480V	3000 / 4000 / 5000
TK-CAN3TNC	200 W	27,400	AC120~277, 347-480V	3000 / 4000 / 5000

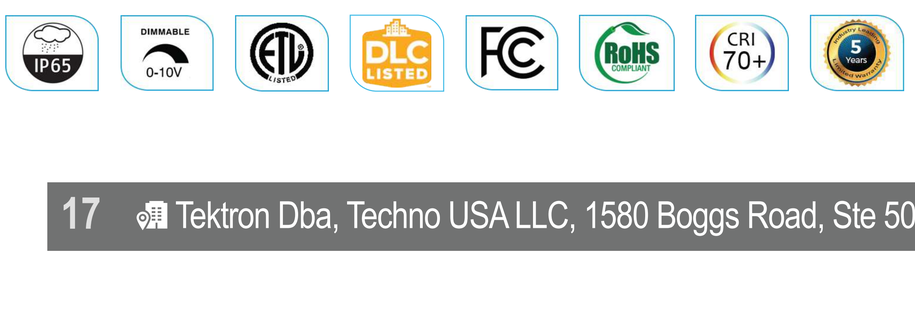




U Bracket mounting



Junction Box Kit



Beauty Plate



Bronze Finish



Black Finish

Tektron Dba, Techno USA LLC, 1580 Boggs Road, Ste 500, Duluth, GA-30096. P: 678-456-4810 F: 678-456-4811 www.tektronled.com Sales@tektronled.com

EE-7033 LED EMERGENCY EXIT

TK-EE-7033 SERIES

STANDARDS & FEATURES

- Injection-molded thermoplastic ABS housing 1.2W per lamp head
- Battery backup for 90 minutes duration
- Wall or ceiling mounting
- 120/277VAC voltage operation
- 3.6V Nickel cadmium battery
- 5 Years Limited Warranty. See warranty documentation for more information



MODEL	WATT	HOUSING CLR	OPTIONS
TK-EE-7033	2.4 W	W- White	HL- High Lumen SDT- Self Diagnostics
	2.4 W	B- Black	

LED EMERGENCY LIGHT

TK-CR-7069 SERIES

STANDARDS & FEATURES

- Injection-molded thermoplastic housing, UL-94V-0 flame rating,fire-retardant
- Wall and ceiling mounting. Super bright SMD LED 2*2W
- Over charge & Over-discharge protection
- Input Voltage: 120/277 VAC 60Hz
- 4.5 watt (36 LEDs x 0.125 watts) per light pipe.
- 5 Years Limited Warranty. See warranty documentation for more information.



MODEL	WATT	HOUSING CLR	OPTIONS
TK-CR-7069	4.5 W	W- White	STD- Self-Diagnostics
	4.5 W	B- Black	

EE-7007 RX LED EMERGENCY EXIT

TK-EE-7007RX SERIES

STANDARDS & FEATURES

- Injection-molded thermoplastic ABS housing. Innovative, easy installation in minutes
- Battery backup for 90 minutes duration
- Wall, side or ceiling mounting. Double / Single face configuration
- 120/277VAC voltage operation. 3.6V Nickel cadmium battery
- 5 Years Limited Warranty. See warranty documentation for more information



MODEL	FACE	LETTER CLR	HOUSING CLR	OPTIONS
TK-EE-7007RX	Single	R- Red	W- White	SDT - Self-Diagnostics
	Double	B-Green	B- Black A- Aluminum	2C-120 - Dual Circuit with 120V input 2C-277 - Dual Circuit with with 277V input CUSTOM - Custom Wording

EE-7109R LED EMERGENCY LIGHT

TK-EE-7109R SERIES

STANDARDS & FEATURES

- Injection-molded thermoplastic ABS housing. Innovative, easy installation
- Battery backup for 90 minutes duration
- Wall, side or ceiling mounting. Double / Single face configuration.
- 120-347VAC voltage operation. 4.8V Nickel cadmium battery
- 5 Years Limited Warranty. See warranty documentation for more information



MODEL	FACE	LETTER CLR	HOUSING CLR	OPTIONS
TK-EE-7109	Single	R- Red	A- Aluminium	SDT Self-Diagnostics
	Double	B-Green	M- Mirror W- White	2C-120 - Dual Circuit with 120V input 2C-277 - Dual Circuit with with 277V input

EE-7082RX EMERGENCY EXIT

TK-EE-7082RX SERIES

STANDARDS & FEATURES

- Injection-molded thermoplastic ABS housing
- Innovative, easy installation in minutes
- Battery backup for 90 minutes duration
- Wall or ceiling mounting. 2X1.2W fully adjustable lamp heads
- 1 20/ 277VAC voltage operation. 3.6V Nickel cadmium battery



MODEL	FACE	LETTER CLR	HOUSING CLR	OPTIONS
TK-EE-7082RX	Double	R- Red	W- White	RC- Remote Control
	Double	G- Green		HL- High Lumen SDT- Self Diagnostics

EE-7024AR EMERGENCY EXIT

TK-EE-7024AR SERIES

STANDARDS & FEATURES

- Injection-molded thermoplastic ABS housing Innovative,
- Easy installation in minutes. Battery backup for 90 minutes duration
- Wall, side or ceiling mounting. Double / Single face configuration
- 120/277VAC voltage operation. 4.8V Nickel cadmium battery
- 5 Years Limited Warranty. See warranty documentation for more information



MODEL	FACE	LETTER CLR	HOUSING CLR	OPTIONS
TK-EE-7024AR	Single	R- Red	W- White	RC- Remote Capacity
	Double	G- Green		

EE-7112 EMERGENCY EXIT

TK-EE-7112 SERIES

STANDARDS & FEATURES

- Injection-molded thermoplastic ABS housing Innovative
- Easy installation in minutes
- Battery backup for 90 minutes emergency duration
- Wall or ceiling mounting. 1.2W x 2 lamp heads. 120/ 277VAC voltage
- Long life Nickel cadmium battery. Suitable for wet locations



MODEL	WATT	HOUSING CLR	OPTIONS
TK-EE-7112	2.4 W	W- White	RC- Remote Capacity
	2.4 W	B- Black	TP- Tamper Proof Screws SDT- Self Diagnostics CW- Cold Weather

04CWLEZ EMERGENCY EXIT

EM SERIES

STANDARDS & FEATURES

- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery)
- Long lasting, efficient ultra-bright white LED lamp heads
- Adjustable LED lamp heads provide optimal center-to-center spacing
- 3.6 watt (3 LEDSx 1.2 Watt)



	FACE	LETTER CLR	HOUSING CLR	OPTIONS
04CWLEZ	Single	R- Red	W- White	RC- Remote Capacity
	Double	G- Green		TP- Tamper Proof Screws SDT- Self Diagnostics CW- Cold Weather

TKPL-UPD-18X1B

WALL LIGHT UP DOWN CYLINDRICAL WALL LAMP




STANDARDS & FEATURES


- Die-cast Aluminum with Glass Tempered Diffuser Flicker free and Non-IC & damp location rated. Beam angle 15° / 30°/ 60°/90°
- It complies with ROHS,ETL, CE, IP65 Rated and 5 years warranty
- It is easy to install with the help of a universal mounting plate preinstalled at the bottom. Instant start with out humming.
- 50,000 working hours
- 5 Years Limited Warranty. See warranty documentation for more information.

MODEL	WATT	LUMENS	VOLTAGE	CCT
TKPL-UPD-18X1B	18W	1,800	100-277V AC	W/WW/Y/R/G/B/Pink/Purple
TKPL-UPD-36B-2	36W	3,600	100-277V AC	W/WW/Y/R/G/B/Pink/Purple
TKPL-UPD-36X1RGBW-2	36W	3,600	100-277V AC	W/WW/Y/R/G/B/Pink/Purple

TK-25-4 4-11G

15 - 25 FEET SQUARE LIGHT POLE

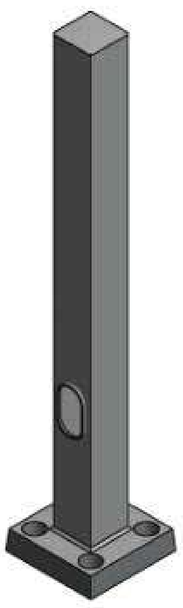

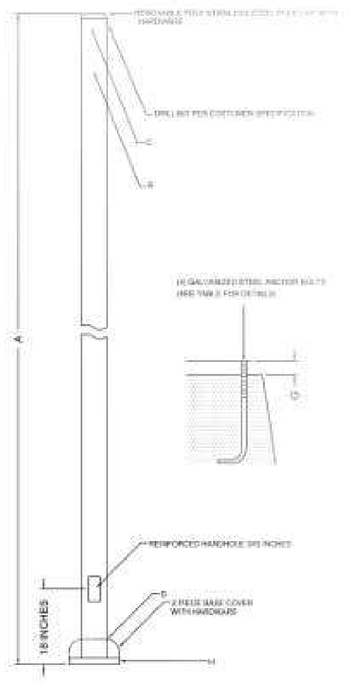


STANDARDS & FEATURES

- Commercial quality welded steel tubing of 1 piece construction with a minimum yield strength of above 60000 psi is used to
- fabricate the cate the pole shaft
- 2.5 x 5 inches tall reinforced handhole with rubber gasket is provided at 18 inches from the base. A cover with a screw
- hardware.
- A 2 piece metal base cover is provided along with hardware to securely attach the 2 pieces together after pole installation.
- 5 Years Limited Warranty. See warranty documentation for more information.

SPECIFICATION OF 25 FEET POLE TABLE		
SPECIFICATION ON TABLE	A	25 FT (7620mm +/- 10 mm)
GAUGE	B	MORE THAN 11 G (3 mm)
TOP WIDTH	C	3.94 INCH (100mm)
BUTT WIDTH	D	3.94 INCH (100mm)
BASE WIDTH	E	9.84 INCH (250mm)
BOLT CIRCLE	F	8.5 INCH (216 mm)
BOLT PROJECTION	G	3.5INCH (76.2MM)
BASE THICKNESS	H	0.79 INCH (20 MM)
ANCHOR BOLT SIZE	I	0.86X17X3 INCH (22X 431X76 MM)
BOLT CIRCLE RANGE	-	7-11 INCH (175 - 275 MM)
POLE WEIGHT	-	200 lbs +/- 5% (90 KG +/- 5 %)
MAXIMUM EPA WITH 1.3 GUST FACTOR:		
80 MPH : 7.4 SQUARE FEET		
90 MPH : 5.3 SQUARE FEET		
100 MPH : 3.2 SQUARE FEET		

MODEL	SIZE
TK-25-4 4-11G	15 FT
TK-25-4 4-11G	20 FT
TK-25-4 4-11G	25 FT
TK-25-4 4-11G	30 FT

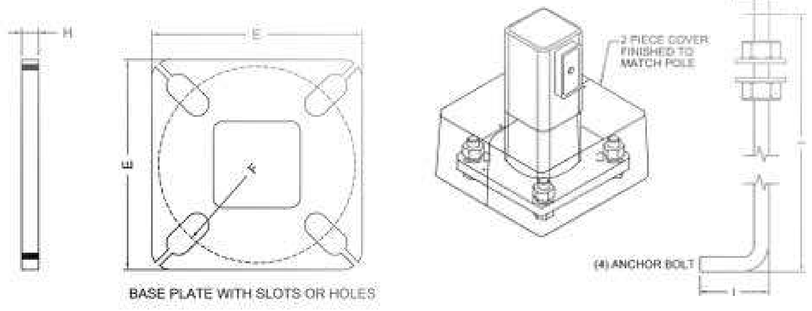

ACCESSORIES

STEEL LIGHT POLE ADAPTERS



External Tenon Reducer
For Round Pole



Spoke Bracket
Three Arms 90 Degree



Spoke Bracket
Four Arms 90 Degree



Spoke Bracket
Three Arms 120 Degree



Spoke Bracket
Two Arms 90 Degree



Spoke Bracket
Two Arms 180 Degree



Internal Tenon
For 4 inch Square Pole



BullHorn Bracket Two Arms
180 Degree for Square Pole



BullHorn Bracket Three Arms
180 Degree for Square Pole



BullHorn Bracket
Four Arms 90 Degree
for Square Pole



Bull Horn Bracket
Two Light Pole Top Mounting

Anti-glare Diffuser

Excellent CRI

Robust Design

Long Life

Eco-Friendly

Zero Maintenance

No UV & IR Radiation

www.instagram.com/tektronled

linkedin.com/company/tektron-led

facebook.com/tektronledlight

x.com/tektronled

TEKTRON®
Reliable Engineering, Futuristic Design

Distribution & Warehouse
TEKTRON DBA Techno USA LLC
1580 Boggs Rd Ste. 500
Duluth,GA 30096

Sales@tektronled.com

www.tektronled.com

678-456-4810

678-456-4811

Manufacturing Unit:
Plot No.81, B/h Keya Motors, Chhani jakat
Naka, Vadodara -390002. Gujarat, India