SPIN

BROWNLEE



Black Finish (Optional) | FL1 diffuser



RD2 diffuser + Extended Housing (EXT) option, also used for Integral Battery Backup (BBI).

2061 LED

The modern SPIN features high efficacy performance and is perfect for corridors, units and plenty of other general lighting applications. Tool-free twist-lock diffuser design with two styles to choose from and no exposed hardware. Refer to the 2081 for a similar look offered in larger sizes.

NEW

-18" dia. size now available.
-Integral Battery Backup now available (both sizes).
-Extended Housing (EXT) now standard on Battery Backup option and Occupancy Sensor + Bi-level Dimming options.

CUSTOMIZE

BN BL BZ BU GN MG NT RD WH YL

SPIN

PROJECT:
MODEL #:
FIXTURE TYPE:

STANDARD SPECIFICATIONS

HOUSING
Sturdy cold rolled steel formed spinning. No exposed hardware on spinning wall.

DIFFUSER
Translucent, UV stabilized, white acrylic. Diffuser is vacuum formed and features a secure tool-free "twist-lock" installation method.

MOUNTING
Directly to j-box (by others). Mounting hardware included. Indoors only.
Extended housing option (EXT) may be used for side-fed conduit entry but must be drilled in the field and is thus non-returnable.


FINISH
The standard finish is a plated brushed nickel. Options include all Brownlee finishes.


LED PERFORMANCE - 3500K STANDARD
120-277V - 3500K, 82 CRI - L80 rating - 60,000 hrs - L70 rating (projected) - 100,000 hrs
Amperage rated @ 110V input. Operating ambient temperature: -20°C / -4°F - 40°C / 104°F
Uses RoHS compliant electrical components. Delivered 3500K lumens noted.

14 Size: R11 - 11W nominal, .09 A input - 1094 lm. Dimmable (0-10V).
14 Size: R18 - 18W nominal, .15 A input - 1749 lm. Dimmable (0-10V).
14 Size: R22 - 22W nominal, .19 A input - 2061 lm. Dimmable (0-10V).

18 Size: R23 - 23W nominal, .19 A input - 2105 lm. Dimmable (0-10V).
18 Size: R34 - 34W nominal, .28 A input - 3100 lm. Dimmable (0-10V).
18 Size: R49 - 49W nominal, .41 A input - 4115 lm. Dimmable (0-10V).

WARRANTY
5 year limited warranty on this LED product. Consult factory for details.

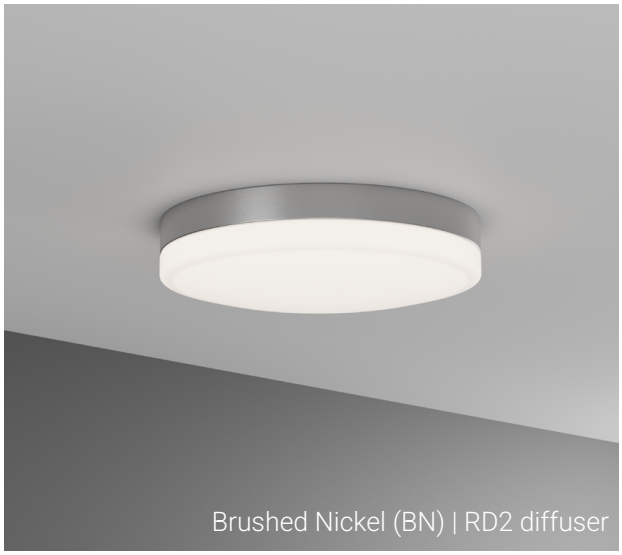

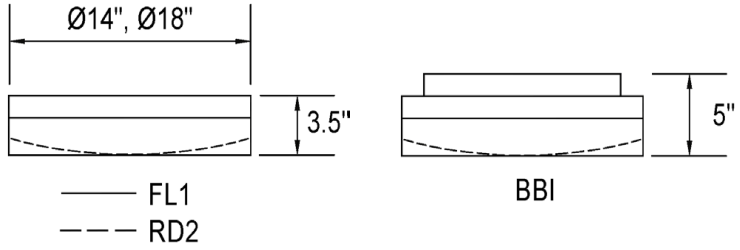

DAMP · ADA · SUPPORTS T24 COMPLIANCE · RoHS COMPLIANT ELECTRONICS · BAA OPTIONS · Ceiling / Wall

ORDERING INFORMATION

2061 - _____ - _____ - _____ - _____ - _____ - _____

Model | 2. | 3. | 4. | 5. | 6. | 7. (if required)

2. SIZE
14 14" dia.
18 18" dia.

3. FINISH
STANDARD
BN Brushed Nickel

OPTIONAL
BL Black
BZ Bronze
BU Pastel Blue (RAL 5024)
GN Pastel Green (RAL 6019)
MG Metallic Gold
NT Nickel Tone
RD Red (RAL 3020)
WH White
YL Yellow (RAL 1018)

4. WATTAGE
14 SIZE
R11 11W R Series LED
R18 18W R Series LED
R22 22W R Series LED

18 SIZE
R23 23W R Series LED
R34 34W R Series LED
R49 49W R Series LED

5. DIFFUSER
FL1 Style 1 Flat Diffuser
RD2 Style 2 Round Diffuser
*Note: RD1 has been discontinued.

6. COLOR TEMPERATURE
35K 3500K standard color temp.
27K 2700K color temp.
30K 3000K color temp.
40K 4000K color temp.

7. AVAILABLE OPTIONS
90R[0] 90 CRI (30K & 35K only)
BAC[1] Buy American Compliant (BAA)
BBI[2*] Integral Battery Backup (8W) (Requires extended housing) (Adds 1.50" to depth)
Battery must be connected to continuous power supply within 7 Mo. of shipping. See Warranty Note 3.
BLD[3]** Bi-Level Dimming (Requires extended housing) (Adds 1.50" to depth)
DTR[4] Triac (Line Voltage) Dimming (120V)
EXT Extended Housing (Intended to match BBI extension) (Adds 1.50" to depth). Contact factory if using for conduit entry.
FCL[7] French Canadian Labels
OCC[8] Occupancy Sensor (Requires extended housing) (Adds 1.50" to depth)
T24[9] Title 24 JA8 Compliant (30K & 35K only)

Universal Footnotes (only applies if superscript is shown in Options section): (0) 90R - All LEDs/CCTs are being transitioned to 90 CRI in the next year. Inquire for this model's availability. **1) BAC/BAB** - www.brownlee.com/resources/usa. **(2) BBI/BBC** - cannot combine with ECW or EXT. **(3) BLD** - integral microwave motion sensor (step-dim). Cannot combine with DTR. **(4) DTR** - cannot combine with BLD or OCC. **(5) ECW** - cannot combine with BBI, BBC, or DTR. **(7) FCL** - cannot combine with BAC. **(8) OCC** - integral microwave motion sensor (ON/OFF). **(9) T24** - includes JA8 labeling and 90 CRI LEDs. **(10) PCH/PC4** - cannot combine with BLD or OCC.
Add'l Notes: *BBI/BBC - BBI minimum operating temp: 10C/50F unless otherwise stated. BBC minimum operating temp: -20C/-4F.
****BLD** - integral microwave motion sensor with step-dim control. 1: Motion is detected, illuminate to 100%.
2: Motion no longer detected, dim to set level. 3: Remain in continuous dimmed state or turn off after set period. Config. via onboard dip switches.

Specifications subject to change without notice.

BROWNLEE LIGHTING
www.brownlee.com

REVISED
2026.08.10