


SECTION
C

Wallplates & Weather Protective Covers

Our broad offering of wallplates are the final touch for any application and are available in standard size, mid-size and oversize. Choose from a variety of materials, colors, and configurations to match any combination of device and décor. Weather protective covers are available in a wide selection of configurations to maintain the integrity of outdoor devices.



Standard size wallplates
C-10



Mid-size wallplates
C-17



Oversize wallplates
C-24




Wallplate accessories
C-25



While-in-use boxes
C-28



Weather protective covers
C-29

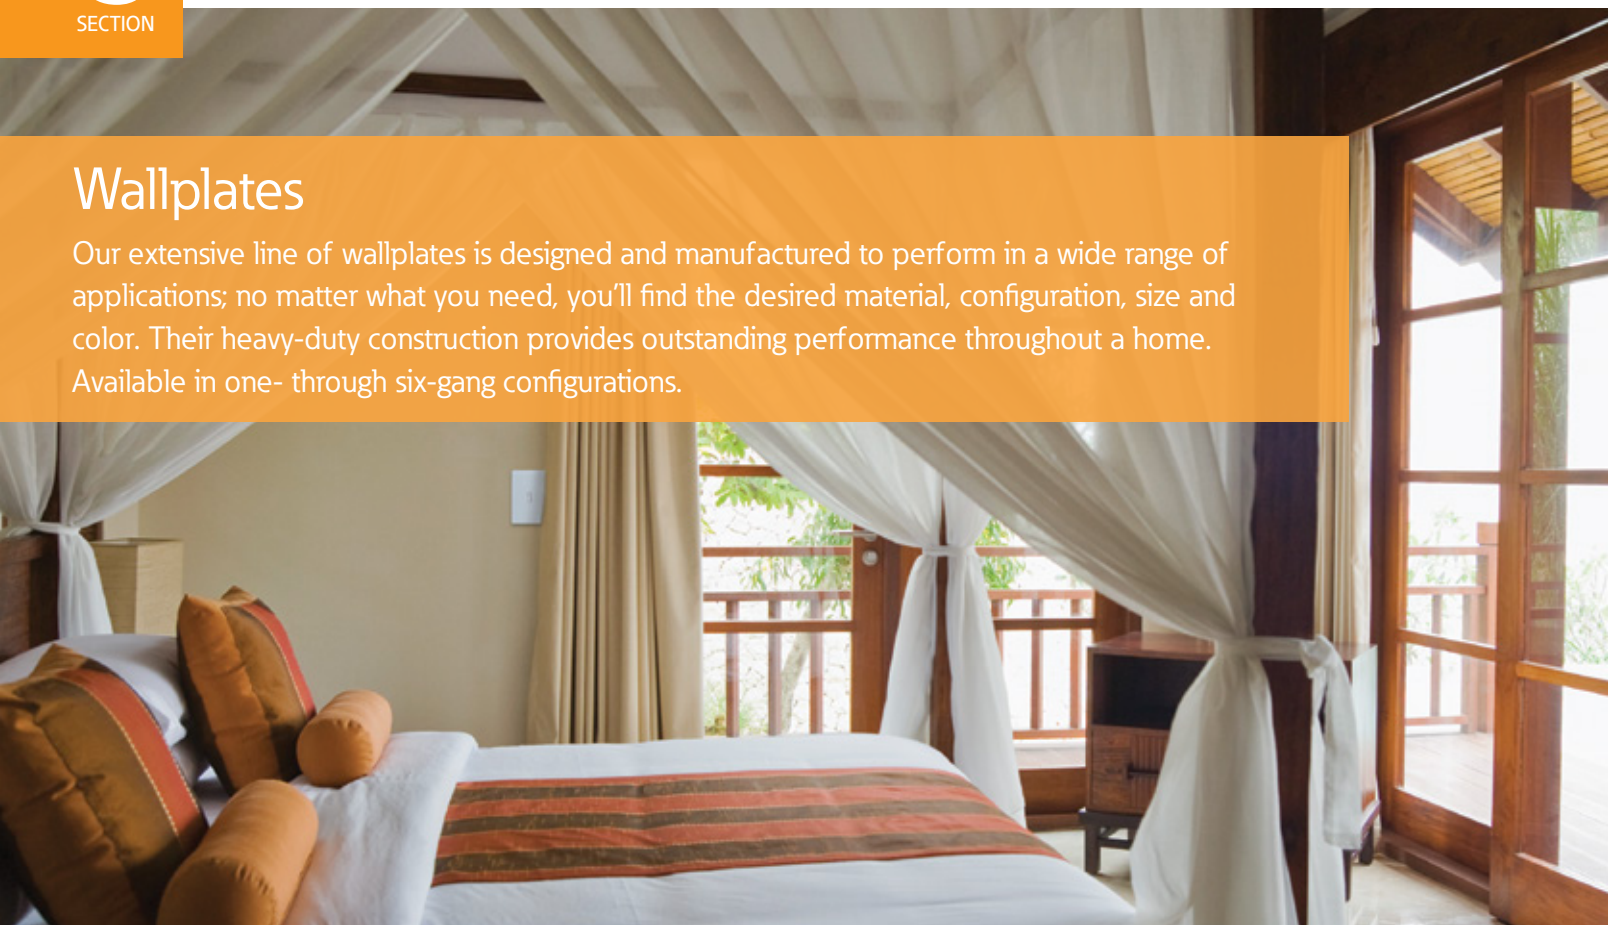


Wallplates

Our extensive line of wallplates is designed and manufactured to perform in a wide range of applications; no matter what you need, you'll find the desired material, configuration, size and color. Their heavy-duty construction provides outstanding performance throughout a home. Available in one- through six-gang configurations.


Wallplate families

Standard size wallplates




C-10

Mid-size wallplates



C-17

Oversize wallplates



C-24

Wallplate accessories




C-25

Wallplate colors

- Almond
- Black
- Brown
- Gray
- Ivory
- Lt. Almond
- White
- Brushed Bronze
- Blue
- Solid Brass
- Red
- Stainless Steel

The Eaton difference

- Mid-size screwless wallplates deliver the ultimate in designer looks with a screwless finish; they are fast and easy to install, virtually unbreakable and easy to clean
- Mid-size & oversize wallplates are designed for use in applications where additional wall coverage is needed
- Extra depth wallplates are available for use with old work outlet boxes for a flush fit to the wall
- Available wallplate materials include virtually unbreakable nylon & polycarbonate thermoplastics, 302/304 corrosion resistant stainless steel, brass, and thermoset
- Nylon & polycarbonate wallplates feature screw-catch, a timesaving feature that holds mounting screws captive to simplify installation
- Our wallplates are manufactured according to the performance & dimensional requirements of Federal Specification WP-455, NEMA Standard WD-1, UL Standard 514 and the NEC®

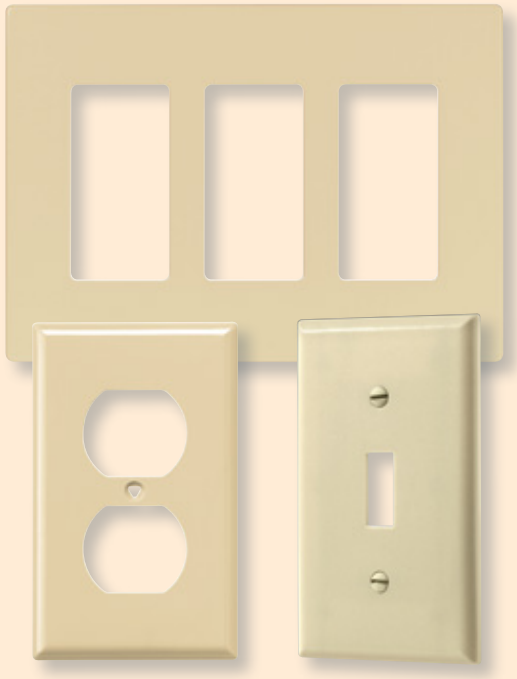

Specific wallplate solutions for today's needs



Aesthetic upgrade

Our screwless wallplates come in 3 different openings for upgrading the look of toggle switches, GFCIs, rotary dimmers and duplex receptacles without having to change out devices!

See pages C-17 to C-19

Shown: PJS1





Corrosion resistance

Brass and stainless steel wallplates offer durable, elegant corrosion resistance making them ideal for high-moisture locations like kitchens, baths, garages and basements.

See pages C-10 to C-25

Shown: 93101



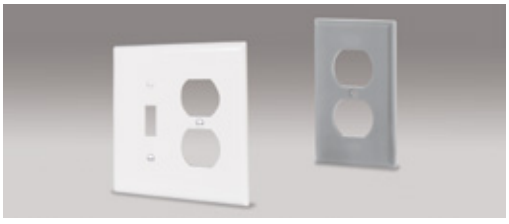

Impact resistance

Thermoplastic polycarbonate and nylon wallplates are virtually unbreakable, warp resistant, abrasion resistant and soil resistant, making them ideal for high-traffic areas.

See pages C-10 to C-26

Shown: PJ26



Wallplate material information



Thermoplastic nylon or polycarbonate wallplates

Design features

- Rugged construction reduces installation cost due to less plate breakage and resists bowing to provide a smooth, flat installation
- Exclusive timesaving Screw-catch feature holds mounting screws captive and simplifies installation
- High gloss finish is soil resistant
- Polycarbonate wallplates are virtually unbreakable with high structural rigidity, long-term form retention, plus superior impact and abrasion resistance
- Nylon wallplates have a flush-fitting, warp resistant design
- Matching mounting screws provide

Testing & code compliance

- cULus listed to UL514C, file no. E33216, certified to CSA C22.2, no. 42.1

Material characteristics

- Flammability: meets UL94 requirements; 5V rated
- Temperature rating: -40°C to 70°C (-40°F to 158°F)



Thermoset wallplates

Design features

- Extensive line of non-flammable thermoset plates provides flush-fitting, warp resistant performance

Testing & code compliance

- cULus listed to UL514C, file no. E33216, certified to CSA C22.2, no. 42.1

Material characteristics

- Flammability: Meets UL94 requirements; 5V rated
- Temperature rating: -40°C to 65°C (-40°F to 149°F)



302/304 Stainless steel wallplates

Design features

- Superior non-corrosive and non-magnetic properties for applications needing protection from those elements
- Stainless steel alloy contains 18% chromium and 8% nickel for corrosion resistance
- Stamped from 0.032" (0.81mm) thick material
- Horizontally satin-brushed surface finish resists finger prints
- All plates are coated with clear, removable PVC to safeguard the surface during handling and installation
- Matching stainless steel mounting screws provided

Testing & code compliance

- Listed to UL514D, file no. E92122, certified to CSA C22.2, no.42.1

Material characteristics

- Temperature rating: -40°C to 70°C (-40°F to 158°F)



Brass wallplates

Design features

- Line of handsomely crafted, elegant solid brass designs in 11 popular NEMA standard size configurations
- Strong, corrosion resistant and coated with transparent lacquer to resist premature oxidation
- Horizontally satin-brushed surface finish resists fingerprints
- Matching brass-plated steel screws resist damage during installation
- All plates are coated with clear, removable PVC to safeguard the surface during handling and installation
- Solid brass material is a 70/30 alloy (#26C), .040" (1.02mm) thick

Testing & code compliance

- Listed to UL514D, file no. E92003


Material characteristics

- Temperature rating: -40°C to 70°C (-40°F to 158°F)

Compliances, specifications and availability are subject to change without notice.


Wallplate quick reference guide

Toggle




	Standard size				Mid-size				Oversize	
Gang	Thermoset	Nylon	Stainless steel	Brass	Thermoset	Polycarbonate	Screwless	Stainless steel	Thermoset	Stainless steel
1-Gang	2134__	5134__	93071	94071	2034__	PJ1__	PJS1__	93971	2144__	93871
2-Gang	2139__	5139__	93072	94072	2039__	PJ2__	PJS2__	93972	2149__	93872
3-Gang	2141__	5141__	93073	94073	2041__	PJ3__	PJS3__	93973	2741__	93873
4-Gang	2154__	5154__	93074	—	2054__	PJ4__	PJS4__	—	—	93874
5-Gang	2155__	—	93075	—	—	PJ5__	—	—	—	—
6-Gang	2156__	—	93076	—	—	PJ6__	—	—	—	—

Decorator/GFCI




	Standard size				Mid-size				Oversize	
Gang	Thermoset	Nylon	Stainless steel	Brass	Thermoset	Polycarbonate	Screwless	Stainless steel	Thermoset	Stainless steel
1-Gang	2151__	5151__	93401	94401	2051__	PJ26__	PJS26__	93934	2751__	93834
2-Gang	2152__	5152__	93402	94402	2052__	PJ262__	PJS262__	93935	—	—
3-Gang	2163__	—	93403	—	2063__	PJ263__	PJS263__	93936	—	—
4-Gang	2164__	—	93404	—	2064__	PJ264__	PJS264__	—	—	—
5-Gang	2165__	—	93405	—	—	PJ265__	PJS265__	—	—	—
6-Gang	2166__	—	93406	—	—	PJ266__	PJS266__	—	—	—

Duplex receptacle



	Standard size				Mid-size				Oversize	
Gang	Thermoset	Nylon	Stainless steel	Brass	Thermoset	Polycarbonate	Screwless	Stainless steel	Thermoset	Stainless steel
1-Gang	2132__	5132__	93101	94101	2032__	PJ8__	PJS8__	93901	2142__	93801
2-Gang	2150__	5150__	93102	94102	2050__	PJ82__	—	93902	2750__	93802
3-Gang	—	—	93103	—	—	—	—	—	—	—

Blank




	Standard size				Mid-size				Oversize	
Gang	Thermoset	Nylon	Stainless steel	Brass	Thermoset	Polycarbonate	Screwless	Stainless steel	Thermoset	Stainless steel
1-Gang	2129__	5129__	93151	94151	2029__	PJ13__	—	93951	2729__	93851
2-Gang	2137__	5137__	93152	—	2037__	PJ23__	—	—	—	93852
3-Gang	—	—	93153	—	—	—	—	—	—	—
4-Gang	—	—	93154	—	—	—	—	—	—	—
1-strap mt.	—	—	—	—	—	PJ14__	—	—	—	—

Compliances, specifications and availability are subject to change without notice.


Wallplate quick reference guide

Power outlet




	Standard size				Mid-size				Oversize	
Gang	Thermoset	Nylon	Stainless steel	Chrome	Thermoset	Polycarbonate	Screwless	Stainless steel	Thermoset	Stainless steel
1-1.40" Hole	2131__	5131__	93091	—	—	PJ7__	—	—	2731__	93891
1-1.59" Hole	—	—	93111	—	—	PJ720__	—	—	—	—
1-2.15" Hole	—	—	93221	39CH	2068__	PJ724__	—	—	—	—
2-2.15" Hole	2168__	—	93227	68	—	PJ703__	—	—	—	—

Combination




	Standard size				Mid-size			Oversize
Gang	Thermoset	Nylon	Stainless steel	Brass	Thermoset	Polycarbonate	Stainless steel	Thermoset
Toggle & duplex receptacle	2138__	5138__	93532	94532	2038__	PJ18__	93932	2148__
Toggle & decorator	2153__	5153__	93432	94432	2053__	PJ126__	93937	—
Toggle & blank	—	5171__	—	—	—	PJ113__	—	—
Duplex receptacle & blank	—	5170__	—	—	—	PJ138__	—	—
Duplex receptacle & decorator	2157__	—	—	—	—	PJ826__	—	—



	Standard size			Mid-size
Gang	Thermoset	Nylon	Stainless steel	Polycarbonate
2 Toggles & duplex receptacle	2158__	5158__	93543	PJ28__
2 Toggles & decorator	2173__	—	93443	PJ226__

Size options

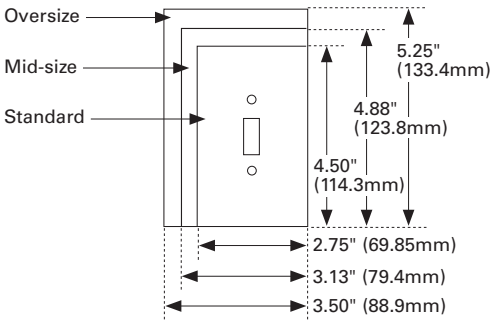

Color ordering information:

A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), Brass, Stainless Steel, BB (Brushed Bronze)


A	B	BK	BL	GY	LA	RD	V	W			BB
(Almond)	(Brown)	(Black)	(Blue)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)	(Brass)	(Stainless Steel)	(Brushed Bronze)

***Note:** See pages C-9 – C-24 for full specifications and available color options.
Compliances, specifications and availability are subject to change without notice.


Wallplate dimensional information

Mounting holes for wallplates and covers


These are the most common nominal spacings for mounting holes on wallplates and covers. Holes are normally countersunk for oval head #6-32 screws.




Device or strap



Box




Decorator/GFCI




FS box

Cover opening dimensions


Nominal dimensions for cover openings conform to industry standards and practices.



4-wire
power device



Off center
power device



3-wire
power device




Single locking
receptacle
20/30 Amp




Single receptacle

Plate opening dimensions


Nominal dimensions for plate openings conform to industry standards and practices.

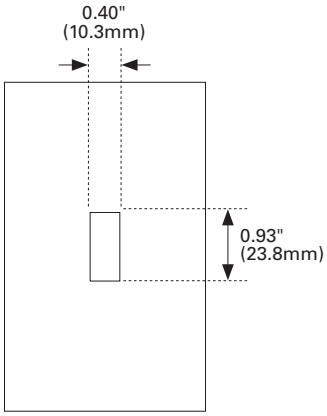

Toggle

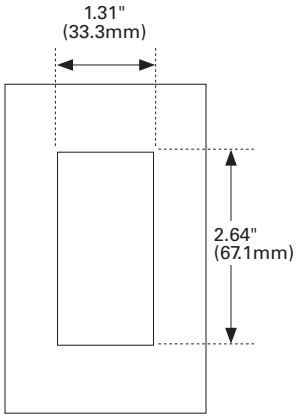

Decorator

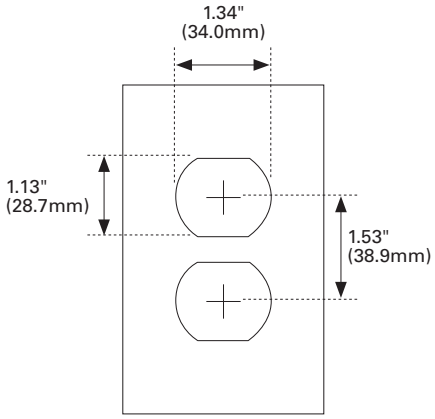

Duplex receptacle


Compliances, specifications and availability are subject to change without notice.

Wallplate dimensional information


Wallplate sizes

Gang	Description	Height	Width	First gang to edge	Gang to gang
1-Gang	Standard	4.50" (114.3mm)	2.75" (34.9mm)	1.37" (34.9mm)	—
	Mid-size	4.87" (123.8mm)	3.13" (79.4mm)	1.56" (39.7mm)	—
	Oversize	5.25" (133.4mm)	3.5" (88.9mm)	1.75" (44.4mm)	—
2-Gang	Standard	4.50" (114.3mm)	4.56" (115.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	4.94" (125.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.4mm)	5.31" (134.9mm)	1.75" (44.4mm)	1.81" (46.0mm)
3-Gang	Standard	4.50" (114.3mm)	6.37" (161.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	6.75" (171.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.4mm)	7.17" (182.2mm)	1.75" (44.4mm)	1.81" (46.0mm)
4-Gang	Standard	4.50" (114.3mm)	8.19" (207.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	8.56" (217.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.4mm)	8.94" (227.0mm)	1.75" (44.4mm)	1.81" (46.0mm)
5-Gang	Standard	4.50" (114.3mm)	10.00" (254.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	10.37" (263.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
6-Gang	Standard	4.50" (114.3mm)	11.81" (300.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	12.18" (309.5mm)	1.56" (39.7mm)	1.81" (46.0mm)


Standard

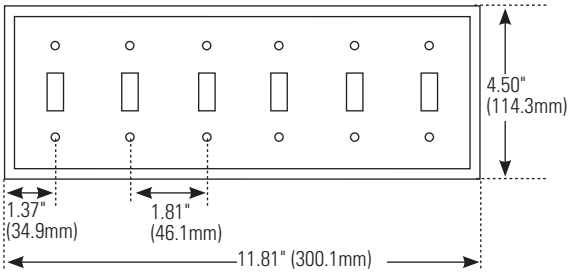


Mid-size

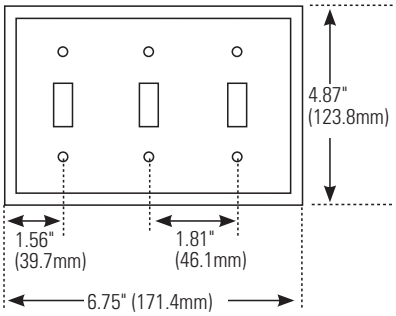

Oversize Mid-size Standard

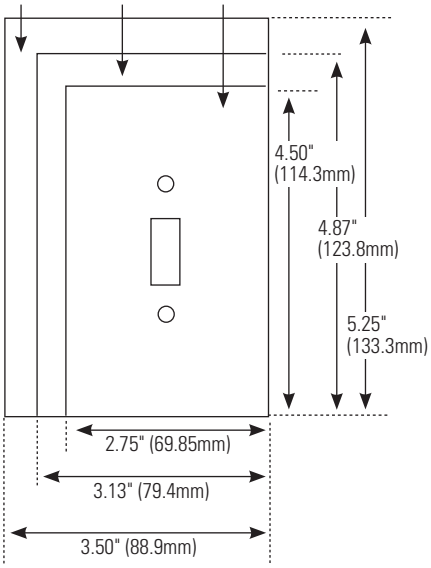

Oversize





Compliances, specifications and availability are subject to change without notice.


Standard size toggle switch wallplates


Product description


1-Gang, 2-Gang, 3-Gang,
4-Gang, 5-Gang, 6-Gang



1-Gang


2-Gang


3-Gang


4-Gang


5-Gang


6-Gang

Toggle switch

Gang	Material	Color suffix	Catalog no.		
1-Gang	Nylon	A, B, BK, GY, LA, RD, V, W	☐ 5134__	•	•
	Thermoset	A, B, LA, V, W	☐ 2134__	•	•
	302/304 Stainless steel	—	☐ 93071	•	•
	Brass	—	☐ 94071	•	•
2-Gang	Nylon	A, B, BK, GY, LA, RD, V, W	☐ 5139__	•	•
	Thermoset	A, B, LA, V, W	☐ 2139__	•	•
	302/304 Stainless steel	—	☐ 93072	•	•
	Brass	—	☐ 94072	•	•
3-Gang	Nylon	A, B, BK, GY, LA, V, W	☐ 5141__	•	•
	Thermoset	A, B, LA, V, W	☐ 2141__	•	•
	302/304 Stainless steel	—	☐ 93073	•	•
	Brass	—	☐ 94073	•	•
4-Gang	Nylon	A, B, BK, GY, LA, V, W	☐ 5154__	•	•
	Thermoset	A, B, LA, V, W	☐ 2154__	•	•
	302/304 Stainless steel	—	☐ 93074	•	•
5-Gang	Thermoset	A, B, LA, V, W	☐ 2155__	•	•
	302/304 Stainless steel	—	☐ 93075	•	•
6-Gang	Thermoset	A, B, V, W	☐ 2156__	•	•
	302/304 Stainless steel	—	☐ 93076	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), Brass, Stainless Steel

A	B	BK	GY	LA	RD	V	W
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)

(Brass) (Stainless Steel)

Certification information: 2000 and 5000 series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified; 94000 are UL certified **Dimensional information:** C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page G-21


RoHS compliant - Page G-21

Standard size wallplates


Standard size duplex receptacle wallplates

Product description


1-Gang, 2-Gang, 3-Gang



1-Gang



2-Gang



3-Gang


Duplex receptacle

Gang	Material	Color suffix	Catalog no.		
1-Gang	Nylon	A, B, BK, GY, LA, RD, V, W	☐ 5132__	•	•
	Thermoset	A, B, LA, V, W	☐ 2132__	•	•
	302/304 Stainless steel	—	☐ 93101	•	•
	Brass	—	☐ 94101	•	•
2-Gang	Nylon	A, B, BK, GY, LA, RD, V, W	☐ 5150__	•	•
	Thermoset	A, B, LA, V, W	☐ 2150__	•	•
	302/304 Stainless steel	—	☐ 93102	•	•
	Brass	—	☐ 94102	•	•
3-Gang	302/304 Stainless steel	—	☐ 93103	•	•

Standard size single receptacle wallplates

Product description

1-Gang



1-Gang

Single receptacle

Gang	Material	Color suffix	Catalog no.		
1-Gang	Nylon	A, B, BK, GY, RD, V, W	☐ 5131__	•	•
	Thermoset	A, B, LA, V, W	☐ 2131__	•	•
	302/304 Stainless steel	—	☐ 93091	•	•
	Brass	—	☐ 94091	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), Brass, Stainless Steel

A	B	BK	GY	LA	RD	V	W		
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)	(Brass)	(Stainless Steel)

Certification information: 2000 and 5000 series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified; 94000 are UL certified **Dimensional information:** C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page G-21


RoHS compliant - Page G-21


Standard size decorator wallplates


Product description


1-Gang, 2-Gang, 3-Gang,
4-Gang, 5-Gang, 6-Gang



1-Gang


2-Gang


3-Gang


4-Gang


5-Gang


6-Gang

Decorator

Gang	Material	Color suffix	Catalog no.		
1-Gang	Nylon	A, B, BL, BK, GY, LA, RD, V, W	☐5151__	•	•
	Thermoset	A, B, BK, GY, LA, V, W	☐2151__	•	•
	302/304 Stainless steel	—	☐93401	•	•
	Brass	—	☐94401	•	•
2-Gang	Nylon	A, B, BK, GY, LA, V, W	☐5152__	•	•
	Thermoset	A, B, BK, GY, LA, V, W	☐2152__	•	•
	302/304 Stainless steel	—	☐93402	•	•
	Brass	—	☐94402	•	•
3-Gang	Thermoset	A, B, GY, LA, V, W	☐2163__	•	•
	302/304 Stainless steel	—	☐93403	•	•
4-Gang	Thermoset	A, B, LA, V, W	☐2164__	•	•
	302/304 Stainless steel	—	☐93404	•	•
5-Gang	Thermoset	A, B, LA, V, W	☐2165__	•	•
	302/304 Stainless steel	—	☐93405	•	•
6-Gang	Thermoset	A, B, LA, V, W	☐2166__	•	•
	302/304 Stainless steel	—	☐93406	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), Brass, Stainless Steel

A	B	BK	BL	GY	LA	RD	V	W
(Almond)	(Brown)	(Black)	(Blue)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)

(Brass) (Stainless Steel)

Certification information: 2000 and 5000 series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified; 94000 are UL certified **Dimensional information:** C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page G-21


RoHS compliant - Page G-21


Standard size wallplates


Standard size blank wallplates


Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang


1-Gang


2-Gang


3-Gang


4-Gang


93630


93631

Blank, box mounted

Gang	Material	Color suffix	Catalog no.		
1-Gang	Nylon	A, B, BK, GY, LA, V, W	☐5129__	•	•
	Thermoset	A, B, LA, V, W	☐2129__	•	•
	302/304 Stainless steel	—	☐93151	•	•
	Brass	—	☐94151	•	•
2-Gang	Nylon	A, B, BK, GY, LA, V, W	☐5137__	•	•
	Thermoset	A, B, LA, V, W	☐2137__	•	•
	302/304 Stainless steel	—	☐93152	•	•
3-Gang	302/304 Stainless steel	—	☐93153	•	•
4-Gang	302/304 Stainless steel	—	☐93154	•	•

Standard size louver

Product description

Horizontal & vertical

Single receptacle

Gang	Material	Color suffix	Catalog no.		
1-Gang horizontal louver	302/304 Stainless steel	—	☐93630	•	•
1-Gang vertical louver	302/304 Stainless steel	—	☐93631	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White), Brass, Stainless Steel

A	B	BK	GY	LA	V	W		
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Ivory)	(White)	(Brass)	(Stainless Steel)

Certification information: 2000 and 5000 series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified; 94000 are UL certified **Dimensional information:** C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page G-21

RoHS compliant - Page G-21


Standard size combination wallplates

Product description


1-Gang, 2-Gang




0.38" Hole




0.63" Hole




Toggle & duplex receptacle




Toggle & single receptacle




Toggle & decorator



Toggle & blank



Duplex receptacle & blank



Duplex receptacle & decorator

Telephone & coax

Gang	Material	Color suffix	Catalog no.		
1-Gang with 0.38" (9.5mm) hole	Nylon	B, GY, V, W	☐5128__	•	•
	Thermoset	A, B, LA, V, W	☐2128__	•	•
	302/304 Stainless steel	—	☐93696	•	•
1-Gang with 0.63" (15.9mm) hole	Nylon	B, GY, V, W	☐5159__	•	•
	Thermoset	A, B, BK V, W, LA, V, W	☐2159__	•	•
	302/304 Stainless steel	—	☐93591	•	•

Combination 2-gang

Gang	Material	Color suffix	Catalog no.		
2-Gang toggle & duplex receptacle	Nylon	A, B, BK, GY, LA, V, W	☐5138__	•	•
	Thermoset	A, B, LA, V, W	☐2138__	•	•
	302/304 Stainless steel	—	☐93532	•	•
	Brass	—	☐94532	•	•
2-Gang toggle & single receptacle	302/304 Stainless steel	—	☐93512	•	•
2-Gang toggle & decorator	Nylon	A, B, BK, GY, LA, V, W	☐5153__	•	•
	Thermoset	A, B, LA, V, W	☐2153__	•	•
	302/304 Stainless steel	—	☐93432	•	•
	Brass	—	☐94432	•	•
2-Gang toggle & blank	Nylon	A, B, BK, LA, V	☐5171__	•	•
2-Gang duplex receptacle & blank	Nylon	A, B, BK, LA, V	☐5170__	•	•
2-Gang duplex receptacle & decorator	Thermoset	A, LA, V, W	☐2157__	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White), Brass, Stainless Steel

A	B	BK	GY	LA	V	W		
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Ivory)	(White)	(Brass)	(Stainless Steel)

Certification information: 2000 and 5000 series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified; 94000 are UL certified **Dimensional information:** C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page G-21


RoHS compliant - Page G-21

Standard size wallplates


Standard size combination wallplates

Product description


3-Gang, 4-Gang



2 toggles & duplex receptacle



2 toggles & decorator



3 toggles & duplex receptacle

Combination 3-gang

Description	Material	Color suffix	Catalog no.		
3-Gang 2 toggles & duplex receptacle	Nylon	B, GY, V, W	☐ 5158__	•	•
	Thermoset	A, B, LA, V, W	☐ 2158__	•	•
	302/304 Stainless steel	—	☐ 93543	•	•
3-Gang 2 toggles & decorator	Thermoset	A, LA, V, W	☐ 2173__	•	•
	302/304 Stainless steel	—	☐ 93443	•	•


Combination 4-gang

Description	Material	Color suffix	Catalog no.		
4-Gang 3 toggles & duplex receptacle	Thermoset	A, LA, V, W	☐ 2174__	•	•
	302/304 Stainless steel	—	☐ 93554	•	•


Standard size power outlet wallplates

Product description


1-Gang, 2-Gang




1-Gang 1.59" hole




1-Gang 2.15" hole



2-Gang 2.15" hole



2-Gang 2.28" hole



2-Gang 2.47" hole

Power outlet

Description	Material	Color suffix	Catalog no.		
1-Gang with 1.59" (40.5mm) hole	302/304 Stainless steel	—	☐ 93111	•	•
1-Gang with 2.15" (54.8mm) hole	302/304 Stainless steel	—	☐ 93221	•	•
2-Gang with 2.15" (54.8mm) hole	Thermoset	A, B, LA, V, W	☐ 2168__	•	•
	302/304 Stainless steel	—	☐ 93227	•	•
2-Gang with 2.28" (57.9mm) hole	302/304 Stainless steel	—	☐ 93228	•	•
2-Gang with 2.47" (62.7mm) hole	Nylon	V, W	☐ 5169__	•	•
	302/304 Stainless steel	—	☐ 93223	•	•

Standard size wallplate guide for power devices

Wallplates for power devices

Power device catalog no.	Wallplate catalog no.
32B, 38B, 1233, 1234, 1253, 1254, 1257, 1258, 1263	2068, 2168, 93221, 93227

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), GY (Gray), LA (Light Almond), V (Ivory), W (White), Stainless Steel



(Almond) (Brown) (Gray) (Lt. Almond) (Ivory) (White) (Stainless Steel)

Certification information: 2000 and 5000 series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified; 94000 are UL certified **Dimensional information:** C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices **Compliances, specifications and availability are subject to change without notice.**


Indicates NAFTA compliant - Page G-21


RoHS compliant - Page G-21


Standard size extra depth wallplates


Product description


1-Gang, 2-Gang



1-Gang toggle



1-Gang duplex receptacle



2-Gang toggle


2-Gang duplex receptacle


2-Gang blank


2-Gang toggle & duplex receptacle


2-Gang toggle & blank


2-Gang duplex receptacle & blank

Extra depth*

Description	Material	Color suffix	Catalog no.		
1-Gang toggle	Thermoset	V, W	☐ 4134__	•	•
1-Gang duplex receptacle	Thermoset	V, W	☐ 4132__	•	•
2-Gang toggle	Thermoset	V, W	☐ 4139__	•	•
2-Gang duplex receptacle	Thermoset	V, W	☐ 4150__	•	•
2-Gang blank	Thermoset	V, W	☐ 4137__	•	•
2-Gang toggle & duplex receptacle	Thermoset	V, W	☐ 4138__	•	•
2-Gang toggle & blank	Thermoset	V, W	☐ 4171__	•	•
2-Gang duplex receptacle & blank	Thermoset	V, W	☐ 4170__	•	•

*Extra depth wallplates are approximately 10% deeper than standard size/standard depth counterparts.

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: V (Ivory), W (White)

V	W
(Ivory)	(White)

Certification information: 2000 and 5000 series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified; 94000 are UL certified **Dimensional information:** C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page G-21


RoHS compliant - Page G-21


Mid-size wallplates


Mid-size toggle switch wallplates


Product description


1-Gang, 2-Gang, 3-Gang,
4-Gang, 5-Gang, 6-Gang



1-Gang


2-Gang


3-Gang


4-Gang


5-Gang


6-Gang


Toggle switch


Description	Material	Color suffix	Catalog no.		
1-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	☐PJ1__		•
	Thermoset	A, B, LA, V, W	☐2034__	•	•
	302/304 Stainless steel	—	☐93971	•	•
2-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	☐PJ2__		•
	Thermoset	A, B, LA, V, W	☐2039__	•	•
	302/304 Stainless steel	—	☐93972	•	•
3-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	☐PJ3__		•
	Thermoset	A, B, LA, V, W	☐2041__	•	•
	302/304 Stainless steel	—	☐93973	•	•
4-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	☐PJ4__		•
	Thermoset	A, LA, V, W	☐2054	•	•
5-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	☐PJ5__		•
6-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	☐PJ6__		•


Mid-size toggle switch screwless wallplates


Product description

1-Gang, 2-Gang, 3-Gang, 4-Gang


1-Gang


2-Gang


3-Gang


4-Gang

Screwless toggle switch

Description	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	☐PJS1__	•
2-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	☐PJS2__	•
3-Gang	Polycarbonate	A, LA, V, W	☐PJS3__	•
4-Gang	Polycarbonate	A, LA, V, W	☐PJS4__	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), BB (Brushed Bronze), Stainless Steel

A	B	BK	GY	LA	RD	V	W	BB	
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)	(Brushed Bronze)	(Stainless Steel)

Certification information: 2000, 5000 and PJ series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified; 94000 are UL certified **Dimensional information:** C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page G-21

RoHS compliant - Page G-21


Mid-size duplex, screwless & single receptacles wallplates

Product description

1-Gang, 2-Gang



1-Gang



2-Gang

Duplex receptacle

Description	Material	Color suffix	Catalog no.		
1-Gang	Polycarbonate	A, B, BK, BL, GY, LA, RD, V, W	☐ PJ8__		•
	Thermoset	A, B, LA, V, W	☐ 2032__	•	•
	302/304 Stainless steel	—	☐ 93901	•	•
2-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	☐ PJ82__		•
	Thermoset	A, LA, V, W	☐ 2050__	•	•
	302/304 Stainless steel	—	☐ 93902	•	•




1-Gang

Mid-size duplex receptacle screwless wallplates

Product description

1-Gang

Description	Material	Color suffix	Catalog no.
1-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	☐ PJS8__



1-Gang

Single receptacle

Description	Material	Color suffix	Catalog no.		
1-Gang with 1.41" (35.7mm) hole	Thermoset	A, B, LA, V, W	☐ 2031__	•	•
	302/304 Stainless steel	—	☐ 93991	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), BB (Brushed Bronze), Stainless Steel

A	B	BK	BL	GY	LA	RD	V	W
(Almond)	(Brown)	(Black)	(Blue)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)

BB	
(Brushed Bronze)	(Stainless Steel)


Certification information: 2000, 5000 and PJ series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified; 94000 are UL certified **Dimensional information:** C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page G-21 RoHS compliant - Page G-21


Mid-size decorator wallplates


Product description


1-Gang, 2-Gang, 3-Gang,
4-Gang, 5-Gang, 6-Gang



1-Gang


2-Gang


3-Gang


4-Gang


5-Gang


6-Gang


Decorator


Description	Material	Color suffix	Catalog no.		
1-Gang	Polycarbonate	A, B, BK, BL, GY, LA, RD, V, W	☐ PJ26__		•
	Thermoset	A, B, LA, V, W	☐ 2051__	•	•
	302/304 Stainless steel	—	☐ 93934	•	•
2-Gang	Polycarbonate	A, B, BK, GY, LA, RD, V, W	☐ PJ262__		•
	Thermoset	A, LA, V, W	☐ 2052__	•	•
	302/304 Stainless steel	—	☐ 93935	•	•
3-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	☐ PJ263__		•
	Thermoset	A, LA, V, W	☐ 2063__	•	•
	302/304 Stainless steel	—	☐ 93936	•	•
4-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	☐ PJ264__		•
	Thermoset	A, LA, V, W	☐ 2064__	•	•
5-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	☐ PJ265__		•
6-Gang	Polycarbonate	A, B, BK, GY, LA, V, W	☐ PJ266__		•


Mid-size decorator screwless wallplates


Product description


1-Gang, 2-Gang, 3-Gang,
4-Gang, 5-Gang, 6-Gang



1-Gang


2-Gang


3-Gang


4-Gang


5-Gang


6-Gang

Screwless Decorator

Description	Material	Color suffix	Catalog no.	
1-Gang	Polycarbonate	A, B, BB, BK, GY, LA, V, W	☐ PJS26__	•
2-Gang	Polycarbonate	A, B, BB, BK, LA, V, W	☐ PJS262__	•
3-Gang	Polycarbonate	A, BB, BK, LA, V, W	☐ PJS263__	•
4-Gang	Polycarbonate	A, BK, LA, V, W	☐ PJS264__	•
5-Gang	Polycarbonate	A, BK, LA, V, W	☐ PJS265__	•
6-Gang	Polycarbonate	A, BK, LA, V, W	☐ PJS266__	•

Color ordering information:


For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), BB (Brushed Bronze), Stainless Steel


A	B	BK	GY	LA	RD	V	W	BB	
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)	(Brushed Bronze)	(Stainless Steel)


Certification information: 2000 and PJ series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified
Dimensional information: C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page G-21

RoHS compliant - Page G-21


1-Gang


2-Gang


0.375" Hole


0.406" Hole

Blank, box & strap mounted wallplates

Product description

1-Gang, 2-Gang

Blank, box & strap mounted

Description	Material	Color suffix	Catalog no.		
1-Gang blank, box mounted	Polycarbonate	A, B, BK, GY, LA, V, W	☐ PJ13__		•
	Thermoset	A, B, LA, V, W	☐ 2029__	•	•
	302/304 Stainless steel	—	☐ 93951	•	•
1-Gang blank, strap mounted	Polycarbonate	A, B, BK, LA, V, W	☐ PJ14__		•
2-Gang blank, box mounted	Polycarbonate	A, B, BK, GY, LA, V, W	☐ PJ23__		•
	Thermoset	A, LA, V, W	☐ 2037__	•	•

Mid-size telephone & coax screwless wallplates

Product description

1-Gang, 2-Gang, 3-Gang,
4-Gang, 5-Gang, 6-Gang

Telephone & coax

Description	Material	Color suffix	Catalog no.		
1-Gang with 0.38" (9.5mm) hole	Thermoset	V, W	☐ 2028__	•	•
	302/304 Stainless steel	—	☐ 93996	•	•
1-Gang with 0.40" (10.2mm) hole, box mounted	Polycarbonate	A, B, BK, LA, V, W	☐ PJ11__		•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White), Stainless Steel

A	B	BK	GY	LA	V	W	
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Ivory)	(White)	(Stainless Steel)


Certification information: 2000 and PJ series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified
Dimensional information: C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page G-21 RoHS compliant - Page G-21


Mid-size combination wallplates

Product description


2-Gang, 3-Gang




Toggle & duplex receptacle




Toggle & decorator




Toggle & blank




2-Gang duplex receptacle & blank



Duplex receptacle & decorator



2 Toggles & duplex receptacle



2 Toggles & decorator

Combination 2-gang

Description	Material	Color suffix	Catalog no.		
2-Gang toggle & duplex receptacle	Polycarbonate	A, B, BK, GY, LA, RD, V, W	☐ PJ18__		•
	Thermoset	A, B, LA, V, W	☐ 2038__	•	•
	302/304 Stainless steel	—	☐ 93932	•	•
2-Gang toggle & decorator	Polycarbonate	A, B, BK, GY, LA, V, W	☐ PJ126__		•
	Thermoset	A, LA, V, W	☐ 2053__	•	•
	302/304 Stainless steel	—	☐ 93937	•	•
2-Gang toggle & blank	Polycarbonate	A, B, LA, V, W	☐ PJ113__		•
2-Gang duplex receptacle & blank	Polycarbonate	A, B, BK, GY, LA, RD, V, W	☐ PJ138__		•
2-Gang duplex receptacle & decorator	Polycarbonate	A, B, BK, GY, LA, RD, V, W	☐ PJ826__		•

Combination 3-gang

Description	Material	Color suffix	Catalog no.	
3-Gang 2 toggles & duplex receptacle	Polycarbonate	A, B, BK, GY, LA, RD, V, W	☐ PJ28__	•
3-Gang 2 toggles & decorator	Polycarbonate	A, B, BK, GY, LA, V, W	☐ PJ226__	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), Stainless Steel

A	B	BK	GY	LA	RD	V	W	
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)	(Stainless Steel)

Certification information: 2000 series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified
Dimensional information: C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page G-21

RoHS compliant - Page G-21


Mid-size power outlet wallplates

Product description


1-Gang, 2-Gang




1-Gang 1.40" hole



1-Gang 1.59" hole



1-Gang 2.15" hole



2-Gang 2.15" hole

Power outlet

Description	Material	Color suffix	Catalog no.		
1-Gang with 1.40" (35.7mm) hole	Polycarbonate	A, B, BK, GY, LA, RD, V, W	☐ PJ7__		•
1-Gang with 1.59" (40.5mm) hole	Polycarbonate	B, GY, V, W	☐ PJ720__		•
1-Gang with 2.15" (54.8mm) hole	Thermoset	A, B, V, W	☐ 2068__	•	•
1-Gang with 2.15" (54.6mm) hole	Polycarbonate	B, BK, V, W	☐ PJ724__		•
	Nylon	V	☐ 5068__	•	•
2-Gang with 2.15" (54.6mm) hole	Polycarbonate	B, V, W	☐ PJ703__		•

Mid-size wallplate guide for power devices

Wallplates for power devices

Power device catalog no.	Wallplate catalog no.
32B, 38B, 1233, 1234, 1253, 1254, 1257, 1258, 1263	2068, 5068, PJ724, PJ703

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

A	B	BK	GY	LA	RD	V	W
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)

Certification information: 2000 and PJ series wallplates are cULus certified
Dimensional information: C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page G-21


RoHS compliant - Page G-21

Mid-size sectional wallplates


Product description

1-Gang


Center **End**




Toggle




Decorator



Duplex receptacle



Blank



Single receptacle

Sectional wallplates

Description	Material	Location	Color suffix	Catalog no.	RoHS
1-Gang toggle	Polycarbonate	Center	V, W	☐ STC1__	•
	Polycarbonate	End	V, W	☐ STE1__	•
1-Gang decorator	Polycarbonate	Center	V, W	☐ STC26__	•
	Polycarbonate	End	V, W	☐ STE26__	•
1-Gang duplex receptacle	Polycarbonate	Center	V, W	☐ STC8__	•
	Polycarbonate	End	V, W	☐ STE8__	•
1-Gang blank	Polycarbonate	Center	V, W	☐ STC14__	•
	Polycarbonate	End	V, W	☐ STE14__	•
1-Gang single receptacle 1.40" (35.7mm) hole	Polycarbonate	Center	V, W	☐ STC7__	•
	Polycarbonate	End	V, W	☐ STE7__	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: V (Ivory), W (White)

V	W
(Ivory)	(White)


Certification information: ST series wallplates are cULus certified
Dimensional information: C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.


RoHS compliant - Page G-21


Oversize toggle switch wallplates


Product description

1-Gang, 2-Gang, 3-Gang, 4-Gang


1-Gang


2-Gang


3-Gang


4-Gang


Toggle switch


Description	Material	Color suffix	Catalog no.		
1-Gang	Thermoset	A, B, LA, V, W	☐2144__	•	•
	302/304 Stainless steel	—	☐93871	•	•
2-Gang	Thermoset	A, B, LA, V, W	☐2149__	•	•
	302/304 Stainless steel	—	☐93872	•	•
3-Gang	Thermoset	V, W	☐2741__	•	•
	302/304 Stainless steel	—	☐93873	•	•
4-Gang	302/304 Stainless steel	—	☐93874	•	•

Oversize duplex & single receptacle wallplates

Product description

1-Gang, 2-Gang


1-Gang


2-Gang

Duplex receptacle

Description	Material	Color suffix	Catalog no.		
1-Gang	Thermoset	A, B, LA, V, W	☐2142__	•	•
	302/304 Stainless steel	—	☐93801	•	•
2-Gang	Thermoset	V, W	☐2750__	•	•
	302/304 Stainless steel	—	☐93802	•	•


Single receptacle


Description	Material	Color suffix	Catalog no.		
1-Gang with 1.40" (35.7mm) hole	Thermoset	V, W	☐2731__	•	•
	302/304 Stainless steel	—	☐93891	•	•

Oversize decorator receptacle wallplates

Product description

1-Gang


1-Gang


1-Gang

Decorator

Description	Material	Color suffix	Catalog no.		
1-Gang	Thermoset	V, W	☐2751__	•	•
	302/304 Stainless steel	—	☐93834	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), Stainless Steel

A	B	BK	GY	LA	RD	V	W	
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)	(Stainless Steel)

Certification information: 2000 series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified
Dimensional information: C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page G-21

RoHS compliant - Page G-21


Oversize wallplates




1-Gang



2-Gang



0.375" Hole



Toggle & duplex receptacle

Oversize blank, box mounted wallplates

Product description

1-Gang, 2-Gang

Blank, box mounted

Description	Material	Color suffix	Catalog no.		
1-Gang	Thermoset	V, W	☐ 2729__	•	•
	302/304 Stainless steel	—	☐ 93851	•	•
2-Gang	302/304 Stainless steel	—	☐ 93852	•	•

Oversize telephone & coax wallplates

Product description

1-Gang, 2-Gang

Telephone & coax

Description	Material	Color suffix	Catalog no.		
1-Gang 0.38" (9.5mm) hole	Thermoset	V, W	☐ 2728__	•	•
	302/304 Stainless steel	—	☐ 93896	•	•

Oversize combination wallplates

Product description

2-Gang

Combination 2-gang

Description	Material	Color suffix	Catalog no.		
2-Gang toggle & duplex receptacle	Thermoset	B, V, W	☐ 2148__	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), V (Ivory), W (White), Stainless Steel



(Brown) (Ivory) (White) (Stainless Steel)

Certification information: 2000 series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified
Dimensional information: C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page G-21

RoHS compliant - Page G-21



GFER



2161



231



756



153

7739

Wallplate accessories

Product description

GFCI extension ring, adapters, wallplate screws, blank insert & pilot light lamp holder

Wallplate accessories

Description	Material	Color suffix	Catalog no.		
GFCI extension ring for use with GFCI's, 7/8" spacer, cULus Certified	Polypropylene	B, BLK, LA, V, W	☐ GFER__		•
Adapter—decorator to blank	Polypropylene	B, LA, V, W	☐ 2160__ [Δ]	•	•
Adapter—decorator to toggle	Polypropylene	V, W	☐ 2161__ [Δ]	•	•
Toggle & receptacle wallplate screws #6-32 x 1/2"	Metal, baked enamel head	B, LA, V, W	☐ 231__ [Δ]		•
	Nylon	RD, V, W	☐ 232__ [Δ]		•
Toggle & receptacle wallplate screws #6-32 x 5/16"		LA, V, W	☐ 2231__ [Δ]		•

[Δ]Not UL listed. GFER: cULus Listed to UL514C, CSA certified to C22.2, no. 18-98

Sub-frame & blank insert

Description	Color suffix	Catalog no.	
Blank insert and strap for any switch plate	B, GY, LA, V, W	☐ 756__	•

Louvered wallplate accessories

Description	Material	Catalog no.	
Recessed pilot light lamp holder with 6 watt clear S-6 bulb	Polypropylene	☐ 153	•

Listed to UL496, file no. E18522; CSA certified to C22.2, no. 43

LED steplight

Product description

15A, 120V/AC

LED steplight

Description	Color suffix	Catalog no.
15A, 120V/AC LED steplight, includes vertical & horizontal louvered wallplates	A, LA, W	☐ 7739__

cULus Listed to UL 1598, file no. E328628; CSA certified to C22.2, no. 43

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

A	B	BK	GY	LA	RD	V	W
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)

Dimensional information: C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page G-21 RoHS compliant - Page G-21



Weather protective covers

Our wide line of weatherproof and weather protective products are designed for impact resistance, corrosion resistance, UV resistance and longevity in virtually any outdoor or indoor wet or damp location. They are ideal for patio and pool areas, decks, garages, seasonal lighting, house exterior and landscape service receptacles.

Weather protective cover families

While-in-use boxes



C-28

Weatherproof receptacle covers



C-29

Weatherproof switch covers



C-29

Weather protective receptacle covers



C-29

Weather protective cover colors

Black


Gray

White

The Eaton difference

- While-in-use boxes offer complete protection of electrical connections, even when cords are plugged in
- Award-winning design offers superior functionality with patented polycarbonate movable hinges that permit easy horizontal or vertical mounting
- Durable one-piece corrosion resistant polycarbonate cover offers additional strength and weather protection
- Deep, see-through design of cover offers plenty of space for plugs and cords along with easy visual access
- Easy to open/close with a lockable clasp
- Pre-applied gasket makes it easy to mount box properly
- Cord opening fits #12 AWG or lighter cords
- Three easy-to-install molded insets for use with decorator devices, duplex or single receptacles, and toggle switches



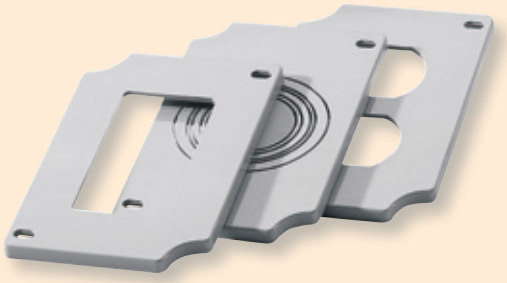

Specific weather protective cover solutions for today's needs



Code compliance

The 2014 NEC® Article 406.9 (B)(1) requires receptacles located outdoors on all dwellings in wet locations to be installed in enclosures that are weatherproof with or without a plug inserted.

See page C-28

Shown:
WIU-1





Weatherproof switch protection

Boat houses and lifts are challenging corrosive environments for switches that need to be protected yet functional. Weather protective switch covers are also lockable for security.

See page C-29

Shown:
S2983





"Protective only" covers

These covers offer "damp location" protection in partially protected outdoor areas such as covered open porches or gazebos and interior areas such as basements or barns.

See page C-29

Shown:
S1962



While-in-use weather protective covers

WeatherBox while-in-use weather protective covers

Product description

1-Gang self-closing
2-Gang self-closing



WIU-1



WIU-1D



WIU-2



WIU-1HX



WIU-2X

Design features

- Meets 2014 NEC® 406.9 (B)(1) extra duty requirement for any application (WIU-1X, WIU-2X series only)
- Rugged UV-resistant polycarbonate cover and back protects devices without cracking or breaking and is non-corrosive and non-conductive
- Moveable hinges reposition easily for vertical or horizontal mounting (WIU-1 only)
- 1-Gang box includes 3 inserts for 16 different configurations
- 2-Gang box includes 4 inserts for over 60 different configurations
- Box inserts accommodate decorator devices, duplex receptacles, a variety of different single receptacle sizes and toggle switches
- Exceeds UL outdoor low voltage landscape lighting requirements
- Box cover includes pre-mounted gasket
- Meets Canadian Electrical Code rule 26-702

Standard depth

Gang	Description	# of available configurations	Color	Catalog no.	RoHS
1-Gang	Horizontal/vertical mount	16	GY	☐ WIU-1	•
1-Gang	Horizontal/vertical mount	16	W	☐ WIU-1W	•
2-Gang	Horizontal/vertical mount	60+	GY	☐ WIU-2	•
2-Gang	Horizontal/vertical mount	60+	W	☐ WIU-2W	•

cULus Listed to UL514D, file no. E33216, certified to CSA C22.2 no. 42; meets NEMA 3R requirements

Extra depth

Gang	Description	# of available configurations	Color	Catalog no.	RoHS
1-Gang	Horizontal/vertical mount	16	GY	☐ WIU-1D	•

cULus Listed to UL514D, file no. E33216, certified to CSA C22.2 no. 42; meets NEMA 3R requirements

Extra duty

Gang	Description	Color	Catalog no.	RoHS
1-Gang	Horizontal mount	GY	☐ WIU-1HX	•
1-Gang	Horizontal mount	W	☐ WIU-1WHX	•
1-Gang	Vertical mount	GY	☐ WIU-1VX	•
1-Gang	Vertical mount	W	☐ WIU-1WVX	•
2-Gang	Horizontal/vertical mount	GY	☐ WIU-2X	•
2-Gang	Horizontal/vertical mount	W	☐ WIU-2WX	•

WIU-2X & WIU-2WX: cULus Listed to UL514D, file no. E33216; meets NEMA 3R requirements

Color ordering information:

Base device is gray. For white, add Color suffix: W (White)

GY	W
(Gray)	(White)

Compliances, specifications and availability are subject to change without notice.

RoHS compliant - Page G-21

Non-metallic protective covers

Product description

Weatherproof or protective only 1-Gang, self-closing lids
1-Gang, stay open lids


S1952


S1954


S2966


S2983


S1961

Design features

- Weatherproof models are UL Listed for wet locations with cover closed
- Weatherproof models meet 2014 NEC® 406.9 (A) and 406.9 (B)(2), except for switch cover which meets 2014 NEC® 404.5
- Tough plastic construction resistant to high impact and sunlight
- Non-corrosive and non-conductive
- Gasket provided seals both device openings and edges
- Switch cover features factory-attached to cover gasket, minimizing labor for installer
- Red switch cover handle for easy visual location (S2983)
- Switch cover lockable with most padlocks in "ON" or "OFF" position (S2983)
- "Protective only" covers not for use in wet locations (S1961/2)

Weatherproof single receptacle cover

Description	Color	Catalog no.	Color	Catalog no.	
Self-closing, horizontal mount	Gray	☐ S1951	White	☐ S1951W	•

Listed to UL514D, file no. E33216; CSA certified to C22.2, no. 42.1

Weatherproof duplex receptacle/combination device cover

Description	Color	Catalog no.	Color	Catalog no.	
2 self-closing lids, horizontal mount	Gray	☐ S1952	White	☐ S1952W	•
Oversized, 2 self-closing lids, horizontal mount	Gray	☐ S1954††	—	—	•
1 self-closing lid, vertical mount	Gray	☐ S2962	White	☐ S2962W	•
1 self-closing lid, horizontal mount	Gray	☐ S3962	White	☐ S3962W	•

Listed to UL514D, file no. E33216; CSA certified to C22.2, no. 42.1 ††S1954 Only UL listed.

Weatherproof GFCI/decorator device cover

Description	Color	Catalog no.	Color	Catalog no.	
1 self-closing lid, vertical mount	Gray	☐ S2966	White	☐ S2966W	•
1 self-closing lid, horizontal mount	Gray	☐ S3966	White	☐ S3966W	•
1 self-closing lid, horizontal mount	Black	☐ S3966BK	—	—	•

Listed to UL514D, file no. E33216; CSA certified to C22.2, no. 42.1

Weatherproof switch cover

Description	Color	Catalog no.	
Flush mount cover, vertical mount	Gray	☐ S2983	•

Listed to UL514D, file no. E33216; CSA certified to C22.2, no. 42.1

Protective only, single or duplex receptacle/combination device cover

Description	Color	Catalog no.	Color suffix	Catalog no.	
Single receptacle, stay-open, horizontal mount	Gray	☐ S1961	W	☐ S1961W	•
Duplex receptacle/combo, stay-open, horizontal mount	Gray	☐ S1962	BK, W	☐ S1962__	•

Listed to UL514D, file no. E33216; CSA certified to C22.2, no. 42.1

Color ordering information:

BK (Black), GY (Gray), W (White)

BK	GY	W
(Black)	(Gray)	(White)

Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page G-21