

Suitable Locations

- Offices & Corporate
- Warehouse & Industrial
- Airport
- Education
- Government
- Healthcare
- Petroleum & Convenience stores
- Restaurants & Hospitality
- Parking
- Retail & Grocery
- Public venues & Recreation

Product description

1. The installation and maintenance must be completed by electricians or professionals.
2. Please cut off the power before installation and maintenance.
3. The thermally insulating material is not allowed to cover the fixture.
4. Please keep away from the corrosive substance, and keep the fixture dry and clean.
5. Working temperature: -20° ~40° , storage temperature: -30° ~60° .

Advantage

- ULus & DLC FCC listed; With LM79 & LM80
- 2ft:110W & 160W 4ft:225W
- High luminous efficacy 130lm/w
- High quality isolated driver; 0-10V dimming; Flicker free
- PF>0.90, driver efficiency>87%; THD<20%
- Suitable for dry/damp location
- Installation: pendant, chain mounting
- CCT: 4000K & 5000K
- Five years warranty
- Designed for warehouses, gymnasiums, and industrial spaces

LED LIGHTING WHOLESALE, INC.

LED Linear High Bay


Technical Details

Product Number	Power (W)	Dimensions	Color Temperature (K)	System LuminousFlux(lm)	SystemEfficacy (Lm/W)
DM-HB2-110W	110	23.82" x12.6" x1.97"	4000K,5000K	14300	130
DM-HB3-160W	160	23.82" x12.6" x1.97"	4000K,5000K	20800	130
DM-HB5-225W	225	45.87" x12.60" x1.22"	4000K,5000K	29250	130

Photometric Data

Rated Power	110W/160W/225W
Input Voltage	120-277VAC
CRI	>80
Power Factor	>0.9
Beam Angle	120°
THD	<20%
Dimming Function	0 - 10 V
Operating Temperature	-30°C to 130°C
Frequecy	50/60Hz

Dimension

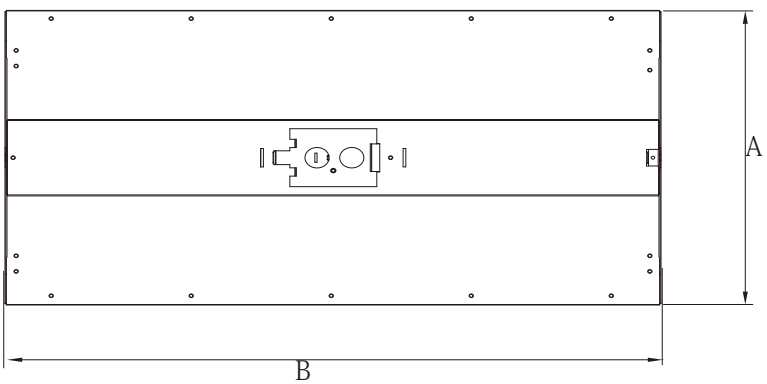



Part No.	A(mm)	B(mm)	C(mm)	D(mm)
DM-HB2-110W	320	605	50	96
DM-HB3-160W	440	605	50	96
DM-HB5-225W	320	1165	50	96

LED Linear High Bay

Multiple installation methods


Mounting Option

Method One :Chain Mount




Method two :Pole Mount


1. Install the junction box.

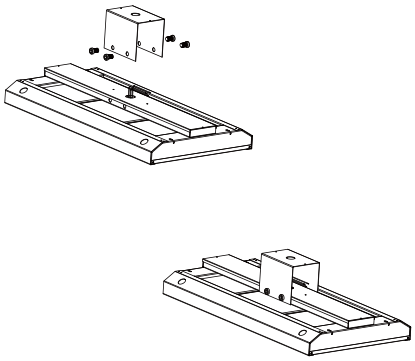


2. Fix the pole.

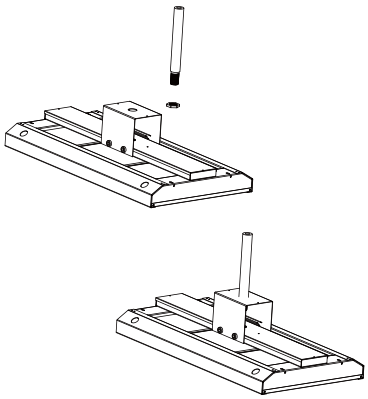

3. Connect the power wire.

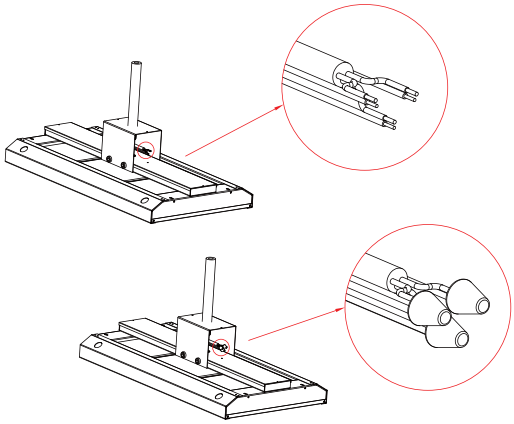


4. Close the door of the junction box.

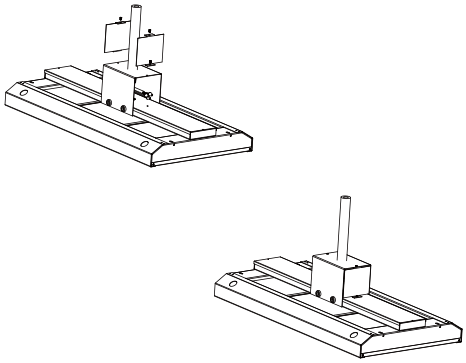

LED Linear High Bay

Packaging and renderings

Package

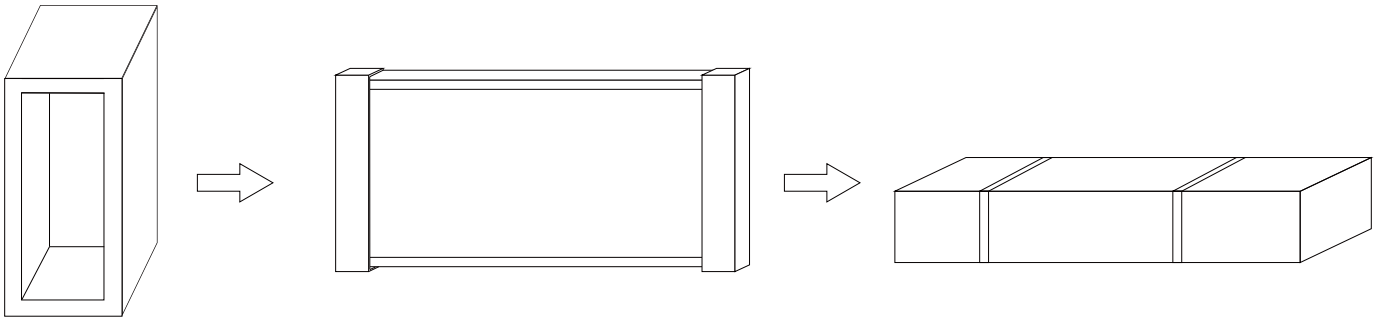

Item	L*W*H	Qty.	N.W.	G. W.
HB2-110W	25.4"x15"x8.7"	2 pcs/CTN	13.22 lbs/CNT	16 lbs/CTN
HB3-160W	25.4"x15"x8.7"	2 pcs/CTN	13.22 lbs/CNT	16 lbs/CTN
HB5-225W	48"x5.9"x15.3"	2 pcs/CTN	16.5 lbs/CNT	19.8 lbs/CTN

Applications



