
EZ6IC-AT

6” UNIVERSAL IC HOUSING WITH LOOSE SOCKET AND QUICK CONNECTORS


EZ SERIES HOUSING — NO SOCKET BRACKET RECESSED DOWNLIGHTS
DESIGNED FOR ALL AF-SERIES TRIMS AND B-SERIES ADJUSTABLE TRIMS

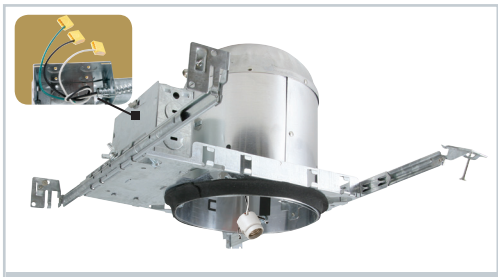

DESIGNED FOR 2” X 8” JOIST CONSTRUCTION

DESCRIPTION

For new construction. Thermally protected, IC rated specification grade recessed housing. Accommodates up to 75W PAR30, R30 lamps, 60W A19 lamps, 65W BR30 lamps, up to 12W LED PAR30 lamps and RL series LED retrofit module.

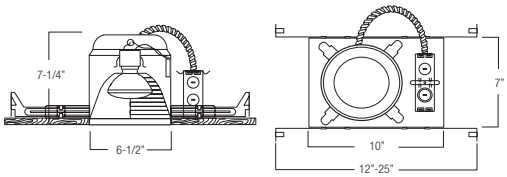

SAMEDAY SHIPPING

PROUDLY ASSEMBLED in AMERICA

SPECIFICATION

A. HOUSING - Die-formed all aluminum construction for maximum heat dissipation and rust protection. Adjusts vertically in plaster frame to accommodate 1/2” to 1-3/8” ceiling.

B. SOCKET - Medium base screw shell porcelain socket that attaches directly to the AF series trims.

C. BAR HANGERS - Preinstalled bar hangers allow housing to be positioned and locked at any point within a 24” joist span. They can be positioned on either the long or short axis of the housing and can be shortened for 12” joists. They contain a double-headed real nail for secure attachment into the joist. Bar hanger nails are installed on a 20º downward angle for better contact, and the 90º pivoting mounting plate makes installation fast and accurate. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods if necessary.

D. JUNCTION BOX - UL listed for through-branch circuit wiring and has four 1/2” KOs, one 3/4” KO and four Romex knockouts with true pry-out slots and strain clamps. With quick-connectors included.

E. THERMAL PROTECTION - Standard thermal protection device guards against improper installation, overlamping and misuse of insulation material.

UL and C-UL listed
For Damp location
For Feed-through wiring
For Direct contact with insulation

OPTION

1. AIR-SHUT-

- **Gasket to prevent air flow from heated or air conditioned spaces.**
- **Meets all national air flow requirements.**

c UL us LISTED

IECC ELITE LIGHTING ENERGY CODE APPROVED AIR-SHUT WASHINGTON STATE PERFORMANCE TESTED ASTM E283

TYPE
❑ EZ6IC-AT

USABLE WITH RL6 SERIES LED RETROFIT MODULE

EZ6RIC-AT

6” UNIVERSAL IC REMODEL HOUSING WITH LOOSE SOCKET AND QUICK CONNECTORS


EZ SERIES HOUSING — NO SOCKET BRACKET RECESSED DOWNLIGHTS
DESIGNED FOR ALL AF-SERIES TRIMS AND B-SERIES ADJUSTABLE TRIMS



DESIGNED FOR 2” X 8” JOIST CONSTRUCTION

DESCRIPTION

Thermally protected, IC rated specification grade remodel recessed housing. For remodeling installations where housing will be in direct contact with insulation. Accommodates up to 75W PAR30, R30 lamps, 60W A19 lamps, 65W BR30 lamp, up to 12W LED PAR30 lamps and RL series LED retrofit module.



SPECIFICATION

A. HOUSING - Die-formed, all aluminum construction for maximum heat dissipation and rust protection.

B. SOCKET - Medium base screw shell porcelain socket that attaches directly to the AF series trims.

C. INSTALLATION - For fast and easy installation in existing plaster or mechanical ceilings from 1/2” to 1-3/8” thick. Four remodel clips are easily retractable for fixture removal if necessary.

D. JUNCTION BOX - UL listed for through-branch circuit wiring, provided with eight 1/2” KOs and four Romex knockouts with strain relief. With quick-connectors included.

E. THERMAL PROTECTION - Standard thermal protection device guards against improper installation, overlamping and misuse of insulation material.

TYPE
❑ EZ6RIC-AT

UL and C-UL listed
For Damp location
For Feed-through wiring
For Direct contact with insulation

OPTION

1. AIR-SHUT-

- **Gasket to prevent air flow from heated or air conditioned spaces.**
- **Meets all national air flow requirements.**

c UL us LISTED

IECC ELITE LIGHTING ENERGY CODE APPROVED AIR-SHUT WASHINGTON STATE PERFORMANCE TESTED ASTM E283

USABLE WITH RL6 SERIES LED RETROFIT MODULE

SAMEDAY SHIPPING

PROUDLY ASSEMBLED in AMERICA

imagination at work

LED PAR30, 10-12W
Equivalent to 65W CFL Lamp
is compatible with the series on this page.



6” EZ SERIES
Incandescent Trims

(LAMP WATTAGE: **(1) MAXIMUM 75W R/PAR30, 60W A19, 65W BR30**)

Catalog Number: EZ6IC-AT	
Project Name:	**Type:**
Note:	elite LIGHTING

AF631W-WH (SOCKET SUPPORTING)
R30/PAR30 SELF FLANGE AIR-SHUT BAFFLE



AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK, SN-SN, CP-CP, BZ-BZ



AF649W-WH (SOCKET SUPPORTING)
R40/PAR38 DEEP SELF FLANGE AIR-SHUT BAFFLE



AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH



AF630W-0V (SOCKET SUPPORTING)
R30/PAR30 AIR-SHUT BAFFLE W/ OVER-SIZED RING



AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH



AF651W (SOCKET SUPPORTING)
R30/PAR30 CONE OPEN TRIM




AVAILABLE COLOR:
WHITE ONLY



AF637W-WH (SOCKET SUPPORTING)
SELF FLANGE AIR-SHUT BAFFLE




AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK, SN-SN, CP-CP, DBZ-DBZ



AF640W-WH (SOCKET SUPPORTING)
DEEP SELF FLANGE AIR-SHUT BAFFLE




AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, SN-SN, CP-CP, BZ-BZ



AF634W-CL-WH (SOCKET SUPPORTING)
R30/PAR30 AIR-SHUT REFLECTOR W/ BAFFLE




AVAILABLE COLORS:
W-CL-WH, P-CL-WH



AF632RG-WH (SOCKET SUPPORTING)
R30/PAR30 AIR-SHUT REFLECTOR




AVAILABLE COLOR COMBINATIONS:
CP-CP, W-WH, RG-WH, MB-WH, CL-WH, MB-BK, RG-PB, CL-CH



AF639W-WH (SOCKET SUPPORTING)
SELF FLANGE AIR-SHUT BAFFLE



AVAILABLE COLOR COMBINATIONS:
W-WH




MATT WHITE FINISH

AF644W-WH (SOCKET SUPPORTING)
PAR30 OPEN RATED SHOWER TRIM

NEW



AVAILABLE COLOR COMBINATIONS:
W-WH, P-WH, P-BK, SN-SN, CP-CP, BZ-BZ




AF601CP (SOCKET SUPPORTING)
METAL ALBALITE SHOWER TRIM



LENS:
ALBALITE

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




AF605PB (SOCKET SUPPORTING)
METAL FRESNEL SHOWER TRIM



LENS:
FRESNEL

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




AF606CP (SOCKET SUPPORTING)
METAL DROP OPAL SHOWER TRIM



LENS:
DROP OPAL

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




AF636W-WH (SOCKET SUPPORTING)
BAFFLE W/ FRESNEL LENS



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




AF635P-WH (SOCKET SUPPORTING)
BAFFLE W/ ALBALITE LENS



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




AF642CL-WH (SOCKET SUPPORTING)
REFLECTOR W/ FRESNEL LENS



REFLECTOR FINISH:
CL, RG, W, MB, CP, SN, SHZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



6” EZ SERIES
Incandescent Trims

(LAMP WATTAGE: **(1) MAXIMUM 75W R/PAR30, 60W A19, 65W BR30**)

Catalog Number: EZ6IC-AT	
Project Name:	**Type:**
Note:	elite LIGHTING


AF641RG-WH (SOCKET SUPPORTING) REFLECTOR W/ ALBALITE LENS



FOR WET LOCATION

REFLECTOR FINISH:
CL, RG, W, MB, CP, SN, SHZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




AF643RG-WH (SOCKET SUPPORTING) REFLECTOR W/ DROP OPAL LENS



FOR WET LOCATION

REFLECTOR FINISH:
CL, RG, W, MB, CP, SN, SHZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




AF638W-WH (SOCKET SUPPORTING) BAFFLE W/ DROP OPAL LENS



FOR WET LOCATION

BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




AF601L (SOCKET SUPPORTING) PLASTIC ALBALITE SHOWER TRIM



FOR WET LOCATION

LENS:
ALBALITE

TRIM/RING FINISH:
WHITE PLASTIC




AF605L (SOCKET SUPPORTING) PLASTIC FRESNEL SHOWER TRIM



FOR WET LOCATION

LENS:
FRESNEL

TRIM/RING FINISH:
WHITE PLASTIC




AF606L (SOCKET SUPPORTING) PLASTIC DROP OPAL SHOWER TRIM




FOR WET LOCATION

LENS:
DROP OPAL


TRIM/RING FINISH:
WHITE PLASTIC



AF633CP SOCKET SUPPORTING R/PAR30 OPEN TRIM




TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B602SN EYEBALL




TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



B663PB PAR30 GIMBAL RING



TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ




B673W-WH PAR30 BAFFLE W/ GIMBAL RING



BAFFLE FINISH:
W, P, SN, CP, BZ

TRIM/RING FINISH:
WH, BK, SN, CP, CH, PB, BZ



BAFFLE		REFLECTOR		TRIM RING	
W	White	**CL**	Chrome	**WH**	White
P	Black	**RG**	Gold	**BK**	Black
SN	Satin Nickel	**W**	White	**SN**	Satin Nickel
CP	Copper	**MB**	Black	**CP**	Copper
BZ	Bronze	**CP**	Copper	**CH**	Chrome
		SN	Satin Nickel	**PB**	Polish Brass
				BZ	Bronze

**For custom baffle, reflector, trim ring, glass color and lens options, please consult factory.*