BAFFLE TRIM

6"

INCANDESCENT

B6RIC | 6" UNIVERSAL IC REMODEL HOUSING





DESCRIPTION:

Thermally protected, IC rated specification grade remodel recessed housing. For remodeling installations where housing will be in direct contact with insulation. For fast and easy installation in existing plaster or mechanical ceilings from 1/2" to 1-3/8" thick. Four remodel clips are easily retractable for fixture removal if necessary. Junction box is provided with eight 1/2" KOs and four Romex knockouts with strain relief. Accommodates up to 75W R30, 75W PAR30, 65W BR40, 65W BR30, 65W PAR38, 50W PAR30 and 60W A19 lamps.

LAMP WATTAGE: (1) Maximum **75W R30, 75W PAR30, 65W BR40, 65W BR30, 65W PAR38, 50W PAR30, 60W A19**

** Maximum lamp wattage may vary based on trim.*

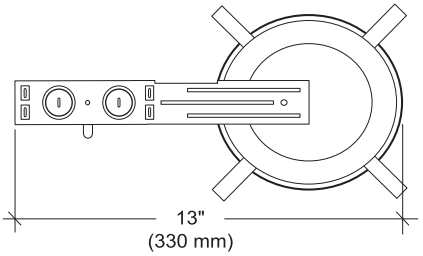

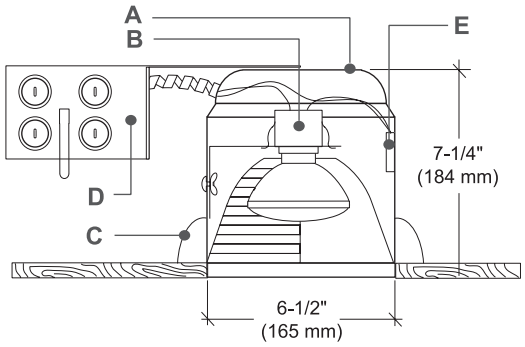

SPECIFICATION:

A. HOUSING - Die-formed, all aluminum construction for maximum heat dissipation and rust protection.

B. SOCKET - Medium base screw shell porcelain socket preinstalled on adjustable mounting bracket is designed to allow usage of different lamp types, as well as proper and consistent lamp positioning.

C. INSTALLATION - Four preinstalled spring clips which secure the housing firmly into ceiling to accommodate different ceiling thicknesses from 1/2" to 1-3/8".

D. JUNCTION BOX - Is UL and ETL listed for through-branch circuit wiring, provided with eight 1/2" KOs and four Romex knockouts with strain relief.

E. THERMAL PROTECTION - Standard thermal protection device guards against improper installation, overlamping and misuse of insulation material.

UL and C-UL listed
ETL and C-ETL listed
for Damp location.

UL listed
ETL listed
for Feed Through wiring.

UL listed
ETL listed
for Direct Contact with Insulation.

AIR SHUT AVAILABLE — Gasket to prevent air flow from heated or air conditioned spaces.

ORDERING INFORMATION, PLEASE SPECIFY:

TYPE	OPTION(S)	TRIM TYPE				BAFFLE	TRIM RING
B6RIC*	AIR SHUT	❑ B630	❑ AF634	❑ B636	❑ B651	❑ W	❑ WH
	❑ AT	❑ B631	❑ B610	❑ B637	❑ B611	❑ P	❑ BK
	WAGO	❑ AF637	❑ B609	❑ B656	❑ B647	❑ SN	❑ SN
	❑ W	❑ AF631	❑ B646	❑ B675	❑ B624	❑ CP	❑ CP
		❑ AF639	❑ B616	❑ B676		❑ BZ	❑ CH
		❑ AF640	❑ B673	❑ B225			❑ PB
		❑ AF649	❑ B635	❑ B653			❑ BZ

For standard housing leave options blank

Specified:

B6RIC-_____-_____-_____-_____-_____

TYPE OPTION(1) OPTION(2) TRIM TYPE BAFFLE TRIM RING

(Sample of Catalog Number: **B6RIC-AT-B630-W-WH**)

SPECIFIED BY:


TYPE:

JOB NAME:

elite LIGHTING U.S.A.

Tel: 323-888-1973 • 877-375-5555 / **Fax:** 323-888-1977 • 877-375-3333
www.iuseelite.com • E-mail: sales@iuseelite.com

B630 ____-____
METAL STEPPED BAFFLE




MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR30, 50W PAR30, 45W PAR38

BAFFLE:
W, P, SN, CP, BZ

RING:
WH, BK, SN, CP, CH, PB, BZ

B631 ____-____
R30 PHENOLIC BAFFLE W/ METAL RING




MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR30, 50W PAR30, 45W PAR38

BAFFLE:
W, P

RING:
WH, BK, SN, CP, CH, PB


AF637 ____-____
SELF-FLANGE AIR-SHUT BAFFLE



MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR30, 50W PAR30, 60W A19

AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH, P-WH, P-BK, BZ-BZ


AF631 ____-____
SELF-FLANGE AIR-SHUT BAFFLE

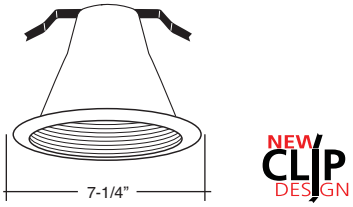

MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR30, 50W PAR30, 45W PAR38

AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH, P-WH, P-BK, BZ-BZ


AF639 ____-____
SELF-FLANGE AIR-SHUT BAFFLE

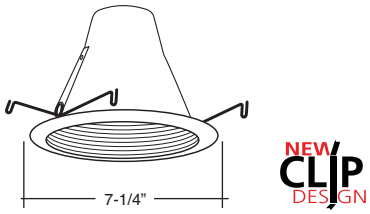

MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR30, 50W PAR30, 60W A19

AVAILABLE COLOR COMBINATION:
W-WH **(WHITE MATT FINISH)**


AF640 ____-____
DEEP SELF-FLANGE AIR-SHUT BAFFLE

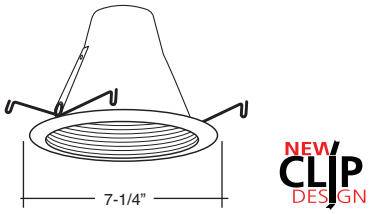

MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR40, 65W BR30, 65W PAR38, 50W PAR30, 60W A19

AVAILABLE COLOR COMBINATION:
W-WH, P-WH


AF649 ____-____
DEEP SELF-FLANGE AIR-SHUT BAFFLE

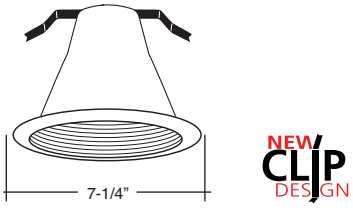

MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR40, 65W BR30, 65W PAR38, 50W PAR30, 60W A19

AVAILABLE COLOR COMBINATIONS:
CP-CP, SN-SN, W-WH, P-WH, P-BK, BZ-BZ


AF634 ____-____
DEEP SELF-FLANGE AIR-SHUT BAFFLE

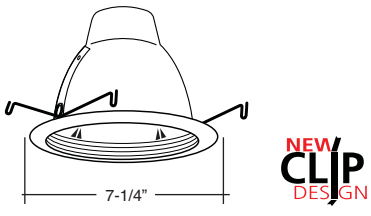

MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR40, 65W BR30, 65W PAR38, 50W PAR30, 60W A19

AVAILABLE COLOR COMBINATIONS:
P-CL, W-CL

B610 ____-____
CONE REFLECTOR W/ BAFFLE



MAX. LAMP WATT:
60W A19


BAFFLE:	REFLECTOR:
W, P	CL, RG

RING:
WH, BK, SN, CP, CH, PB

RING/TRIM FINISHES: **WH**=White **BK**=Black **SN**=Satin Nickel **CP**=Copper **CH**=Chrome **PB**=Polished Brass **BZ**=Bronze
BAFFLE FINISHES: **W**=White **P**=Black **SN**=Satin Nickel **CP**=Copper **BZ**=Bronze
REFLECTOR FINISHES: **CL**=Chrome **RG**=Gold **W**=White **MB**=Black **CP**=Copper **SN**=Satin Nickel


elite LIGHTING U.S.A.

B609 _____-_____
REGRESSED EYEBALL W/ BAFFLE




MAX. LAMP WATT:
75W R30/PAR30, 65W BR30, 50W PAR30
BAFFLE:
W, P, SN, CP
RING:
WH, BK, SN, CP, CH, PB
EYEBALL:
WH, BK, SN, CP, CH, PB

B646 _____-_____
EYEBALL WITH BAFFLE




MAX. LAMP WATT:
75W R30, 75W PAR30,
65W BR30, 50W PAR30
BAFFLE:
W, P
RING:
WH

B616 _____-_____
PAR20 REG. EYEBALL W/ BAFFLE (30° TILT)




MAX. LAMP WATT:
50W R20, 50W PAR20, 50W BR20
BAFFLE:
W, P
RING:
WH

B673 _____-_____
PAR30 GIMBAL TRIM (35° TILT)




MAX. LAMP WATT:
75W PAR30, 50W PAR30
BAFFLE:
W, P, SN, CP
RING:
WH, BK, SN, CP, CH, PB
GIMBAL RING:
WH, BK, SN, CP, CH, PB

B635 _____-_____
BAFFLE W/ ALBALITE LENS

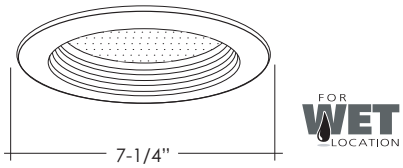


MAX. LAMP WATT:
40W A19
BAFFLE:
W, P, SN, CP
RING:
WH, BK, SN, CP, CH, PB

B636 _____-_____
BAFFLE W/ FRESNEL LENS

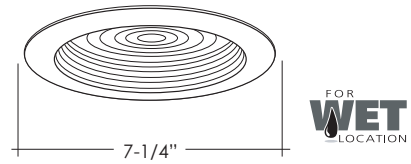


MAX. LAMP WATT:
40W A19
BAFFLE:
W, P, SN, CP
RING:
WH, BK, SN, CP, CH, PB

B637 _____-_____
BAFFLE W/ DROP OPAL LENS

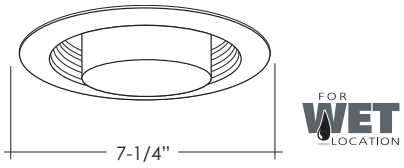


MAX. LAMP WATT:
40W A19
BAFFLE:
W, P, SN, CP
RING:
WH, BK, SN, CP, CH, PB

B656 _____-_____
BAFFLE W/ FROSTED DOME SHOWER LENS

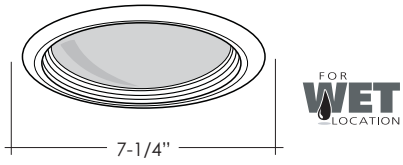

MAX. LAMP WATT:
40W A19
BAFFLE:
W, P, SN, CP
RING:
WH, BK, SN, CP, CH, PB


B675 _____-_____
BAFFLE W/ PRISMATIC LENS

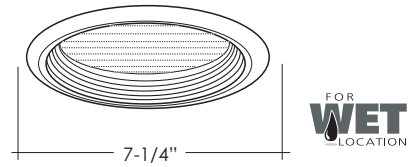

MAX. LAMP WATT:
40W A19
BAFFLE:
W, P, SN, CP
RING:
WH, BK, SN, CP, CH, PB

RING/TRIM FINISHES: **WH**=White **BK**=Black **SN**=Satin Nickel **CP**=Copper **CH**=Chrome **PB**=Polished Brass **BZ**=Bronze
BAFFLE FINISHES: **W**=White **P**=Black **SN**=Satin Nickel **CP**=Copper **BZ**=Bronze
REFLECTOR FINISHES: **CL**=Chrome **RG**=Gold **W**=White **MB**=Black **CP**=Copper **SN**=Satin Nickel


B676 ____-____
REFLECTOR W/ FROSTED LENS



FOR WET LOCATION


MAX. LAMP WATT:
40W A19
BAFFLE:
W, P, SN, CP
RING:
WH, BK, SN, CP, CH, PB

B225 ____-____
OPEN TRIM STEPPED BAFFLE




MAX. LAMP WATT:
75W R30, 75W PAR30, 65W BR30, 50W PAR30, 45W PAR38
BAFFLE:
W, P
RING:
WH

B653 ____-____
BAFFLE WITH BAFFLE




MAX. LAMP WATT:
50W R20, 50W PAR20, 50W BR20
BAFFLE:
W, P
RING:
WH, BK, SN, CP, CH, PB

B651 ____-____
PAR20 STEPPED BAFFLE




MAX. LAMP WATT:
50W R20, 50W PAR20, 50W BR20
BAFFLE:
W, P, SN, CP
RING:
WH, BK

B611 ____-____
PAR30 BAFFLE WALL WASH




MAX. LAMP WATT:
50W R20, 50W PAR30, 45W BR30
BAFFLE:
W, P, SN, CP
WALL WASH COVER:
WH, BK

B647 ____-____
DESIGNER BAFFLE WALL WASH



MAX. LAMP WATT:
35W PAR20, 30W R20, 30W BR20
BAFFLE:
W, P, SN, CP
WALL WASH COVER:
WH, BK

B624 ____-____
CONE REFLECTOR W/ BAFFLE WALL WASH



MAX. LAMP WATT:	
40W A19	
BAFFLE:	**REFLECTOR:**
W, P	CL, RG
WALL WASH COVER:	
WH, BK	

RING/TRIM FINISHES: **WH**=White **BK**=Black **SN**=Satin Nickel **CP**=Copper **CH**=Chrome **PB**=Polished Brass **BZ**=Bronze
BAFFLE FINISHES: **W**=White **P**=Black **SN**=Satin Nickel **CP**=Copper **BZ**=Bronze
REFLECTOR FINISHES: **CL**=Chrome **RG**=Gold **W**=White **MB**=Black **CP**=Copper **SN**=Satin Nickel

elite LIGHTING U.S.A.