
TYPE “SR” ALUMINUM SPLICERS/REDUCERS



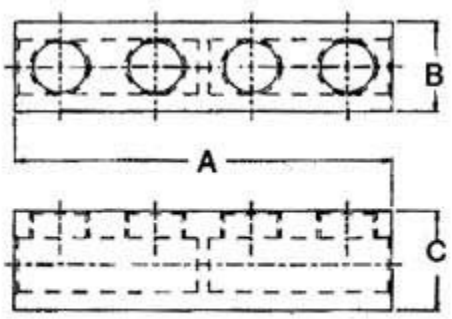

Buy Retail Online @ Galvan Direct

Dual-Rated Solderless Connectors

- For splicing copper to copper, copper to aluminum, and aluminum to aluminum conductors
- Solid center barrier wall prevents contact between conductors

CATALOG NUMBER	FIG.NO.	CONDUCTOR RANGE	PCS. PER CTN.	WT. PER 100	DIMENSIONS			NAED UPC NO.632591-
					A	B	C	
SR-2	1	2-14	10	10	1.38	0.5	0.56	71579-9
SR-0	1	1/0-14	10	12	1.91	0.75	0.75	71577-5
SR-250	2	250-6	10	47	3.94	1	1.13	71580-5
SR-350	2	350-6	10	50	4.19	1.13	1.19	71582-9

CATALOG NUMBER	FIG.NO.	CONDUCTOR RANGE	PCS. PER CTN.	WT. PER 100	DIMENSIONS			NAED UPC NO.632591-
SR-500	2	500-3/0	3	64	5	1.38	1.5	71583-6
SR-750	2	750-250	2	90	6.25	1.63	1.75	71584-3