
FISH RODS & ACCESSORIES

Fish Stix™ and Glo Stix™

- 200 lb (0.9 kN) maximum pulling strength
- Two different threaded tips accommodate various bundles of wire or cable
- All Fish Stix™ are interchangable so you can connect our Fish Stix™ with Glo Stix™

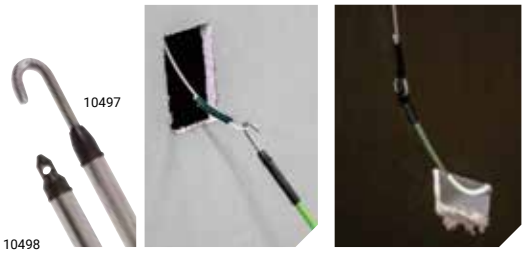

FISH STIX™

- High-visibility green rods allow you to easily spot them above ceilings, in between walls or under floors
- 1/4" (6.4 mm) diameter fiberglass allows you to add rigidity when connecting multiple sections

GLO STIX™

- Luminescent fiberglass rods glow in the dark for fishing in dark spaces
- More flexible than FishStix™, so you can fish through outlet box holes to get in between walls
- Sturdy, steel-threaded connectors are interchangeable with Greenlee 1/4" (6.4 mm) Fish Stix™
- Clear, non-metalic storage tube keeps Glo Stix™ charged and ready to use







	CAT. NO.	UPC NO.	DESCRIPTION
A	540-20P	783310129196	Professional Installers Kit: (3)-1/4" x 4' Fish Stix™ sections, (2)-3/16" x 2' Glo Stix™ Sections & (1)-5/32" x 4' Glo Stix™ Section, (1) whisk, (1) "J" hook, (1) bullet nose
	10497	783310104971	Hook Nose Tip
A	10498	783310104988	Bullet Nose Tip
A	11426	783310114260	Whisk Nose Tip
	540-12	783310105046	Fish Stix™ Kit: 1/4" x 12' (6.4 mm x 3.6 m) with bullet & "J" hook nose tips
	540-24	783310105060	Fish Stix™ Kit: 1/4" x 24' (6.4 mm x 7.3 m) with bullet & "J" hook nose tips
	540-8M	783310129189	Glo Stix™ Kit: 3/16" x 8' long (4.7 mm x 2.4 m) with bullet & "J" hook nose tips
	540-15	783310114222	Glo Stix™ Kit: 3/16" x 15' (4.7 mm x 4.6 m) with bullet & "J" hook nose tips
	540-18	783310867968	Glo Stix™ Kit: 5/32" x 18' (4.0 mm x 5.5 m) with bullet & "J" hook nose tips

SPECIFICATIONS

	540-12	540-24	540-8M	540-15	540-18	540-20P
Overall Length	12' (3.6 m)	24' (7.3 m)	8' (2.4 m)	15' (4.6 m)	18' (5.5 m)	6' (1.8 m)
Sections	3	5	5	3	3	6
Section Length	4' (1.2 m)	(3) 6' (1.8 m), (1) 3' (0.9 m) & (1) 3' (0.9 m)	20" (.5 m)	5' (1.5 m)	6' (1.8 m)	†
Diameter	1/4" (6.4 mm)	1/4" (6.4 mm)	3/16" (4.8 mm)	3/16" (4.7 mm)	5/32" (4.0 mm)	5/32" (4.0 mm)
Type	FishStix™	FishStix™	Glo Stix™	Glo Stix™	Glo Stix™	Glo Stix™
Minimum Bend Radius	6 1/2" (165 mm)	6 1/2" (165 mm)	4 1/4" (108 mm)	4 1/4" (108 mm)	3 1/2" (89 mm)	3 1/2" (89 mm)

†540-20P includes: (3)-1/4" x 4' Fish Stix™ sections, (2)-3/16" x 2' Glo Stix™ Sections & (1)-5/32" x 4' Glo Stix™ Section.