
Split Bolt Connector




Listed
Control No. 43Y8
File No. AP98113

TRADE SIZE	HALEX PART #	PCS/ UNIT	CTN/CASE QTY	CTN/CASE WT	UPC BAR CODED SELL UNIT	DIMENSIONS A (in inches)	B	C
12 Sol-8 Sol	**32408B**	bulk	100	4	NA	0.145	0.375	0.500
10-6 Sol	**32406B**	bulk	100	5	NA	0.165	0.438	0.625
8-4 Sol	**32404B**	bulk	100	7	NA	0.215	0.500	0.688
6-2 Sol	**32403B**	bulk	100	9	NA	0.264	0.563	0.750
6 Sol-2 Str	**32402B**	bulk	100	11	NA	0.328	0.469	0.813
4 Sol-1/0 Str	**32310B**	bulk	50	8	NA	0.377	0.688	0.875
2 Sol-2/0 Str	**32320B**	bulk	25	8	NA	0.420	0.750	1.000
2 Sol-3/0Str	**32330B**	bulk	25	10	NA	0.470	0.875	1.125
1/0 Sol-250 MCM	**32340B**	bulk	25	13	NA	0.580	1.000	1.313
CARDED ITEMS								
12 Sol-8Str	**43248**	2/card	10 cards	0.7	UPC on card	0.145	0.375	0.500
10-6 Sol	**43246**	2/card	10 cards	1.1	UPC on card	0.165	0.438	0.625
8-4 Sol	**43244**	1/card	10 cards	0.5	UPC on card	0.215	0.500	0.688
6 Sol-2 Str	**43242**	1/card	10 cards	0.3	UPC on card	0.328	0.469	0.813

Application: Indoors or Outdoors
Use to connect copper and copper-weld wires.
Material: Silicon Bronze
Type: Flat Style

Split Bolt Connector

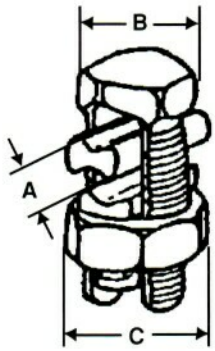

Listed
Control No. 43Y8
File No. AP98113

FOR COPPER TO COPPER; **CAN BE USED ON ALUMINUM CONDUCTOR - NOT UL LISTED FOR THAT APPLICATION**								
16 Str-8 Str	**32008B**	bulk	100	4	NA	0.145	0.375	0.500
CARDED ITEMS								
16 Str-8 Str	**43208**	2/card	10 cards	1.6	UPC on card	0.145	0.375	0.500
FOR COPPER TO COPPER, COPPER TO ALUMINUM, ALUMINUM TO ALUMINUM								
14 Str-6 Sol	**32006B**	bulk	100	6	NA	0.165	0.428	0.625
10 Str-4 Sol	**32004B**	bulk	100	8	NA	0.215	0.500	0.688
8 Str-3 Str	**32003B**	bulk	100	10	NA	0.264	0.563	0.750
8 Sol-2 Str	**32002B**	bulk	100	13	NA	0.328	0.469	0.813
CARDED ITEMS								
14 Str-6 Sol	**43206**	2/card	10 cards	2.4	UPC on card	0.165	0.438	0.625
10 Str-4 Sol	**43204**	1/card	10 cards	0.8	UPC on card	0.215	0.500	0.688
8 Str-3 Str	**43203**	1/card	10 cards	1	UPC on card	0.264	0.563	0.750
8 Sol-2 Str	**43202**	1/card	10 cards	1.3	UPC on card	0.328	0.469	0.813
FOR COPPER TO COPPER; **CAN BE USED ON ALUMINUM CONDUCTOR - NOT UL LISTED FOR THAT APPLICATION**								
6 Sol-1/0 Str	**31910B**	bulk	50	9	NA	0.377	0.688	0.875
6 Str-2/0 Str	**31920B**	bulk	25	8	NA	0.420	0.750	1.000
4 Str-3/0 Str	**31930B**	bulk	25	10	NA	0.470	0.875	1.125
4 Str-250 MCM	**31940B**	bulk	25	13.3	NA	0.580	1.000	1.313
CARDED ITEMS								
6 Sol-1/0 Str	**43191**	1/card	10 cards	1.8	UPC on card	0.377	0.688	0.875
6 Str-2/0 Str	**43192**	1/card	10 cards	3.2	UPC on card	0.420	0.750	1.000
4 Str-3/0 Str	**43193**	1/card	10 cards	4	UPC on card	0.470	0.750	1.000
4 Str-250 MCM	**43194**	1/card	8 cards	4.3	UPC on card	0.580	1.000	1.313

Application: Indoors or Outdoors
Use to connect wires together. Use oxide-inhibiting compound when connecting aluminum or ACSR (aluminum conductor steel reinforced) wires.
Material: Silicon Bronze with Elecrtro-tin Plated Bolt, Nut, Spacer, and Pressure Bar

23901 Aurora Road Bedford Hts., Ohio 44146 Phone: 440.439.1616 Fax: 440.439.1792