

HI–LITE MFG. CO., INC.
13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Fax: (909) 465-0907

Job Name: _____
Type: _____
Quantity: _____

Deep Bowl Collection



H-16007, H-16008, H-16110, H-16112



H-16114, H-16116, H-16118, H-17118, H-17124

Item Number	Height (A)	Width (B)
H-16007	6 1/4"	7"
H-16008	8"	8"
H-16110	10 1/4"	10"
H-16112	10 3/4"	12"
H-16114	14"	14"
H-16116	16 1/2"	16"
H-16118	17"	18"
H-17118	18"	19 1/2"
H-17124	20 1/4"	24"

Fixture No.	Fixture Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/ Lamp options	LED Color Temp	Driver
H-16007 (1) H-16008 (1) H-16110 H-16112 H-16114 H-16116 (2) H-16118 (2) H-17118 (2) H-17124 (2)	Standard (2) **91** (Black) **93** (White) **95** (Dk. Grn) **96** (Galv.) **BR47** (Rust) **BK01, GN20.** Upgraded (2) Finishes **01,11,14, 22,24,25,26, 29, 33,41,44, 48,49,66,74, 77,82,89,92, 94,97,98,100, 101,102,112, 117,118,119, 121,122,123, 124,127,128, 130,133,134, 135,136,137, 139,140,141, 145,146,147, 148,150,151, 152,153,154, 155,156,157, 158,165,991** For finish specs see pages 344-348.	Mounting Options **1/2"** **3/4"** Cord Options (3) **CB8** (8' Blk Cord) **CW8** (8' Wht Cord) **CG8** (8' Gray Mesh Cord) Custom Cord Options (3) **CB___** (Black) **CW___** (White) **CG___** (Gray Mesh) Specify length. Stem Options (Stem 1/2") **___ST** Specify length and canopy. **HSC** (Canopy) **SMC** (Canopy) Flush Mount Options **FHSC** **FSMC** Arm Options **B-1** **HL-K** **HL-A** **HL-U** **HL-H** **P-1** **HL-C** **P-3** **HL-D** For all arms and specs see pages 321-344.	Standard **91** (Black) **93** (White) **95** (Dk. Grn) **96** (Galv.) **BR47** (Rust) **BK01, GN20.** Upgraded Finishes **01,11,14, 22,24,25,26, 29, 33,41,44, 48,49,66,74, 77,82,89,92, 94,97,98,100, 101,102,112, 117,118,119, 121,122,123, 124,127,128, 130,133,134, 135,136,137, 139,140,141, 145,146,147, 148,150,151, 152,153,154, 155,156,157, 158,165,991** For finish specs see pages 344-348.	**CGU**(4) (Cast guard & glass) **LCGU**(4) (Large cast guard & glass) **WGU**(4) (Wire guard & glass) **LWGU**(4) (Large wire guard & glass) **ARN**(4) (Acorn globe) **LARN**(4) (Large acorn globe) **WGR** (Wire guard) **SK** (Swivel knuckle) **FX** (Flexible tubing for cord mounted fixture only) For specs and glass color see pages 321-344.	Standard **91** (Black) **93** (White) **95** (Dk. Grn) **96** (Galv.) **BR47** (Rust) For all finishes see pages 344-348.	Incandescent **INC** (5) (Fixture is standard 100W or 200W Medium Base.) **GU24** (5) (2-Pin Twist Lock Socket) LED4 series (5)(6) (Not available with glass enclosures) **6LED4** (850 Lumens) **10LED4** (1250 Lumens) **14LED4** (1650 Lumens) **18LED4** (2000 Lumens) **20LED4** (2500 Lumens) **23LED4** (3000 Lumens) LED3 Series (5)(6) (Requires glass enclosure) **12LED3** 1400 (Lumens) For specs see LED Spec Sheet online **CFL/MH/HPS** (Compact Fluorescent) (Metal Halide & High Pressure Sodium) **Contact Factory for availability**	LED Color Temp not available for INC or GU24. **27** (2700K) **30** (3000K) **35** (3500K) **40** (4000K) For specs See LED Spec Sheet Online	Driver not available for INC or GU24. **CBCM** (Cord Driver Housing) **SBCM** (Stem Driver Housing) **WBCM** (Wall Driver Housing) **LPLB** Post Driver Housing) (LED4(6) Dimming Specs: ELV, Triac, 0/1-10V Standard) (LED3(6) Dimming Specs: ELV, Triac, 0/1-10V Standard) For specs See LED Spec Sheet Online

H-16007	- 91	/ 1/2"	- 91	/ CGU-FR	- 91	/ 12LED3	- 27	- WBCM

ORDER EXAMPLE
(USE THIS FORMAT TO PLACE ORDER)

Notes:

(1) H-16007 and H-16008 available for 100W Max INC & up to 10WLED4 Max.
H-16007 and H-16008 not available with glass enclosures.

(2) For interior finish of fixture refer to color chart on pages 344-348.
H-16116, H-16118, H-17118 and H-17124 not available in copper or brass finish.

(3) Cord Mounting wattage not to exceed 100 for HID.
Gray Mesh Cord not available for HID.

(4) Requires Globe Option. (See pages 339-341 for Globe Options)
Max Wattages for CGU and WGU are 100W INC, 32W CFL and 100W HID.
Max Wattages for LWGU, LCGU, ARN and LARN are 200W INC, 57W CFL and 175W HID.

INC,GU24,CFL & HID are UL Listed
LED is ETL Listed

(5) Socket Bases: INC and HID are medium base. CFL is GX24Q.,GU24 is 2-pin Twist lock, LED is Dedicated with a driver and Module
INC & GU24 are standard 120 Volt & LED is standard 120/277 Volts.

(6) LED4 Series in not available with Glass Enclosures.
LED4 Dimming Specs:Driver is Standard Tri Dim, ELV, Triac,0/1-10V.
LED3 Dimming Specs:ELV, Triac,0/1-10V, standard-ordered after 2-21-2024, 0/1-10v ordered prior to 2-20-2024.

Cord-hung fixtures: suitable for dry location only.
Stem-hung fixtures: suitable for damp & dry location.
Gooseneck, post mount & wall bracket fixtures: suitable for wet, damp & dry location.

Finish	Interior of Shade Finish	Finish Rating
01-Polished Brass	Satin Brass	Dry Rated
14-Satin Steel/ Satin Copper	Satin Steel	Dry Rated
15-Burnt Copper	Burnt Copper	Wet Rated
16-Burnt Steel	Burnt Steel	Dry Rated
22-Weathered Brass	Weathered Brass	Wet Rated
24-Satin Copper	Satin Copper	Wet Rated
25-Satin Brass	Satin Brass	Wet Rated
26-Natural Brass W/Clear Coat	Natural Brass W/Clear Coat	Wet Rated
29-French Green	White	Wet Rated
33-Patina	Patina	Wet Rated
41-Polished Brass/Polished Copper	Satin Brass	Dry Rated
44-Polished Brass	Satin Brass	Damp Rated
48-Raw Copper	Raw Copper	Wet Rated
49-Weathered Copper	Weathered Copper	Wet Rated
55-Chrome	Satin Chrome	Dry Rated
66-Navajo White	Navajo White	Dry Rated
74-Rosewood/Raw Copper accent	Rosewood	Wet Rated
77-Rosewood	Rosewood	Wet Rated
82-Sierra Wash	White	Wet Rated
89-Aged Brass	Aged Brass	Wet Rated
91-Black	White	Wet Rated
92-Yellow	White	Wet Rated
93-White	White	Wet Rated
94-Cruiser Green	White	Wet Rated
95-Dark Green	White	Wet Rated
96-Galvanized	Galvanized	Wet Rated
98-Polished Aluminum	Brushed Aluminum	Damp Rated
100-Dark Brown	White	Wet Rated
101-Brushed Aluminum	Brushed Aluminum	Wet Rated
102-Raw Aluminum	Raw Aluminum	Wet Rated
112-Tuscany	White	Wet Rated
117-Gun Metal Grey	White	Wet Rated
118-Painted Aluminum	Painted Aluminum	Wet Rated
119-Bronze	White	Wet Rated
121-Café	Café	Wet Rated
122-Transparent Green	Transparent Green	Wet Rated
123-Transparent Blue	Transparent Blue	Wet Rated
124-Transparent Red	Transparent Red	Wet Rated
127-Vanilla Cream	Vanilla Cream	Wet Rated
128-Painted Gold	Painted Gold	Wet Rated
130-Painted Natural Copper	Painted Natural Copper	Wet Rated
133-BK01/Brushed Gold	White	Dry Rated
134-BK01/Brushed Silver	White	Dry Rated
135-BK01/Brushed Copper	White	Dry Rated
136-BK01/Brushed Gold	White	Dry Rated
139-Cranberry	White	Wet Rated
140-Mallard Green	White	Wet Rated
141-Orange	White	Wet Rated
145-Oil Rubbed Bronze	White	Wet Rated
146-Navy Blue	White	Wet Rated
147-BattleShip Gray	White	Wet Rated
148-Caribbean Blue	White	Wet Rated
151-Old Copper	Old Copper	Wet Rated
152-Old Nickel	Old Nickel	Wet Rated
153-Bright Yellow	White	Wet Rated
154-Bright Red	White	Wet Rated
155-Bright Blue	White	Wet Rated
156-Bright Orange	White	Wet Rated
157-White w/Black Trim line	White	Wet Rated
158-Black Polished Copper	Polished Copper	Wet Rated
159-Gold Foil(For use with Interior of shade only)	Gold Foil	Dry Rated
160-Polished Nickel	Satin Nickel	Dry Rated
161-Copper Foil(For use with Interior of shade only)	Copper Foil	Dry Rated
162-Silver Foil(For use with Interior of shade only)	Silver Foil	Dry Rated
165-Powder Coat Brass	Powder Coat Brass	Wet Rated
991-High Gloss Black	White	Wet Rated
BK01-Black Texture	White	Wet Rated
BR47-Rust	White	Wet Rated
GN20-Powder Coat Patina	White	Wet Rated
COP/BLK-Copper/Black	White	Dry Rated
GLD/BLK-Gold/Black	White	Dry Rated
SIL/BLK-Silver/Black	White	Dry Rated

MADE IN U.S.A. • www.hilitemfg.com • Tel: 909.465.1999 • Toll Free: 800.465.0211 • Fax: 909.465.0907


HI–LITE MFG. CO., INC.
13450 Monte Vista Avenue Telephone: (909) 465-1999
Chino, California 91710 Toll Free: (800) 465-0211
Fax: (909) 465-0907
www.hilitemfg.com

Stems Canopies & Accessories for Conduit

Stem-1/2" & 3/4" Conduit


Item No.	Conduit size and thread	Note.
____ST2 (Specify length in inches)	1/2" 14-NPT	Not available in steel, brass, copper or specialty finishes.
____ST3 (Specify length in inches)	3/4" 14-NPT	Not available in steel or specialty finishes.

Example: 44"ST2 for a 44" Stem 1/2" conduit




Incandescent Canopy
SMC (Stem Mount Canopy)
FSMC (Flush Stem Mount Canopy)

(Only available with 1/2" stem, ST2)





Not available in steel, brass, copper or specialty finishes.



Incandescent Canopy
HDSMC (Heavy Duty Stem Mount Canopy)
FHDSMC (Flush Heavy Duty Stem Mount Canopy)


For 1/2" & 3/4" Stems







Incandescent Canopy
HSC (Hang Straight Canopy)
FHSC (Flush Hang Straight Canopy)

1/2" has a max 38° Swivel , 3/4" has a max 35° Swivel






Incandescent Canopy
HDSMC-SK (Heavy Duty Stem Mount Canopy
With Swivel Knuckle, swivel to almost any angle)





Not available in steel, brass, copper or specialty finishes.



Incandescent Canopy
H-SQBP (Heavy Duty Square Back Plate)


For 1/2" & 3/4" Stems

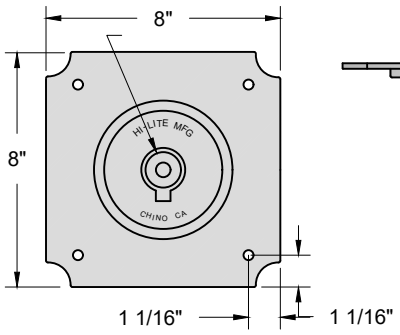



DCC (Decorative Canopy Cover)

For 1/2" & 3/4" Stems, for use with HDSMC Only.




***Confidential and Proprietary. The information contained on this page is the sole property of Hi-Lite Mfg. Co., Inc. Any reproduction, redistribution, or use to profit from in part or as a whole without prior written authorization of Hi-Lite Mfg. Co., Inc. is unlawful, against trade laws and will be prosecuted to the fullest extent.


HI–LITE MFG. CO., INC.
13450 Monte Vista Avenue Telephone: (909) 465-1999
Chino, California 91710 Toll Free: (800) 465-0211
Fax: (909) 465-0907
www.hilitemfg.com

Stems Canopies & Accessories for Conduit


LED CANOPY
SMC (Stem Mount Canopy)
FSMC (Flush Stem Mount Canopy)
(Only available with 1/2" stem, ST2)

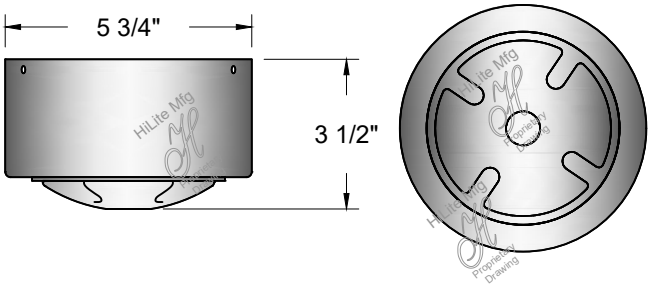


LED CANOPY
HSC (Hang Straight Canopy)
FHSC (Flush Hang Straight Canopy)
1/2" has a max 38° Swivel , 3/4" has a max 35° Swivel

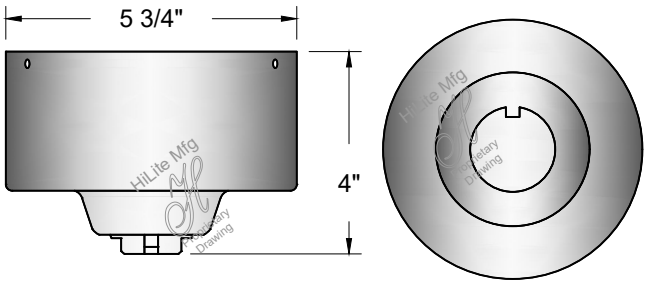

LED CANOPY
HDSMC (Heavy Duty Stem Mount Canopy)
FHDSMC (Flush Heavy Duty Stem Mount Canopy)
For 1/2" & 3/4" Stems

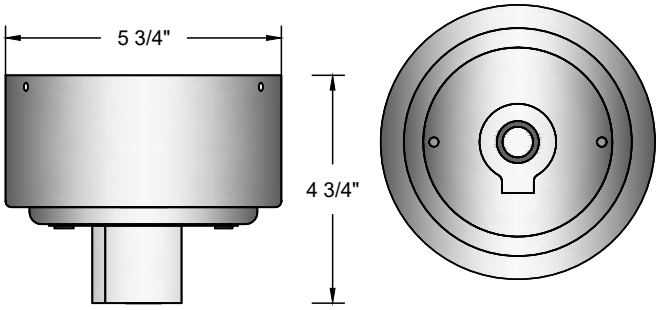


LED CANOPY
HDSMC-SK (Heavy Duty Stem Mount Canopy
With Swivel Knuckle, swivel to almost any angle)

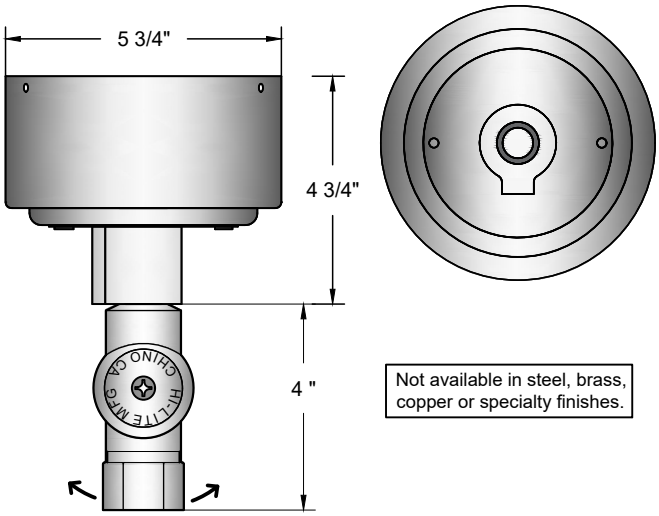

Not available in steel, brass, copper or specialty finishes.

Multi-Stem Mount

Not available in steel, brass or specialty finishes.

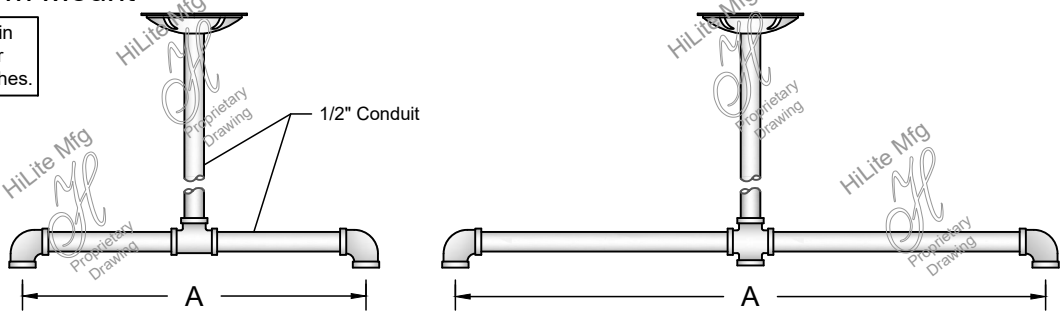

Multi-Stem Mounting					
Accessory No.	Stem	Canopy	Mounting Width (A)	Fixture Quantity	Fits Fixture Diameter
2S11	___ST (Specify stem length)	SMC HDSMC HSC	11 1/2"	2-Light	8"-10"
2S15			15"	2-Light	12"
2S23			23"	2-Light	14"-18"
3S25			25"	3-Light	8"-10"
3S30			30"	3-Light	12"
3S46			46"	3-Light	14"-18"

***Confidential and Proprietary. The information contained on this page is the sole property of Hi-Lite Mfg. Co., Inc. Any reproduction, redistribution, or use to profit from in part or as a whole without prior written authorization of Hi-Lite Mfg. Co., Inc. is unlawful, against trade laws and will be prosecuted to the fullest extent.


HI–LITE MFG. CO., INC.
13450 Monte Vista Avenue Telephone: (909) 465-1999
Chino, California 91710 Toll Free: (800) 465-0211
Fax: (909) 465-0907
www.hilitemfg.com

Wire Guards, Cast Guard, Glass & Accessories


Cast and Wire Guards and Glass

Fixture No.	Height (A)	Width (B)
CGU	10"	4"
WGU	10"	4"
LCGU	12"	5"
LWGU	12"	5"

Not available in steel, brass, copper or specialty finishes.



CGU LCGU



WGU LWGU

Cast Guard and Glass


Accessory No.	Glass Color	Wattage
CGU-CLR	Clear	100W/INC, 32W/CFL
CGU-RIB	Clear Ribbed	100W/INC, 32W/CFL
CGU-FR	Frost	100W/INC, 32W/CFL
CGU-RD	Red	100W/INC, 32W/CFL
CGU-BL	Blue	100W/INC, 32W/CFL
CGU-GRN	Green	100W/INC, 32W/CFL
CGU-AM	Amber	100W/INC, 32W/CFL
CGU-AMC	Amber Crackle	100W/INC, 32W/CFL
LCGU-CLR	Clear	200W/INC, 57W/CFL
LCGU-RIB	Clear Ribbed	200W/INC, 57W/CFL
LCGU-FR	Frost	200W/INC, 57W/CFL
LCGU-RD	Red	200W/INC, 57W/CFL
LCGU-BL	Blue	200W/INC, 57W/CFL
LCGU-GRN	Green	200W/INC, 57W/CFL
LCGU-AM	Amber	200W/INC, 57W/CFL
LCGU-AMC	Amber Crackle	200W/INC, 57W/CFL

Wire Guard and Glass

Accessory No.	Glass Color	Wattage
WGU-CLR	Clear	100W/INC, 32W/CFL
WGU-RIB	Clear Ribbed	100W/INC, 32W/CFL
WGU-FR	Frost	100W/INC, 32W/CFL
WGU-RD	Red	100W/INC, 32W/CFL
WGU-BL	Blue	100W/INC, 32W/CFL
WGU-GRN	Green	100W/INC, 32W/CFL
WGU-AM	Amber	100W/INC, 32W/CFL
WGU-AMC	Amber Crackle	100W/INC, 32W/CFL
LWGU-CLR	Clear	200W/INC, 57W/CFL
LWGU-RIB	Clear Ribbed	200W/INC, 57W/CFL
LWGU-FR	Frost	200W/INC, 57W/CFL
LWGU-RD	Red	200W/INC, 57W/CFL
LWGU-BL	Blue	200W/INC, 57W/CFL
LWGU-GRN	Green	200W/INC, 57W/CFL
LWGU-AM	Amber	200W/INC, 57W/CFL
LWGU-AMC	Amber Crackle	200W/INC, 57W/CFL

Glass Cover

Fixture No.	Height (A)	Width (B)
SGU	7"	3 1/2"
LSGU	10"	5"

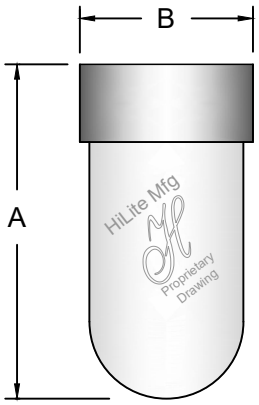

SGU
LSGU

Glass Cover

Accessory No.	Glass Color	Wattage
SGU-CLR	Clear	100W/INC, 32W/CFL
SGU-RIB	Clear Ribbed	100W/INC, 32W/CFL
SGU-FR	Frost	100W/INC, 32W/CFL
SGU-RD	Red	100W/INC, 32W/CFL
SGU-BL	Blue	100W/INC, 32W/CFL
SGU-GRN	Green	100W/INC, 32W/CFL
SGU-AM	Amber	100W/INC, 32W/CFL
SGU-AMC	Amber Crackle	100W/INC, 32W/CFL
LSGU-CLR	Clear	200W/INC, 57W/CFL
LSGU-RIB	Clear Ribbed	200W/INC, 57W/CFL
LSGU-FR	Frost	200W/INC, 57W/CFL
LSGU-RD	Red	200W/INC, 57W/CFL
LSGU-BL	Blue	200W/INC, 57W/CFL
LSGU-GRN	Green	200W/INC, 57W/CFL
LSGU-AM	Amber	200W/INC, 57W/CFL
LSGU-AMC	Amber Crackle	200W/INC, 57W/CFL

Glass Colors


CLR-Clear

FR-Frost


RIB-Clear Ribbed


AM-Amber


AMC-Amber Crackle


RD-Red


BL-Blue



GRN-Green

***Confidential and Proprietary. The information contained on this page is the sole property of Hi-Lite Mfg. Co., Inc. Any reproduction, redistribution, or use to profit from in part or as a whole without prior written authorization of Hi-Lite Mfg. Co., Inc. is unlawful, against trade laws and will be prosecuted to the fullest extent.

HI—LITE MFG. CO., INC.
13450 Monte Vista Avenue Telephone: (909) 465-1999
Chino, California 91710 Toll Free: (800) 465-0211
Fax: (909) 465-0907
www.hilitemfg.com


Wire Guards, Cast Guard, Glass & Accessories

WGR-Wire Guards




Wire Guard	
Accessory No.	Diameter
H-WGR-7	7"
H-WGR-8	8"
H-WGR-10	10"
H-WGR-12	12"
H-WGR-14	14"
H-WGR-16	16"
H-WGR-17	17"
H-WGR-18	18"
H-WGR-20	20"
H-WGR-24	24"
H-WGR-27	27"

6OP-Opal Ball




ARN-Acorn Glass




Fixture No.	Height (A)	Width (B)
ARN	10"	7"
ARN-FR	10"	7"
LARN	14"	10"
LARN-FR	14"	10"

Drop Wire Guard

Item No.	Height (A)	Width (B)
DWG-1	3"	7"
DWG-2	4 1/2"	7"
DWG-3	5 1/2"	10"
DWG-4	8"	10"





***Confidential and Proprietary. The information contained on this page is the sole property of Hi-Lite Mfg. Co., Inc. Any reproduction, redistribution, or use to profit from in part or as a whole without prior written authorization of Hi-Lite Mfg. Co., Inc. is unlawful, against trade laws and will be prosecuted to the fullest extent.

Hi-Lite Mfg. Co.

LED4 Series Specifications

Description

The Hi-Lite LED 4 series is a drop-in LED light engine with integrated thermal management and optics.
This LED series is available for Open-rated fixtures. The LED series is offered in Eight lumen outputs: 850, 1250, 1650, 2000, 2500, 3000, 3500 and 4000.



Specifications

- Open-rated fixture only (not rated for use within a sealed fixture or glass enclosure)
- Frosted Lens
- 6W, 850lm, (tested at 4000 K)
- 10W, 1250lm, (tested at 4000 K)
- 14W, 1650lm, (tested at 4000 K)
- 18W, 2000lm, (tested at 4000 K)
- 20W, 2500lm, (tested at 4000 K)
- 23W, 3000lm, (tested at 4000 K)
- 29W, 3500lm, (tested at 4000 K)
- 34W, 4000lm, (tested at 4000 K)
- 120/277V Multi Volt Standard
- ≥ 90 CRI for all CCTs (2700 K, 3000 K, 3500 K, 4000 K)
- Min 0ºC start up temp
- 96°Beam Angle
- Diming Specs: 6W, 10W, 14W, 18W, 20W, 23W, 29W, & 34W are all rated for ELV, Triac & 0/1-10v Dim Standard. Triac Dim will only work at 120V.

(USE THIS FORMAT TO PLACE)

Wattage/ Light Source	Color Temperature	Driver Location
6LED4 (850 lumens)	**27** (2700 K)	**WBCM** (Wall Mount Ballast Canopy Mount)
10LED4 (1250 lumens)	**30** (3000 K)	
14LED4 (1650 lumens)	**35** (3500 K)	**SBCM** (Stem Mount Ballast Canopy Mount)
18LED4 (2000 lumens)	**40** (4000 K)	
20LED4 (2500 lumens)		**CBCM** (Cord Mount Ballast Canopy Mount)
23LED4 (3000 lumens)		
29LED4 (3500 lumens)		**LPLB** (Post Mount Ballast Canopy Mount)
34LED4 (4000 lumens)		
18LED4	30	WBCM

Ordering Examples:

18LED430WBCM - 18W, LED4, 3000 K, Non-Dimming, Ballast Canopy Mount, 120/277 V

10LED427WBCM - 10W, LED4, 2700 K, Ballast Canopy Mount, 120/277 V

34LED440WBCM - 34W, LED4, 4000 K, Non-Dimming, Ballast Canopy Mount, 120/277 V

MADE IN THE U.S.A. • www.hilitemfg.com • Tel: 909.465.1999 • Toll Free: 800.465.0211 • Fax: 909.465.0907

Hi-Lite Mfg. Co.

LED 3 Series Specifications

Description

The Hi-Lite LED 3 series is a Chip -On-Board (COB) drop -in LED light board. The LED 3 series is specifcally used for enclosed light fixtures with jelly jar style fixtures. The LED 3 series is offered in 1400 lumens.

Specifications

- For use with enclosed-rated Jelly Jar style fixtures and accessories only.
- Standard 120º Beam Angle
- 12W, 1400lm, 350mA (tested at 4000 K)
- 120/277V Multi Volt Standard
- 90 CRI for all CCTs (2700K, 3000K, 3500K, 4000K)
- Lumen maintenance, L70 lifetime=50k hours based on 105º operating temp.
- 3-year Limited Warranty-LED Module only
- 1-year Limited Warranty-LED Driver only
- Dimming Specs: Anything Ordered Prior to 2-20-24 will be 0/1-10V Dim Standard.
- Dimming Specs: Anything ordered after 2-21-24 will be rated for ELV, Triac & 0/1-10v Dim Standard. Triac Dim will only work at 120V.



(USE THIS FORMAT TO PLACE ORDER)

Wattage/ Light Source	Color Temperature	Driver Location
12LED3 (1400 lumens)	**27** (2700 K) **30** (3000 K) **35** (3500 K) **40** (4000 K)	**WBCM** (Wall Mount Ballast Canopy Mount) **SBCM** (Stem Mount Ballast Canopy Mount) **CBCM** (Cord Mount Ballast Canopy Mount) **LPLB** (Post Mount Ballast Canopy Mount)
12LED3	27	WBCM

12LED3/27/BCM

Ordering Examples:

12LED327WBCM - 12W, LED3, 2700 K, Ballast Canopy Mount, 120/277 V

12LED330WBCM - 12W, LED3, 3000 K, Ballast Canopy Mount, 120/277 V

12LED340WBCM - 12W, LED3, 4000 K, Ballast Canopy Mount, 120/277 V