

LED

TECH

BROCHURE



H-15116-91/HL-A-91



H-15116-96/18”ST-HSC-96



H-18112-96/HL-H-96



H-4316-B-119



H-16116-96/CB8-91



H-7412-B-77



H-16058-B-BR47



H-4120-77/CB8-91



H-23670-91-RIB/CB8-91
/CLLS W/91 RING



H-16810-B-91/WGR-97



H-15620-102/CB8-91



H-16516-92/CB8-91



H-7130-96/CB8-91



H-23680-101-RIB/CB8-91

Hi-Lite Mfg. Co.

LED4
Series
Specifications

Description

The Hi-Lite LED 4 series is a drop-in LED light engine with integrated thermal management and optics.
This LED series is available for Open-rated fixtures. The LED series is offered in Eight lumen outputs: 850, 1250, 1650, 2000, 2500, 3000, 3500 and 4000.



Specifications

- Open-rated fixture only (not rated for use within a sealed fixture or glass enclosure)
- Frosted Lens
- 6W, 850lm, (tested at 4000 K)
- 10W, 1250lm, (tested at 4000 K)
- 14W, 1650lm, (tested at 4000 K)
- 18W, 2000lm, (tested at 4000 K)
- 20W, 2500lm, (tested at 4000 K)
- 23W, 3000lm, (tested at 4000 K)
- 29W, 3500lm, (tested at 4000 K)
- 34W, 4000lm, (tested at 4000 K)
- 120/277V Multi Volt Standard
- ≥ 90 CRI for all CCTs (2700 K, 3000 K, 3500 K, 4000 K)
- Min 0ºC start up temp
- 96°Beam Angle
- Diming Specs: 6W, 10W, 14W, 18W, 20W, 23W, 29W, & 34W are all rated for ELV, Triac & 0/1-10v Dim Standard. Triac Dim will only work at 120V.

(USE THIS FORMAT TO PLACE)

Wattage/ Light Source	Color Temperature
6LED4 (850 lumens)	**27** (2700 K)
10LED4 (1250 lumens)	**30** (3000 K)
14LED4 (1650 lumens)	**35** (3500 K)
18LED4 (2000 lumens)	**40** (4000 K)
20LED4 (2500 lumens)	
23LED4 (3000 lumens)	
29LED4 (3500 lumens)	
34LED4 (4000 lumens)	

18LED4	30

Ordering Examples:

18LED430 - 18W, LED4, 3000 K, Non-Dimming, Ballast Canopy Mount, 120/277 V

10LED427 - 10W, LED4, 2700 K, Ballast Canopy Mount, 120/277 V

34LED440 - 34W, LED4, 4000 K, Non-Dimming, Ballast Canopy Mount, 120/277 V

MADE IN THE U.S.A. • www.hilitemfg.com • Tel: 909.465.1999 • Toll Free: 800.465.0211 • Fax: 909.465.0907



H-15116-91/HL-A-91/CGU-91



H-15416-96CLR/CB8-91/97 GUARD



H-7130-91/HL-D-91/CGU-91-FR



H-16812-B-119/CGU-FR-119



H-CGU-10-1B-91-FR



H-CGU-1O-1B-96-RIB



H-19414-B-77/CGU-FR-114



H-4111-B-BR47/CGU-AMC-BR47



H-91418-93-RIB/18”ST-HSC-93



H-33108-BR47-RIB/CB8-91



H-20112-96/CB8-91



H-16116-101/CB8-91/LCGU-FR-101



H-1358-119-FR/CB8-91/113-RING



H-CGU-10-96-RIB/CB8-91

MADE IN THE U.S.A. • www.hilitemfg.com • Tel: 909.465.1999 • Toll Free: 800.465.0211 • Fax: 909.465.0907

Hi-Lite Mfg. Co.

LED 3 Series Specifications

Description

The Hi-Lite LED 3 series is a Chip -On-Board (COB) drop -in LED light board. The LED 3 series is specifcally used for enclosed light fixtures with jelly jar style fixtures. The LED 3 series is offered in 1400 lumens.

Specifications

- For use with enclosed-rated Jelly Jar style fixtures and accessories only.
- Standard 120º Beam Angle
- 12W, 1400lm, 350mA (tested at 4000 K)
- 120/277V Multi Volt Standard
- 90 CRI for all CCTs (2700K, 3000K, 3500K, 4000K)
- Lumen maintenance, L70 lifetime=50k hours based on 105º operating temp.
- 3-year Limited Warranty-LED Module only
- 1-year Limited Warranty-LED Driver only
- Dimming Specs: Anything Ordered Prior to 2-20-24 will be 0/1-10V Dim Standard.
- Dimming Specs: Anything ordered after 2-21-24 will be rated for ELV, Triac & 0/1-10v Dim Standard. Triac Dim will only work at 120V.

FOR USE WITH CGU/ GLASS ENCLOSED STYLE FIXTURES



(USE THIS FORMAT TO PLACE ORDER)

Wattage/ Light Source	Color Temperature
12LED3 (1400 lumens)	**27** (2700 K) **30** (3000 K) **35** (3500 K) **40** (4000 K)

12LED3	27

12LED3/27

Ordering Examples:

12LED327 - 12W, LED3, 2700 K, Ballast Canopy Mount, 120/277 V

12LED330 - 12W, LED3, 3000 K, Ballast Canopy Mount, 120/277 V

12LED340 - 12W, LED3, 4000 K, Ballast Canopy Mount, 120/277 V

Hi-Lite Mfg. Co.

LED Series Specifications





FIXTURE NUMBER	LED4	LED 3
H-1208	N/A	12
H-1210	N/A	12
H-1212	N/A	12
H-1214	N/A	12
H-1216	N/A	12
H-1308-B	N/A	12
H-1310-B	N/A	12
H-1312-B	N/A	12
H-1314-B	N/A	12
H-1316-B	N/A	12
H-1320	N/A	12
H-1344	N/A	12
H-1350	N/A	12
H-1351-B	N/A	12
H-1356	N/A	12
H-1358	N/A	12
H-1408	N/A	12
H-1410	N/A	12
H-1412	N/A	12
H-1414	N/A	12
H-1416	N/A	12
H-1418	N/A	12
H-1420	N/A	12
H-1422	N/A	12
H-1424	N/A	12
H-1508-B	N/A	12
H-1510-B	N/A	12
H-1512-B	N/A	12
H-1514-B	N/A	12
H-1516-B	N/A	12
H-1518-B	N/A	12
H-1520-B	N/A	12
H-1522-B	N/A	12
H-1524-B	N/A	12
H-4110	6,10,14,18,20,23	12





FIXTURE NUMBER	LED4	LED 3
H-4111-B	6,10,14,18,20,23	12
H-4120	6,10,14,18,20,23,28,34	12
H-4214	6,10,14,18,20,23	12
H-4216	6,10,14,18,20,23	12
H-4220	6,10,14,18,20,23,28,34	12
H-4222	6,10,14,18,20,23,28,34	12
H-4224	6,10,14,18,20,23,28,34	12
H-4314-B	6,10,14,18,20,23	12
H-4316-B	6,10,14,18,20,23	12
H-7130	6,10,14,18,20,23,28,34	12
H-7350	N/A	12
H-7355	N/A	12
H-7375	N/A	12
H-7412-B	6,10,14,18,20,23,28,34	12
H-7414-B	6,10,14,18,20,23	12
H-7416-B	6,10,14,18,20,23	12
H-7512	6,10,14,18,20,23	12
H-7514	6,10,14,18,20,23	12
H-7516	6,10,14,18,20,23	12
H-7524	6,10,14,18,20,23,28,34	12
H-13115	6,10,14,18,20,23,28,34	12
H-13120	6,10,14,18,20,23,28,34	12
H-15112	6,10,14,18,20,23,28,34	12
H-15113	6,10	12
H-15114	6,10,14,18,20,23,28,34	12
H-15115	6,10	12
H-15116	6,10,14,18,20,23,28,34	12
H-15117	6,10,14,18,20,23,28,34	12
H-15118	6,10,14,18,20,23,28,34	12
H-15120	6,10,14,18,20,23,28,34	12
H-15124	6,10,14,18,20,23,28,34	12
H-15127	6,10,14,18,20,23,28,34	12
H-15216	6,10,14,18,20,23,28,34	12
H-15218	6,10,14,18,20,23,28,34	12
H-15220	6,10,14,18,20,23,28,34	12

Hi-Lite Mfg. Co.

LED Series Specifications





FOR USE WITH

FIXTURE NUMBER	LED4	LED 3
H-15312-B	6,10,14,18,20,23,28,34	12
H-15314-B	6,10,14,18,20,23,28,34	12
H-15316-B	6,10,14,18,20,23,28,34	12
H-15412	N/A	12
H-15414	N/A	12
H-15416	N/A	12
H-15418	N/A	12
H-15420	N/A	12
H-15424	N/A	12
H-15427	N/A	12
H-15512	6,10,14,18,20,23,28,34	12
H-15514	6,10,14,18,20,23,28,34	12
H-15516	6,10,14,18,20,23,28,34	12
H-15518	6,10,14,18,20,23,28,34	12
H-15612	6,10,14,18,20,23,28,34	12
H-15614	6,10,14,18,20,23,28,34	12
H-15616	6,10,14,18,20,23,28,34	12
H-15618	6,10,14,18,20,23,28,34	12
H-15620	6,10,14,18,20,23,28,34	12
H-15624	6,10,14,18,20,23,28,34	12
H-15627	6,10,14,18,20,23,28,34	12
H-16034	6,10,14,18,20,23,28,34	N/A
H-16036	6,10,14,18,20,23,28,34	N/A
H-16038	6,10,14,18,20,23,28,34	N/A
H-16044	6,10,14,18	N/A
H-16046	6,10,14,18	N/A
H-16054-B	6,10,14,18	N/A
H-16056-B	6,10,14,18	N/A
H-16058-B	6,10,14,18	N/A
H-16064-F	6,10,14,18	N/A
H-16066-F	6,10,14,18	N/A
H-16110	6,10,14,18,20,23,28,34	12
H-16112	6,10,14,18,20,23,28,34	12
H-16114	6,10,14,18,20,23,28,34	12
H-16116	6,10,14,18,20,23,28,34	12





FOR USE WITH

FIXTURE NUMBER	LED4	LED 3
H-16118	6,10,14,18,20,23,28,34	12
H-16212	N/A	12
H-16214	N/A	12
H-16216	N/A	12
H-16218	N/A	12
H-16224	N/A	12
H-16312 (will have vented cone)	6,10,14,18,20,23	12
H-16314 (will have vented cone)	6,10,14,18,20,23	12
H-16316 (will have vented cone)	6,10,14,18,20,23,28,34	12
H-16318 (will have vented cone)	6,10,14,18,20,23,28,34	12
H-16320 (will have vented cone)	6,10,14,18,20,23,28,34	12
H-16324 (will have vented cone)	6,10,14,18,20,23,28,34	12
H-16412	N/A	12
H-16414	N/A	12
H-16416	N/A	12
H-16418	N/A	12
H-16420	N/A	12
H-16424	N/A	12
H-16510	6,10,14,18,20,23,28,34	12
H-16512	6,10,14,18,20,23,28,34	12
H-16514	6,10,14,18,20,23,28,34	12
H-16516	6,10,14,18,20,23,28,34	12
H-16518	6,10,14,18,20,23,28,34	12
H-16520	6,10,14,18,20,23,28,34	12
H-16524	6,10,14,18,20,23,28,34	12
H-16612	N/A	12
H-16614	N/A	12
H-16616	N/A	12
H-16618	N/A	12
H-16620	N/A	12
H-16624	N/A	12
H-16712-F	N/A	12
H-16714-F	N/A	12
H-16716-F	N/A	12
H-16718-F	N/A	12

Hi-Lite Mfg. Co.

LED Series Specifications





FIXTURE NUMBER	LED4	LED 3
H-16720-F	N/A	12
H-16724-F	N/A	12
H-16810-B	6,10,14,18,20,23	12
H-16812-B	6,10,14,18,20,23,28,34	12
H-16912	6,10,14,18,20,23,28,34	12
H-16914	6,10,14,18,20,23,28,34	12
H-16916	6,10,14,18,20,23,28,34	12
H-16918	6,10,14,18,20,23,28,34	12
H-16920	6,10,14,18,20,23,28,34	12
H-16924	6,10,14,18,20,23,28,34	12
H-17118	6,10,14,18,20,23,28,34	12
H-17124	6,10,14,18,20,23,28,34	12
H-18110	6,10,14,18,20,23	12
H-18112	6,10,14,18,20,23,28,34	12
H-18114	6,10,14,18,20,23,28,34	12
H-19112	6,10,14,18,20,23,28,34	12
H-19114	6,10,14,18,20,23,28,34	12
H-19116	6,10,14,18,20,23,28,34	12
H-19118	6,10,14,18,20,23,28,34	12
H-19120	6,10,14,18,20,23,28,34	12
H-19122	6,10,14,18,20,23,28,34	12
H-19124	6,10,14,18,20,23,28,34	12
H-19214	N/A	12
H-19216	N/A	12
H-19218	N/A	12
H-19220	N/A	12
H-19222	N/A	12
H-19224	N/A	12
H-19314	6,10,14,18,20,23,28,34	12
H-19316	6,10,14,18,20,23,28,34	12
H-19318	6,10,14,18,20,23,28,34	12
H-19320	6,10,14,18,20,23,28,34	12
H-19322	6,10,14,18,20,23,28,34	12
H-19324	6,10,14,18,20,23,28,34	12
H-19412-B	6,10,14,18,20,23,28,34	12





FIXTURE NUMBER	LED4	LED 3
H-19414-B	6,10,14,18,20,23,28,34	12
H-19416-B	6,10,14,18,20,23,28,34	12
H-20108	N/A	12
H-20110	N/A	12
H-20112	N/A	12
H-20116	N/A	12
H-23630	6,10,14,18,20,23,28,34	N/A
H-23634	6,10,14,18,20,23,28,34	N/A
H-23638	6,10,14,18,20,23,28,34	N/A
H-23640	6,10,14,18,20,23,28,34	N/A
H-23644	6,10,14,18,20,23,28,34	N/A
H-23648	6,10,14,18,20,23,28,34	N/A
H-23650	6,10,14,18,20,23,28,34	N/A
H-23654	6,10,14,18,20,23,28,34	N/A
H-23658	6,10,14,18,20,23,28,34	N/A
H-23660	6,10,14,18,20,23,28,34	N/A
H-23664	6,10,14,18,20,23,28,34	N/A
H-23668	6,10,14,18,20,23,28,34	N/A
H-23670	6,10,14,18,20,23,28,34	N/A
H-23674	6,10,14,18,20,23,28,34	N/A
H-23678	6,10,14,18,20,23,28,34	N/A
H-23680	6,10,14,18,20,23,28,34	N/A
H-23684	6,10,14,18,20,23,28,34	N/A
H-23688	6,10,14,18,20,23,28,34	N/A
H-24110-B	6,10,14,18	12
H-24112-B	6,10,14,18	12
H-24210	6,10,14,18	12
H-24212	6,10,14,18	12
H-28114-F	N/A	12
H-28116-F	N/A	12
H-28118-F	N/A	12
H-28124-F	N/A	12
H-29114	N/A	12
H-29116	N/A	12
H-29118	N/A	12

Hi-Lite Mfg. Co.

LED Series Specifications





FIXTURE NUMBER	LED4	LED 3
H-29124	N/A	12
H-30114	6,10,14,18,20,23,28,34	12
H-30116	6,10,14,18,20,23,28,34	12
H-30118	6,10,14,18,20,23,28,34	12
H-30120	6,10,14,18,20,23,28,34	12
H-30122	6,10,14,18,20,23,28,34	12
H-30124	6,10,14,18,20,23,28,34	12
H-30125	6,10,14,18,20,23,28,34	12
H-30132	6,10,14,18,20,23,28,34	12
H-30136	6,10,14,18,20,23,28,34	12
H-30214	N/A	12
H-30216	N/A	12
H-30218	N/A	12
H-30220	N/A	12
H-30222	N/A	12
H-30224	N/A	12
H-30225	N/A	12
H-31110-1HB	N/A	12
H-31112-1HB	N/A	12
H-31114-1HB	N/A	12
H-31116-1HB	N/A	12
H-32108-B	N/A	12
H-32110-B	N/A	12
H-32112-B	N/A	12
H-32114-B	N/A	12
H-32116-B	N/A	12
H-32118-B	N/A	12
H-33108	N/A	12
H-33110	N/A	12
H-33112	N/A	12
H-33114	N/A	12
H-33116	N/A	12
H-33118	N/A	12
H-34108	N/A	12
H-34110	N/A	12





FIXTURE NUMBER	LED4	LED 3
H-34112	N/A	12
H-34114	N/A	12
H-34116	N/A	12
H-34118	N/A	12
H-35108-F	N/A	12
H-35110-F	N/A	12
H-35112-F	N/A	12
H-35114-F	N/A	12
H-35116-F	N/A	12
H-35118-F	N/A	12
H-36114	N/A	12
H-36116	N/A	12
H-36118	N/A	12
H-36124	N/A	12
H-36206-B	N/A	12
H-36208-B	N/A	12
H-36306	N/A	12
H-36308	N/A	12
H-37114	N/A	12
H-37116	N/A	12
H-37118	N/A	12
H-37124	N/A	12
H-38317	6,10,14,18,20,23,28,34	12
H-40114	6,10,14,18,20,23,28,34	12
H-40116	6,10,14,18,20,23,28,34	12
H-40118	6,10,14,18,20,23,28,34	12
H-40120	6,10,14,18,20,23,28,34	12
H-40122	6,10,14,18,20,23,28,34	12
H-40124	6,10,14,18,20,23,28,34	12
H-40125	6,10,14,18,20,23,28,34	12
H-40214	N/A	12
H-40216	N/A	12
H-40218	N/A	12
H-40220	N/A	12
H-40222	N/A	12

Hi-Lite Mfg. Co.

LED Series Specifications





FOR USE WITH

FIXTURE NUMBER	LED4	LED 3
H-40224	N/A	12
H-40225	N/A	12
H-43310-B	N/A	12
H-43314-B	N/A	12
H-43317-B	N/A	12
H-43324-B	N/A	12
H-51012	6,10,14,18,20,23,28,34	12
H-51014	6,10,14,18,20,23,28,34	12
H-51016	6,10,14,18,20,23,28,34	12
H-51018	6,10,14,18,20,23,28,34	12
H-51022	6,10,14,18,20,23,28,34	12
H-51025	6,10,14,18,20,23,28,34	12
H-51112-B	6,10,14,18,20,23,28,34	12
H-51114-B	6,10,14,18,20,23,28,34	12
H-52012	N/A	12
H-52014	N/A	12
H-52016	N/A	12
H-52018	N/A	12
H-52022	N/A	12
H-52025	N/A	12
H-53012	6,10	12
H-53014	6,10	12
H-53016	6,10	12
H-53018	6,10,14,18,20,23,28,34	12
H-53022	6,10,14,18,20,23,28,34	12
H-53025	6,10,14,18,20,23,28,34	12
H-53112-B	6,10	12
H-53114-B	6,10	12
H-53212	6,10	12
H-53214	6,10	12
H-53216	6,10	12
H-53312-B	6,10	12
H-53314-B	6,10	12
H-54016	6,10,14,18,20,23,28,34	12
H-54024	6,10,14,18,20,23,28,34	12





FOR USE WITH

FIXTURE NUMBER	LED4	LED 3
H-54216	6,10,14,18,20,23,28,34	12
H-54224	6,10,14,18,20,23,28,34	12
H-60108	N/A	12
H-60110	N/A	12
H-60112	N/A	12
H-60114	N/A	12
H-60116	N/A	12
H-60314	N/A	12
H-60318	N/A	12
H-65110-B	6,10	12
H-65210	6,10	12
H-70412	6,10,14,18,20,23,28,34	12
H-70415	6,10,14,18,20,23,28,34	12
H-91408	N/A	12
H-91410	N/A	12
H-91412	N/A	12
H-91414	N/A	12
H-91416	N/A	12
H-91418	N/A	12
H-91420	N/A	12
H-91422	N/A	12
H-91424	N/A	12
H-91508-B	N/A	12
H-91510-B	N/A	12
H-91512-B	N/A	12
H-91514-B	N/A	12
H-91516-B	N/A	12
H-91518-B	N/A	12
H-91520-B	N/A	12
H-91522-B	N/A	12
H-91524-B	N/A	12
H-93708	N/A	12
H-93710	N/A	12
H-93712	6,10,14,18	12
H-93714	6,10,14,18	12

Hi-Lite Mfg. Co.

LED Series Specifications





FOR USE WITH

FIXTURE NUMBER	LED4	LED 3
H-93716	6,10,14,18	12
H-93718	6,10,14,18,20,23	12
H-94716	6,10,14,18,20,23,28,34	12
H-94718	6,10,14,18,20,23,28,34	12
H-94720	6,10,14,18,20,23,28,34	12
H-94722	6,10,14,18,20,23,28,34	12
H-94724	6,10,14,18,20,23,28,34	12
H-94727	6,10,14,18,20,23,28,34	12
H-CGU	N/A	12
H-CGU-1B	N/A	12
H-CGU-1HB	N/A	12
H-CGU-2B	N/A	12
H-CGU-2VB	N/A	12
H-CGU-10	N/A	12
H-CGU-10-1B	N/A	12
H-CGU-10-2B	N/A	12
H-CGU-F	N/A	12
H-CGU-FB	N/A	12
H-CGU-F2F	N/A	12
H-CGU-HB	N/A	12
H-CGU-OB	N/A	12
H-CGU-10-CM	N/A	12
H-CGU-10-1-CM	N/A	12
H-CGU-10-1-PM	N/A	12
H-CGU-10-RG-PM	N/A	12
H-CGU-10-RG-1-PM	N/A	12
H-CGU-10-PSM	N/A	12
H-CGU-10-1-PSM	N/A	12
H-CGU-10-RG-PSM	N/A	12
H-CGU-10-RG-1-PSM	N/A	12
H-CGU-10-RG	N/A	12
H-CGU-10-RG-1	N/A	12
H-CGU-10-RG-1-A	N/A	12
H-CGU-10-RG-A-1B	N/A	12
H-CGU-10-RG-A1-1B	N/A	12





FOR USE WITH

FIXTURE NUMBER	LED4	LED 3
H-CGU-10-RG-A2-1B	N/A	12
H-CGU-10-RG-F	N/A	12
H-CGU-RS-8	N/A	12
H-CGU-RS-8-1B	N/A	12
H-CGU-RS-8-2B	N/A	12
H-CGU-RS-9	N/A	12
H-CGU-RS-9-1B	N/A	12
H-CGU-RS-9-2B	N/A	12
H-CGU-RSHB-8	N/A	12
H-CGU-RSHB-9	N/A	12
H-CGU-SS-8	N/A	12
H-CGU-SS-8-1B	N/A	12
H-CGU-SS-8-2B	N/A	12
H-CGU-SSHB-8	N/A	12
H-CGU-W2B	N/A	12
H-EM-10	6,10,14,18,20,23	12
H-EM-12	6,10,14,18,20,23	12
H-EM-16	6,10,14,18,20,23,28,34	12
H-EMC-10	6,10,14,18,20,23,28,34	12
H-EMC-12	6,10,14,18,20,23,28,34	12
H-EMC-16	6,10,14,18,20,23,28,34	12
H-FGU	N/A	12
H-FGU-1HB	N/A	12
H-FGU-2B	N/A	12
H-FGU-10	N/A	12
H-FGU-10-1B	N/A	12
H-FGU-10-2B	N/A	12
H-FGU-F	N/A	12
H-FGU-HB	N/A	12
H-FGU-OB	N/A	12
H-LCGU	N/A	12
H-LCGU-1B	N/A	12
H-LCGU-1HB	N/A	12
H-LCGU-2B	N/A	12
H-LCGU-2VB	N/A	12

Hi-Lite Mfg. Co.

LED Series Specifications





FOR USE WITH

FIXTURE NUMBER	LED4	LED 3
H-LCGU-14	N/A	12
H-LCGU-14-1B	N/A	12
H-LCGU-14-2B	N/A	12
H-LCGU-F	N/A	12
H-LCGU-F2F	N/A	12
H-LCGU-OB	N/A	12
H-LCGU-14-CM	N/A	12
H-LCGU-14-1-CM	N/A	12
H-LCGU-14-PM	N/A	12
H-LCGU-14-1-PM	N/A	12
H-LCGU-14-RG-PM	N/A	12
H-LCGU-14-RG-1-PM	N/A	12
H-LCGU-14-PSM	N/A	12
H-LCGU-14-1-PSM	N/A	12
H-LCGU-14-RG-PSM	N/A	12
H-LCGU-14-RG-1-PSM	N/A	12
H-LCGU-14-RG	N/A	12
H-LCGU-14-RG-1	N/A	12
H-LCGU-14-RG-1-A	N/A	12
H-LCGU-14-RG-A1-1B	N/A	12
H-LCGU-14-RG-A-1B	N/A	12
H-LCGU-14-RG-A2-1B	N/A	12
H-LCGU-14-RG-F	N/A	12
H-LCGU-RS-10	N/A	12
H-LCGU-RS-10-1B	N/A	12
H-LCGU-RS-10-2B	N/A	12
H-LCGU-RS-12	N/A	12
H-LCGU-RS-12-1B	N/A	12
H-LCGU-RS-12-2B	N/A	12
H-LCGU-RSHB-10	N/A	12
H-LCGU-RSHB-12	N/A	12
H-LCGU-SS-10	N/A	12
H-LCGU-SS-10-1B	N/A	12
H-LCGU-SS-10-2B	N/A	12
H-LCGU-SS-12	N/A	12





FOR USE WITH

FIXTURE NUMBER	LED4	LED 3
H-LCGU-SS-12-1B	N/A	12
H-LCGU-SSHB-10	N/A	12
H-LCGU-SSHB-12	N/A	12
H-LCGU-W2B	N/A	12
H-LFGU	N/A	12
H-LFGU-1B	N/A	12
H-LFGU-1HB	N/A	12
H-LFGU-2B	N/A	12
H-LFGU-14	N/A	12
H-LFGU-14-1B	N/A	12
H-LFGU-14-2B	N/A	12
H-LFGU-F	N/A	12
H-LFGU-HB	N/A	12
H-LFGU-OB	N/A	12
H-LWGU-2VB	N/A	12
H-LWGU-F2F	N/A	12
H-LWGU-W2B	N/A	12
H-MCGUS-6S	N/A	12
H-MCGUS-10-4D	N/A	12
H-MFGUS-10-4D	N/A	12
H-MNCGU-FB	N/A	12
H-MNCGU-10-RG	N/A	12
H-MNCGU-10-RG-1	N/A	12
H-MNCGU-10-RG-1-A	N/A	12
H-MNCGU-10-RG-A-1B	N/A	12
H-MNCGU-10-RG-1-A1-1B	N/A	12
H-MNCGU-10-RG-1-A2-1B	N/A	12
H-MNCGU-10-RG-F	N/A	12
H-WGU-F2F	N/A	12
H-WGU-2VB	N/A	12
H-WGU-W2B	N/A	12
H-WGUGR-8	N/A	12
H-WGUGR-10	N/A	12
H-WGUGR-12	N/A	12
H-WGUGR-14	N/A	12

Hi-Lite Mfg. Co.

LED
Series
Specifications




FOR USE WITH

FIXTURE NUMBER	LED4	LED 3
H-WGUGR-16	N/A	12
H-WGUGR-17	N/A	12
H-WGUGR-18	N/A	12


HI-LITE MFG.CO., INC

13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Toll Free: (800) 465-0211
Fax: (909) 465-0907
www.hilitemfg.com

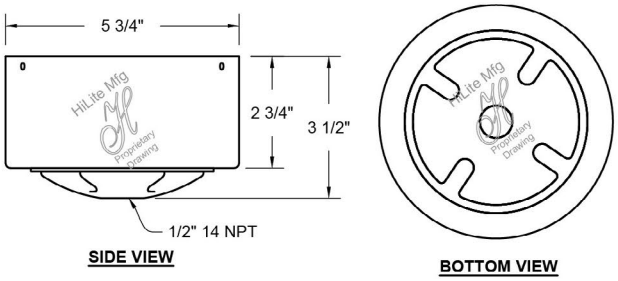


LED 2/3 Stem Mount Canopy (LED/SMC)

Note: Not available in steel, copper, brass or specialty finishes.
Stem mount fixtures are suitable for damp location only.

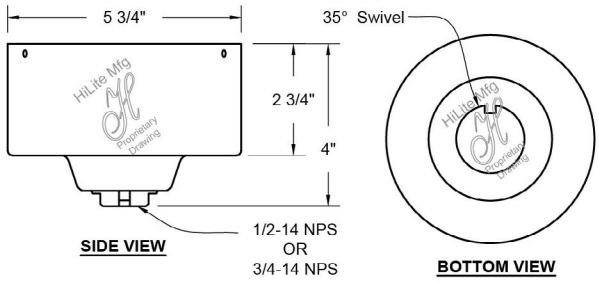


LED 2/3 Hang Straight Canopy 1/2" or 3/4" (LED/HSC 1/2" or 3/4")

Note: Not available in steel, copper, brass or specialty finishes.
Stem mount fixtures are suitable for damp location only.

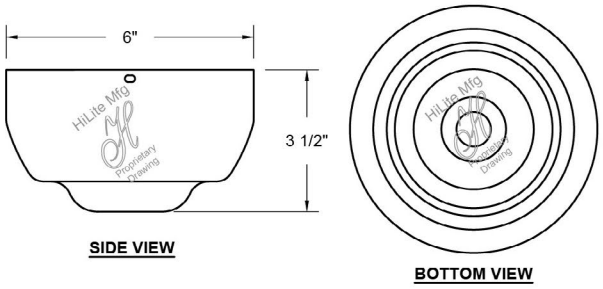

LED 2/3 Cord Canopy

Note: Not available in steel, copper, brass or specialty finishes.
Stem mount fixtures are suitable for damp location only.

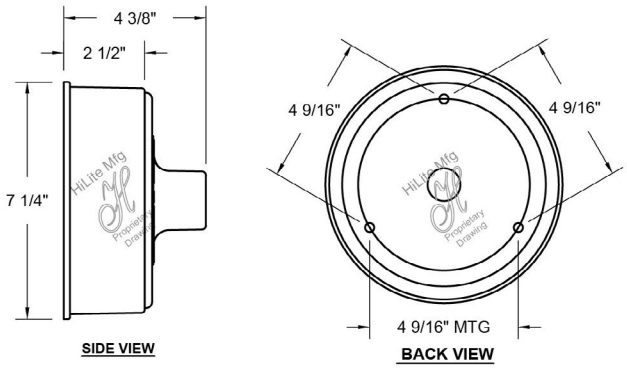

LED 2/3 Wall Mount Ballast Canopy

Note: Not available in steel, copper, brass or specialty finishes.
Gooseneck & wall bracket fixtures are suitable for wet, damp & dry locations.



Hi-Lite Mfg.
13450 Monte Vista Avenue
Chino,California 91710
Tel: 909.965.1999 • Toll Free: 800.465.0211
Fax: 909.465.0907
www.hilitemfg.com
Email: Sales@hilitemfg.com

The designs are sole property of Hi-Lite Mfg. Co., Inc.
they are protected by Copyright, Trademark and Trade Dress Law.
A number of these designs are protected by design patents, issued or pending.