HONYA Lighting

Project Name: _____
Date: _____ Note: _____

LEDMini Wall Pack- MNWP Series





Application: Ideal for indoor and outdoor areas such as decks, entryways, porches, patios, corridors, walkways, and other common spaces.


Certification

DLC LISTED PREMIUM | ETL Intertek | IK08 RATED | Wet Location | Wattage Selectable | CCT Selectable | Dimmable

Specifications


Model	HYA-MWP-962-3W3CCT	HYA-MWP-962-3W3CCT (WH)
Finish	Black	White
Wattage	15W/20W/25W (Selectable)	
Input Voltage	100-277 V AC, 50/60Hz	
Dimming	0-10V	
Lumen Output	1800/2400/3200 lm (Selectable)	
CCT	3000K/4000K/5000K or 3500K/5000K/6500K (Selectable)	
CRI	Ra>80	
Lens	Clear Stripped (IK08 Vandal Resistant Rating & UV Resistant)	
Operating Temperature	-4˚F ~+113˚F (-20˚C ~+40˚C)	
Location Rating	Wet Location Rated (IP66)	
Life Span	Lumen Maintenance over 70% @ 50,000+ Hours	
Accessories & Options	Photocell Control(PC) pre-Installed	
DLC ID	DLC Premium (S-K4BGAD)	
PCS/BOX	10	
Master Box Dimensions	15.35" x 13.18" x 9.65" (390 x 335 x 245 mm)	
Master Box Weight	15.65 lb (7.1 kg)	

Dimensions

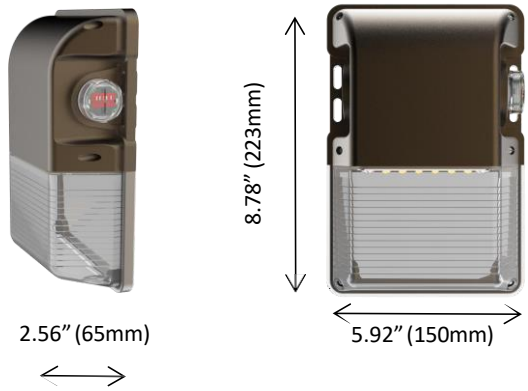

Features


The transparent cover on the side can be screwed off easily.

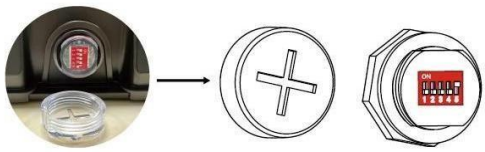

Wattage Select



Photocell



CCT Select

