
HUBBELL
Wiring Device-Kellems

3-Gang Rectangular PVC Box, 3.00" Minimum Depth of Pour

By Hubbell Wiring Device-Kellems
Catalog # PFBRG3

3-Gang Rectangular PVC Box, 3.00" Minimum Depth of Pour

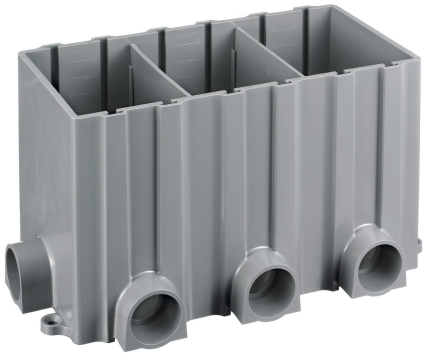

Features

- Non-corrosive plastic construction
- Parallel conduit hubs reduce labor and material cost
- Concrete cover, conduit reducers and conduit hub plugs included

Application

For Use with Concrete Floor Boxes

Specifications

EU RoHS Indicator	No
Industry Standard(s)	• UL/CSA • UL514

Conductor

Cable Entry	From Top

Configuration

Number of Gang(s)	3-Gang
Knockouts	8) 1 1/4 in
Mounting Method	Cast Into Concrete

Dimensions

Length	10.04 in
Height	6 in
Width	5.39 in
Size	3-Gang
Dimensions	10.04 in x 5.39 in x 6 in

General

Application - For Use On	Concrete
Color	Gray
Series	Flush Rectangular - PFB Series
Specifications	• Cubic Inch Capacity - 14.3 cu. in. (234.3 cm3) • Hubs - Eight in Number with 1 1/4 Inch • Min. Depth of Pour - 3.00" (76.2) • Reducers - 1" to 3/4" and 1 1/4" to 1"
UPC	783585848327
Type	3-Gang Rectangular
Construction	Molded
Material	Thermoplastic

Logistics

Pallet Quantity	90
Carton Quantity	1

Product Assets

Catalog [English]

© 2026 Hubbell Incorporated. All rights reserved