onlinecomponents.com

HUBBELL®

tradeSELECT™









Boxes ♦ Fittings ♦ Devices ♦ Surge ♦ Weatherproof ♦ Covers ♦ Wallplates

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

onlinecomponents.com

tradeSELECT™

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

TABLE OF CONTENTS

I-III GENERAL INFORMATION

General Information ii
Electrical Code Requirements ..... iii-iv

A METAL BOXES, COVERS AND ACCESSORIES

Device Boxes A1-A5
Octagon Boxes A6-A7
Square Boxes And Covers A8-A12
Utility Boxes And Covers A13-A14
Steel Stud Boxes A15-A20
347 Volt Boxes And Covers A21-A22
Standard Masonry Boxes A23
Concrete Rings A24
Preganged Boxes And Covers A25
Vapour/Air Barriers A26
Door Switches And Boxes A26
Bar Hangers A27
Accessories A27

B NON-METALLIC BOXES

Standard Non-Metallic Boxes B1-B2
Vapour/Air Barrier Non-Metallic Boxes B3-B4

C WALL PLATES

General Information C1
Standard Wall Plates C2-C5
347 Volt Wall Plates C6
King Size Wall Plates C7
Wall Plate Accessories C7
Custom Wall Plate Information C8
Technical Data C9-C10

D FITTINGS

Non-Metallic Sheathed Cable D1-D2
Armoured Cable D3-D4
Liquidtight Conduit D5-D6
Emt D7-D9
Conduit Bodies D10
Conduit Nipples D11
Rigid Straps D12
Bushings D13
Metal Bushings D14
Threaded Hubs D15
Knock-Outs D16
Jack Chain D17
Service Entrance Head D18

E WIRE MANAGEMENT

Straight Male Connectors E1-E3
45° Male Cord Connectors E4
90° Male Cord Connectors E5
Straight Female Connectors E6
Low Profile Connectors E7
Accessories E8
Hubbell Junior® Nylon Cord Connectors E9
Polytuff® Liquidtight Conduit E10
Polytuff® Liquidtight Tubing E11
Polytuff® Liquidtight Fittings E12

F tradeSELECT™ and netSELECT®

tradeSELECT™

Rocker Switches F1-F3
Weather Resistant, Tamper Resistant & Standard Receptacles F4
Wallplates F5-F6
Decorator Frames F7
Snap Fit Jacks F8
Molded-in Jacks F9

F tradeSELECT™ and netSELECT® (continued)

Toggle Switches F10-F11
Combination Switches/Devices F12
Duplex,Single & GFCI Receptacles F13-F15
Range & Dryer Receptacles & Plugs F16
Special Use Products F17
Dimmer & Fan Controls F18-F19
Sensors F20
Floor Boxes F21-F22
Under Cabinet Power Distribution F23
JLoad® Multimedia Outlet F24
Decorator Switches F25

netSELECT®

In-Wall A/V Delivery F26
HDMI Products F27
Structured Wiring F28
Network Enclosures F29
Network Modules F30
Audio/Video Modules F31
Universal Consolidation Blocks, Patch Panels and Patch Cords F32
Accessories F33
Modular Snap Fit Jacks F34
Decorator Frames F35
Molded-In Voice/Data/Video F36
Molded-In Plates F37
Telephone Wall Jacks F38

G 347V SWITCHES

347V Switches G1
HMOSS™ 347V Wall Switches G2
347V Wallplates G3

H WEATHERPROOF BOXES, COVERS & LIGHTING

BELL® Single-Gang Boxes, Extensions and Adapters H1-H3
Two-Gang Boxes H4-H5
Multi-Gang Boxes and Extensions H6
Round Splice Boxes, Extension Adapters and Covers H7
Specialty Covers H8
Rayntite® Single-Gang Boxes and Covers H9-H10
Rayntite® Two-Gang Boxes and Covers H11-H12
Rayntite® Single-Gang Device Covers H13
Rayntite® Two-Gang Device Covers H14
Single-Gang Device Covers H15
Generator Kits H16
Single-Gang Device Covers H17
Single-Gang Blank Covers and Mini-Plate H18
Two-Gang Device Covers H19
Two And Three-Gang Device Covers H20
Single-Gang Lever Switch Covers H21
Two-Gang Lever Switch Covers H22
Three-Gang Lever Switch Cover & Replacement Switch H23
Cluster Covers H24
Lampholders & Lampholder Combinations H25-H27
Light Kits H28-H29
Garden Lights H30
Replacement Globes H30
Accessories H31-H32

I SPECIALTY SWITCHES

RACO® Specialty Type Switches I1-I5

J SURGE PROTECTION DEVICES

Wired-In Surge Protective Devices J1
Whole House Surge Protection J1
Surge Strips J2-J3

onlinecomponents.com

HUBBELL®

onlinecomponents.com

MATERIALS
All tradeSELECT boxes and covers are manufactured from galvanized steel, unless otherwise stated.

CERTIFICATION
All tradeSELECT products are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File NUMBERs are available on request.

GENERAL INQUIRIES/CUSTOMER SERVICE
For all General Inquiries or Customer Service Requests, please call us at 1-877-233-8324.

TECHNICAL DATA
CAD drawings are available upon request.
For more information call us at 1-877-233-8324

USING THIS CATALOGUE

TABLE HEADING	ABBREVIATION	EXPLANATION
Brackets	B	Side bracket, nailing style with picks.
	FBA	Flanged vapour barrier.
	MS	Mounting strap, nailing style with picks.
	MSB	Conventional steel stud bracket, with required additional support.
	MSB-1	Conventional steel stud bracket, 3" to 6" stud set back 1' for double drywall.
	MSBS	Smaller stud bracket facilitates 1-5/8" - 3" stud. *Please note 3102/1102 MSB series utilize the MSBS bracket.*
	BAR	Item is barcoded.
	RW	Rework bracket.
	SB	Side bracket.
	SBS	Side bracket shallow. Facilitates wall applications less than 2" thick.
Ears	Flush	Plaster ears are mounted flush with the face of the box.
	Recessed	Plaster ears are recessed 1/2" from the face of the box.
Knockouts*	K	Concentric knockout, a combination 1/2 and 3/4 trade size knockout. *Actual diameters are 7/8" and 1 3/32"*
	1/2 (16)	1/2 trade size knockout. Actual diameter is 7/8".
	3/4 (21)	3/4 trade size knockout. Actual diameter is 1 3/32".
	1 (27)	1 trade size knockout. Actual diameter is 1 3/8".
Cable Clamps	L	Clamps for non metallic cable (NMD90).
	A	Clamps for armoured cable (AC90).
	U	Universal Cable Clamp.

** The NUMBER in brackets following each type of knockout represents the NUMBER of knockouts of that type featured in the product. For example, 1/2 (16) (4) means that there are 4 knockouts of the 1/2 (16) trade size featured in the product.*

onlinecomponents.com

onlinecomponents.com

A selection of Canadian Electrical Code requirements are listed below along with Hubbell product information.

CEC CLAUSE 12-3010, OUTLET BOX SUPPORTS

(4) Where boxes are mounted on metal studs, additional support shall be provided to prevent the movement of the boxes after the drywall is installed.

All Hubbell steel stud boxes provide this additional support.

(5) Mounting nails or screws shall not pass through the interior of an outlet box.

Hubbell non-metallic ceiling outlet boxes are not manufactured from PVC material and CEC CLAUSE 30-302 does not apply. Non-metallic boxes are certified to support fixture/luminaire of a maximum weight of 23 kg. (50 lb.) Installer should follow instructions supplied by luminaire manufacturer. All of Hubbell boxes non-metallic and metallic boxes are tested and certified to support 23 kg. (50 lb.).

CEC CLAUSE 12-3030, CONDUCTORS IN BOXES, CABINETS OR FITTINGS

(1) Conductors which are connected to different power or distribution transformers or other different sources of voltage shall not be installed in the same box, cabinet or fitting unless:

(a) A barrier of sheet steel not less than 1.3 mm thick or a flame-retardant nonmetallic insulating material not less than 1.6 mm in thickness is used to divide the space into separate compartments for the conductors of each system;

Hubbell offers a NUMBER of partitions (barriers) which meet this requirement. The 1104-P can be used with the 1104 and 2104 series boxes, and is installed in our power/communication boxes (4204 series); MBD-P and MBS-P are designed for use with our masonry boxes (MBD and MBS series); LVP is designed for use with our pre-ganged boxes (GSB series).

onlinecomponents.com

onlinecomponents.com

MAXIMUM NUMBER OF CONDUCTORS IN A BOX

The table below, based on clause 12-3034 of the Canadian Electrical Code, lists the maximum NUMBER of conductors permitted in a box. It is assumed that the box contains no more than 1 wire connector, and no fixture studs, hickeys or flush devices.

Capacity per gang in³ (ml)	Box series	Maximum NUMBER of Conductors*			
		14 AWG	12 AWG	10 AWG	8 AWG
4.5 (73)	DS	3	2	2	-
5 (90)	56111, OBEX	3	2	2	1
8 (131)	1100	5	4	3	2
10 (163)	1102, 775, EZ101	6	5	4	3
11.5 (188)	2018	7	6	5	4
12 (196)	3102	8	6	5	4
12.5 (204)	1104, 2104, 4204	8	7	5	4
14 (229)	2020, MBS	9	8	6	5
15 (245)	1004, 1504, 54151, 55151	10	8	6	5
15.7 (257)	1204	10	8	6	5
16 (262)	3104	10	9	7	5
16.5 (270)	1110, 1111	11	9	7	6
18 (294)	1804, 54521, 3004	12	10	8	6
18.5 (303)	1151	12	10	8	6
20.25 (331)	MBS-HV	13	11	9	7
21 (334)	52151, 53151, 54171, 55171, MBD	14	12	9	7
22.25 (344)	MBD-HV	14	12	9	8
24 (393)	54531	16	13	10	8
30 (491)	52171, 53171, 54541, 72151, 73151	20	17	13	10
36 (589)	54551	24	20	16	13
42 (688)	54561, 72171, 73171	28	24	18	15

* The maximum NUMBER of conductors is reduced in each of the following cases:
  - One conductor if the box contains one or more fixture studs or hickeys.
  - One conductor for every pair of wire connectors (no deduction for one wire connector, deduct one connector for 2 or 3 wire connectors, two conductors for 4 or 5 wire connectors, etc.).
  - Two conductors if the box contains one or more flush devices mounted on a single strap. If a flush device is greater than 1" thick, reduce the box capacity by 5 cubic inches X the thickness of the device.

The maximum NUMBER of conductors listed is per gang. Multiply the NUMBER listed by the NUMBER of gangs (where applicable) to obtain the maximum NUMBER of conductors in the box.

Refer to the Canadian Electrical Code for complete information.

SINGLE GANG DEVICE BOXES

onlinecomponents.com

APPLICATION

Device boxes are used to house wiring devices such as switches or receptacles.

PRODUCT FEATURES

- Gangable device boxes offer the option of constructing a box to hold two or more devices
- Plaster ears allow box to be used in "rework" applications
- Rugged metallic construction



1100–LUBAR



1100–LLEUBAR



1100–LREU



1102BAR




1102–LUBAR




1102–LHUBAR



1102–LREU



1102–MSB



1102–MSBU



1102–SB

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
2" x 3" Device Box - 1-1/2" Deep - Gangable					
1100-LUBAR	8.0	-	Flush	-	U
1100-LLEUBAR	8.0	-	-	-	U
1100-LREU	8.0	-	Recessed	-	U
2" x 3" Device Box - 2" Deep - Gangable					
1102BAR	10.0	-	Recessed	1/2" (4)	U
1102-LUBAR	10.0	-	Flush	-	U
1102-LHUBAR	10.0	-	-	-	U
1102-LREU	10.0	-	Recessed	-	U
1102-MSB	10.0	MSBS	-	1/2" (4)	-
1102-MSBU	10.0	MSBS	-	-	U
1102-SB	10.0	SB	-	1/2" (4)	-

SINGLE GANG DEVICE BOXES

onlinecomponents.com


APPLICATION

Device boxes are used to house wiring devices such as switches or receptacles.

PRODUCT FEATURES

- Gangable device boxes offer the option of constructing a box to hold two or more devices
- Plaster ears allow box to be used in "rework" applications
- Rugged metallic construction


3102–LHU


3102–MSB


3102–MSBU


1104–K


1104–LBUBAR



1104–LUBAR


1104–LUDBAR



1104–SB



1104–LE


1104–LHU


1104–LMSU


1104–LRWUBAR


1104–MSB


1104–MSBUBAR


1304–LHU


1104–P*


X–CUBE

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
2" x 3" Device Box - 2" Deep - Gangable					
3102-LHU	12.0	-	-	-	U
3102-MSB	12.0	MSBS	-	1/2" (4)	-
3102-MSBU	12.0	MSBS	-	-	U
2" x 3" Device Box - 2-1/2" Deep - Gangable					
1104-K	12.5	-	Recessed	K(2), 1/2"(2)	-
1104-LBUBAR	12.5	-	-	-	U
1104-LUBAR	12.5	-	Flush	-	U
1104-LUDBAR	12.5	Rework	Flush	-	U
1104-SB	12.5	SB	-	K(2), 1/2"(2)	-
1104-LE	12.5	-	-	K(2), 1/2"(2)	-
1104-LHU	12.5	-	-	-	U
1104-LMSU	12.5	MS	-	-	U
1104-LRWUBAR	12.5	RW	Flush	-	U
1104-MSB	12.5	MSB	-	K(2), 1/2"(2)	-
1104-MSBUBAR	12.5	MSB	-	-	U
1304-LHU	14.5	-	-	-	U
1104-P*	Partition - For use with 1104 series & 2104, 2, 3, 4-gang metal boxes				
X-CUBE	Adds 5.5 Cu. In. For use with 1104 series metal boxes				

***Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources WITHIN THE SAME BOX**

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SINGLE GANG DEVICE BOXES

APPLICATION
Device boxes are used to house wiring devices such as switches or receptacles.

PRODUCT FEATURES
- Plaster ears allow box to be used in "rework" applications
- Rugged metallic construction


2104–LU


2104–LLEUBAR


2104–LNU


2104–MSBU


EZ–101BAR


KIT–201


2304–LLEU


1504–LLEUBAR


1504–MSBUBAR


1804–LHU


3104–LHU


3104–MSB


3104–MSBU

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
2" x3" Device Box - 2-1/2" Deep					
2104-LU	12.5	-	Flush	-	U
2104-LLEUBAR	12.5	-	-	-	U
2104-LNU	12.5	-	-	-	U
2104-MSBU	12.5	MSB	-	-	U
EZ-101BAR	12.5	-	Flush	1/2" (1)	U
KIT-201	12.5	Contains: One 2104LU & One pair of 820-D F-brackets			
2304-LLEU	14.5	-	-	-	U
1504-LLEUBAR	15.0	-	-	-	U
1504-MSBUBAR	15.0	MSB	-	-	U
1804-LHU	16.0	-	-	-	U
3104-LHU	16.0	-	-	-	U
3104-MSB	16.0	MSB	-	K(2), 1/2"(2)	-
3104-MSB-1*	16.0	MSB	-	K(2), 1/2"(2)	-
3104-MSBU	16.0	MSB	-	-	U
3104-MSBU-1*	16.0	MSB	-	-	U

** Brackets set back for two layers of 1/2" drywall*

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SINGLE GANG DEVICE BOXES

APPLICATION


Device boxes are used to house wiring devices such as switches or receptacles.

PRODUCT FEATURES

- Gangable device boxes offer the option of constructing a box to hold two or more devices
- Plaster ears allow box to be used in "rework" applications
- Rugged metallic construction



1004–H | 1004–LUBAR | 1004–LBU | 1004–LHU | 3004–LHU

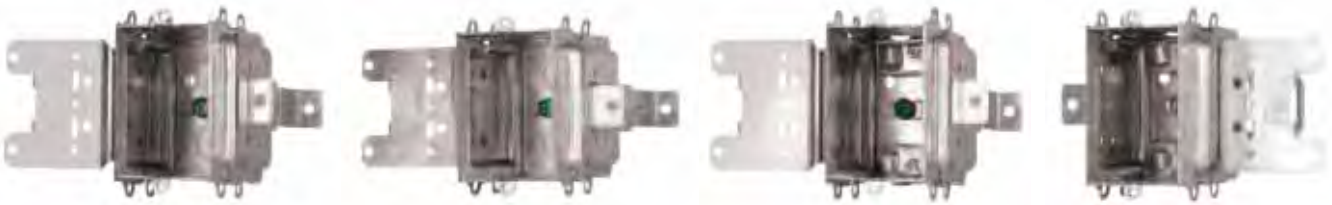

3004–MSB | 3004–MSB–1* | 3004–MSBU | 3004–MSBU–1*

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
2" x 3" Device Box - 3" Deep - Gangable					
1004-H	15.0	-	Recessed	1/2"(4)	-
1004-LUBAR	15.0	-	Flush	-	U
1004-LBU	15.0	B	-	-	U
1004-LHU	15.0	-	-	-	U
3004-LHU	18.0	-	-	-	U
3004-MSB	18.0	MSB	-	1/2"(4)	-
3004-MSB-1*	18.0	MSB	-	1/2"(4)	-
3004-MSBU	18.0	MSB	-	-	U
3004-MSBU-1*	18.0	MSB	-	-	U

** Brackets set back for two layers of 1/2" drywall*

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

MULTI-GANG DEVICE BOXES

APPLICATION

Device boxes are used to house wiring devices such as switches or receptacles.

PRODUCT FEATURES

- Plaster ears allow box to be used in "rework" applications
- Rugged metallic construction


2104–LU–2


2104–LLEU–2


2104–MSBU–2


2304–LLEU–2


4204–MSB


4204–MSBU


2104–LLEU–3BAR


2104–MSBU–3


2304–LLEU–3


2104–LLEU–4BAR


2104–MSBU–4


2304–LLEU–4


1104–P*

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
2" x 3" Device Box - 2-1/2" Deep - 2-gang					
2104-LU-2	12.5	-	Flush	-	U
2104-LLEU-2	25.0	-	-	-	U
2104-MSBU-2	25.0	MSB	-	-	U
2304-LLEU-2	29.0	-	-	-	U
2" x 3" Device Box - 2-1/2" Deep - 2-gang (Power/Communication)					
4204-MSB	12.5	MSB	-	K(4), 1/2"(4)	-
4204-MSBU	12.5	MSB	-	K(2), 1/2"(2)	U
2" x 3" Device Box - 2-1/2" Deep - 3-gang					
2104-LLEU-3BAR	37.5	-	-	-	U
2104-MSBU-3	37.5	MSB	-	-	U
2304-LLEU-3	43.5	-	-	-	U
2" x 3" Device Box - 2-1/2" Deep - 4-gang					
2104-LLEU-4BAR	50.0	-	-	-	U
2104-MSBU-4	50.0	MSB	-	-	U
2304-LLEU-4	58.0	-	-	-	U
1104-P*	Partition - For use with 1104 series & 2104, 2, 3, 4-gang metal boxes				

**Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources within the same box*

HUBBELL®

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

4" OCTAGON BOXES

APPLICATION

Octagon boxes can be used in the installation of ceiling or wall lighting fixtures. Extension rings provide a means for adding additional cubic capacity.

PRODUCT FEATURES

- Combination screw heads provide for faster installation
- Self-tapping screws virtually eliminate stripping
- Rugged metallic construction


54151–LHB


54151–KBAR


54151–LBAR


54151–LABAR


54151–LB


54151–MSB


54151–MSBABAR


54151–MSBL


54151–LDBAR


55151–KBAR


OBEXBAR


54171–MSB


54171-K


54171-L


54171-LB


54171-LHB


55171-K


54171-LFBAR**

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	RAISED GROUND SCREW	KNOCKOUTS	CABLE CLAMPS
4" Octagon Box - 1-1/2" Deep					
54151-LHB	15.0	SB	no	1/2"(2)	L
54151-KBAR	15.0	-	yes	K(6), 1/2"(2)	-
54151-LBAR	15.0	-	no	1/2"(3)	L
54151-LABAR	15.0	-	no	1/2"(3)	A
54151-LB	15.0	B	no	1/2"(2)	L
54151-MSB	15.0	MSB	yes	K(4), 1/2"(2)	-
54151-MSBABAR	15.0	MSB	no	1/2"(1)	A
54151-MSBL	15.0	MSB	no	1/2"(1)	L
54151-LDBAR	15.0	Rework	no	-	-
55151-KBAR	15.0	Ext. Ring	-	K(4)	-
OBEXBAR	5.0	Ext. Ring	-	-	-
4" Octagon Box - 2-1/8" Deep					
54171-MSB	21.0	MSB	yes	K(4), 1/2"(4)	-
54171-MSB-1*	21.0	MSB	yes	K(4), 1/2"(4)	-
54171-K	21.0	-	yes	K(4), 1/2"(4)	-
54171-L	21.0	-	no	1/2"(3)	L
54171-LB	21.0	B	no	1/2"(2)	L
54171-LHB	21.0	SB	no	1/2"(2)	L
55171-K	21.0	Ext. Ring 21.0	-	K(2), 1/2"(2)	-
4" Ceiling Fan - 2-1/8" Deep - Max Load Capacity: 35 lb (15.6 kg)					
54171-LFBAR**	21.0	-	no	1/2"(3)	L

** Brackets set back for two layers of 1/2" drywall*
*** supplied with two No. 10-32 machine screws and washers*

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

4" OCTAGON BOX COVERS

APPLICATION

Covers are used to close an outlet box. Switches or receptacles may be installed into octagon boxes by using covers 54-C-62, 54-C-64, 54-C-65 or 54-C-94.

PRODUCT FEATURES

- Rugged metallic construction



54-C-1



54-C-6



54-C-62



54-C-64



54C-65BAR



54-C-94

CATALOGUE NUMBER	DESCRIPTION	OPENING	KNOCKOUTS
4" Round Covers			
54-C-1	Flat Cover	Blank	-
54-C-6	Flat Cover	-	1/2"(1)
54-C-62	Flat Cover	1.62" Receptacle	-
54-C-64	Flat Cover	1.40" Receptacle	-
54C-65BAR	Flat Cover	Duplex Receptacle	-
54-C-94	Flat Cover	Toggle Switch	-

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

4” SQUARE BOXES

APPLICATION

Boxes are installed in ceiling or wall junctions. Square boxes are used where multiple conductor runs are split into two or more directions to bring power to a number of electrical devices.

PRODUCT FEATURES

- Self-tapping screws virtually eliminate stripping
- Rugged metallic construction



52151–KBAR



52151–KSB



52151–MSB



52151–MSBS



53151–K



52171–1



52171–KBAR



52171–KSB



52171–MSB



521711–MSB



53171–K

CATALOGUE NUMBER	CAPACITY (CU. IN)	BRACKET	RAISED GROUND SCREW	KNOCKOUTS
4"x 4" Square Boxes - 1-1/2" Deep				
52151-KBAR	21.0	-	yes (2)	K(6), 1/2"(6), 3/4"(2)
52151-KSB	21.0	SB	yes (2)	K(4), 1/2"(6), 3/4"(2)
52151-MSB	21.0	MSB	yes (2)	K(2), 1/2"(6), 3/4"(2)
52151-MSBS	21.0	MSBS	yes (2)	K(2), 1/2"(6), 3/4"(2)
53151-K	21.0	Ext. Ring	yes (2)	K(6), 1/2"(4)
4" x 4" Square Boxes - 2-1/8" Deep				
52171-1	30.0	-	yes (2)	1/2"(2), 3/4"(2), 1"(4)
52171-KBAR	30.0	-	yes (2)	K(6), 1/2"(6), 3/4"(2)
52171-KSB	30.0	SB	yes (2)	K(4), 1/2"(6), 3/4"(2)
52171-MSB	30.0	MSB	yes (2)	K(2), 1/2"(6), 3/4"(2)
521711-MSB	30.0	MSB	yes (2)	K(3), 1/2"(2), 1"(2)
53171-K	30.0	Ext. Ring	yes (2)	K(6), 1/2"(4)

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

4" SQUARE COVERS

APPLICATION

Covers are used to close an outlet box. Raised device covers are used for mounting switches or receptacles.

PRODUCT FEATURES

- Self-tapping screws virtually eliminate stripping
- Rugged metallic construction
- 52 series boxes are designed for use with 52 series boxes.


52–C–0


52–C–00BAR


52–C–1


52–C–6BAR


52–C–3


52–C–10


52–C–13


52–C–14


52–C–14–5/8


52–C–15


52–C–16


52–C–17


52–C–18


52–C–18–5/8

CATALOGUE NUMBER	DESCRIPTION	CAPACITY (CU. IN.)	OPENING	KNOCKOUTS
4" x 4" Square Covers				
52-C-0	flat	-	one device	-
52-C-00BAR	flat	-	two devices	-
52-C-1	flat	-	blank	-
52-C-6BAR	flat	-	-	1/2" (1)
52-C-3	raised 1/2"	3.7	one device	-
52-C-10	raised 3/16"	1.2	one device	-
52-C-13	raised 1/2"	3.5	one device	-
52-C-14	raised 3/4"	5.1	one device	-
52-C-14-5/8	raised 5/8"	4.3	one device	-
52-C-15	raised 7/8"	6.1	one device	-
52-C-16	raised 1-1/4"	8.5	one device	-
52-C-17	raised 1/2"	6.3	two devices	-
52-C-18	raised 3/4"	9.7	two devices	-
52-C-18-5/8	raised 5/8"	7.8	two devices	-
52-C-6214	raised 5/8"	7.8	one device	-

4" SQUARE COVERS

onlinecomponents.com

APPLICATION

Covers are used to close an outlet box. Raised device covers are used for mounting switches or receptacles.

PRODUCT FEATURES

- Self-tapping screws virtually eliminate stripping
- Rugged metallic construction
- 52 series boxes are designed for use with 52 series boxes.


52-C-49-1/2


52-C-49-3/4


52-C-49-1


52-C-49-1-1/4


52-C-50-1-1/2


52-C-51-2


8361


8362


8363


8364


8365


8366


8367


8368


8371


8372


8375

CATALOGUE NUMBER	DESCRIPTION	CAPACITY (CU. IN.)	OPENING	KNOCKOUTS
4" x 4" Square Tile Covers				
52-C-49-1/2	tile cover 1/2"	3.4	one device	-
52-C-49-3/4	tile cover 3/4"	5.3	one device	-
52-C-49-1	tile cover 1"	6.8	one device	-
52-C-49-1-1/4	tile cover 1-1/4"	8.6	one device	-
52-C-50-1-1/2	tile cover 1-1/2"	10.0	one device	-
52-C-51-2	tile cover 2"	14.0	one device	-
52-C-52-1/2	raised cover 1/2"	5.5	two device	-
52-C-52-5/8	raised cover 5/8"	7.3	two device	-
52-C-52-3/4	raised cover 3/4"	8.8	two device	-
52-C-52-1	raised cover 1"	12.0	two device	-
52-C-52-1-1/4	raised cover 1-1/4"	15.0	two device	-
52-C-53-1-1/2	raised cover 1-1/2"	15.5	two device	-
52-C-54-2	raised cover 2"	20.5	two device	-
4" x 4" Square Surface Covers				
8361	surface cover 3/8"	4.6	toggle switch	-
8362	surface cover 3/8"	4.6	2.625" receptacle	-
8363	surface cover 3/8"	4.6	1.40" receptacle	-
8364	surface cover 3/8"	4.6	1.625" receptacle	-
8365	surface cover 3/8"	4.6	duplex receptacle	-
8366	surface cover 3/8"	4.6	2.156" receptacle	-
8367	surface cover 3/8"	4.6	2 toggle switches	-
8368	surface cover 3/8"	4.6	2 GFCI/Styleline	-
8371	surface cover 3/8"	4.6	2 duplex receptacles	-
8372	surface cover 3/8"	4.6	1 GFCI	-
8375	surface cover 3/8"	4.6	1 toggle, 1 duplex	-

onlinecomponents.com


4 11/16" SQUARE BOXES

APPLICATION

Boxes are installed in ceiling or wall junctions or stove & dryer receptacles. Square boxes are used where multiple conductor runs are split into two or more directions to bring power to a number of electrical devices.

PRODUCT FEATURES

- Self-tapping screws virtually eliminate stripping
- Rugged metallic construction



72151–K



73151–KBAR



72171–MSB



72171–KBAR



72171–KSB



72171–1



73171–KBAR

CATALOGUE NUMBER	CAPACITY (CU. IN)	BRACKET	RAISED GROUND SCREW	KNOCKOUTS
4-11/16" Square Boxes - 1-1/2" Deep				
72151-K	30.0	-	yes	K(6), 1/2"(6), 3/4"(2)
73151-KBAR	42.0	Ext. Ring	-	K(6), 1/2"(4)
4-11/16" Square Boxes - 1-1/8" Deep				
72171-MSB	42.0	MSB	yes	1/2"(6), 3/4"(2), K(2)
72171-KBAR	42.0	-	yes	K(6), 1/2"(6), 3/4"(2)
72171-KSB	42.0	SB	yes	K(4), 1/2"(6), 3/4"(2)
72171-1	42.0	-	yes	1/2"(2), 3/4"(2), 1"(8)
73171-KBAR	42.0	Ext. Ring	-	K(6), 1/2"(4)

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

4-11/16" SQUARE COVERS

APPLICATION

Covers are used to close an outlet box. Raised device covers are used for mounting switches or receptacles.

PRODUCT FEATURES

- Rugged metallic construction
- 72 series covers are designed for use with 72 series boxes



72–C–1



72–C–6–K



72–C–10



72–C–13



72–C–14



72–C–15



72–C–17



72–C–18

CATALOGUE NUMBER	DESCRIPTION	CAPACITY (CU. IN.)	OPENING	KNOCKOUTS
4-11/16" Covers				
72-C-1	flat	-	blank	-
72-C-6-K	flat	-	concentric knockout	K(1)
72-C-10	raised cover 3/16"	1.2	one device	-
72-C-13	raised cover 1/2"	3.5	one device	-
72-C-14	raised cover 3/4"	5.1	one device	-
72-C-15	raised cover 7/8"	6.1	one device	-
72-C-17	raised cover 1/2"	6.3	two device	-
72-C-18	raised cover 3/4"	9.7	two device	-

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

UTILITY BOXES & COVERS

APPLICATION

Utility boxes are used for convenience outlets, switch boxes or small junction boxes. They are popular for exposed work applications (surface mounted wiring).

PRODUCT FEATURES

- Raised ground screw provides easier access and prevents the ground screw from protruding beyond the bottom of the box when tightened
- Covers are designed to match the contours of the box
- Cover corners are rounded
- All covers have captive screws
- Self-tapping ground screws which virtually eliminate stripping
- Mounting screws are included with covers



2018



2018–SB



2020–BAR



2020–RBAR



2020–SB

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	RAISED GROUND SCREW	KNOCKOUTS
2-1/8" x 4" Utility Boxes - 1-1/2" Deep				
2018	11.5	-	yes	1/2"(10)
2018-SB	11.5	SB	yes	1/2"(7)
2-1/8" x 4" Utility Boxes - 1-7/8" Deep				
2020-BAR	14.0	-	yes	1/2"(10)
2020-RBAR	14.0	Ext. Ring	-	1/2"(8)
2020-SB	14.0	SB	yes	1/2"(7)

APPLICATION

Utility box covers are used to close a utility box. Covers may also be used as single-gang wall plates.

PRODUCT FEATURES

- Covers are designed to match the contours of the box.
- All covers have captive screws.
- Self-tapping ground screws which virtually eliminate stripping.
- Mounting screws are included with covers.



20–C–1



20–C–3



20–C–4BAR



20–C–5

CATALOGUE NUMBER	DESCRIPTION
4" x 2-1/8" Utility Box Covers	
20-C-1	duplex receptacle
20-C-3	1.40" receptacle
20-C-4BAR	blank
20-C-5	toggle switch

onlinecomponents.com

UTILITY BOXES & COVERS

onlinecomponents.com

APPLICATION

Utility boxes are used for convenience outlets, switch boxes or small junction boxes. They are popular for exposed work applications (surface mounted wiring).

PRODUCT FEATURES

- Raised ground screw provides easier access and prevents the ground screw from protruding beyond the bottom of the box when tightened
- Covers are designed to match the contours of the box
- Cover corners are rounded
- All covers have captive screws
- Self-tapping ground screws which virtually eliminate stripping
- Mounting screws are included with covers


1110–BAR


1110–RBAR


1110–SB


1110–MSB


1111


1110–HV


1151BAR


1199H


1198H

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	RAISED GROUND SCREW	KNOCKOUTS
2-1/2" x 4" Utility Boxes - 1-7/8" Deep				
1110-BAR	16.5	-	yes	1/2"(10)
1110-RBAR	16.5	Ext. Ring	yes	1/2"(8)
1110-SB	16.5	SB	-	1/2"(7)
1110-MSB	16.5	MSB	yes	1/2"(4)
1111	16.5	-	yes	1/2"(10)
2-1/2" x 4" High Voltage (347V) Utility Boxes - 1-7/8" Deep				
1110-HV	16.0	-	yes	1/2"(10)
2-1/2" x 4" Utility Boxes - 2-1/8" Deep				
1151BAR	18.5	-	no	1/2"(4)
1199H	18.5	-	no	1/2"(4)
1198H	18.5	-	no	1/2"(4)


11–C–1


11–C–2H


11–C–3BAR


11–C–4


11–C–4HV


11–C–5



11–C–5HV


11–C–10

CATALOGUE NUMBER	DESCRIPTION
4" x 2-1/2" Utility Box Covers	
11-C-1	duplex receptacle
11-C-2H	1.625" receptacle
11-C-3BAR	1.40" receptacle
11-C-4	blank
11-C-4HV	blank (347V)
11-C-5	toggle switch
11-C-5HV	toggle switch (347V)
11-C-10	GFCI

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STEEL STUD DEVICE BOXES

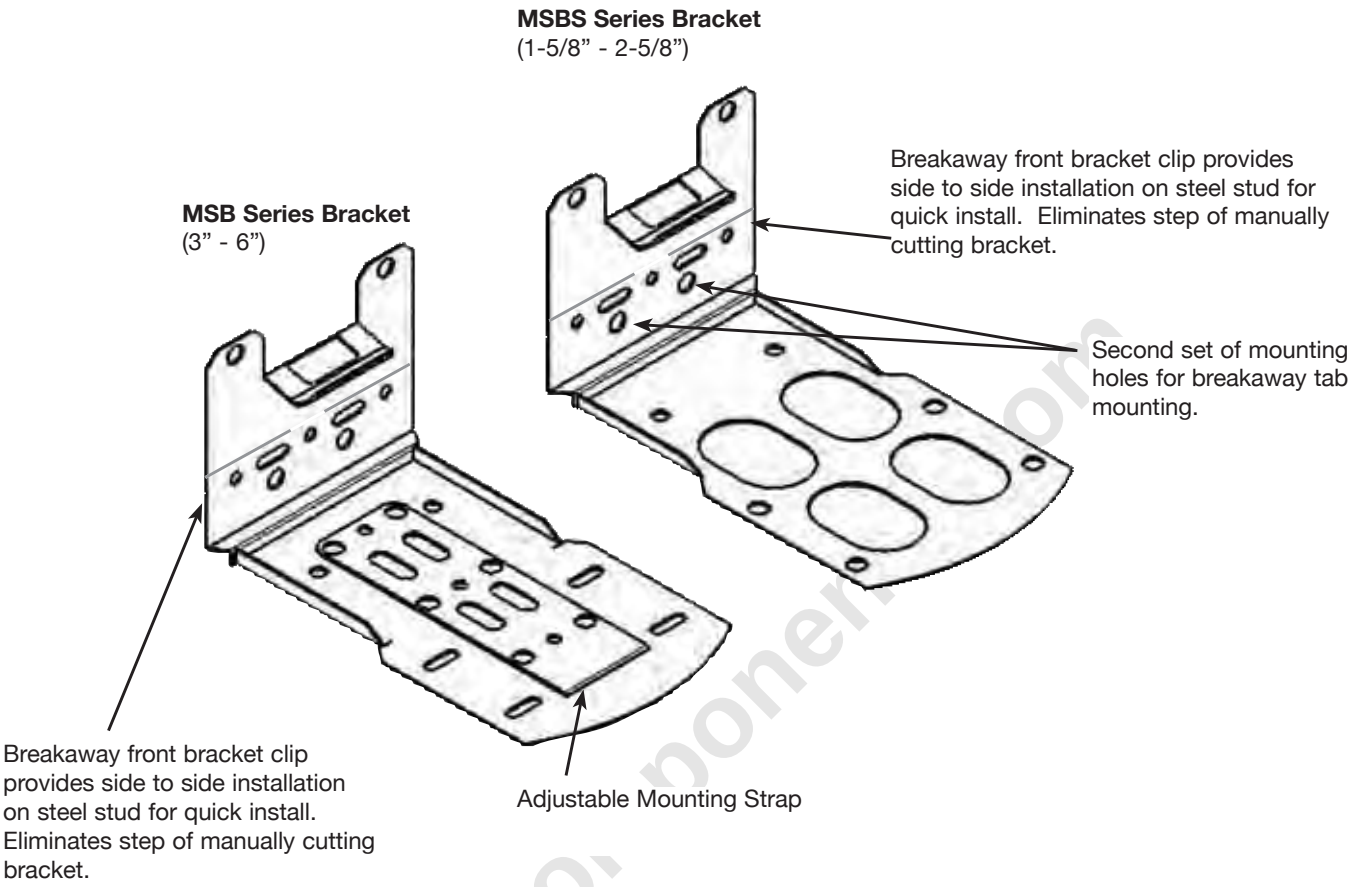

onlinecomponents.com

ADJUSTABLE MOUNTING STRAP

tradeSELECT steel stud boxes feature a unique adjustable mounting strap and clip-on tab that makes it easier than ever to position and hold boxes in place.

tradeSELECT boxes are simply the fastest and easiest boxes to install on any size steel stud.


onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STEEL STUD BOX INSTALLATION


- Bend out adjustable mounting strap at fold marks for either 3″, 4″ or 6″ stud size.
- Position and attach the box on stud by pressing the clip-on tab to hold box in place.
- Use pliers for crimping or screw gun to fasten or screw box to stud for final installation.

3″ STUD

3″ Fold Position





Adjustable mounting strap

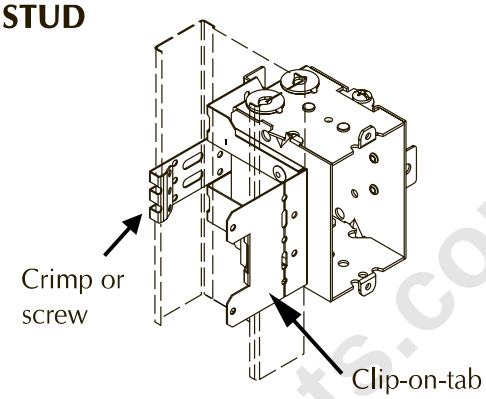

4″ STUD


4″ Fold Position

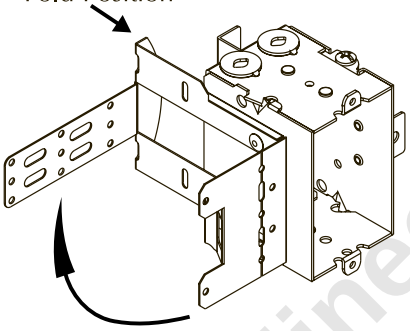

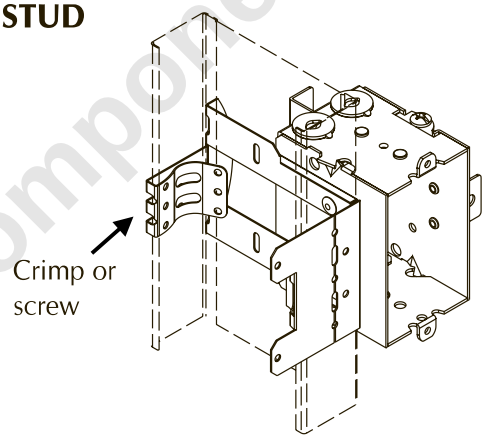


6″ STUD


Add our extension foot #7902 to existing support

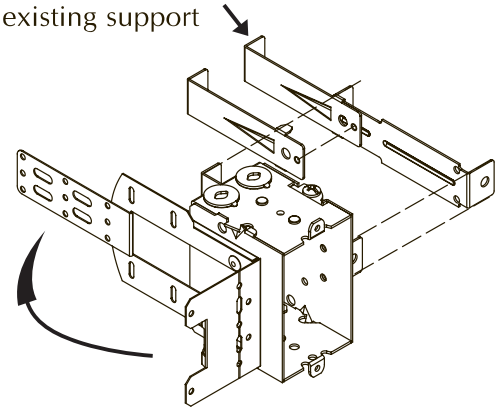

Open at 180°

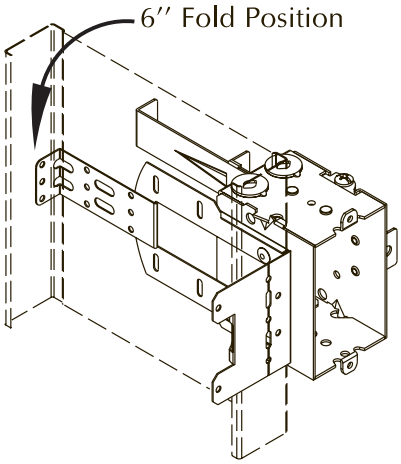

- **Upturned edge provides more rigid installation to steel stud.**

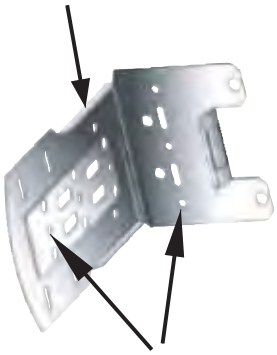

- **Series of smaller mounting holes allow more choices in fastening box to the steel stud.**

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STEEL STUD DEVICE BOXES

APPLICATION
Steel stud boxes are used in Commercial, Residential and Industrial construction.

PRODUCT FEATURES
- Unique adjustable mounting strap and patented clip-on tab allow for easy positioning
- Gangable device boxes offer the option of constructing a box to hold two or more devices
- Rugged metallic construction


1102–MSB


1102–MSBU


3102–MSB


3102–MSBU


1104–MSB


1104–MSBUBAR


4204–MSB


4204–MSBU


1504–MSBUBAR


1204–MSB–HV


1104–P*


7902**

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	STUD SIZES	KNOCKOUTS	CABLE CLAMPS
2" x 3" Device Box - 2" Deep - Gangable					
1102-MSB	10.0	MSBS	1-5/8", 2-3/8"	1/2"(4)	-
1102-MSBU	10.0	MSBS	1-5/8", 2-3/8"	-	U
3102-MSB	12.0	MSBS	1-5/8", 2-3/8"	1/2"(4)	-
3102-MSBU	12.0	MSBS	1-5/8", 2-3/8"	-	U
2" x 3" Device Box - 2-1/2" Deep - Gangable					
1104-MSB	12.5	MSB	2-3/8", 3-5/8"	K(2), 1/2"(2)	-
1104-MSBUBAR	12.5	MSB	2-3/8", 3-5/8"	-	U
2" x 3" Device Box - 2-1/2" Deep Power /Communication Box - Gangable					
4204-MSB	12.5	MSB	2-3/8", 3-5/8"	K(4), 1/2"(4)	-
4204-MSBU	12.5	MSB	2-3/8", 3-5/8"	K(2), 1/2"(2)	U
2-1/4" x 3" Device Box - 2-1/2" Deep - Gangable					
1504-MSBUBAR	15.0	MSB	2-3/8", 3-5/8"	-	U
2-1/4" x 3" Device Box - 2-1/2" Deep 347V Box - Gangable					
1204-MSB-HV	15.7	MSB	2-3/8", 3-5/8"	1/2"(2)	-
1104-P*	Partition - For use with 1104 series & 2104, 2, 3, 4-gang metal boxes				
7902**	Foot Extender				

**Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources within the same box*
*** Steel stud foot extender. Use with existing MSB foot to facilitate 6" steel stud installation*

HUBBELL®

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STEEL STUD DEVICE BOXES

APPLICATION

Steel stud boxes are used in Commercial, Residential and Industrial construction.

PRODUCT FEATURES

- Raised ground screw provides easier access and prevents the ground screw from protruding beyond the bottom of the box when tightened.
- Rugged metallic construction



3104–MSB



3104–MSBU



3004–MSB



3004–MSBU



1104–P*



7902***

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	STUD SIZES	KNOCKOUTS	CABLE CLAMPS
2" x 3" Device Box - 2-1/2" Deep - Gangable					
3104-MSB	16.0	MSB	2-3/8", 3-5/8"	K(2), 1/2"(2)	-
3104-MSB-1*	16.0	MSB	2-3/8", 3-5/8"	K(2), 1/2"(2)	-
3104-MSBU	16.0	MSB	2-3/8", 3-5/8"	-	U
3104-MSBU-1*	16.0	MSB	2-3/8", 3-5/8"	-	U
2" x 3" Device Box - 3" Deep - Gangable					
3004-MSB	18.0	MSB	2-3/8", 3-5/8"	1/2"(4)	-
3004-MSBU	18.0	MSB	2-3/8", 3-5/8"	-	U
3004-MSBU-1*	18.0	MSB	2-3/8", 3-5/8"	-	U
1104-P**	Partition - For use with 1104 series & 2104, 2, 3, 4-gang metal boxes				
7902***	Foot Extender				

** Brackets set back for two layers of 1/2" drywall*

*** Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources within the same box*

**** Steel stud foot extender. Use with existing MSB foot to facilitate 6" steel stud installation*

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STEEL STUD DEVICE BOXES

APPLICATION
Steel stud boxes are used in Commercial, Residential and Industrial construction.

PRODUCT FEATURES
- Unique adjustable mounting strap and patented clip-on tab allow for easy positioning
- Rugged metallic construction


2104–MSBU


2104–MSBU–2


2104–MSBU–3


2104–MSBU–4


2304–MSBKU


2304–MSBKU–2


2304–MSBKU–3


2304–MSBKU–4


1104–P*


7902**

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	STUD SIZES	KNOCKOUTS	CABLE CLAMPS
2" x 3" Device Box - 2-1/2" Deep					
2104-MSBU	12.5	MSB	2-3/8", 3-5/8"	-	U
2104-MSBU-2	25.0	MSB	2-3/8", 3-5/8"	-	U
2104-MSBU-3	37.5	MSB	2-3/8", 3-5/8"	-	U
2104-MSBU-4	50.0	MSB	2-3/8", 3-5/8"	-	U
2" x 3" Device Box - 2-1/2" Deep - Combination Box					
2304-MSBKU	14.5	MSB	2-3/8", 3-5/8"	K(1)	U
2304-MSBKU-2	29.0	MSB	2-3/8", 3-5/8"	K(2)	U
2304-MSBKU-3	43.5	MSB	2-3/8", 3-5/8"	K(3)	U
2304-MSBKU-4	58.0	MSB	2-3/8", 3-5/8"	K(4)	U
1104-P*	Partition - For use with 1104 series & 2104, 2, 3, 4-gang metal boxes				
7902**	Foot Extender				

** Once installed, the box meets Canadian Electrical Code requirements, allowing the installation of devices connected to different power sources within the same box*
*** Steel stud foot extender. Use with existing MSB foot to facilitate 6" steel stud installation*

HUBBELL®

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STEEL STUD 4" OCTAGON BOXES

APPLICATION

Steel stud boxes are used in Commercial, Residential and Industrial construction.

PRODUCT FEATURES

- Unique adjustable mounting strap and patented clip-on tab allow for easy positioning
- Rugged metallic construction



54151–MSB | 54151–MSBABAR | 54151–MSBL | 54171–MSB | 54171–MSB–1 | 7902**

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	STUD SIZES	KNOCKOUTS	CABLE CLAMPS
4" Octagon Box - 1-1/2" Deep					
54151-MSB	15.0	MSB	2-3/8, 3-5/8"	K(4), 1/2"(2)	-
54151-MSBABAR	15.0	MSB	2-3/8, 3-5/8"	1/2"(1)	A
54151-MSBL	15.0	MSB	2-3/8, 3-5/8"	1/2"(1)	L
4" Octagon Box - 2-1/8" Deep					
54171-MSB	21.0	MSB	2-3/8, 3-5/8"	K(4), 1/2"(4)	-
54171-MSB-1	21.0	MSB	2-3/8", 3-5/8"	K(4), 1/2"(4)	-
7902**	Foot Extender				

*** Steel stud foot extender. Use with existing MSB foot to facilitate 6" steel stud installation.*

SQUARE STEEL STUD BOXES



52151–MSB | 52151–MSBS | 52171–MSB | 521711–MSB | 72171–MS | 7902**

CATALOGUE NUMBER	CAPACITY (CU. IN)	BRACKET	STUD SIZES	KNOCKOUTS	RAISED GROUND SCREW
4" x 4" Square Boxes - 1-1/2" Deep					
52151-MSB	21.0	MSB	2-3/8, 3-5/8"	K(2), 1/2"(6), 3/4(2)	yes
52151-MSBS	21.0	MSB	2-3/8, 3-5/8"	K(2), 1/2"(6), 3/4(2)	yes
4" x 4" Square Boxes - 2-1/8" Deep					
52171-MSB	30.0	MSB	2-3/8, 3-5/8"	K(2), 1/2"(6), 3/4(2)	yes
521711-MSB	30.0	MSB	2-3/8, 3-5/8"	K(3), 1/2"(2), 1"(2)	yes
4-11/16" Square Boxes - 2-1/8" Deep					
72171-MSB	42.0	MSB	2-3/8, 3-5/8"	K(2), 1/2"(2)	yes
7902**	Foot Extender				

*** Steel stud foot extender. Use with existing MSB foot to facilitate 6" steel stud installation.*

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

347V BOXES AND COVERS

APPLICATION

347 Volt boxes are used for the installation of 347 Volt switches for commercial and industrial lighting.

PRODUCT FEATURES

- All 347 Volt boxes have tapped holes with vertical spacing of 3.531" to accommodate 347 Volt switches.
- 1204 series boxes feature 2.25" spacing between gangs. Use tradeSELECT wall plates with HV suffixes.
- HV version of MBD and MBS series boxes feature 1.812" spacing between gangs. Use tradeSELECT wall plates with HVR suffixes.


1204–1–HV


1204–2–HV


1204–MSB–HV


1204–HVP


1110–HV

CATALOGUE NUMBER	CAPACITY (CU. IN.)	BRACKET	EARS	KNOCKOUTS	CABLE CLAMPS
2-1/4" x 3" Device Box - 2-1/2" Deep - Gangable					
1204-1-HV	15.7	-	Recessed	1/2"(2)	-
1204-2-HV	15.7	-	Recessed	1/2"(2)	-
1204-MSB-HV	15.7	MSB	-	1/2"(2)	-
1204-HVP	High Voltage Partition				
2-1/4" x 3" Utility - 1-7/8" Deep					
1110-HV	16.0	-	-	1/2"(2)	-


11–C–4–HV


11–C–5–HV

CATALOGUE NUMBER	DESCRIPTION
2.665" x 4.275" Utility Box Covers	
11-C-4-HV	Blank
11-C-5-HV	Toggle Switch

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

347 VOLT MASONRY BOXES

APPLICATION

347 Volt boxes are used for the installation of 347 Volt switches for commercial and industrial lighting.

PRODUCT FEATURES

- All 347 Volt boxes have tapped holes with vertical spacing of 3.531" to accommodate 347 Volt switches.
- 1204 series boxes feature 2.25" spacing between gangs. Use tradeSELECT wall plates with HV suffixes.
- HV version of MBD and MBS series boxes feature 1.812" spacing between gangs. Use tradeSELECT wall plates with HVR suffixes.



MBS–1–HV



MBS–2–HV



MBS–3–HV



MBS–4–HV




MBD–1–HV



MBD–2–HV



MBD–3–HV

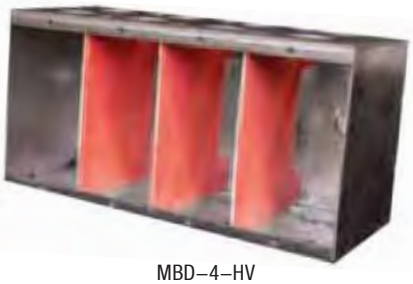

MBD–4–HV

CATALOGUE NUMBER	CAPACITY (CU. IN.)	DESCRIPTION	KNOCKOUTS
2-1/4" x 4" Masonry Boxes - 2-3/8" Deep			
MBS-1-HV	20.3	1-gang Masonry Box	1/2"(2)
MBS-2-HV	40.5	2-gang Masonry Box	1/2"(4)
MBS-3-HV	60.8	3-gang Masonry Box	1/2"(6)
MBS-4-HV	81.0	4-gang Masonry Box	1/2"(8)
2-1/4" x 4" Masonry Boxes - 3-3/8" Deep			
MBD-1-HV	22.5	1-gang Masonry Box	1/2"(4)
MBD-2-HV	45.0	2-gang Masonry Box	1/2"(8)
MBD-3-HV	67.5	3-gang Masonry Box	1/2"(12)
MBD-4-HV	90.0	4-gang Masonry Box	1/2"(16)

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STANDARD MASONRY BOXES

APPLICATION

Masonry boxes are used for the flush installation of devices in masonry construction.

PRODUCT FEATURES

2, 3, and 4-gang masonry boxes allow for the installation of partitions. The following partitions are available:

- Partition MBS-P is designed for use with MBS-2, MBS-3 and MBS-4 boxes.
- Partition MBD-P is designed for use with MBD-2, MBD-3 and MBD-4 boxes.
- Once these partitions are installed, the masonry box meets Canadian Electrical Code requirements specified in clause 12-3034, allowing the installation of devices connected to different power sources within the same box.


MBS–1–K


MBS–2–K


MBS–3–K


MBS–4–K


MBS–5–K


MBS–6–K


MBS–P


MBD–1–K


MBD–2–K


MBD–3–K


MBD–4–K


MBD–5–K


MBD–6–K


MBD–P

CATALOGUE NUMBER	CAPACITY (CU. IN.)	DESCRIPTION	WIDTH	HEIGHT	CONCENTRIC KNOCKOUTS	
					1/2", 3/4" , 1"	1/2", 3/4"
Masonry Boxes - 2-1/2" Deep						
MBS-1-K	14.0	1-gang Masonry Box	2"	3-3/4"	1	7
MBS-2-K	28.0	2-gang Masonry Box	3-13/16"	3-3/4"	1	11
MBS-3-K	42.0	3-gang Masonry Box	5-10/16"	3-3/4"	1	15
MBS-4-K	56.0	4-gang Masonry Box	7-7/16"	3-3/4"	1	19
MBS-5-K	70.0	5-gang Masonry Box	9-1/4"	3-3/4"	1	23
MBS-6-K	84.0	6-gang Masonry Box	11-1/16"	3-3/4"	1	27
MBS-P	-	Partition	-	3-3/4"	-	-
Masonry Boxes - 3-1/2" Deep						
MBD-1-K	21.0	1-gang Masonry Box	2"	3-3/4"	1	9
MBD-2-K	42.0	2-gang Masonry Box	3-13/16"	3-3/4"	1	15
MBD-3-K	63.0	3-gang Masonry Box	5-10/16"	3-3/4"	1	21
MBD-4-K	84.0	4-gang Masonry Box	7-7/16"	3-3/4"	1	27
MBD-5-K	105.0	5-gang Masonry Box	9-1/4"	3-3/4"	1	33
MBD-6-K	126.0	6-gang Masonry Box	11-1/16"	3-3/4"	1	39
MBD-P	-	Partition	-	3-3/4"	-	-

Online Component

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

4" CONCRETE RINGS

APPLICATION

Concrete rings are used with poured deck (floor) in high-rise construction. These boxes are installed on wooden or steel concrete forms. After the forms are removed, the box is flush with the concrete.

PRODUCT FEATURES

- Flat sides provide excellent contact for locknuts
- External ears are used to nail the ring to the wood form
- Ears on inside of box are for fixtures.
- Waxed fixture ears prevent concrete from interfering with the threads
- The top-cover is removable for before-pour work.
- Rugged metallic construction


54521


54531


54541


54551


54561


54561–1/2


54571


54581


54591


54560


CBA


53171–ER

CATALOGUE NUMBER	CAPACITY (CU. IN.)	DEPTH	KNOCKOUTS
4" Concrete Rings			
54521	18.0	1-1/2"	1/2"(4), 3/4"(4)
54531	24.0	2"	1/2"(4), 3/4"(4)
54541	30.0	2-1/2"	1/2"(4), 3/4"(4)
54551	36.0	3"	1/2"(4), 3/4"(4)
54561	42.0	3-1/2"	1/2"(4), 3/4"(4)
54561-1/2	42.0	3-1/2"	1/2"(8)
54571	48.0	4"	1/2"(4), 3/4"(2), 1"(2)
54581	60.0	5"	1/2"(4), 3/4"(2), 1"(2)
54591	72.0	6"	1/2"(4), 3/4"(2), 1"(2)
54560	-	Concrete Cover	-
CBA*	-	Adaptor	-
53171-ER	30.0	Ext. Ring - concrete rings only	1/2"(4), K(6)

**CBA Adapter - use for mounting and aligning octagonal extension rings.*

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

PREGANGED BOXES AND COVERS

APPLICATION

Pre-ganged boxes are used for the installation of multiple devices.

PRODUCT FEATURES

- GSB series boxes feature 1.812" spacing between gangs.
- All GBC covers have tapped holes with vertical spacing of 3.281" to accommodate standard devices.
- Rugged metallic construction



GSB–3



GBC–3

CATALOGUE NUMBER	CAPACITY (CU. IN.)	DESCRIPTION	WIDTH	1/2" KNOCKOUTS	USE WITH
Pre-Ganged Boxes - 4" x 2"					
GSB-2	52.0	2-gang Box	7"	16	GBC-2 or 3
GSB-3	66.0	3-gang Box	8-13/16"	18	GBC-3 or 4
GSB-4	80.0	4-gang Box	10-5/8"	24	GBC-4 or 5
GSB-5	93.0	5-gang Box	12-7/8"	26	GBC-5 or 6
GSB-6	107.0	6-gang Box	14-1/4"	28	GBC-6
LVP	-	Partition	-	-	-

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

VAPOUR BARRIERS

APPLICATION

Vapour barriers prevent unwanted penetration of exterior air and help maintain the existing interior environment from elements outside of the structure.

PRODUCT FEATURES

- Made from durable polyethylene material.
- Designed to fit snugly into boxes for easy cable entry and sealing of openings.



HVB1BAR



HVB2BAR



HVB3BAR



HVBCBAR



HVBSDBAR

CATALOGUE NUMBER	DESCRIPTION
Vapour/Air Barrier - Low Density Polyethelene	
HVB1BAR	For 2" x 3" device boxes
HVB2BAR	For 4" square and 2-gang device boxes
HVB3BAR	For 3-gang device boxes
HVBCBAR	For 4" octagonal boxes
HVBSDBAR	For 4-11/16" boxes

DOOR SWITCHES AND BOXES



DS–30
DS–55



DS–BO



DS–PL

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATING	KNOCKOUTS
Door Boxes & Switches - 1-11/32" x 3-11/16" x 1-1/2"			
DS-30	Box, Switch & Plate	3A, 125V AC N/O	1/2"(3)
DS-55	Box, Switch & Plate	3A, 125V AC N/C	1/2"(3)
DS-BO	Box Only	-	1/2"(3)
DS-PL	Plate Only	-	-
S-30	Switch Only	3A, 125V AC N/O	-
S-55	Switch Only	3A, 125V AC N/C	-

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

BAR HANGERS

APPLICATION
Adjustable bar hanger allows box to be placed between ceiling joists.

PRODUCT FEATURES
- Boxes can be located anywhere along length of the bar


1041BAR


1042BAR



1050


1060

CATALOGUE NUMBER	DESCRIPTION	LOAD CAPACITY
Bar Hangers - For Octagonal & Square Boxes		
1041BAR	Adjustable 11-1/2" to 18-1/2"	50 lbs.
1042BAR	Adjustable 16-1/2" to 26-1/2"	50 lbs up to 22-1/2", 25 lbs. up to 26-1/2"
1050	18" with 1/2 Offset	50 lbs
Bar Hangers - For Device Boxes		
1060	16" Bar grooved for box ears	-

STEEL BOX ACCESSORIES


66


66SS


820D


LRW


7901RW


SBEXBAR


7902


9008

CATALOGUE NUMBER	DESCRIPTION
Accessories	
66	Protector plate. Meets requirements of CEC rule 12-616.
66SS	Protector plate for steel stud
820D	Device box supports
LRW	Rework bracket, for use with 2" x 3" device boxes with plaster ears
7901RW	Rework bracket, for use with octagonal boxes. Max load 10 lbs.
SBEXBAR	2" x 3" device box extension, adjustable depth up to 7/8"
7902	Steel stud foot extender, adds to MSB foot to facilitate 6" steel stud installation
9008	Low voltage mounting plate

HUBBELL®

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS


onlinecomponents.com

online components.com


OCTAGON CEILING BOX



2027FBAR

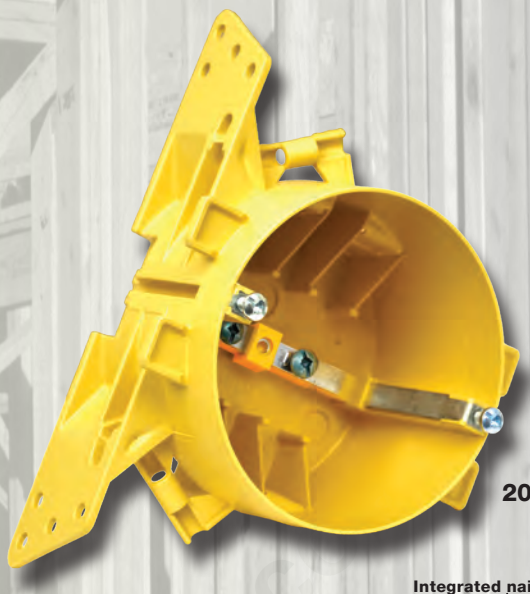

2027R



Fixture/cover screws pre-installed and backed out



Fasten box through the strap when bottom mounting or locate box centre using a longer screw




Integrated nail guide



Offset mounting wings



Star shape openings



Ground screws positioned in-line

Continuous ground strap moulded in place



Breakaway tabs

KEY FEATURES

- Superior mounting methods to accommodate screws and/or nail installation. The box provides flexibility by offering universal mounting brackets, with screw and nail guides.
- Ground screw spacing positioned in line with wire entry. Easy to wrap ground wires with fingers or pliers.
- Advanced overmoulded ground strap retention for better support.
- A full ‘u’ shaped ground strap that improves mechanical performance and continuous ground.
- Engineered with pre-installed device mounting screws 2 of 8 - 32” x 1” allows quicker installations.
- Bottom ground screw location complete with two green ground screws to accommodate quick installation.
- Large cubic capacity – 27” cubic capacity allows ease to terminate and accommodate conductors, wire nuts and grounding.
- Centering V notches saves installation time by assuring consistent proper box positioning.
- 4 oversize ½” drywall breakaway tabs with score lines.
- 2 x 45° mounting holes are located inside and closed off giving the installer more mounting options.
- Star shape openings to secure and hold screws or nails in place while working overhead.

*Patent Pending

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

NON-METALLIC BOXES

APPLICATION
Accommodates wiring devices such as switches and receptacles.

PRODUCT FEATURES
- Self-clamping wire entry tabs

STANDARD MATERIAL
- Molded from high-strength plastic resin


2001R


2021R


2002R


2003R


2027R


2006R


2016R


2014R

CATALOGUE NUMBER	CAPACITY (CU. IN)	DESCRIPTION	CABLE CLAMPS
Device Boxes - For use with non-metallic sheathed cable			
2001R	18.0	1-gang with flush bracket, 1/2" setback	4
2021R	18.0	1-gang with compact mounting bracket, 1/2" setback	4
2002R	37.0	2-gang with flush bracket, 1/2" setback	8
2003R	54.0	3-gang with flush bracket, 1/2" setback	12
4" Round Ceiling Box - For use with non-metallic sheathed cable			
2027R*	27.0	Round box with flush bracket, 1/2" setback	4
Stove/Dryer Box - For use with non-metallic sheathed cable			
2006R	42.0	stove/dryer box, 1/2" setback	1/2"(2), 3/4"(1)
Trailer Box - For use with non-metallic sheathed cable			
2016R	17.0	1-gang, Trailer Box	2014R
2014R	-	Fast Wire Clamp for Trailer Box	-

*Patent Pending

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

NON-METALLIC BOXES

APPLICATION

Vapour barrier boxes prevent unwanted penetration of exterior air and help maintain the existing interior environment from elements outside of the structure. Accommodates wiring devices such as switches and receptacles.

PRODUCT FEATURES

- Self-clamping wire entry tabs
- Vapour/air barrier flange and integral wire entry seal provides superior energy savings and quick installation.

STANDARD MATERIAL

- Molded from high-strength plastic resin.



2011FBAR



2002FBAR



2003FBAR



2027FBAR*



2006FBAR

CATALOGUE NUMBER		CAPACITY (CU. IN)	DESCRIPTION	CABLE CLAMPS
Device Boxes - For use with non-metallic sheathed cable				
Flanged w/ Vapour Barrier	**Flanged Only**			
2011FBAR	**2011F**	18.0	1-gang with flush bracket, 1/2" setback	4
2002FBAR	**2002F**	37.0	2-gang with flush bracket, 1/2" setback	8
2003FBAR	**2003F**	54.0	3-gang with flush bracket, 1/2" setback	12
4" Round Ceiling Box - For use with non-metallic sheathed cable				
Flanged w/ Vapour Barrier	**Flanged Only**			
2027FBAR*	**2027F***	27.0	Round box with flush bracket, 1/2" setback	4
Stove/Dryer Box - For use with non-metallic sheathed cable				
Flanged w/ Vapour Barrier	**Flanged Only**			
2006FBAR	**2006F**	42.0	stove/dryer box, 1/2" setback	1/2"(2), 3/4"(1)

*Patent Pending

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

GENERAL INFORMATION

MATERIALS

Stainless Steel - Type 430
- 0.031" nominal thickness. Contains 16% chrome. Corrosion resistant.
- Horizontal brush finish (97 series).
- For use in industrial, institutional, and commercial environments.

Solid Brass
- 0.040" nominal thickness. Contains 70% copper, 30% zinc alloy.
- Lacquered to prevent corrosion.
- Polished finish (PB series).

Painted Steel
- 0.031" nominal thickness.
- Painted white (SW series).

COMPLIANCE

All tradeSELECT wall plates are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

PACKAGING

tradeSELECT wall plates are individually packed with chrome plated mounting screws, except solid brass wall plates which include brass plated mounting screws.

Wall plates can be bulk packed, with or without mounting screws, upon request.
Stainless Steel and Solid Brass wall plates are supplied with a plastic coating which protects the finish and should be removed once the plate is installed.

The packaging label includes the quantity, catalogue number, material type, bar code information, and a drawing of the product.

SUFFIX DESIGNATIONS

HV	347 Volt wall plate, for use with 1204 style device boxes (unless otherwise stated).
HVR	347 Volt wall plate, for use with HV versions of MBD and MBS style device boxes.
KS	King-size wall plate, 22% larger than standard wall plates.
KSHV	King-size 347 Volt wall plate, for use with 1204 style device boxes (unless otherwise stated).
KSHVR	King-size 347 Volt wall plate for use with HV versions of MBD and MBS style device boxes.

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STANDARD WALL PLATES




97071SS



97080SS



97402SS

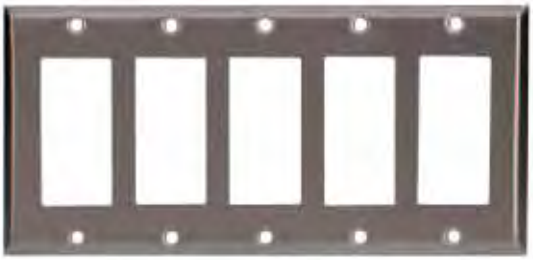

97405SS



97001SS



97002SS

DESCRIPTION	STAINLESS STEEL TYPE 430	PAINTED STEEL WHITE	SOLID BRASS POLISHED
Standard Wall Plates			
1-gang, Toggle Switch	**97071SS**	**SW071**	**PB071**
2-gang, Toggle Switch	**97072SS**	**SW072**	**PB072**
3-gang, Toggle Switch	**97073SS**	**-**	**PB073**
4-gang, Toggle Switch	**97074SS**	**-**	**PB074**
5-gang, Toggle Switch	**97075SS**	**-**	**PB075**
6-gang, Toggle Switch	**97076SS**	**-**	**PB076**
7-gang, Toggle Switch	**97077SS**	**-**	**PB077**
8-gang, Toggle Switch	**97078SS**	**-**	**PB078**
9-gang, Toggle Switch	**97079SS**	**-**	**PB079**
10-gang, Toggle Switch	**97080SS**	**-**	**PB080**
1-gang, Decora or GFCI	**97401SS**	**SW401**	**PB401**
2-gang, Decora or GFCI	**97402SS**	**SW402**	**PB402**
3-gang, Decora or GFCI	**97403SS**	**-**	**PB403**
4-gang, Decora or GFCI	**97404SS**	**-**	**PB404**
5-gang, Decora or GFCI	**97405SS**	**-**	**PB404**
6-gang, Decora or GFCI	**97406SS**	**-**	**PB406**
2-gang, Decora or GFCI, centered opening	**97001SS**	**SW001**	**PB001**
GFCI conversion kit, 2-gang centered opening	**97002SS**	**SW002**	**PB002**

online components

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STANDARD WALL PLATES



97101SS





97125SS



97154SS

DESCRIPTION	STAINLESS STEEL TYPE 430	PAINTED STEEL WHITE	SOLID BRASS POLISHED
Standard Wall Plates			
1-gang, Duplex Receptacle	**97101SS**	**SW101**	**PB101**
2-gang, Duplex Receptacle	**97102SS**	**SW102**	**PB102**
3-gang, Duplex Receptacle	**97103SS**	**-**	**PB103**
4-gang, Duplex Receptacle	**97104SS**	**-**	**PB104**
5-gang, Duplex Receptacle	**97105SS**	**-**	**-**
1-gang, Blank, device mount 2.375"	**97121SS**	**SW121**	**PB121**
2-gang, Blank, device mount 2.375"	**97122SS**	**SW122**	**PB122**
3-gang, Blank, device mount 2.375"	**97123SS**	**--**	**PB123**
4-gang, Blank, device mount 2.375"	**97124SS**	**-**	**PB124**
5-gang, Blank, device mount 2.375"	**97125SS**	**-**	**-**
1-gang, blank box mount 3.281"	**97151SS**	**SW151**	**PB151**
2-gang, blank box mount 3.281"	**97152SS**	**SW152**	**PB152**
3-gang, blank box mount 3.281"	**97153SS**	**-**	**PB153**
4-gang, blank box mount 3.281"	**97154SS**	**-**	**PB154**
5-gang, blank box mount 3.281"	**97155SS**	**-**	**-**

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STANDARD WALL PLATES



97091SS



97411SS



97181SS



97191SS



97630SS



97631SS




97182SS

DESCRIPTION	STAINLESS STEEL TYPE 430	PAINTED STEEL WHITE	SOLID BRASS POLISHED
Standard Wall Plates			
1-gang, 1 single receptacle 1.40" opening	**97091SS**	**SW091**	**PB091**
2-gang, 2 single receptacle 1.40" opening	**97092SS**	**SW092**	**PB092**
1-gang, 1 single receptacle 1.625" opening	**97111SS**	**SW111**	**PB111**
1-gang, 1 single receptacle 1.750" opening	**97211SS**	**SW211**	**PB211**
2-gang, 1 single receptacle 2.156" opening	**97411SS**	**SW411**	**PB411**
2-gang, 1 single receptacle 2.156" opening	**97421SS**	**SW421**	**PB411**
2-gang, 1 single receptacle 2.625" opening	**97521SS**	**SW521**	**PB521**
1-gang, 1/2" bushed slot with 1 mounting bridge	**97731SS**	**SW731**	**PB731**
3-gang, 1/2" bushed slot with 2 mounting bridges	**97730SS**	**-**	**PB730**
1-gang, 3/8" telephone opening device mount 2.375"	**97181SS**	**SW181**	**PB181**
2-gang, 3/8" telephone opening device mount 2.375"	**97182SS**	**SW182**	**PB182**
1-gang, 5/8" telephone opening device mount 2.375"	**97201SS**	**SW201**	**PB201**
2-gang, 5/8" telephone opening device mount 2.375"	**97202SS**	**SW202**	**PB202**
1-gang, 1-1/8" square telephone opening device mount 2.375"	**97191SS**	**SW191**	**PB191**
1-gang, louvered, vertical device mount - 2.375"	**97631SS**	**-**	**PB631**
1-gang, louvered, horizontal device mount - 2.375"	**97630SS**	**-**	**PB630**

STANDARD WALL PLATES

onlinecomponents.com

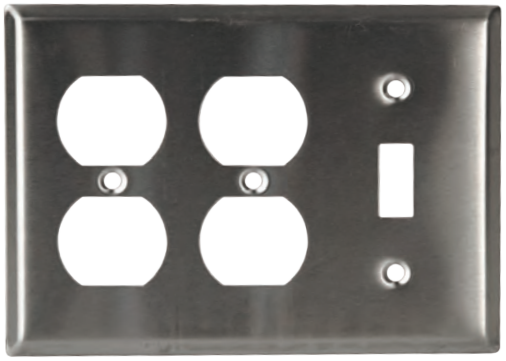

97213SS



97342SS



97392SS



97322SS

DESCRIPTION	STAINLESS STEEL TYPE 430	PAINTED STEEL WHITE	SOLID BRASS POLISHED
Standard Wall Plates			
2-gang, 1 toggle switch, 1 duplex receptacle	**97532SS**	**SW532**	**PB532**
3-gang, 2 toggle switch, 1 duplex receptacle	**97543SS**	-	**PB543**
4-gang, 3 toggle switch, 1 duplex receptacle	**97553SS**	-	**PB553**
5-gang, 4 toggle switch, 1 duplex receptacle	**97563SS**	-	**PB563**
6-gang, 5 toggle switch, 1 duplex receptacle	**97573SS**	-	**SU573**
3-gang, 2 toggle switch, and 1 blank device mount 2.375"	**97233SS**	-	-
2-gang, 1 toggle switch, and 1 blank device mount 2.375"	**97502SS**	**SW502**	**PB502**
3-gang, 1 toggle switch, and 2 blank device mount 2.375"	**97223SS**	-	-
3-gang, 2 duplex receptacle and 1 toggle switch	**97213SS**	-	-
2-gang, 1 duplex receptacle, 1 blank device mount 2.375"	**97322SS**	-	-
3-gang, 1 duplex receptacle, 2 blank device mount 2.375"	**97323SS**	-	-
2-gang, 1 duplex receptacle, 1 blank, box mount 3.281"	**97352SS**	-	-
3-gang, 1 duplex receptacle, 2 blank, box mount 3.281"	**97353SS**	-	-
2-gang, 1 toggle switch, 1 Decora	**97242SS**	-	-
2-gang, 1 duplex receptacle, 1 Decora	**97342SS**	-	-
2-gang, 1 toggle switch, and 1 single receptacle 1.40"	**97512SS**	**SW512**	**PB512**
2-gang, 1 duplex receptacle, and 1 single receptacle 1.40"	**97392SS**	-	-

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

347 VOLT WALL PLATES


97071HV


97074HV


97077HV


97151HV


97154HV


97401KSHV


97402KSHV


97404KSHV

DESCRIPTION	FOR USE WITH 1204 BOXES	FOR USE WITH 347V MBD OR MBS
347V Wall Plates		
1-gang, Toggle Switch 347V	**97071HV**	**97071HV**
2-gang, Toggle Switch 347V	**97072HV**	**97072HVR**
3-gang, Toggle Switch 347V	**97073HV**	**97073HVR**
4-gang, Toggle Switch 347V	**97074HV**	**97074HVR**
5-gang, Toggle Switch 347V	**97075HV**	**97075HVR**
6-gang, Toggle Switch 347V	**97076HV**	**97076HVR**
7-gang, Toggle Switch 347V	**97077HV**	**97077HVR**
1-gang, blank 347V box mount 3.531"	**97151HV**	**97151HV**
2-gang, blank 347V box mount 3.531"	**97152HV**	**97152HVR**
3-gang, blank 347V box mount 3.531"	**97153HV**	**97153HVR**
4-gang, blank 347V box mount 3.531"	**97154HV**	**97154HVR**
1-gang, toggle switch 347V king-size plate	**97071KSHV**	**97071KSHV**
1-gang, Decora 347V king-size plate	**97401KSHV**	**97401KSHV**
2-gang, Decora 347V box mount 3.531" king-size plate	**97402KSHV**	**97402KSHVR**
3-gang, Decora 347V box mount 3.531" king-size plate	**97403KSHV**	**97403KSHVR**
4-gang, Decora 347V box mount 3.531" king-size plate	**97404KSHV**	**97404KSHVR**

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

KING SIZE WALL PLATES



97071KS



97074KS



97101KS





97124KS

DESCRIPTION	STAINLESS STEEL TYPE 430
King Size Wall Plates	
1-gang, toggle switch king-size plate	**97071KS**
2-gang, toggle switch king-size plate	**97072KS**
3-gang, toggle switch king-size plate	**97073KS**
4-gang, toggle switch king-size plate	**97074KS**
1-gang, Duplex Receptacle, king-size plate	**97101KS**
2-gang, Duplex Receptacle, king-size plate	**97102KS**
3-gang, Duplex Receptacle, king-size plate	**97103KS**
4-gang, Duplex Receptacle, king-size plate	**97104KS**
1-gang, Blank, king-size device mount 2.375"	**97121KS**
2-gang, Blank, king-size device mount 2.375"	**97122KS**
3-gang, Blank, king-size device mount 2.375"	**97123KS**
4-gang, Blank, king-size device mount 2.375"	**97124KS**
1-gang, blank, king-size box mount 3.281"	**97151KS**
2-gang, blank, king-size box mount 3.281"	**97152KS**
3-gang, blank,king-size box mount 3.281"	**97153KS**
4-gang, blank, king-size box mount 3.281"	**97154KS**



6851RF



6300H



WPS2

DESCRIPTION	STAINLESS STEEL TYPE 430
Accessories	
1-gang, toggle with FURNACE and ON/OFF markings, device mount - 2.375"	**6851RF**
Mounting bridge converts device mount 2.375" to box mount 3.281"	**6300H**
Wall plate Screws 6/32 oval head milled slot 1/2" long - Plated Steel Chrome	**WPS2**
Wall plate Screws 6/32 oval head milled slot 1/2" long - Plated Steel Brass	**WPS3**

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

WALL PLATES CUSTOM

CUSTOM WALL PLATES

Hubbell Canada LP is the leading manufacturer of custom stainless steel wall plates in Canada. tradeSELECT® custom wall plates are made from type 430 stainless steel and can be configured in a variety of combinations to meet your 120/227V, King Size, 347V and King Size High Voltage requirements.

COMPLIANCE


All tradeSELECT® custom wall plates are CSA certified, unless otherwise stated, and meet the requirements of the Canadian Electrical Code. File numbers are available upon request.

ORDERING PROCEDURE

1. Call 1-877-394-7464 with a description or fax 905-839-2649 with a sketch of the desired wall plate. Please include number of gangs, type of opening(s), and quantity required.

2. A technical drawing and a quotation will be forwarded to you.

3. To place your order, simply approve the drawing with your signature and date, then return it along with the quotation number and your purchase order.

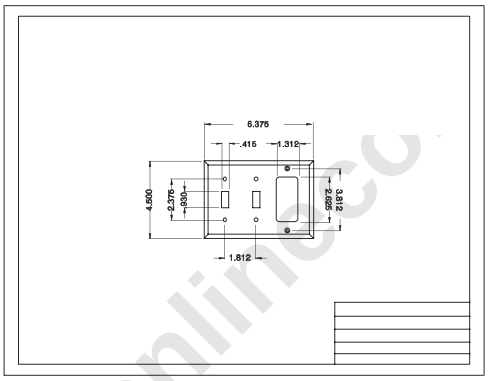


+




onlinecc

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS


STANDARD WALL PLATES

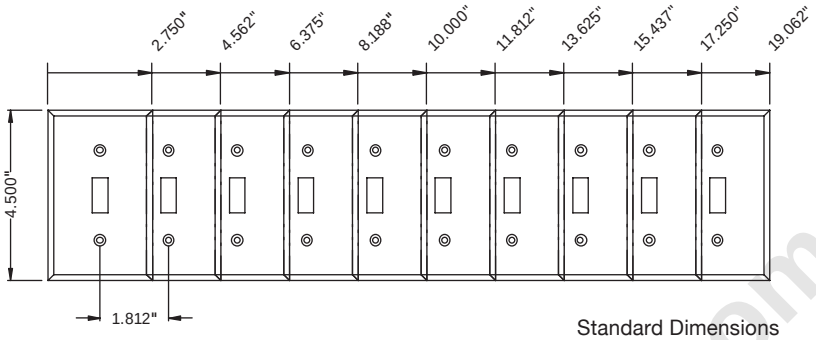


Standard Dimensions




97071SS




97101SS




97401SS




97091SS




97111SS




97211SS




97411SS




97191SS




97181SS




97201SS




97731SS



97421SS



97521SS

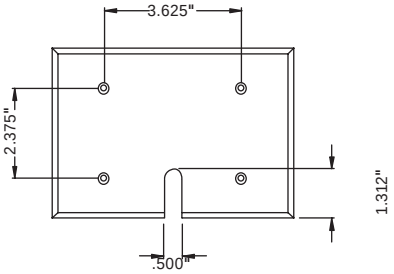

97730SS


Dimensions are in inches.

onlinecomponents.com


onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

TECHNICAL DATA


347 VOLT WALL PLATES

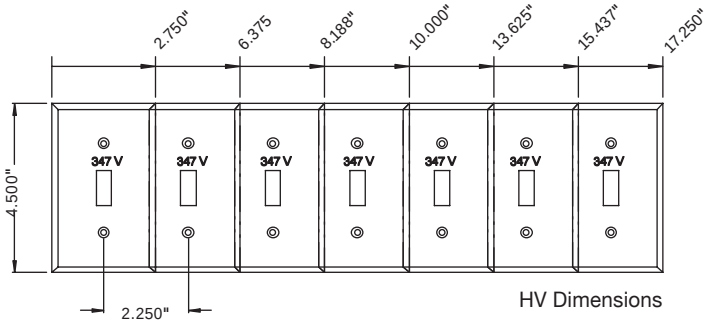


HV Dimensions

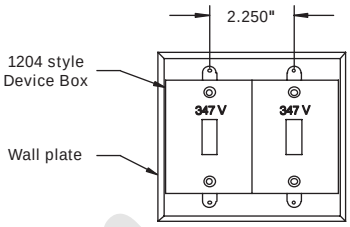

97072-HV

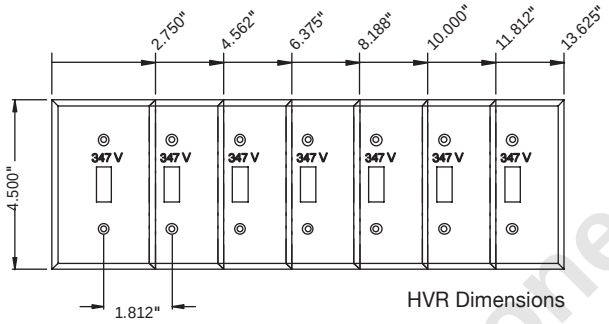


HVR Dimensions

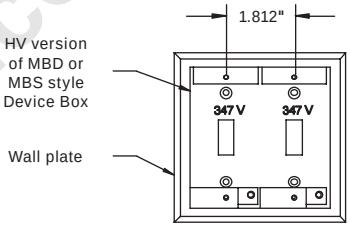


97072-HVR

KINGSIZE WALL PLATES

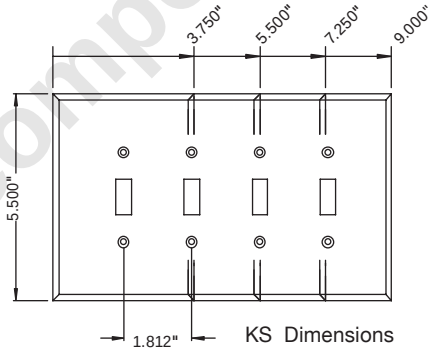


KS Dimensions


MOUNTING HOLE SPACINGS



Device Mount



Box Mount



HV Box Mount

Dimensions are in inches.

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

CONNECTORS
NON-METALLIC SHEATHED CABLE


NMS038


NMS038SF


NMC038


NMB038


DUP038


DUP038SF


NMSI050


NMPI050


NMSQ038

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
One Screw - Saddle Connector				
NMS038	3/8"(12)	50	500	Zinc
NMS050	1/2" (16)	25	250	Zinc
NMS075	3/4" (21)	20	200	Zinc
NMS100	1" (27)	10	100	Zinc
One Screw - Saddle Connector (Snap Fit)				
NMS038SF	3/8"(12)	50	500	Zinc
Two Screw - Saddle Connector				
NMC038	3/8"(12)	100	1000	Zinc
NMC075	3/4" (21)	50	500	Zinc
NMC100	1" (27)	25	250	Zinc
NMC125	1-1/4" (35)	10	100	Zinc
NMC150	1-1/2" (41)	5	50	Zinc
NMC200	2" (53)	10	40	Zinc
Two Piece Clamp Connector				
NMB038	3/8"(12)	100	1000	Steel
NMB075	3/4" (21)	50	500	Steel
Duplex Connector				
DUP038	3/8"(12)	25	250	Zinc
Duplex Connector (Snap Fit)				
DUP038SF	3/8"(12)	25	250	Zinc
Nonmetallic Push-In Connectors				
NMPI050	1/2" (16)	100	1000	Plastic
NMPI050B (Bucket)	1/2" (16)	-	300	Plastic
NMPI075	3/4" (21)	50	500	Plastic
NMPI075B (Bucket)	3/4" (21)	-	150	Plastic
Nonmetallic Snap-In Connector				
NMSI050	1/2" (16)	50	500	Plastic
Squeeze-In Connector				
NMSQ038	3/8"(12)	100	1000	Steel

onlinecomponents.com

HUBBELL®

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

ACCESSORIES
NON-METALLIC SHEATHED CABLE


TES1


NSP050P


CS1


CSC10

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
Cable Staples				
TES1	14/2 - 12/2	500	5000	Galvanized Steel
TES1B (Bucket)	14/2 - 12/2	-	1500	Galvanized Steel
TES2	14/2-12/2, 14-3-12/3	500	5000	Galvanized Steel
TES2B (Bucket)	14/2-12/2, 14-3-12/3	-	1000	Galvanized Steel
TES3	10/2-8/2, 14/3-10/3	250	2500	Galvanized Steel
TES4	8/3-6/3	250	1000	Galvanized Steel
Nailing Straps				
NSP050P	14/2-12/2	500	5000	Polypropylene
NSP050B (Bucket)	14/2-12/2	-	1500	Polypropylene
NSP075P	14/2-8/2	400	4000	Polypropylene
NSP075B (Bucket)	14/2-8/2	-	1000	Polypropylene
Cable Straps				
CS1	14/2-10/3	250	5000	Aluminum
CS10	14/2	250	5000	Aluminum
CS11	12/2-10/2	250	5000	Aluminum
CS21	12/2-8/3	200	4000	Aluminum
CS3	10/2-6/3	100	2000	Aluminum
CS4	4/3	100	2000	Aluminum
CS50	3/3 - 2/3	100	1000	Aluminum
CSC10	14/2-10/3	250	5000	Aluminum

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

CONNECTORS
ARMOURED CABLE / FLEX CONDUIT


SQ90038


SQ90038SF


DUP038


DUP038SF


EFK038


SF038


SF038SF


SFK050

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
90 Degree Connectors				
SQ90038	3/8"(12)	25	250	Zinc
SQ90050	1/2" (16)	25	250	Zinc
SQ90075	3/4" (21)	10	100	Zinc
SQ90100	1" (27)	5	50	Zinc
SQ90125	1-1/4" (35)	10	40	Zinc
SQ90150	1-1/2" (41)	-	5	Zinc
SQ90200	2" (53)	-	5	Zinc
SQ90250	2-1/2" (63)	-	1	Zinc
SQ90300	3" (78)	-	1	Zinc
SQ90350	3-1/2" (91)	-	1	Zinc
SQ90400	4" (103)	-	1	Zinc
90 Degree Connectors (Snap Fit)				
SQ90038SF	3/8"(12)	25	250	Zinc
SQ90050SF	1/2" (16)	25	250	Zinc
Duplex Connector				
DUP038	3/8"(12)	25	250	Zinc
Duplex Connector (Snap Fit)				
DUP038SF	3/8"(12)	25	250	Zinc
EMT to Flex Couplings				
EFK5038	1/2"-3/8"	50	500	Zinc
EFK5050	1/2"-1/2"	25	250	Zinc
EFK7575	3/4"-3/4"	25	250	Zinc
EMT to Flex Connectors				
SF038	3/8"(12)	50	500	Zinc
SF050	1/2" (16)	50	500	Zinc
EMT to Flex Connectors (Snap Fit)				
SF038SF	3/8"(12)	50	500	Zinc
SF050SF	1/2" (16)	50	500	Zinc
Flex to Flex Coupling				
SFK050	1/2" (16)	50	500	Zinc

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

CONNECTORS
ARMOURED CABLE / FLEX CONDUIT



SQ038



S1F038

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
Squeeze Connector				
SQ038	3/8"(12)	50	500	Zinc
SQ050	1/2" (16)	25	250	Zinc
SQ075	3/4" (21)	25	250	Zinc
SQ100	1" (27)	10	100	Zinc
SQ125	1-1/4" (35)	10	100	Zinc
SQ150	1-1/2" (41)	5	50	Zinc
SQ200	2" (53)	10	40	Zinc
SQ250	2-1/2" (63)	-	10	Zinc
SQ300	3" (78)	-	5	Zinc
SQ350	3-1/2" (91)	-	2	Zinc
SQ400	4" (103)	-	1	Zinc
One Hole Strap				
S1F038	3/8"(12)	100	1000	Steel

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

CONNECTORS
LIQUID TIGHT CONDUIT


LTMI038


LTMI90038


LTMI45038


LTM038


LTM90038


LTM45038

INSULATED	UNINSULATED	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
Straight Liquid Tight Connector					
LTMI038	**LTM038**	3/8"(12)	50	200	Steel
LTMI050	**LTM050**	1/2" (16)	50	200	Steel
LTMI075	**LTM075**	3/4" (21)	25	100	Steel
LTMI100	**LTM100**	1" (27)	-	10	Steel
LTMI125	**LTM125**	1-1/4" (35)	-	10	Malleable Iron
LTMI150	**LTM150**	1-1/2" (41)	-	5	Malleable Iron
LTMI200	**LTM200**	2" (53)	-	5	Malleable Iron
LTMI250	**LTM250**	2-1/2" (63)	-	1	Malleable Iron
LTMI300	**LTM300**	3" (78)	-	1	Malleable Iron
LTMI400	**LTM400**	4" (103)	-	1	Malleable Iron
90 Degree Liquid Tight Connector					
LTMI90038	**LTM90038**	3/8"(12)	25	100	Malleable Iron
LTMI90050	**LTM90050**	1/2" (16)	25	100	Malleable Iron
LTMI90075	**LTM90075**	3/4" (21)	25	100	Malleable Iron
LTMI90100	**LTM90100**	1" (27)	-	10	Malleable Iron
LTMI90125	**LTM90125**	1-1/4" (35)	-	10	Malleable Iron
LTMI90150	**LTM90150**	1-1/2" (41)	-	5	Malleable Iron
LTMI90200	**LTM90200**	2" (53)	-	5	Malleable Iron
LTMI90250	**LTM90250**	2-1/2" (63)	-	1	Malleable Iron
LTMI90300	**LTM90300**	3" (78)	-	1	Malleable Iron
LTMI90400	**LTM90400**	4" (103)	-	1	Malleable Iron
45 Degree Liquid Tight Connector					
LTMI45038	**LTM45038**	3/8"(12)	-	25	Malleable Iron
LTMI45050	**LTM45050**	1/2" (16)	-	25	Malleable Iron
LTMI45075	**LTM45075**	3/4" (21)	-	25	Malleable Iron
LTMI45100	**LTM45100**	1" (27)	-	10	Malleable Iron
LTMI45125	**LTM45125**	1-1/4" (35)	-	10	Malleable Iron
LTMI45150	**LTM45150**	1-1/2" (41)	-	5	Malleable Iron
LTMI45200	**LTM45200**	2" (53)	-	5	Malleable Iron

Online Components cc

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

CONNECTORS
LIQUIDTIGHT CONDUIT



LTZ038



LTZ90038

INSULATED	UNINSULATED	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
Straight Liquid Tight Connector					
LTZI038	**LTZ038**	3/8"(12)	20	200	Zinc
LTZI050	**LTZ050**	1/2" (16)	20	200	Zinc
LTZI075	**LTZ075**	3/4" (21)	10	100	Zinc
LTZI100	**LTZ100**	1" (27)	5	50	Zinc
LTZI125	**LTZ125**	1-1/4" (35)	5	50	Zinc
LTZI150	**LTZ150**	1-1/2" (41)	2	20	Zinc
LTZI200	**LTZ200**	2" (53)	2	20	Zinc
LTZI250	**LTZ250**	2-1/2" (63)	-	1	Zinc
LTZI300	**LTZ300**	3" (78)	-	1	Zinc
LTZI400	**LTZ400**	4" (103)	-	1	Zinc
90 Degree Liquid Tight Connector					
LTZI90038	**LTZ90038**	3/8"(12)	10	100	Zinc
LTZI90050	**LTZ90050**	1/2" (16)	10	100	Zinc
LTZI90075	**LTZ90075**	3/4" (21)	10	100	Zinc
LTZI90100	**LTZ90100**	1" (27)	5	50	Zinc
LTZI90125	**LTZ90125**	1-1/4" (35)	2	20	Zinc
LTZI90150	**LTZ90150**	1-1/2" (41)	2	20	Zinc
LTZI90200	**LTZ90200**	2" (53)	1	10	Zinc
LTZI90250	**LTZ90250**	2-1/2" (63)	-	1	Zinc
LTZI90300	**LTZ90300**	3" (78)	-	1	Zinc
LTZI90400	**LTZ90400**	4" (103)	-	1	Zinc

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

EMT CONNECTORS


CCZI050


CCSI050


SCZI050


SCSI050


CCZ050


CCS050


SCZ050


SCS050

INSULATED	UNINSULATED	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
EMT COMPRESSION CONNECTOR					
CCZI050	**CCZ050**	1/2" (16)	50	500	Zinc
CCZI075	**CCZ075**	3/4" (21)	25	250	Zinc
CCZI100	**CCZ100**	1" (27)	20	200	Zinc
CCZI125	**CCZ125**	1-1/4" (35)	25	100	Zinc
CCZI150	**CCZ150**	1-1/2" (41)	15	60	Zinc
CCZI200	**CCZ200**	2" (53)	10	40	Zinc
CCZI250	**CCZ250**	2-1/2" (63)	-	12	Zinc
CCZI300	**CCZ300**	3" (78)	-	12	Zinc
CCZI400	**CCZ400**	4" (103)	-	6	Zinc
CCSI050	**CCS050**	1/2" (16)	50	500	Steel
CCSI075	**CCS075**	3/4" (21)	25	250	Steel
CCSI100	**CCS100**	1" (27)	25	100	Steel
CCSI125	**CCS125**	1-1/4" (35)	5	25	Steel
CCSI150	**CCS150**	1-1/2" (41)	-	20	Steel
CCSI200	**CCS200**	2" (53)	-	20	Steel
CCSI250	**CCS250**	2-1/2" (63)	-	5	Steel
CCSI300	**CCS300**	3" (78)	-	1	Steel
CCSI400	**CCS400**	4" (103)	-	1	Steel
EMT SET SCREW CONNECTOR					
SCZI050	**SCZ050**	1/2" (16)	50	500	Zinc
SCZI075	**SCZ075**	3/4" (21)	25	250	Zinc
SCZI100	**SCZ100**	1" (27)	50	200	Zinc
SCZI125	**SCZ125**	1-1/4" (35)	25	100	Zinc
SCZI150	**SCZ150**	1-1/2" (41)	-	25	Zinc
SCZI200	**SCZ200**	2" (53)	-	20	Zinc
SCZI250	**SCZ250**	2-1/2" (63)	-	12	Zinc
SCZI300	**SCZ300**	3" (78)	-	12	Zinc
SCZI400	**SCZ400**	4" (103)	-	6	Zinc
SCSI050	**SCS050**	1/2" (16)	50	500	Steel
SCSI075	**SCS075**	3/4" (21)	25	250	Steel
SCSI100	**SCS100**	1" (27)	20	200	Steel
SCSI125	**SCS125**	1-1/4" (35)	-	100	Steel
SCSI150	**SCS150**	1-1/2" (41)	-	25	Steel
SCSI200	**SCS200**	2" (53)	-	20	Steel
SCSI250	**SCS250**	2-1/2" (63)	-	12	Steel
SCSI300	**SCS300**	3" (78)	-	12	Steel
SCSI400	**SCS400**	4" (103)	-	6	Steel

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

EMT COUPLINGS



CKZ050



CKS050



SKZ050



SKS050

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
EMT Compression Coupling				
CKZ050	1/2" (16)	50	500	Zinc
CKZ075	3/4" (21)	25	250	Zinc
CKZ100	1" (27)	20	200	Zinc
CKZ125	1-1/4" (35)	25	100	Zinc
CKZ150	1-1/2" (41)	15	60	Zinc
CKZ200	2" (53)	10	40	Zinc
CKZ250	2-1/2" (63)	-	12	Zinc
CKZ300	3" (78)	-	12	Zinc
CKZ400	4" (103)	-	6	Zinc
CKS050	1/2" (16)	50	500	Steel
CKS075	3/4" (21)	25	250	Steel
CKS100	1" (27)	25	100	Steel
CKS125	1-1/4" (35)	5	25	Steel
CKS150	1-1/2" (41)	-	20	Steel
CKS200	2" (53)	-	20	Steel
CKS250	2-1/2" (63)	-	5	Steel
CKS300	3" (78)	-	1	Steel
CKS400	4" (103)	-	1	Steel
EMT Set Screw Coupling				
SKZ050	1/2" (16)	50	500	Zinc
SKZ075	3/4" (21)	25	250	Zinc
SKZ100	1" (27)	50	200	Zinc
SKZ125	1-1/4" (35)	25	100	Zinc
SKZ150	1-1/2" (41)	-	25	Zinc
SKZ200	2" (53)	-	20	Zinc
SKZ250	2-1/2" (63)	-	12	Zinc
SKZ300	3" (78)	-	12	Zinc
SKZ400	4" (103)	-	6	Zinc
SKS050	1/2" (16)	50	500	Steel
SKS075	3/4" (21)	25	250	Steel
SKS100	1" (27)	50	200	Steel
SKS125	1-1/4" (35)	25	100	Steel
SKS150	1-1/2" (41)	-	25	Steel
SKS200	2" (53)	-	20	Steel
SKS250	2-1/2" (63)	-	12	Steel
SKS300	3" (78)	-	12	Steel
SKS400	4" (103)	-	6	Steel

onlinecomponents.com

onlinecomponents.com



PEEE050



PEEB050



E1S050



E2S050

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
90 Degree Pull Elbow with Gasket				
PEEB050	1/2" EMT to Box	10	100	Zinc
PEEB075	3/4" EMT to Box	5	50	Zinc
PEEB100	1" EMT to Box	-	25	Zinc
90 Degree Pull Elbow with Gasket				
PEEE050	1/2" EMT to EMT	10	100	Zinc
PEEE075	3/4" EMT to EMT	5	50	Zinc
PEEE100	1" EMT to EMT	-	25	Zinc
One Hole Strap				
E1S050	1/2" (16)	100	1000	Steel
E1S075	3/4" (21)	100	1000	Steel
E1S100	1" (27)	50	500	Steel
E1S125	1-1/4" (35)	25	250	Steel
E1S150	1-1/2" (41)	25	250	Steel
E1S200	2" (53)	20	200	Steel
Two Hole Strap				
E2S050	1/2" (16)	100	1000	Steel
E2S075	3/4" (21)	100	1000	Steel
E2S100	1" (27)	50	500	Steel
E2S125	1-1/4" (35)	-	200	Steel
E2S150	1-1/2" (41)	-	200	Steel
E2S200	2" (53)	-	200	Steel
E2S250	2-1/2" (63)	-	200	Steel
E2S300	3" (78)	-	100	Steel
E2S400	4" (103)	-	100	Steel

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

CONDUIT BODIES



CBC50COM



CBLB50COM



CBLRL50COM



CBT50COM

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
Type C Conduit Body - Combination Rigid/EMT				
CBC50COM	1/2" (16)	10	100	Aluminum
CBC75COM	3/4" (21)	10	50	Aluminum
CBC100COM	1" (27)	5	25	Aluminum
CBC125COM	1-1/4" (35)	2	10	Aluminum
CBC150COM	1-1/2" (41)	2	10	Aluminum
CBC200COM	2" (53)	1	5	Aluminum
Type LB Conduit Body - Combination Rigid/EMT				
CBLB50COM	1/2" (16)	10	100	Aluminum
CBLB75COM	3/4" (21)	10	50	Aluminum
CBLB100COM	1" (27)	5	25	Aluminum
CBLB125COM	1-1/4" (35)	5	20	Aluminum
CBLB150COM	1-1/2" (41)	2	20	Aluminum
CBLB200COM	2" (53)	1	5	Aluminum
Type LB Conduit Body - Rigid				
CBLB250RIG	2-1/2" (63)	-	1	Aluminum
CBLB300RIG	3" (78)	-	1	Aluminum
CBLB400RIG	4" (103)	-	1	Aluminum
Type LRL Conduit Body - Combination Rigid/EMT				
CBLRL50COM	1/2" (16)	10	100	Aluminum
CBLRL75COM	3/4" (21)	10	50	Aluminum
CBLRL100COM	1" (27)	5	25	Aluminum
CBLRL125COM	1-1/4" (35)	2	20	Aluminum
CBLRL150COM	1-1/2" (41)	2	20	Aluminum
CBLRL200COM	2" (53)	1	5	Aluminum
Type T Conduit Body - Combination Rigid/EMT				
CBT50COM	1/2" (16)	10	100	Aluminum
CBT75COM	3/4" (21)	10	50	Aluminum
CBT100COM	1" (27)	5	25	Aluminum
CBT125COM	1-1/4" (35)	2	10	Aluminum
CBT150COM	1-1/2" (41)	2	10	Aluminum
CBT200COM	2" (53)	1	5	Aluminum

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

CONDUIT NIPPLES



CN050



ON050



RB0705

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
Conduit Nipples				
CN050	1/2" (16)	100	1000	Zinc
CN075	3/4" (21)	50	500	Zinc
CN100	1" (27)	25	250	Zinc
CN125	1-1/4" (35)	25	250	Zinc
CN150	1-1/2" (41)	25	100	Zinc
CN200	2" (53)	10	40	Zinc
CN250	2-1/2" (63)	10	40	Zinc
CN300	3" (78)	10	40	Zinc
CN400	4" (103)	5	20	Zinc
Offset Nipples				
ON050	1/2" (16)	10	100	Zinc
ON075	3/4" (21)	10	100	Zinc
ON100	1" (27)	10	100	Zinc
ON125	1-1/4" (35)	5	50	Zinc
ON150	1-1/2" (41)	5	50	Zinc
ON200	2" (53)	2	20	Zinc
Reducing Bushings				
RB0705	3/4"-1/2"	-	100	Steel
RB1005	1"-1/2"	-	50	Steel
RB1007	1"-3/4"	-	50	Steel
RB1205	1-1/4"-1/2"	-	50	Steel
RB1207	1-1/4"-3/4"	-	50	Steel
RB1210	1-1/4"-1"	-	50	Steel
RB1505	1-1/2"-1/2"	-	50	Steel
RB1507	1-1/2"-3/4"	-	50	Steel
RB1510	1-1/2"-1"	-	50	Steel
RB1512	1-1/2"-1-1/4"	-	50	Steel
RB2005	2"-1/2"	-	25	Steel
RB2007	2"-3/4"	-	25	Steel
RB2010	2"-1"	-	25	Steel
RB2012	2"-1-1/4"	-	25	Steel
RB2015	2"-1-1/2"	-	25	Steel

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

RIGID STRAPS



R1S050



R2S050



EK050

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
One Hole Strap				
R1S050	1/2" (16)	50	500	Steel
R1S075	3/4" (21)	50	500	Steel
R1S100	1" (27)	-	200	Steel
R1S125	1-1/4" (35)	-	200	Steel
R1S150	1-1/2" (41)	-	200	Steel
R1S200	2" (53)	-	100	Steel
R1S250	2-1/2" (63)	-	50	Steel
R1S300	3" (78)	-	50	Steel
R1S350	3-1/2" (91)	-	25	Steel
R1S400	4" (103)	-	25	Steel
Two Hole Strap				
R2S050	1/2" (16)	100	1000	Steel
R2S075	3/4" (21)	100	1000	Steel
R2S100	1" (27)	50	500	Steel
R2S125	1-1/4" (35)	-	200	Steel
R2S150	1-1/2" (41)	-	200	Steel
R2S200	2" (53)	-	200	Steel
R2S250	2-1/2" (63)	-	200	Steel
R2S300	3" (78)	-	100	Steel
R2S350	3-1/2" (91)	-	100	Steel
R2S400	4" (103)	-	100	Steel
Three Piece Coupling				
EK050	1/2" (16)	25	100	Malleable Iron
EK075	3/4" (21)	25	100	Malleable Iron
EK100	1" (27)	5	25	Malleable Iron
EK125	1-1/4" (35)	5	25	Malleable Iron
EK150	1-1/2" (41)	-	5	Malleable Iron
EK200	2" (53)	-	5	Malleable Iron
EK250	2-1/2" (63)	-	4	Malleable Iron
EK300	3" (78)	-	4	Malleable Iron
EK350	3-1/2" (91)	-	2	Malleable Iron
EK400	4" (103)	-	2	Malleable Iron
EK500	5" (129)	-	1	Malleable Iron
EK600	6" (155)	-	1	Malleable Iron

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

BUSHINGS



BP050



BIG050

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
Non Metallic Insulated Bushings				
BP050	1/2" (16)	100	2000	Polypropylene
BP075	3/4" (21)	100	2000	Polypropylene
BP100	1" (27)	50	500	Polypropylene
BP125	1-1/4" (35)	50	500	Polypropylene
BP150	1-1/2" (41)	-	200	Polypropylene
BP200	2" (53)	-	200	Polypropylene
BP250	2-1/2" (63)	-	100	Polypropylene
BP300	3" (78)	-	100	Polypropylene
BP350	3-1/2" (91)	-	100	Polypropylene
BP400	4" (103)	-	50	Polypropylene
BP500	5" (129)	-	5	Polypropylene
BP600	6" (155)	-	5	Polypropylene
Insulated Grounding Bushing				
BIG050	1/2" (16)	25	100	Zinc
BIG075	3/4" (21)	25	100	Zinc
BIG100	1" (27)	25	100	Zinc
BIG125	1-1/4" (35)	20	80	Zinc
BIG150	1-1/2" (41)	20	80	Zinc
BIG200	2" (53)	10	40	Zinc
BIG250	2-1/2" (63)	10	40	Zinc
BIG300	3" (78)	10	40	Zinc
BIG350	3-1/2" (91)	5	20	Zinc
BIG400	4" (103)	5	20	Zinc

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

METALLIC BUSHINGS



BZI050



BMI050



BZ050



BM050

INSULATED	UNINSULATED	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
Metallic Bushings					
BZI050	**BZ050**	1/2" (16)	100	1000	Zinc
BZI075	**BZ075**	3/4" (21)	50	250	Zinc
BZI100	**BZ100**	1" (27)	50	250	Zinc
BZI125	**BZ125**	1-1/4" (35)	25	125	Zinc
BZI150	**BZ150**	1-1/2" (41)	25	125	Zinc
BZI200	**BZ200**	2" (53)	10	50	Zinc
BZI250	**BZ250**	2-1/2" (63)	-	10	Zinc
BZI300	**BZ300**	3" (78)	-	10	Zinc
BZI350	**BZ350**	3.50"	-	10	Zinc
BZI400	**BZ400**	4" (103)	-	10	Zinc
BMI050	**BM050**	1/2" (16)	-	100	Malleable Iron
BMI075	**BM075**	3/4" (21)	-	50	Malleable Iron
BMI100	**BM100**	1" (27)	-	25	Malleable Iron
BMI125	**BM125**	1-1/4" (35)	-	25	Malleable Iron
BMI150	**BM150**	1-1/2" (41)	-	25	Malleable Iron
BMI200	**BM200**	2" (53)	-	10	Malleable Iron
BMI250	**BM250**	2-1/2" (63)	-	10	Malleable Iron
BMI300	**BM300**	3" (78)	-	5	Malleable Iron
BMI350	**BM350**	3-1/2" (91)	-	5	Malleable Iron
BMI400	**BM400**	4" (103)	-	5	Malleable Iron

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

THREADED HUBS


THI050


REK050


LNS050


PERR050


PERB050

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
Insulated Threaded Hubs				
THI050	1/2" (16)	-	25	Zinc
THI075	3/4" (21)	-	25	Zinc
THI100	1" (27)	-	25	Zinc
THI125	1-1/4" (35)	-	10	Zinc
THI150	1-1/2" (41)	-	10	Zinc
THI200	2" (53)	-	10	Zinc
THI250	2-1/2" (63)	-	5	Zinc
THI300	3" (78)	-	2	Zinc
THI350	3-1/2" (91)	-	2	Zinc
THI400	4" (103)	-	2	Zinc
Combination Couplings - Rigid to EMT				
REK050	1/2" (16)	25	250	Steel
REK075	3/4" (21)	10	100	Steel
REK100	1" (27)	10	100	Steel
Locknuts				
LNS050	1/2" (16)	200	2000	Steel
LNS075	3/4" (21)	100	1000	Steel
LNS100	1" (27)	100	1000	Steel
LNS125	1-1/4" (35)	100	1000	Steel
LNS150	1-1/2" (41)	50	500	Steel
LNS200	2" (53)	50	500	Steel
LNS250	2-1/2" (63)	25	250	Steel
LNS300	3" (78)	-	10	Steel
LNS350	3-1/2" (91)	-	10	Steel
LNS400	4" (103)	-	10	Steel
LNS500	5" (129)	-	10	Steel
LNS600	6" (155)	-	10	Steel
90 Degree Pull Elbow - Rigid to Rigid				
PERR050	1/2" Rigid to Rigid	-	20	Zinc
PERR075	3/4" Rigid to Rigid	10	100	Zinc
PERR100	1" Rigid to Rigid	5	50	Zinc
PERR125	1-1/4" Rigid to Rigid	-	25	Zinc
90 Degree Pull Elbow - Rigid to Rigid				
PERB050	1/2" Rigid to Box	10	100	Zinc
PERB075	3/4" Rigid to Box	5	50	Zinc
PERB100	1" Rigid to Box	-	25	Zinc

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

KNOCK-OUTS



KO050



BC100



RW0705

CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
Knockout Closures				
KO050	1/2"	100	1000	Steel
KO075	3/4" (21)	100	1000	Steel
KO100	1" (27)	100	400	Steel
KO125	1-1/4" (35)	50	200	Steel
KO150	1-1/2" (41)	-	50	Steel
KO200	2" (53)	-	25	Steel
Beam Clamps				
BC100	1" (27)	-	100	Iron
BC200	2" (53)	-	50	Iron
BC250	2-1/2" (63)	-	25	Iron
Reducing Washers				
RW0705	3/4" x 1/2"	250	5000	Steel
RW1005	1" x 1/2"	250	5000	Steel
RW1007	1 x 3/4"	250	5000	Steel
RW1205	1-1/4" x 1/2"	200	2000	Steel
RW1207	1-1/4" x 3/4"	200	2000	Steel
RW1210	1-1/4" x 1"	200	2000	Steel
RW1505	1-1/2" x 1/2"	100	1000	Steel
RW1507	1-1/2" x 3/4"	100	1000	Steel
RW1510	1-1/2" x 1"	100	1000	Steel
RW1512	1-1/2" x 1-1/4"	100	1000	Steel
RW2005	2" x 1/2"	50	500	Steel
RW2007	2" x 3/4"	50	500	Steel
RW2010	2" x 1"	50	500	Steel
RW2012	2" x 1-1/4"	50	500	Steel
RW2015	2" x 1-1/2"	50	500	Steel
RW2505	2-1/2" x 1/2"	25	250	Steel
RW2507	2-1/2" x 3/4"	25	250	Steel
RW2510	2-1/2" x 1"	-	50	Steel
RW2512	2-1/2" x 1-1/4"	-	50	Steel
RW2515	2-1/2" x 1-1/2"	-	50	Steel
RW2520	2-1/2" x 2"	-	50	Steel
RW3010	3" x 1"	-	25	Steel
RW3020	3" x 2"	-	25	Steel
RW3025	3" x 2-1/2"	-	25	Steel

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

JACK CHAIN



CH050



GCB0510



JC10



JC3



S105

CATALOGUE NUMBER	TRADE SIZE EMT	TRADE SIZE RIGID	CARTON QTY	CASE QTY	MATERIAL
Conduit Hangers					
CH050	1/2" (16)	1/2" (16)	100	400	Steel
CH075	3/4" (21)	3/4" (21)	100	400	Steel
CH100	1" (27)	1" (27)	100	400	Steel
CH125	1-1/4" (35)	N/S	-	100	Steel
CH150	1-1/2" (41)	1-1/4" (35)	-	100	Steel
CH150R	N/S	1-1/2" (41)	-	100	Steel
CH200	2" (53)	2" (53)	-	50	Steel
CH250	2-1/2" (63)	2-1/2" (63)	-	25	Steel
CH300	3" (78)	3" (78)	-	50	Steel
CH400	4" (103)	4" (103)	-	10	Steel
Conduit Hangers					
GCZ0510	1/2" (16)	1" (27)	25	250	Zinc
GCB0510	1/2" (16)	1" (27)	25	100	Brass
GCB1220	1-1/4" (35)	2" (53)	25	250	Brass
Jack and Lion Chain					
JC10	#10	-	100	43 lbs.	Zinc Plated Steel
JC10B	#10	-	250	43 lbs.	Zinc Plated Steel
LC3	#3	-	100	90 lbs.	Zinc Plated Steel
LC3B	#3	-	300	90 lbs.	Zinc Plated Steel
S-Hooks					
S105	#105	100	1000	90 lbs.	Zinc Plated Steel

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SERVICE ENTRANCE HEADS



CATALOGUE NUMBER	TRADE SIZE	CARTON QTY	CASE QTY	MATERIAL
Service Entrance Heads - Rigid/EMT Combo				
2402	1/2" (16)	-	10	Aluminum
2403	3/4" (21)	-	10	Aluminum
2404	1" (27)	-	5	Aluminum
2405	1-1/4" (35)	-	10	Aluminum
2406	1-1/2" (41)	-	5	Aluminum
2408	2" (53)	-	5	Aluminum
2410	2-1/2" (63)	-	1	Aluminum
2412	3" (78)	-	1	Aluminum
2414	3-1/2" (91)	-	1	Aluminum
2416	4" (103)	-	1	Aluminum

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STRAIGHT MALE CORD CONNECTORS

IP66* SUITABILITY

UL Listed to Type 4, 4X, 12 and Type 13

Straight Male



Machined Aluminum



Machined Zinc–Plated Steel

N.P.T. Hub Size	Cord Dia. Inches (mm)	Form Size	Colour Code	Machined Aluminum	Machined Zinc-Plated Steel	Stainless Steel	Nylon Gray	Nylon Black
	.06"–.13" (1.6–3.2)		Green	–	–	–	SHC1001CR	–
	.13"–.19" (3.2–4.7)		Orange	SHC1002	–	–	SHC1002CR	–
1/4	.19"–.25" (4.7–6.3)	F1	Red	SHC1003	–	SHC1003SS	SHC1003CR	–
	.25"–.31" (6.3–7.9)		Black	SHC1004	–	SHC1004SS	SHC1004CR	–
	.31"–.38" (7.9–9.5)		White	SHC1005**	–	–	SHC1005CR	SHC2005CR
	.38"–.44" (9.5–11)		Blue	–	–	–	SHC1006CR	–
	.06"–.13" (1.6–3.2)		Green	SHC1007	–	–	–	–
	.13"–.19" (3.2–4.7)		Orange	SHC1008	SHC1008ZP	–	SHC1008CR	SHC2008CR
3/8	.19"–.25" (4.7–6.3)	F1	Red	SHC1009	–	SHC1009SS	SHC1009CR	–
	.25"–.31" (6.3–7.9)		Black	SHC1010	SHC1010ZP	–	SHC1010CR	SHC2010CR
	.31"–.38" (7.9–9.5)		White	SHC1011	–	SHC1011SS	SHC1011CR	SHC2011CR
	.38"–.44" (9.5–11.0)		Blue	SHC1012	SHC1012ZP	SHC1012SS	SHC1012CR	SHC2012CR
	.19"–.25" (4.7–6.3)		Red	SHC1015	–	–	–	–
1/2	.25"–.31" (6.3–7.9)	F1	Black	SHC1016	–	–	–	–
	.31"–.38" (7.9–9.5)		White	SHC1017	–	–	–	–
	.38"–.44" (9.5–11.0)		Blue	SHC1018	–	–	–	–
	.06"–.13" (1.6–3.2)		Green	SHC1019	–	–	SHC1019CR	–
	.13"–.19" (3.2–.4.7)		Orange	SHC1020	SHC1020ZP	SHC1020SS	SHC1020CR	–
1/2	.19"–.25" (4.7–6.3)	F2	Red	SHC1021	SHC1021ZP	SHC1021SS	SHC1021CR	SHC2021CR
	.25"–.38" (6.3–.9.7)		White	SHC1022	SHC1022ZP	SHC1022SS	SHC1022CR	SHC2022CR
	.38"–.50" (9.7–12.7)		Blue	SHC1023	SHC1023ZP	SHC1023SS	SHC1023CR	SHC2023CR
	.50"–.63" (12.7–15.9)		Brown	SHC1024	SHC1024ZP	SHC1024SS	SHC1024CR**	SHC2024CR**
	.38"–.50" (9.7–12.7)		Blue	SHC1025	–	–	–	–
	.50"–.63" (12.7–15.9)		Brown	SHC1026	–	–	–	–
1/2	.63"–.75" (15.9–19.0)	F3	Yellow	SHC1027**	SHC1027ZP**	–	–	–
	.75"–.88" (19.0–22.2)		Orchid	SHC1028**	SHC1028ZP**	–	–	–

*Note: * IP66 Suitability when used with optional metal clad O-ring.*
*** Cable jacket may have to be stripped to pass through connector body.*

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STRAIGHT MALE CORD CONNECTORS

IP66*
SUITABILITY

UL Listed to Type 4, 4X, 12 and Type 13

Straight Male

N.P.T. Hub Size	Cord Dia. Inches (mm)	Form Size	Colour Code	Machined Aluminum	Machined Zinc-Plated Steel	Stainless Steel	Nylon Gray	Nylon Black
3/4	.06"–.13" (1.6–3.2)	F2	Green	SHC1029	–	–	–	–
	.13"–.19" (3.2–4.7)		Orange	SHC1030	SHC1030ZP	–	–	–
	.19"–.25" (4.7–6.3)		Red	SHC1031	SHC1031ZP	–	–	–
	.25"–.38" (6.3–9.7)		White	SHC1032	SHC1032ZP	–	–	–
	.38"–.50" (9.7–12.7)		Blue	SHC1033	SHC1033ZP	–	–	–
	.50"–.63" (12.7–15.9)		Brown	SHC1034	SHC1034ZP	–	–	–
3/4	.38"–.50" (9.5–12.7)	F3	Blue	–	SHC1035ZP	SHC1035SS	SHC1035CR	SHC2035CR
	50"–.63" (12.7–15.9)		Brown	SHC1036	–	SHC1036SS	SHC1036CR	SHC2036CR
	.63"–.75" (15.9–19.0)		Yellow	SHC1037	SHC1037ZP	SHC1037SS	SHC1037CR	SHC2037CR
	.75"–.88" (19.0–22.2)		Orchid	SHC1038**	SHC1038ZP**	SHC1038SS**	SHC1038CR**	SHC2038CR**
1	.50"–.63" (12.7–15.9)	F3	Brown	–	SHC1097ZP	–	–	–
	.63"–.75" (15.9–19.0)		Yellow	–	SHC1098ZP	–	–	–
	.75"–.88" (19.0–22.2)		Orchid	–	SHC1099ZP	–	–	–
1	.38"–.50" (9.7–12.7)	F4	Blue	SHC1039	–	–	SHC1039CR	–
	.50"–.63" (12.7–15.9)		Brown	SHC1040	–	–	SHC1040CR	SHC2040CR
	.63"–.75" (15.9–19.0)		Yellow	SHC1041	–	SHC1041SS	SHC1041CR	SHC2041CR
	.75"–.88" (19.0–22.2)		Orchid	SHC1042	–	SHC1042SS	SHC1042CR	SHC2042CR
	.88"–1.00" (22.2–25.4)		Gray	SHC1043	SHC1043ZP	–	SHC1043CR	SHC2043CR
	1.00"–1.13" (25.4–28.6)		Pink	SHC1044**	–	SHC1044SS**	SHC1044CR**	SHC2044CR**



Stainless Steel



Gray Nylon



Black Nylon

*Note: * IP66 Suitability when used with optional metal clad O-ring.*
*** Cable jacket may have to be stripped to pass through connector body.*
Form 4 aluminum and plated steel nuts are machined, bodies are cast aluminum.

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STRAIGHT MALE CORD CONNECTORS

IP66*
SUITABILITY

UL Listed to Type 4, 4X, 12 and Type 13



Cast Aluminum



Cast Aluminum
Malleable Iron

Straight Male

N.P.T. Hub Size	Cord Diameter Inches	(mm)	Form Size	Cast Aluminum	Malleable Iron
	.88"–1.00"	(22.2–25.4)		**SHC1046**	**–**
1	1.00"–1.13"	(25.4–28.6)	F5	**SHC1047****	**–**
	1.13"–1.25"	(28.6–31.7)		**SHC1048****	**–**
	1.25"–1.38"	(31.7–34.9)		**SHC1049****	**–**
	.75"–.88"	(19.0–22.2)		**SHC1050**	**–**
	.88"–1.00"	(22.2–25.4)		**SHC1051**	**–**
1–1/4	1.00"–1.13"	(25.4–28.6)	F5	**SHC1052**	**SHC1052ZP**
	1.13"–1.25"	(28.6–31.7)		**SHC1053**	**SHC1053ZP**
	1.25"–1.38"	(31.7–34.9)		**SHC1054****	**SHC1054ZP**
	.75"–.88"	(19.0–22.2)		**SHC1055**	**–**
	.88"–1.00"	(22.2–25.4)		**SHC1056**	**–**
1–1/2	1.00"–1.13"	(25.4–28.6)	F5	**SHC1057**	**SHC1057ZP**
	1.13"–1.25"	(28.6–31.7)		**SHC1058**	**SHC1058ZP**
	1.25"–1.38"	(31.7–34.9)		**SHC1059**	**SHC1059ZP**
	1.38"–1.50"	(34.9–38.1)		**SHC1061**	**–**
1–1/2	1.50"–1.63"	(38.1–41.3)	F6	**SHC1062****	**–**
	1.63"–1.75"	(41.3–44.4)		**SHC1063****	**–**
	1.75"–1.88"	(44.4–47.6)		**SHC1064****	**–**
	1.25"–1.38"	(31.7–34.9)		**SHC1065**	**–**
	1.38"–1.50"	(34.9–38.1)		**SHC1066**	**–**
2	1.50"–1.63"	(38.1–41.3)	F6	**SHC1067**	**–**
	1.63"–1.75"	(41.3–44.4)		**SHC1068**	**–**
	1.75"–1.88"	(44.4–47.6)		**SHC1069**	**–**
	1.69"–1.81"	(42.9–46.0)		**SHC1070**	**–**
	1.81"–1.94"	(46.0–49.2)		**SHC1071**	**–**
2	1.94"–2.06"	(49.2–52.4)	F7	**SHC1072****	**–**
	2.06"–2.19"	(52.4–55.6)		**SHC1073****	**–**
	2.19"–2.31"	(55.6–58.7)		**SHC1074****	**–**
	1.69"–1.81"	(42.9–46.0)		**SHC1076**	**–**
	1.81"–1.94"	(46.0–49.2)		**SHC1077**	**–**
2–1/2	1.94"–2.06"	(49.2–52.4)	F7	**SHC1078**	**–**
	2.06"–2.19"	(52.4–55.6)		**SHC1079**	**–**
	2.19"–2.31"	(55.6–58.7)		**SHC1080**	**–**
	2.31"–2.44"	(58.7–61.9)		**SHC1081****	**–**
	1.69"–1.81"	(42.9–46.0)		**SHC1086**	**–**
	1.94"–2.06"	(49.2–52.4)	F7	**SHC1088**	**–**
3	2.06"–2.19"	(52.4–55.6)		**SHC1089**	**–**
	2.19"–2.31"	(55.6–58.7)		**SHC1090**	**–**
	2.31"–2.44"	(58.7–61.9)		**SHC1091**	**–**
	2.44"–2.63"	(61.9–66.7)		**SHC1092**	**–**
	2.63"–2.81"	(66.7–71.4)		**SHC1093**	**–**
3	2.81"–3.00"	(71.4–76.2)	F8	**SHC1094**	**–**
	3.00"–3.25"	(76.2–82.5)		**SHC1095****	**–**

*Note: * IP66 Suitability when used with optional metal clad O-ring.*
*** Cable jacket may have to be stripped to pass through connector body.*
Form 4 aluminum and plated steel nuts are machined, bodies are cast aluminum.
F5 and larger will not be colour coded.

onlinecomponents.com

HUBBELL®

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

45° MALE CORD CONNECTORS

IP66*
SUITABILITY

UL Listed to Type 4, 4X, 12 and Type 13

45° Male

N.P.T. Hub Size	Cord Diameter Inches	(mm)	Form Size	Colour Code	Machined Aluminum†	Machined Zinc-Plated SteelΔ	Cast Aluminum
	.19"–.25"	(4.7–6.3)		Red	**VHC1021**	–	–
1/2	.25"–.38"	(6.3–9.7)	F2	White	**VHC1022**	**VHC1022ZP**	–
	.38"–.50"	(9.7–12.7)		Blue	**VHC1023**	**VHC1023ZP**	–
	.50"–.63"	(12.7–15.9)		Brown	**VHC1024****	**VHC1024ZP****	–
	.38"–.50"	(9.7–12.7)		Blue	**VHC1035**	–	–
3/4	.50"–.63"	(12.7–15.9)	F3	Brown	**VHC1036**	–	–
	.63"–.75"	(15.9–19.0)		Yellow	**VHC1037****	–	–
1	.63"–.75"	(15.9–19.0)	F4	Yellow	**VHC1041**	–	–
	.75"–.88"	(19.0–22.2)		Orchid	**VHC1042**	–	–
1–1/4	1.00"–1.13"	(25.4–28.6)	F5		–	–	**VHC1052**
	1.13"–1.25"	(28.6–31.7)			–	–	**VHC1053****

*Note: * IP66 Suitability when used with optional metal clad O-ring.*
*** Cable jacket may have to be stripped to pass through connector body.*
Form 4 aluminum and plated steel nuts are machined, bodies are cast aluminum.
† Nuts are machined aluminum and bodies are cast aluminum.
Δ Nuts are machined zinc-plated steel and bodies are malleable iron, cadmium plated.



Machined Aluminum †



Machined Zinc–Plated Steel Δ



Cast Aluminum

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

90° MALE CORD CONNECTORS

IP66*
SUITABILITY

UL Listed to Type 4, 4X, 12 and Type 13



90° Male

N.P.T. Hub Size	Cord Diameter Inches	(mm)	Form Size	Colour Code	Machined Aluminum†	Machined Zinc-Plated Steel∆	Nylon Gray	Nylon Black	Cast Aluminum
	.25"–.31"	(6.3–7.9)		Black	NHC1010	—	—	—	—
3/8	.31"–.38"	(7.9–9.5)	F1	White	NHC1011	—	—	—	—
	.38"–.44"	(9.5–11.0)		Blue	NHC1012	—	—	—	—
	.06"–.13"	(1.6–3.2)		Green	—	—	—	—	—
	.13"–.19"	(3.2–4.7)		Orange	NHC1020	—	NHC1020CR	—	—
1/2	.19"–.25"	(4.7–6.3)	F2	Red	NHC1021	NHC1021ZP	NHC1021CR	—	—
	.25"–.38"	(6.3–9.7)		White	NHC1022	NHC1022ZP	NHC1022CR	NHC2022CR	—
	.38"–.50"	(9.7–12.7)		Blue	NHC1023	NHC1023ZP	NHC1023CR	NHC2023CR	—
	.50"–.63"	(12.7–15.9)		Brown	NHC1024**	NHC1024ZP**	NHC1024CR**	NHC2024CR**	—
	.38"–.50"	(9.7–12.7)		Blue	NHC1035	NHC1035ZP	NHC1035CR	—	—
3/4	.50"–.63"	(12.7–15.9)	F3	Brown	NHC1036	NHC1036ZP	NHC1036CR	—	—
	.63"–.75"	(15.9–19.0)		Yellow	NHC1037	NHC1037ZP	NHC1037CR	—	—
	.75"–.88"	(19.0–22.2)		Orchid	NHC1038	NHC1038ZP	NHC1038CR	—	—
	.50"–.63"	(12.7–15.9)		Brown	NHC1040	—	—	—	—
	.63"–.75"	(15.9–19.0)		Yellow	NHC1041	NHC1041ZP	NHC1041CR	NHC2041CR	—
1	.75"–.88"	(19.0–22.2)	F4	Orchid	NHC1042	—	NHC1042CR	NHC2042CR**	—
	.88"–1.00"	(22.2–25.4)		Gray	NHC1043**	—	NHC1043CR	NHC2043CR**	—
	1.00"–1.13"	(25.4–28.7)		Pink	NHC1044**	—	—	—	—
	.88"–1.00"	(22.2–25.4)		—	—	—	—	—	NHC1051
1–1/4	1.00"–1.13"	(25.4–28.6)	F5	—	—	—	—	—	NHC1052
	1.13"–1.25"	(28.6–31.7)		—	—	—	—	—	NHC1053**
	1.25"–1.38"	(31.7–34.9)		—	—	—	—	—	NHC1054**
	1.00"–1.13"	(25.4–28.6)		—	—	—	—	—	NHC1057
1–1/2	1.13"–1.25"	(28.6–31.7)	F5	—	—	—	—	—	—
	1.25"–1.38"	(31.7–34.9)		—	—	—	—	—	NHC1059
2	1.38"–1.50"	(34.9–38.1)	F6	—	—	—	—	—	NHC1066

*Note: * IP66 Suitability when used with optional metal clad O-ring.*
*** Cable jacket may have to be stripped to pass through connector body.*
† Nuts are machined aluminum and bodies are cast aluminum.
∆ Compression nuts are machined zinc-plated steel and bodies are zinc-plated malleable iron.



Machined Aluminum†



Machined Zinc-Plated Steel∆



Gray Nylon



Black Nylon



Cast Aluminum

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STRAIGHT FEMALE, UNDERGROUND FEEDER AND METRIC CONNECTORS

Straight Female

N.P.T. Hub Size	Cord Diameter Inches	(mm)	Form Size	Colour Code	Machined Aluminum
1/2	.25"–.38"	(6.3–9.7)	F2	White	**FHC1022**
	.38"–.50"	(9.7–12.7)		Blue	**FHC1023**
3/4	.38"–.50"	(9.7–12.7)	F2	Blue	**FHC1033**
	.50"–.63"	(12.7–15.9)		Brown	**FHC1034**
1	.75"–.88"	(19.0–22.2)	F4	Orchid	**FHC1042†**
	.88"–1.00"	(22.2–25.4)		Gray	**FHC1043†**

*Note: * Cable jacket may have to be stripped to pass through connector body.*
† Nuts are machined aluminum and bodies are cast aluminum.



Machined Aluminum

Underground Feeder Connectors

IP66* SUITABILITY

N.P.T. Hub Size	Diameter Inches	(mm)	Wire Size	UF** Machined Aluminum	Zinc-Plated Steel	Machined Nylon Gray	Nylon Black
1/2	.2"x.4" min	(5.1 x 10.2)	2 # 14,				
	.25"–.55" max	(6.3 x 14.0)	2 # 12, 2 # 10.	**UFC0001**	**UFC0001ZP**	**UFC0001CR**	**UFC2001CR**
3/4	.2"x.4" min	(5.1x10.2)	2 # 14,				
	.25"–.55" max	(6.3x14.0)	2 # 12, 2 # 10.	**UFC0002**	**–**	**–**	**–**
3/4	.2"x.6" min	(5.1x15.2)	3 # 14,				
	.26"x.78" max	(6.6x19.8)	3 # 12, 3 # 10.	**UFC0003**	**–**	**UFC0003CR**	**UFC2003CR**

*Note: * IP66 Suitability when used with optional metal clad O-ring.*
*** Wire sizes vary among manufacturers.*



Machined Aluminum



Machined Zinc–Plated Steel

UL Listed to Type 4, 4X, 12 and Type 13

Metric Aluminum Cord Connectors

Hub Size	Cord Diameter Inches	(mm)	Form Size	Catalog Number
M16	.31"–.38"	(7.9–9.7)	F1	**SHCM161011**
M20	.31"–.38"	(7.9–9.7)	F1	**SHCM201017**
	.25"–.38"	(6.3–9.7)		**SHCM201022**
M20	.38"–.50"	(9.7–12.7)	F2	**SHCM201023**
	.50"–.62"	(12.7–15.8)		**SHCM201024**
M25	.38"–.50"	(9.7–12.7)	F2	**SHCM251033**
	.50"–.62"	(12.7–15.8)		**SHCM251034**
M30	.63"–75"	(15.9–19.0)	F3	**SHCM301037**

Note: † When used with metal clad O-ring.
Non-metallic Locknuts sold separately.



Gray Nylon



Machined Aluminum

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

LOW PROFILE N.P.T., PG AND METRIC THREAD CONNECTORS

IP66* SUITABILITY



SEC100BA

Low Profile N.P.T. Cord Connectors

N.P.T. Hub Size	Inches	Cord Diameter (mm)	Colour	Catalog Number	Non-metallic Locknuts
3/8	.18"–.31"	(4.6–7.9)	Gray	**SEC38GA***	**31622002LPK50**
3/8	.18"–.31"	(4.6–7.9)	Black	**SEC38BA***	**31622002LPK50**
1/2	.17"–.45"	(4.3–11.4)	Gray	**SEC50GA**	**31622003LPK50**
1/2	.17"–.45"	(4.3–11.4)	Black	**SEC50BA**	**31622003LPK50**
3/4	.45"–.71"	(11.4–18.0)	Gray	**SEC75GA**	**31622007LPK50**
3/4	.45"–.71"	(11.4–18.0)	Black	**SEC75BA**	**31622007LPK50**
1	.59"–1.00"	(15–25.4)	Gray	**SEC100GA**	**31622008LPK50**
1	.59"–1.00"	(15–25.4)	Black	**SEC100BA**	**31622008LPK50**

Note: Catalog numbers with "PK50" suffix are bulk packed 50 pieces.



SECP29GA

Low Profile PG∆ Cord Connectors

Hub Size	Cord Diameter Inches	(mm)	Colour	Catalog Number	Non-metallic Locknuts
PG7	.11"–.25"	(2.9–6.4)	Gray	**SECP7GA***	**LNP7BPK100**
PG7	.11"–.25"	(2.9–6.4)	Black	**SECP7BA***	**LNP7BPK100**
PG9	.18"–.31"	(4.6–7.9)	Gray	**SECP9GA***	**LNP9BPK100**
PG9	.18"–.31"	(4.6–7.9)	Black	**SECP9BA***	**LNP9BPK100**
PG11	.23"–.40"	(5.8–10.0)	Gray	**SECP11GA***	**LNP11BPK100**
PG11	.23"–.40"	(5.8–10.0)	Black	**SECP11BA***	**LNP11BPK100**
PG13.5	.17"–.47"	(4.3–11.9)	Gray	**SECP13GA**	**LNP13BPK100**
PG13.5	.17"–.47"	(4.3–11.9)	Black	**SECP13BA**	**LNP13BPK100**
PG16	.23"–.53"	(5.8–13.5)	Gray	**SECP16GA**	**LNP16BPK100**
PG16	.23"–.53"	(5.8–13.5)	Black	**SECP16BA**	**LNP16BPK100**
PG21	.45"–.71"	(11.4–17.9)	Gray	**SECP21GA**	**LNP21BPK100**
PG21	.45"–.71"	(11.4–17.9)	Black	**SECP21BA**	**LNP21BPK100**
PG29	.59"–.99"	(15–25.2)	Gray	**SECP29GA**	**LNP29BPK25**
PG29	.59"–.99"	(15–25.2)	Black	**SECP29BA**	**LNP29BPK25**
PG36	.88"–1.30"	(22.2–32.0)	Gray	**SECP36GA**	**LNP36BPK25**
PG36	.88"–1.30"	(22.2–32.0)	Black	**SECP36BA**	**LNP36BPK25**



LNP29BPK25

Low Profile Metric Cord Connectors

Hub Size	Cord Diameter Inches	(mm)	Colour	Catalog Number	Non-metallic Locknuts
M12	.12"–.25"	(2.9–6.4)	Gray	**SECM12G**	**LNM12BPK100**
M12	.12"–.25"	(2.9–6.4)	Black	**SECM12B**	**LNM12BPK100**
M16	.11"–.31"	(2.7–7.9)	Gray	**SECM16G**	**LNM16BPK100**
M16	.11"–.31"	(2.7–7.9)	Black	**SECM16B**	**LNM16BPK100**
M20	.17"–.45"	(4.3–11.4)	Gray	**SECM20G***	**LNM20BPK100**
M20	.17"–.45"	(4.3–11.4)	Black	**SECM20B***	**LNM20BPK100**
M25	.49"–.71"	(12.3–18.0)	Gray	**SECM25G***	**LNM25BPK100**
M25	.49"–.71"	(12.3–18.0)	Black	**SECM25B***	**LNM25BPK100**
M32	.59"–1.00"	(15.0–25.4)	Gray	**SECM32G***	**LNM32BPK100**
M32	.59"–1.00"	(15.0–25.4)	Black	**SECM32B***	**LNM32BPK100**
M40	.87"–1.30"	(22.0–32.0)	Gray	**SECM40G**	**LNM40BPK100**
M40	.87"–1.30"	(22.0–32.0)	Black	**SECM40B**	**LNM40BPK100**

Note: Catalog numbers above with "PK100" suffix, i.e. LNP7BPK100, are bulk packed 100 per carton.
Catalog numbers above with "PK25" suffix, i.e. LNP29BPK25, are bulk packed 25 per carton.
** Items indicated are UL recognized components.*
∆ Panzergewinde.

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

ACCESSORIES

Locknuts — Non-Metallic

N.P.T. Hub Size	Catalog Number
1/4	31622001LPK50
3/8	31622002LPK50
1/2	31622003LPK50
3/4	31622007LPK50
1	31622008LPK50
1-1/4	–
1-1/2	–

Note: Catalog numbers above with "PK50" suffix are bulk packed 50 per carton.
See page T-101 for additional technical data and dimensional drawings.



Non–Metallic Locknuts

Metal Clad Sealing O-Rings

N.P.T. Hub Size	Catalog Number
1/2	20509001
3/4	20509002
1	20509003
1–1/4	20509004
1–1/2	20509005
2	20509006
2–1/2	20509007
3	20509008



Metal Clad
Sealing O–Rings

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

HUBBELL JUNIORS® MINIATURE NYLON CORD CONNECTORS

Miniature Nylon Cord Connector

N.P.T. Hub Size	Cord Diameter Range Inches	(mm)	Gray	Black
	.08"–.14"	(1.9–3.4)	HJ1001GPK25	HJ1001BPK25
1/4	.14"–.20"	(3.4–5.1)	HJ1002GPK25	HJ1002BPK25
	.20"–.27"	(5.1–6.7)	HJ1003GPK25	HJ1003BPK25
	.15"–.21"	(3.7–5.3)	HJ1004GPK25	HJ1004BPK25
3/8	.21"–.28"	(5.3–7.0)	HJ1005GPK25	HJ1005BPK25
	.28"–.34"	(7.0–8.6)	HJ1006GPK25	HJ1006BPK25
	.06"–.13"	(1.6–3.2)	HJ1055GPK25	HJ1055BPK25
	.13"–.19"	(3.2–4.7)	HJ1056GPK25	HJ1056BPK25
1/2	.19"–.25"	(4.7–6.3)	HJ1057GPK25	HJ1057BPK25
	.25"–.31"	(6.3–7.9)	HJ1058GPK25	HJ1058BPK25
	.31"–.38"	(7.9–9.5)	HJ1059GPK25	HJ1059BPK25
	.38"–.44"	(9.5–11.1)	HJ1060GPK25	HJ1060BPK25



Gray Cord Connector



Black Cord Connector

Miniature Nylon Cord Connector with Spiral

N.P.T. Hub Size	Cord Diameter Range Inches	(mm)	Gray	Black
	.08"–.14"	(1.9–3.4)	HJ1010GPK25	HJ1010BPK25
1/4	.14"–.20"	(3.4–5.1)	HJ1011GPK25	HJ1011BPK25
	.20"–.27"	(5.1–6.7)	HJ1012GPK25	HJ1012BPK25
	.15"–.21"	(3.7–5.3)	HJ1013GPK25	HJ1013BPK25
3/8	.21"–.28"	(5.3–7.0)	HJ1014GPK25	HJ1014BPK25
	.28"–.34"	(7.0–8.6)	HJ1015GPK25	HJ1015BPK25
	.13"–.19"	(3.2–4.7)	HJ1038GPK25	HJ1038BPK25
	.19"–.25"	(4.7–6.3)	HJ1039GPK25	HJ1039BPK25
1/2	.25"–.31"	(6.3–7.9)	HJ1040GPK25	HJ1040BPK25
	.31"–.38"	(7.9–9.5)	HJ1041GPK25	HJ1041BPK25
	.38"–.44"	(9.5–11.1)	HJ1042GPK25	HJ1042BPK25
3/4	.25"–.49"	(6.4–12.3)	HJ1043GPK25*	HJ1043BPK25*
	.45"–.71"	(11.4–18.0)	HJ1044GPK25*	HJ1044BPK25*



Gray Cord Connector with Spiral



Black Cord Connector with Spiral

Miniature Nylon Snap-In Cord Connector with Spiral

Cord Diameter Range Inches	(mm)	For Chassis Thickness	Gray	Black
.22"–.27"	(5.6–6.9)	.10" (2.5) Max	HS1001GPK25	HS1001BPK25
.28"–.32"	(7.1–8.1)	.10" (2.5) Max	HS1002GPK25	HS1002BPK25
.30"–.36"	(7.6–9.1)	.13" (3.2) Max	HS1003GPK25	HS1003BPK25
.32"–.43"	(8.1–10.9)	.13" (3.2) Max	HS1004GPK25	HS1004BPK25

Note: Catalog numbers above with "PK25" suffix, i.e. HJ1001GPK25, are bulk packed 25 per carton.



Gray Snap–In Cord Connector



Black Snap–In Cord Connector

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

POLYTUFF® I NON-METALLIC LIQUIDTIGHT CONDUIT


PolyTuff® I Conduit–Gray

Rigid PVC core bonded to flexible PVC jacket

All nonmetallic construction ends metal fatigue and separation problems

UL Listed and CSA Certified

Cuts cleanly with a knife or PVC cutter so there are no jagged metal edges

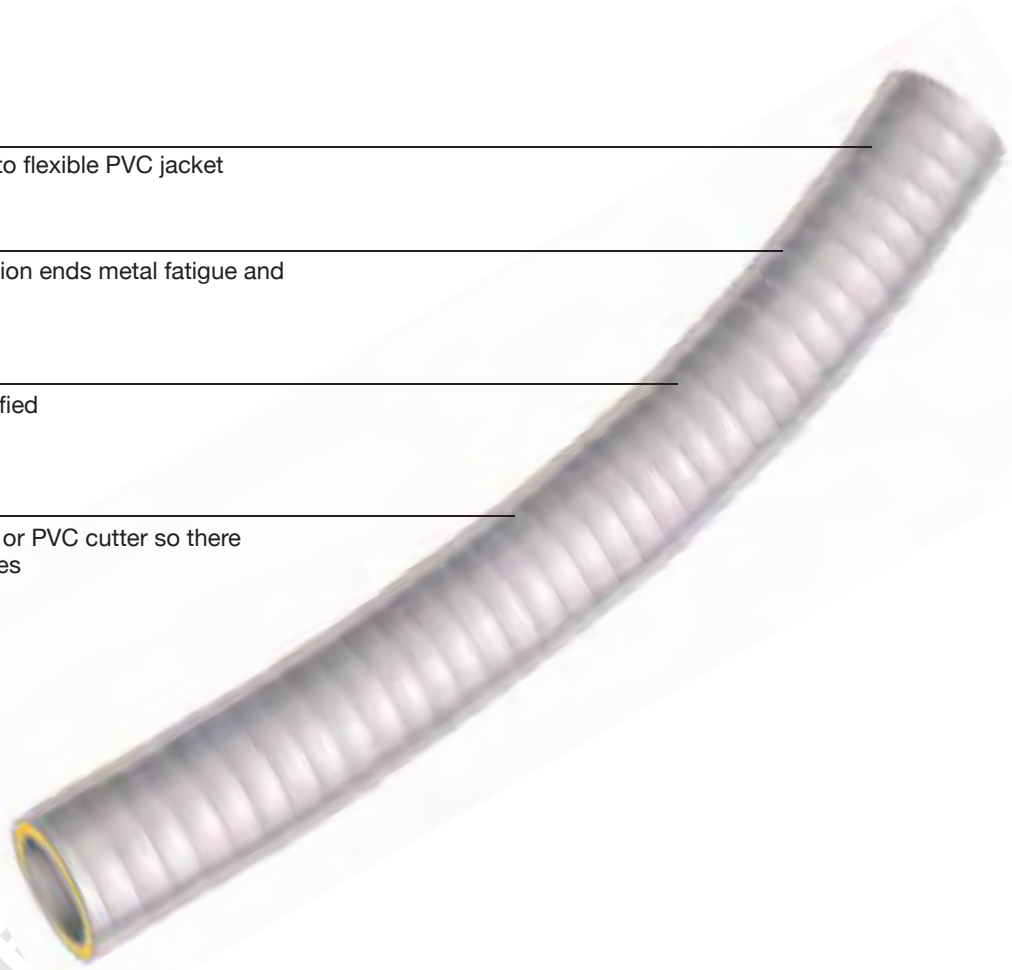



IP66
SUITABILITY

PolyTuff® I Conduit

Trade Size (metric designator)	Feet (m)	Catalog Number
⅜ (12)	100 (30.5)	**G1038**
½ (16)	100 (30.5)	**G1050**
¾ (21)	100 (30.5)	**G1075**
1 (27)	100 (30.5)	**G1100**
1¼ (35)	100 (30.5)	**G1125**
1½ (41)	50 (15.2)	**G1150**
2 (53)	50 (15.2)	**G1200**

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

POLYTUFF® II NON-METALLIC LIQUIDTIGHT TUBING

PolyTuff® II Tubing–Black

PVC core with corrugated walls bonded to PVC jacket

Handles twists, turns, bends, switchbacks and straightaways with ease

All nonmetallic construction ends fatigue and separation problems

Can be cut with a knife or PVC cutters

UL Recognized and CSA Certified



IP66
SUITABILITY

PolyTuff® II Tubing

Trade Size (metric designator)	Feet (m)	Catalog Number
¼ (10)	100 (30.5)	**B2025**
⅜ (12)	100 (30.5)	**B2038**
½ (16)	100 (30.5)	**B2050**
¾ (21)	100 (30.5)	**B2075**
1 (27)	100 (30.5)	**B2100**
1¼ (35)	100 (30.5)	**B2125**
1½ (41)	50 (15.2)	**B2150**
2 (53)	50 (15.2)	**B2200**



onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

POLYTUFF® II NON-METALLIC LIQUIDTIGHT FITTINGS

UL Listed to Type 4, 4X, 12 and Type 13

Straight with Male Non-Metallic Liquidtight Fittings

Trade Size (metric designator)	Black Catalog Number	Gray Catalog Number
¼ (6)	F2025	–
⅜ (9)	P038NBKA	P038NGYA
½ (13)	P050NBKA	P050NGYA
¾ (19)	P075NBKA	P075NGYA
1 (25)	P100NBKA	P100NGYA
1¼ (32)	P125NBK	P125NGY
1½ (38)	P150NBK	P150NGY
2 (51)	P200NBK	P200NGY

Note: Fittings are to be used with PolyTuff I and PolyTuff II.
⅜" Liquidtight conduit fitting have ½ N.P.T. male threads.



P075NGYA



P125NGY

SwivelLok® Multi-Position with Male Non-Metallic Liquidtight Fittings

Trade Size (metric designator)	Black Catalog Number	Gray Catalog Number
⅜ (9)	PS0389NBK	PS0389NGY
½ (13)	PS0509NBK	PS0509NGY
¾ (19)	PS0759NBK	PS0759NGY
1 (25)	PS1009NBK	PS1009NGY

Note: Fittings are to be used with PolyTuff I and PolyTuff II.
⅜" Liquidtight conduit fitting have ½ N.P.T. male threads.



PS0509NGY – SwivelLok®

Fixed 90° Fittings for Non-Metallic Conduit

Trade Size (metric designator)	Black Catalog Number	Gray Catalog Number
¼ (6)	F20259	–
⅜ (9)	P0389NBK	P0389NGY
½ (13)	P0509NBK	P0509NGY
¾ (19)	P0759NBK	P0759NGY
1 (25)	P1009NBK	P1009NGY
1¼ (32)	P1259NBK	P1259NGY

Note: Fittings are to be used with PolyTuff I and PolyTuff II.
⅜" Liquidtight conduit fitting have ½ N.P.T. male threads.



P1259NGY

SwivelLok® Flexible Conduit Kit

Trade Size (metric designator)	Fitting and Conduit	Catalog Number
½ (13)	2 PS0509NGY, 6' G1050	PS05GYKIT
¾ (19)	2 PS0759NGY, 6' G1075	PS07GYKIT



PS05GYKIT

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

DECORATOR QUIET ROCKER SWITCHES

Smart Style, Good Looks.

Residential Decorator Switches and Receptacles provide more than solid, dependable function alone. Indeed, they are fashion statements, masterfully complementing the look and feel of any room in any home.

A PERFECT MATCH

Residential decorator devices and wallplates blend in beautifully with all kinds of wall coverings.



EASY-ACTIVATE ROCKERS

Ideal for use in assisted-living environments—or any living environment.

FLUSH AND CONTEMPORARY

Sleek, smart and appealing, Residential devices add beautiful, fashionable, highly-styled devices to any home.



MINI-ROCKER SWITCHES

Take up less space and provide full function.

SNAP-ON WALLPLATES

Snap-on wallplates offer a clean, elegant look that can be installed in seconds.

onlinecomponents.com

Colour Selection

Almond | Black | Brown | Gray | Ivory | Light Almond | White



HUBBELL®

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

DECORATOR QUIET ROCKER SWITCHES

FEATURES

- Smooth, quiet rocker
- Self-grounding feature is standard
- Ultrasonically welded cover and base
- Operating temperature: -20°C to 60°C
- UL Listed E3896, CSA Certified

Single Pole Decorator Quiet Rocker Switches

Description	Single Pole	Single Pole, Illuminated*	Single Pole, Pilot Light**	Single Pole with ON/OFF Marking
Termination	**Self-Grounding, Push, Back and Side Wire**	**Self-Grounding, Push, Back and Side Wire**	**Self-Grounding, Push, Back and Side Wire**	**Self-Grounding, Push, Back and Side Wire**
Rating	**15A 120-277V AC**	**15A 120V AC**	**15A 120V AC**	**15A 120-277V AC**
Almond	**RSD115AL**	**RSD115ILAL**	**RSD115PLAL**	**—**
Black	**RSD115BK**	**—**	**—**	**—**
Brown	**RSD115**	**—**	**—**	**—**
Gray	**RSD115GY**	**—**	**—**	**—**
Ivory	**RSD115I**	**RSD115ILI**	**RSD115PLI**	**RSD115IM**
Light Almond	**RSD115LA**	**RSD115ILLA**	**RSD115PLLA**	**RSD115LAM**
White	**RSD115W**	**RSD115ILW**	**RSD115PLW**	**RSD115WM**

*Note: * Light glows through the top portion of the rocker when switch is in the off position. Does not require a neutral wire.*
*** Light glows through the top portion of the rocker when switch is in the on position. Requires a neutral wire.*



RSD115W



RSD115PLW

Double-Pole, Three Way and Four-Way Decorator Quiet Rocker Switches

Description	Double-Pole	Three Way	Three Way, Illuminated*	Four-Way
Termination	**Self-Grounding, Back and Side Wire**	**Self-Grounding, Push, Back and Side Wire**	**Self-Grounding, Push, Back and Side Wire**	**Self-Grounding, Back and Side Wire**
Rating	**15A 120-277V AC**	**15A 120-277V AC**	**15A 120V AC**	**15A 120-277V AC**
Almond	**RSD215AL**	**RSD315AL**	**RSD315ILAL**	**RSD415AL**
Black	**RSD215BK**	**RSD315BK**	**—**	**RSD415BK**
Brown	**RSD215**	**RSD315**	**—**	**RSD415**
Gray	**RSD215GY**	**RSD315GY**	**—**	**RSD415GY**
Ivory	**RSD215I**	**RSD315I**	**RSD315ILI**	**RSD415I**
Light Almond	**RSD215LA**	**RSD315LA**	**RSD315ILLA**	**RSD415LA**
White	**RSD215W**	**RSD315W**	**RSD315ILW**	**RSD415W**

*Note: * Light glows through the top portion of the rocker when switch is in the off position. Does not require a neutral wire.*




RSD115WM




RSD215W

Product Dimensions

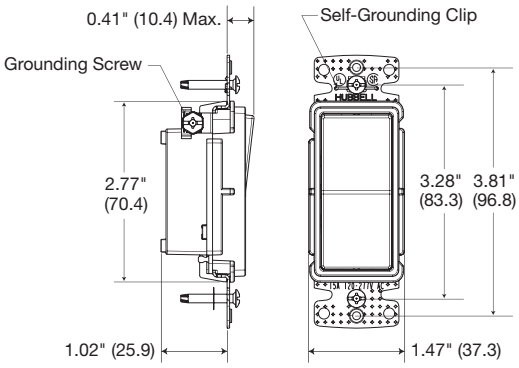

Single-Pole Decorator Switch

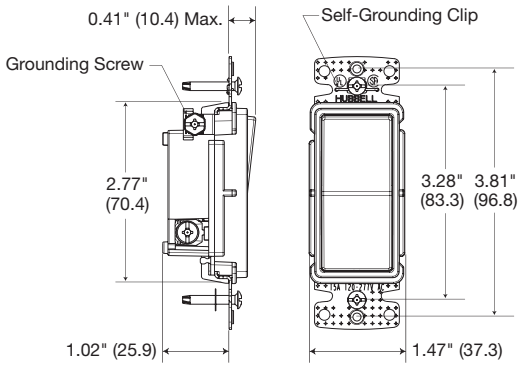

Three-Way Decorator Switch

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

COMBINATION QUIET ROCKER SWITCHES/DEVICES

FEATURES

- Low profile, less than 1 inch deep
- Self-grounding feature is standard
- Operating temperature: -20°C to 60°C.
- UL Listed E3896, CSA Certified.


RCD111W


RCD101W


RCD108W



RCD109W

Combination Quiet Rocker Switches/Devices

Description	Three (3) Single Pole Switches	Two (2) Single Pole Switches	Single Pole and Three Way Switch	TR Single Pole Switch, Tamper- Resistant, 2 Pole, 3 Wire, Receptacle	Single Pole Switch, 2 Pole, 3 Wire Receptacle
Termination	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**
Rating	**15A 120-277V AC**	**15A 120-277V AC**	**15A 120-277V AC**	**15A 120V (switch) 15A 125V (recept.) NEMA 5-15R**	**15A 120V 15A 125V NEMA 5-15R**
Almond	RCD111AL	RCD101AL	RCD103AL	RCD108ALTR	RCD108AL
Black	RCD111BK	RCD101BK	RCD103BK	RCD108BKTR	RCD108BK
Gray	—	RCD101GY	RCD103GY	RCD108GYTR	RCD108GY
Ivory	RCD111I	RCD101I	RCD103I	RCD108ITR	RCD108I
Light Almond	RCD111LA	RCD101LA	RCD103LA	RCD108LATR	RCD108LA
White	RCD111W	RCD101W	RCD103W	RCD108WTR	RCD108W

Description	Two (2) Three Way Switches	TR Three Way Switch, Tamper- Resistant, 2 Pole, 3 Wire, Receptacle	Three Way Switch, 2 Pole, 3 Wire Receptacle	Single Pole Switch, Pilot Light, Clear Lens, Amber Neon Bulb	Three Way Switch, Pilot Light, Clear Lens, Amber Neon Bulb
Termination	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**
Rating	**15A 120-277V AC**	**15A 120V (switch) 15A 125V (recept.) NEMA 5-15R**	**15A 120V (switch) 15A 125V (recept.) NEMA 5-15R**	**15A 120V**	**15A 120V**
Almond	RCD303AL	RCD308ALTR	RCD308AL	RCD109AL	RCD309AL
Black	RCD303BK	RCD308BKTR	RCD308BK	—	—
Gray	RCD303GY	RCD308GYTR	RCD308GY	—	—
Ivory	RCD303I	RCD308ITR	RCD308I	RCD109I	RCD309I
Light Almond	RCD303LA	RCD308LATR	RCD308LA	RCD109LA	RCD309LA
White	RCD303W	RCD308WTR	RCD308W	RCD109W	RCD309W

Pilot Light Wiring Diagram

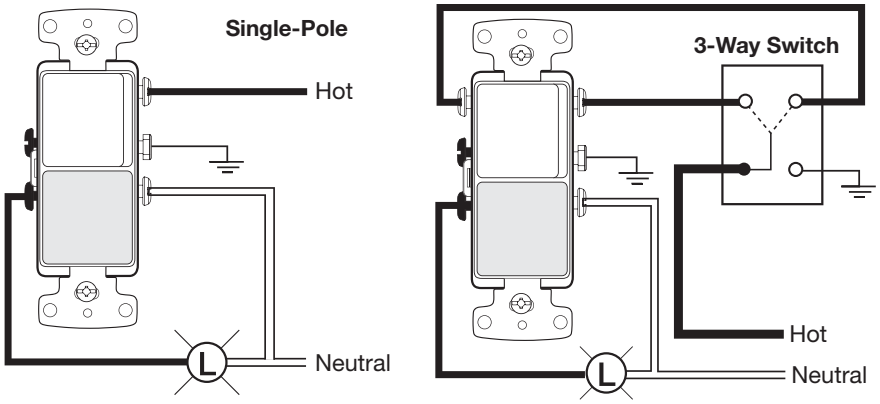

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

WEATHER RESISTANT, TAMPER-RESISTANT AND STANDARD RECEPTACLES

Decorator Duplex Receptacles, 2 Pole, 3 Wire

Description	Weather and Tamper- Resistant	Tamper- Resistant	Standard	Standard
Termination	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Push and Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Almond	RRD15SALWRTR	RRD15SALTR	RRD15SAL	RRD15AL
Black	RRD15SBKWRTR	RRD15SBKTR	RRD15SBK	RRD15BK
Brown	RRD15SWRTR	RRD15STR	RRD15S	RRD15
Gray	RRD15SGYWRTR	RRD15SGYTR	RRD15SGY	RRD15GY
Ivory	RRD15SIWRTR	RRD15SITR	RRD15SI	RRD15I
Light Almond	RRD15SLAWRTR	RRD15SLATR	RRD15SLA	RRD15LA
White	RRD15SWWRTR	RRD15SWTR	RRD15SW	RRD15W


RRD15SW

Description	Tamper- Resistant	Standard	Tamper- Resistant, Without Ears**	Standard, Without Ears**
Termination	Self-Grounding, Eight Push Wire Holes Only #14 AWG	Self-Grounding, Eight Push Wire Holes Only #14 AWG	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Almond	RRD15EALTR	RRD15EAL	RRD15KALTR	RRD15KAL
Black	RRD15EBKTR	RRD15EBK	RRD15KBKTR	RRD15KBK
Brown	RRD15ETR	RRD15E	RRD15KTR	RRD15K
Gray	RRD15EGYTR	RRD15EGY	RRD15KGYTR	RRD15KGY
Ivory	RRD15EITR	RRD15EI	RRD15KITR	RRD15KI
Light Almond	RRD15ELATR	RRD15ELA	RRD15KLATR	RRD15KLA
White	RRD15EWTR	RRD15EW	RRD15KWTR	RRD15KW


RRD15W

*Note: ** 100 per case, bulk packed. Mounting screws inserted into strap.*


RRD15KW

Decorator Single Receptacles, 2 Pole, 3 Wire

Description	Tamper- Resistant	Standard	Tamper- Resistant	Standard
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	20A 125V NEMA 5-20R	20A 125V NEMA 5-20R
Almond	RRD151ALTR	RRD151AL	RRD201ALTR	RRD201AL
Black	RRD151BKTR	RRD151BK	RRD201BKTR	RRD201BK
Brown	RRD151TR	RRD151	RRD201TR	RRD201
Gray	RRD151GYTR	RRD151GY	RRD201GYTR	RRD201GY
Ivory	RRD151ITR	RRD151I	RRD201ITR	RRD201I
Light Almond	RRD151LATR	RRD151LA	RRD201LATR	RRD201LA
White	RRD151WTR	RRD151W	RRD201WTR	RRD201W


RRD151W


Description	Standard	Standard
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 250V NEMA 6-15R	20A 250V NEMA 6-20R
Almond	RRD155AL	RRD205AL
Black	RRD155BK	RRD205BK
Brown	RRD155	RRD205
Gray	RRD155GY	RRD205GY
Ivory	RRD155I	RRD205I
Light Almond	RRD155LA	RRD205LA
White	RRD155W	RRD205W


RRD201W

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS


SNAP-ON, NYLON AND METAL WALLPLATES



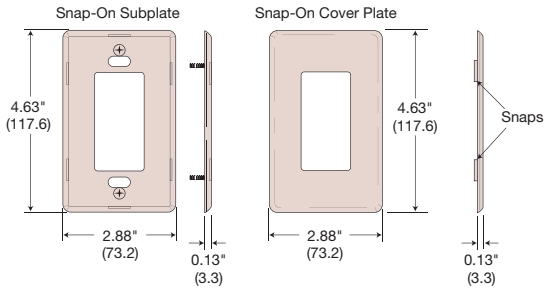

A subplate is fastened to the device, then a screwless snap-on cover plate is affixed. Four snaps securely hold the cover to the subplate.

Snap-On, Nylon, Two Piece Construction Wallplates



Colour	1-gang, 1-Decorator	2-gang, 2-Decorator	3-gang, 3-Decorator	4-gang, 4-Decorator	5-gang, 5-Decorator	6-gang, 6-Decorator
Almond	RCW1AL	RCW2AL	RCW3AL	RCW4AL	RCW5AL	RCW6AL
Ivory	RCW1I	RCW2I	RCW3I	RCW4I	RCW5I	RCW6I
Light Almond	RCW1LA	RCW2LA	RCW3LA	RCW4LA	RCW5LA	RCW6LA
White	RCW1W	RCW2W	RCW3W	RCW4W	RCW5W	RCW6W

Decorator, Standard, Nylon Wallplates

Colour	1-gang, 1-Decorator	2-gang, 2-Decorator	3-gang, 3-Decorator	4-gang, 4-Decorator	5-gang, 5-Decorator	6-gang, 6-Decorator
Almond	NP26AL	NP262AL	NP263AL	NP264AL	NP265AL	NP266AL
Black	NP26BK	NP262BK	NP263BK	NP264BK	NP265BK	NP266BK
Brown	NP26	NP262	NP263	NP264	NP265	NP266
Gray	NP26GY	NP262GY	NP263GY	NP264GY	NP265GY	NP266GY
Ivory	NP26I	NP262I	NP263I	NP264I	NP265I	NP266I
Light Almond	NP26LA	NP262LA	NP263LA	NP264LA	NP265LA	NP266LA
White	NP26W	NP262W	NP263W	NP264W	NP265W	NP266W

Decorator, Mid-Size, Nylon Wallplates

Colour	1-gang, 1-Decorator	2-gang, 2-Decorator	3-gang, 3-Decorator	4-gang, 4-Decorator	5-gang, 5-Decorator	6-gang, 6-Decorator
Almond	NPJ26AL	NPJ262AL	NPJ263AL	NPJ264AL	–	–
Black	NPJ26BK	NPJ262BK	NPJ263BK	NPJ264BK	–	–
Brown	NPJ26	NPJ262	NPJ263	NPJ264	–	–
Gray	NPJ26GY	NPJ262GY	NPJ263GY	NPJ264GY	–	–
Ivory	NPJ26I	NPJ262I	NPJ263I	NPJ264I	–	–
Light Almond	NPJ26LA	NPJ262LA	NPJ263LA	NPJ264LA	–	–
White	NPJ26W	NPJ262W	NPJ263W	NPJ264W	–	–

Decorator, Mid-Size, Metal Wallplates


Material	1-gang, 1-Decorator	2-gang, 2-Decorator	3-gang, 3-Decorator	4-gang, 4-Decorator	5-gang, 5-Decorator	6-gang, 6-Decorator
Brass	SB26	SB262	–	–	–	–
Brass Plated	SBP26	SBP262	SBP263	–	–	–
Chrome	SCH26	SCH262	–	–	–	–
S/S 302/304	SS26	SS262	SS263	SS264	SS265	SS266
S/S 430	SS26L	SS262L	–	–	–	–

HUBBELL®

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

COMBINATION WALLPLATES

Combination, Nylon, Standard Wallplates



Colour	2-gang, 1-Toggle 1-Decorator	2-gang, 1-Duplex, 1-Decorator	2-gang, 1-Blank Box Mount 1-Decorator	3-gang, 2-Toggle 1-Decorator	3-gang, 1-Toggle 2-Decorator	4-gang, 3-Toggle 1-Decorator	4-gang, 2-Toggle 2-Decorator
Almond	NP126AL	NP826AL	NP1326AL	NP226AL	NP1262AL	NP326AL	NP2262AL
Black	NP126BK	NP826BK	NP1326BK	NP226BK	NP1262BK	NP326BK	NP2262BK
Brown	NP126	NP826	NP1326	NP226	NP1262	NP326	NP2262
Gray	NP126GY	NP826GY	NP1326GY	NP226GY	NP1262GY	NP326GY	NP2262GY
Ivory	NP126I	NP826I	NP1326I	NP226I	NP1262I	NP326I	NP2262I
Light Almond	NP126LA	NP826LA	NP1326LA	NP226LA	NP1262LA	NP326LA	NP2262LA
White	NP126W	NP826W	NP1326W	NP226W	NP1262W	NP326W	NP2262W

Combination, Nylon, Mid-Size Wallplates


Colour	2-gang, 1-Toggle 1-Decorator	2-gang, 1-Duplex, 1-Decorator	2-gang, 1-Blank Box Mount 1-Decorator	3-gang, 2-Toggle 1-Decorator	3-gang, 1-Toggle 2-Decorator	4-gang, 3-Toggle 1-Decorator	4-gang, 2-Toggle 2-Decorator
Almond	NPJ126AL	NPJ826AL	NPJ1326AL	NPJ226AL	–	–	–
Black	NPJ126BK	NPJ826BK	–	NPJ226BK	–	–	–
Brown	NPJ126	NPJ826	NPJ1326	NPJ226	–	–	–
Gray	NPJ126GY	NPJ826GY	–	NPJ226GY	–	–	–
Ivory	NPJ126I	NPJ826I	NPJ1326I	NPJ226I	–	–	–
Light Almond	NPJ126LA	NPJ826LA	NPJ1326LA	NPJ226LA	–	–	–
White	NPJ126W	NPJ826W	NPJ1326W	NPJ226W	–	–	–

Combination, Standard, Metal Wallplates

Material	2-gang, 1-Toggle 1-Decorator	2-gang, 1-Duplex, 1-Decorator	2-gang, 1-Blank Strap Mount 1-Decorator	3-gang, 2-Toggle 1-Decorator	3-gang, 1-Toggle 2-Decorator	4-gang, 3-Toggle 1-Decorator	4-gang, 2-Toggle 2-Decorator
Brass	SB126	SB826	–	–	–	–	–
Brass Plated	SBP126	–	–	–	–	–	–
Chrome	–	–	–	–	–	–	–
SS 302/304	SS126	SS826	SS1426	SS226	–	SS326	–
SS 430	SS126L	–	–	–	–	–	–

onlinecomponents.com

Product Dimensions

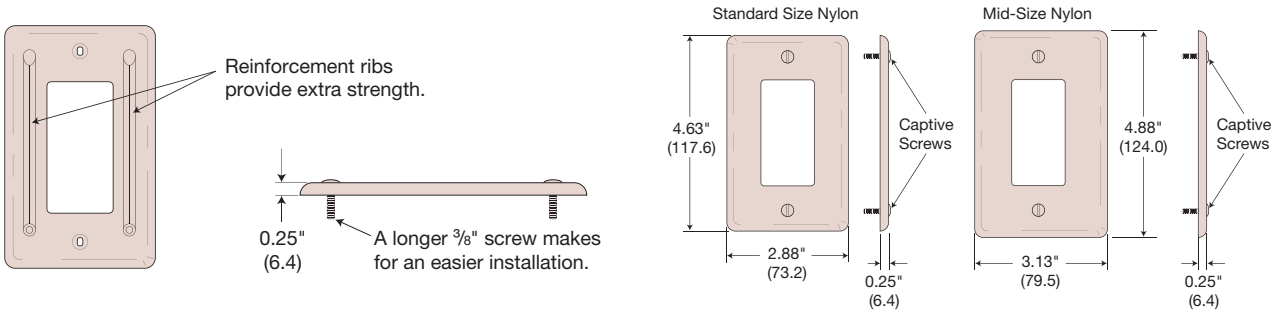

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS


DECORATOR FRAMES

FEATURES

Decorator frames provide a stylized look for that finishing touch. This allows all devices to match. Multimedia jacks insert into frame for custom configuration.

- Elongated strap for better wall box mounting.
- High impact-resistant thermoplastic frame.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

Customize the jack selections and look.

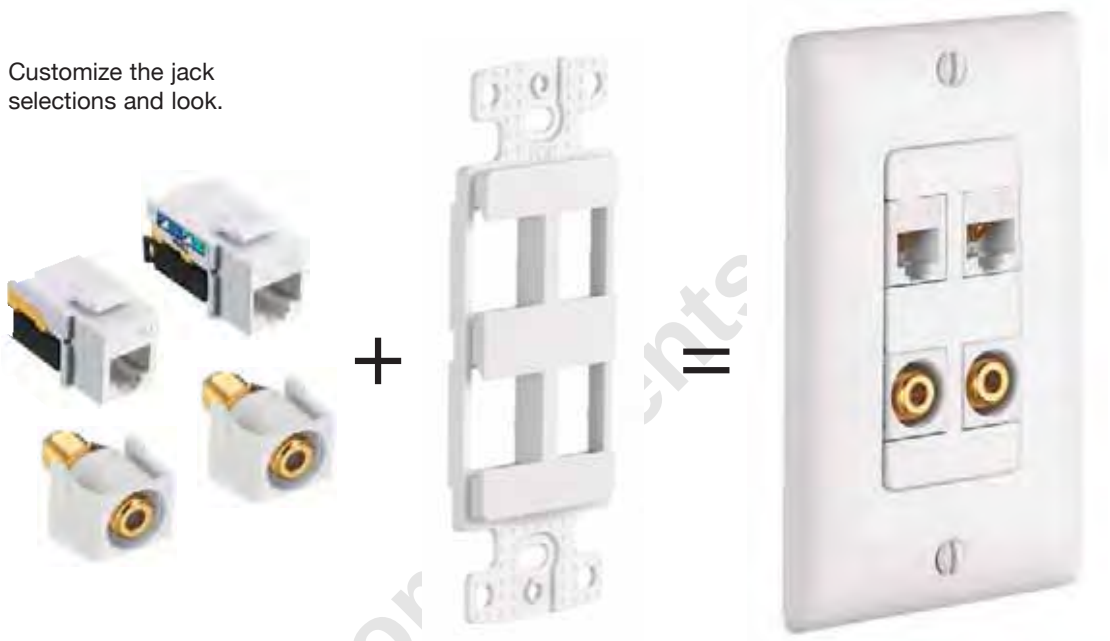

Decorator Frames



Colour	1-gang, 2-Port	1-gang, 3-Port	1-gang, 4-Port	1-gang, 6-Port	1-gang, Adapter .406" (10.30) Dia. Hole*	1-gang, Adapter Blank**
Almond	NS612AL	NS613AL	NS614AL	NS616AL	NS621AL	NS620AL
Black	NS612BK	NS613BK	NS614BK	NS616BK	–	–
Gray	NS612GY	NS613GY	NS614GY	NS616GY	–	–
Ivory	NS612I	NS613I	NS614I	NS616I	NS621I	NS620I
Light Almond	NS612LA	NS613LA	NS614LA	NS616LA	NS621LA	NS620LA
White	NS612W	NS613W	NS614W	NS616W	NS621W	NS620W

*Note: * For use with rotary dimmers or to pull through AV or telephone cable.*
*** To fill an extra decorator opening or to create customized openings.*

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

MODULAR SNAP FIT JACKS

FEATURES

netSELECT® Voice/Data Jacks and AV Connectors allow custom creation of multimedia outlets and workstations while maintaining a decorative look.

- Quick and secure snap-in design.
- Use with multimedia plates and decorator frames(see pages F-7 and F-35).
- UL Listed and CSA Certified, or cULus Listed 1863 - Communication Circuit Accessory.

Molded-In Voice/Low-Speed Data

Description	Modular Snap Fit Cat. 6 Jack	Modular Snap Fit Cat. 5e Jack	Modular Snap Fit USOC Jack
Colour			
Almond	NSJ6AL	NSJ5EAL	NSJUAL
Black	NSJ6BK	NSJ5EBK	NSJUBK
Blue	NSJ6B	NSJ5EB	NSJUB
Gray	NSJ6GY	NSJ5EGY	NSJUGY
Green	NSJ6GN	NSJ5EGN	NSJUGN
Ivory	NSJ6I	NSJ5EI	NSJUI
Light Almond	NSJ6LA	NSJ5ELA	NSJULA
Orange	NSJ6OR	NSJ5EOR	NSJUOR
Red	NSJ6R	NSJ5ER	NSJUR
White	NSJ6W	NSJ5EW	NSJUW
Yellow	NSJ6Y	NSJ5EY	NSJUY

Audio/Video Connectors - Standard Bulkhead

Description	Gold F-Type Coupler Bulkhead, Female to Female	Nickel F-Type Coupler Bulkhead, Female to Female	RCA Gold Pass Through, Female to Female, Red Interior	RCA Gold Pass Through, Female to Female, White Interior	RCA Gold Pass Through, Female to Female, Yellow Interior	RCA Gold Pass Through, Female to Female, Blue Interior	RCA Gold Pass Through, Female to Female, Green Interior
Colour							
Almond	SFFGAL	NSF70AL	SFRCRFFAL	SFRCWFFAL	SFRCYFFAL	SFRCBFFAL	SFRCGNFFAL
Black	SFFGBK	NSF70BK	SFRCRFFBK	SFRCWFFBK	SFRCYFFBK	SFRCBFFBK	SFRCGNFFBK
Gray	SFFGGY	NSF70GY	SFRCRFFGY	SFRCWFFGY	SFRCYFFGY	SFRCBFFGY	SFRCGNFFGY
Ivory	SFFGEI	NSF70I	SFRCRFFEI	SFRCWFFEI	SFRCYFFEI	SFRCBFFEI	SFRCGNFFEI
Light Almond	SFFGLA	NSF70LA	SFRCRFFLA	SFRCWFFLA	SFRCYFFLA	SFRCBFFLA	SFRCGNFFLA
White	SFFGW	NSF70W	SFRCRFFW	SFRCWFFW	SFRCYFFW	SFRCBFFW	SFRCGNFFW

Audio/Video Connectors - Recessed

Description	Gold F-Type Coupler Bulkhead, Female to Female	RCA Gold Pass Through, Female to Female, Red Interior	RCA Gold Pass Through, Female to Female, White Interior	RCA Gold Pass Through, Female to Female, Yellow Interior	RCA Gold Pass Through, Female to Female, Blue Interior	RCA Gold Pass Through, Female to Female, Green Interior
Colour						
Almond	SFGRFAL	SFRCRRAL	SFRCWRAL	SFRCYRAL	SFRCBRAL	SFRCGNRAL
Black	SFGRFBK	SFRCRRBK	SFRCWRBK	SFRCYRBK	SFRCBRBK	SFRCGNRBK
Gray	SFGRFGY	SFRCRRGY	SFRCWRGY	SFRCYRGY	SFRCBRGY	SFRCGNRGY
Ivory	SFGRFEI	SFRCRREI	SFRCWREI	SFRCYREI	SFRCBREI	SFRCGNREI
Light Almond	SFGRFLA	SFRCRRLA	SFRCWRLA	SFRCYRLA	SFRCBRLA	SFRCGNRLA
White	SFGRFW	SFRCRRW	SFRCWRW	SFRCYRW	SFRCBRW	SFRCGNRW

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

MOLDED-IN VOICE/DATA/VIDEO

FEATURES

Designed to complement decorator styling, these jacks offer voice and Cat. 5e devices to fit within a decorator wallplate.

- High impact-resistant thermoplastic frame.
- Meets FCC part 68.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

Molded-In Voice/Low-Speed Data

Description	Decorator Frame, One RJ11 Jack, 6-Position, 4-Conductor	Decorator Frame, One RJ11 Jack, 6-Position, 6-Conductor	Decorator Frame, Duplex RJ11 Jacks, 6-Position, 6-Conductor	Decorator Frame, One Cat. 5e 110 Punch-Down, One RJ11 Jack, 6-Position, 4-Conductor
Termination	**Screw Terminations**	**Screw Terminations**	**Screw Terminations**	**Screw Terminations**
Colour				
Almond	NS770AL	NS771AL	NS772AL	NS784AL
Black	NS770BK	–	–	NS784BK
Brown	NS770	NS771	–	NS784
Gray	NS770GY	–	–	NS784GY
Ivory	NS770I	NS771I	NS772I	NS784I
Light Almond	NS770LA	NS771LA	NS772LA	NS784LA
White	NS770W	NS771W	NS772W	NS784W

FEATURES

Coaxial video and combination jacks complement multimedia needs in a 1-gang decorator opening.

- High impact-resistant thermoplastic frame.
- Jacks meet FCC part 68.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

Molded-In Voice/Low-Speed Data

Description	Decorator Frame, Single F-Type Coupler Bulkhead, Female to Female	Decorator Frame, Duplex F-Type Coupler Bulkhead, Female to Female	Decorator Frame, One RJ11 Jack, 6-Position, 4-Conductor, One F-Type Coupler Bulkhead, Female to Female	Decorator Frame, One Cat. 5e 110 Punch-Down, One F-Type Coupler Bulkhead, Female to Female
Termination	**Screw Terminations**	**Screw Terminations**	**Screw Terminations**	**Screw Terminations**
Colour				
Almond	NS780AL	NS782AL	NS783AL	NS785AL
Black	–	–	–	NS785BK
Brown	–	–	–	NS785
Gray	–	–	–	NS785GY
Ivory	NS780I	NS782I	NS783I	NS785I
Light Almond	NS780LA	NS782LA	NS783LA	NS785LA
White	NS780W	NS782W	NS783W	NS785W

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

TOGGLE SWITCHES AND COMBINATION SWITCHES/DEVICES

FEATURES

Standard toggle switches provide the basic on/off control for home lighting and appliances.


- Tough thermoplastic with ultrasonically welded cover and base.
- Elongated strap for easier wall box mounting.
- Hi-visibility yellow base for easy installation.
- Operating temperature: -20°C to 60°C.
- UL Listed E3896, CSA Certified.



FEATURES

Mini-toggles provide for multiple switches in a compact single gang. Maximize control while maintaining function and appearance.

- Low profile, less than 1 inch.
- Self-grounding feature is standard.
- Smooth toggle action.
- Operating temperature: -20°C to 60°C.
- UL Listed, CSA Certified.

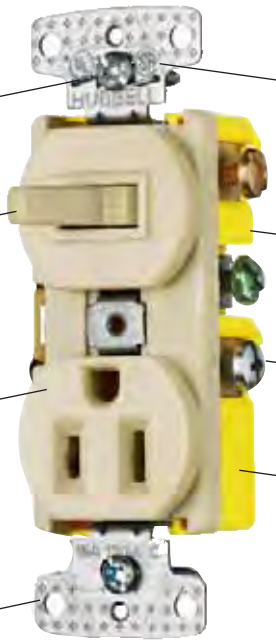

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

TOGGLE SWITCHES

Single Pole Toggle Switches

Description	Single Pole	Single Pole, Without Ears*	Single Pole	Single Pole, Illuminated**
Termination	Grounding, Push and Side Wire	Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire
Rating	15A 120V AC	15A 120V AC	15A 120V AC	15A 120V AC
Colour				
Clear	–	–	–	RS115ILC
Almond	RS115AL	RS115KAL	RS115SAL	RS115ILAL
Black	RS115BK	–	–	–
Brown	RS115	–	RS115S	–
Ivory	RS115I	RS115KI	RS115SI	RS115ILI
Light Almond	RS115LA	RS115KLA	RS115SLA	RS115ILLA
White	RS115W	RS115KW	RS115SW	RS115ILW

*Note: * 100 per case, bulk packed. Mounting screws inserted into strap.*
*** Frame is clear and illuminates, toggle is coloured. Does not require a neutral wire.*

Three- and Four-Way Toggle Switches

Description	Three Way	Three Way, Without Ears*	Three Way	Three Way, Illuminated**	Four-Way
Termination	Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Side Wire
Rating	15A 120V AC	15A 120V AC	15A 120V AC	15A 120V AC	15A 120V AC
Colour					
Clear	–	–	–	RS315ILC	–
Almond	RS315AL	RS315KAL	RS315SAL	RS315ILAL	RS415AL
Black	RS315BK	–	–	–	RS415BK
Brown	RS315	–	RS315S	–	RS415
Ivory	RS315I	RS315KI	RS315SI	RS315ILI	RS415I
Light Almond	RS315LA	RS315KLA	RS315SLA	RS315ILLA	RS415LA
White	RS315W	RS315KW	RS315SW	RS315ILW	RS415W

*Note: * 100 per case, bulk packed. Mounting screws inserted into strap.*
*** Frame is clear and illuminates, toggle is coloured. Does not require a neutral wire.*

onlinecomponents.com

HUBBELL®

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

COMBINATION SWITCHES/DEVICES

Combination Toggle Switches/Devices

Description	Two (2) Single Pole Switches	TR Single Pole Switch, Tamper- Resistant, 2 Pole, 3 Wire, Receptacle	Single Pole Switch, 2 Pole, 3 Wire, Receptacle	Single Pole Switch, Pilot Light, Clear Lens, Amber Neon Bulb**
Termination	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**
Rating	**15A 120V AC**	**15A 120V (switch) 15A 125V (recept.) NEMA 5-15R**	**15A 120V (switch) 15A 125V (recept.) NEMA 5-15R**	**15A 120V AC**
Colour				
Almond	RC101AL	RC108ALTR	RC108AL	RC109AL
Brown	RC101	RC108TR	RC108	RC109
Ivory	RC101I	RC108ITR	RC108I	RC109I
Light Almond	RC101LA	RC108LATR	RC108LA	RC109LA
White	RC101W	RC108WTR	RC108W	RC109W

*Note:** Neutral required for pilot light.*

Combination Toggle Switches/Devices

Description	Single Pole and Three Way Switch	Two (2) Three Way Switches	TR Three Way Switch, Tamper- Resistant, 2 Pole, 3 Wire, Receptacle	Three Way Switch, 2 Pole, 3 Wire, Receptacle	Three Way Switch, Pilot Light, Clear Lens, Amber Neon Bulb**
Termination	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**	**Self-Grounding, Side Wire**
Rating	**15A 120V AC**	**15A 120V AC**	**15A 120V (switch) 15A 125V (recept.) NEMA 5-15R**	**15A 120V (switch) 15A 125V (recept.) NEMA 5-15R**	**15A 120V AC**
Colour					
Almond	RC103AL	RC303AL	RC308ALTR	RC308AL	RC309AL
Brown	RC103	RC303	RC308TR	RC308	RC309
Ivory	RC103I	RC303I	RC308ITR	RC308I	RC309I
Light Almond	RC103LA	RC303LA	—	—	—
White	RC103W	RC303W	RC308WTR	RC308W	RC309W

*Note: ** Neutral required for pilot light.*

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

DUPLEX QUICK THREAD RECEPTACLES

QUICK AND EASY DOES IT.


Residential exclusive “Quick Thread” makes installation of wallplates and receptacles quicker and easier.

Provides branch circuit convenience power in duplex and single configurations.

- Smooth indented face appearance.
- Terminal screws accepts up to #12 AWG.
- Duplex ultrasonically welded.
- Push wire designed for #14 AWG solid copper wire only.
- Operating temperature: -20°C to 60°C.
- UL Listed E2186, CSA Certified.

ONE PUSH FOR A SNUG FIT

Just push in the screw and turn.

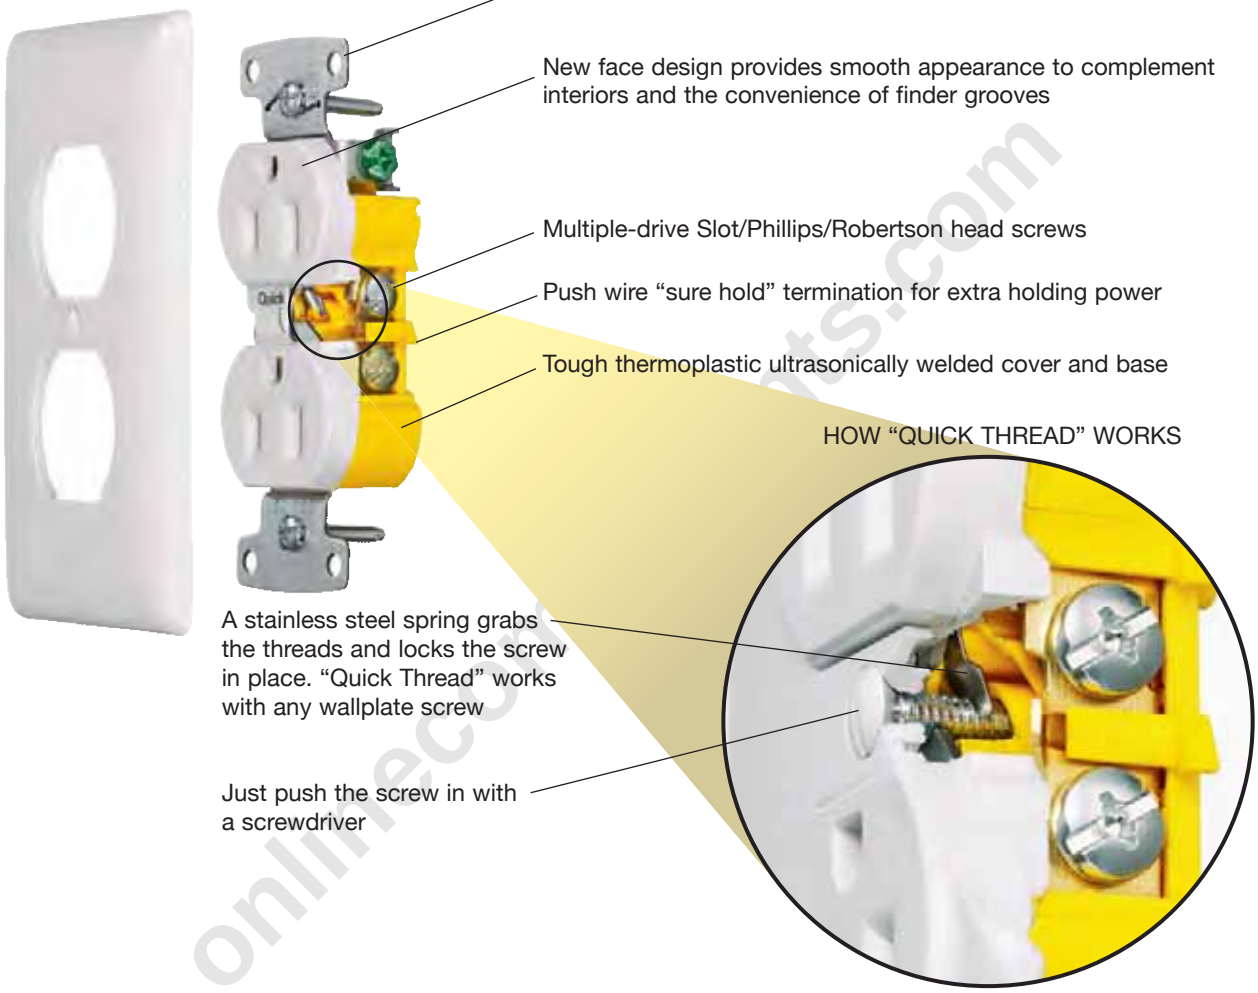


RR15QW

Duplex Quick Thread Receptacles, 2-Pole, 3 Wire				
Description	**Tamper- Resistant, Quick Thread**	**Standard, Quick Thread**	**Tamper- Resistant, Quick Thread**	**Standard, Quick Thread**
Termination	**Self-Grounding, Push and Side Wire**	**Self-Grounding, Push and Side Wire**	**Eight Push Wire Holes Only #14 AWG**	**Eight Push Wire Holes Only #14 AWG**
Rating	**15A 125V NEMA 5-15R**	**15A 125V NEMA 5-15R**	**15A 125V NEMA 5-15R**	**15A 125V NEMA 5-15R**
Almond	**RR15QALTR**	**RR15QAL**	**RR15EQALTR**	**RR15EQAL**
Black	**RR15QBKTR**	**RR15QBK**	**RR15EQBKTR**	**RR15EQBK**
Brown	**RR15QTR**	**RR15Q**	**RR15EQTR**	**RR15EQ**
Ivory	**RR15QITR**	**RR15QI**	**RR15EQITR**	**RR15EQI**
Light Almond	**RR15QLATR**	**RR15QLA**	**RR15EQLATR**	**RR15EQLA**
White	**RR15QWTR**	**RR15QW**	**RR15EQWTR**	**RR15EQW**

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

DUPLEX AND SINGLE RECEPTACLES

Duplex Receptacles, 2 Pole, 3 Wire

Description	Standard	Weather and Tamper- Resistant	Tamper- Resistant	Standard
Termination	Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Almond	RR15AL	RR15SALWRTR	RR15SALTR	RR15SAL
Black	RR15BK	RR15SBKWRTR	RR15SBKTR	RR15SBK
Brown	RR15	RR15SWRTR	RR15STR	RR15S
Ivory	RR15I	RR15SIWRTR	RR15SITR	RR15SI
Light Almond	RR15LA	RR15SLAWRTR	RR15SLATR	RR15SLA
White	RR15W	RR15SWWRTR	RR15SWTR	RR15SW


RR15W

Description	Tamper- Resistant, Without Ears	Standard, Without Ears	Tamper- Resistant, Without Ears**	Standard, Without Ears**
Termination	Eight Push Wire Holes Only #14 AWG	Eight Push Wire Holes Only #14 AWG	Eight Push Wire Holes Only #14 AWG	Eight Push Wire Holes Only #14 AWG
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Almond	RR15EALTR	RR15EAL	RR15KALTR	RR15KAL
Black	RR15EBKTR	RR15EBK	—	—
Brown	RR15ETR	RR15E	RR15KTR	RR15K
Gray	RR15EGYTR	RR15EGY	—	—
Ivory	RR15EITR	RR15EI	RR15KITR	RR15KI
Light Almond	RR15ELATR	RR15ELA	RR15KLATR	RR15KLA
White	RR15EWTR	RR15EW	RR15KWTR	RR15KW


RR15KW

Single Receptacles, 2 Pole, 3 Wire

Description	Weather and Tamper-Resistant	Tamper-Resistant	Standard	Weather Resistant	Standard
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 250V NEMA 6-15R	15A 250V NEMA 6-15R
Almond	RR151ALWRTR	RR151ALTR	RR151AL	RR155ALWR	RR155AL
Black	RR151BKWRTR	RR151BKTR	RR151BK	RR155BKWR	RR155BK
Brown	RR151WRTR	RR151TR	RR151	RR155WR	RR155
Gray	RR151GYWRTR	RR151GYTR	RR151GY	RR155GYWR	RR155GY
Ivory	RR151IWRTR	RR151ITR	RR151I	RR155IWR	RR155I
Light Almond	RR151LAWRTR	RR151LATR	RR151LA	RR155LAWR	RR155LA
White	RR151WWRTR	RR151WTR	RR151W	RR155WWR	RR155W


RR151W

Description	Weather and Tamper-Resistant	Tamper-Resistant	Standard	Weather Resistant	Standard
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	20A 125V NEMA 5-20R	20A 125V NEMA 5-20R	20A 125V NEMA 5-20R	20A 250V NEMA 6-20R	20A 250V NEMA 6-20R
Almond	RR201ALWRTR	RR201ALTR	RR201AL	RR205ALWR	RR205AL
Black	RR201BKWRTR	RR201BKTR	RR201BK	RR205BKWR	RR205BK
Brown	RR201WRTR	RR201TR	RR201	RR205WR	RR205
Gray	RR201GYWRTR	RR201GYTR	RR201GY	RR205GYWR	RR205GY
Ivory	RR201IWRTR	RR201ITR	RR201I	RR205IWR	RR205I
Light Almond	RR201LAWRTR	RR201LATR	RR201LA	RR205LAWR	RR205LA
White	RR201WWRTR	RR201WTR	RR201W	RR205WWR	RR205W


RR201W

*Note: ** 100 per case, bulk packed. Mounting screws inserted into strap.*

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

GFCI RECEPTACLES

SAFETY AND ECONOMY.

Meets UL Standard 943
Class A GFCI



10kA Short Circuit Current Rating

Comprehensive diagnostics
- When test button is actuated, both the electronic components and mechanical trip mechanism are functionally tested

Ground fault indicator
- Flashing RED indicates device has lost capability to provide protection

No power at face if reverse wired
- Open circuit condition eliminates false assumption of protection at face

Installation ease
- Internal back wiring
- Automatic grounding feature
- Captive mounting screws

GF15ILA



GFTR20I



GF15ILA



GFBF20ILA

GFCI Duplex Receptacles, Flush Nylon Face, Matching Nylon Wallplate Included

Description	Tamper-Resistant Weather Resistant	Tamper-Resistant Weather Resistant	15A 125V NEMA 5-15R UL/CSA Standard	20A 125V NEMA 5-20R UL/CSA Standard
Termination	**Self-Grounding, Back and Side Wire**	**Self-Grounding, Back and Side Wire**	**Self-Grounding, Back and Side Wire**	**Self-Grounding, Back and Side Wire**
Rating	**15A 125V AC NEMA 5-15R**	**20A 125V AC NEMA 5-20R**	**15A 125V AC NEMA 5-15R**	**20A 125V AC NEMA 5-20R**
Almond	**GFTR15AL**	**GFTR20AL**	**GF15ALLA**	**GF20ALLA**
Black	**GFTR15BK**	**GFTR20BK**	**GF15BKLA**	**GF20BKLA**
Brown	**GFTR15**	**GFTR20**	**GF15LA**	**GF20LA**
Gray	**GFTR15GY**	**GFTR20GY**	**GF15GYLA**	**GF20GYLA**
Ivory	**GFTR15I**	**GFTR20I**	**GF15ILA**	**GF20ILA**
Light Almond	**GFTR15LA**	**GFTR20LA**	**GF15LALA**	**GF20LALA**
Red	**GFTR15R**	**GFTR20R**	**GF15RLA**	**GF20RLA**
White	**GFTR15W**	**GFTR20W**	**GF15WLA**	**GF20WLA**

GFCI Duplex Receptacles, Flush Nylon Face, Matching Nylon Wallplate Included

Description	Circuit Guard® Faceless
Termination	**Self-Grounding, Back and Side Wire**
Rating	**20A 125V NEMA 5-20R**
Almond	**GFBF20ALLA**
Black	**GFBF20BKLA**
Brown	**GFBF20LA**
Gray	**GFBF20GYLA**
Ivory	**GFBF20ILA**
Light Almond	**GFBF20LALA**
Red	**GFBF20RLA**
White	**GFBF20WLA**

Online Components .com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

RANGE AND DRYER POWER RECEPTACLES AND PLUGS

Range and Dryer Power Receptacles

Description	 30A 125/250V NEMA 14-30R UL/CSA **Flush Mount for** $4^{11}/_{16}$" Sq. Box	 50A 125/250V NEMA 14-50R UL/CSA **Flush Mount for** $4^{11}/_{16}$" Sq. Box	 30A 125/250V NEMA 14-30R UL/CSA **Flush Mount for 1 or 2-gang box**	 50A 125/250V NEMA 14-50R UL/CSA **Flush Mount for 1 or 2-gang box**	 30A 125/250V NEMA 10-30R UL/CSA **Flush Mount for 1 or 2-gang box**	 50A 125/250V NEMA 10-50R UL/CSA **Flush Mount for 1 or 2-gang box**
Rating	**30A 125/250V 3 Pole, 4 Wire, with Ground, Integrated Wallplate Cover**	**50A 125/250V 3 Pole, 4 Wire, with Ground, Integrated Wallplate Cover**	**30A 125/250V 3 Pole, 4 Wire with Ground**	**50A 125/250V 3 Pole, 4 Wire with Ground**	**30A 125/250V 3 Pole, 3 Wire without Ground**	**50A 125/250V 3 Pole, 3 Wire without Ground**
Black			RR430F	RR450F	RR330F*	RR350F*
White	RR430WIPCN	RR450WIPCN	RR430FW	RR450FW	—	—

Description	Surface Mount	Surface Mount	Surface Mount	Surface Mount
Rating	**30A 125/250V 3 Pole, 4 Wire with Ground**	**50A 125/250V 3 Pole, 4 Wire with Ground**	**30A 125/250V 3 Pole, 3 Wire without Ground**	**50A 125/250V 3 Pole, 3 Wire without Ground**
Black	RR430	RR450	RR330*	RR350*

Description	Panel Mount	Panel Mount
Rating	**30A 125/250V 3 Pole, 4 Wire with Ground**	**50A 125/250V 3 Pole, 4 Wire with Ground**
Black	RR430PM	RR450PM
White	—	—

*Note: * For replacement use only.*

Range and Dryer Power Angled Plugs

Description	 30A 125/250V NEMA 14-30R UL/CSA	 50A 125/250V NEMA 14-50R UL/CSA	 30A 125/250V NEMA 10-30R UL/CSA	 50A 125/250V NEMA 10-50R UL/CSA
	With Interchangeable Blades for 30 or 50 Amp		**With Interchangeable Blades for 30 or 50 Amp**	
Rating	**30/50A 125/250V 3 Pole, 4 Wire with Ground**		**30/50A 125/250V 3 Pole, 4 Wire without Ground**	
Black	RR435P		RR335P	

Wallplates, Surface Mount, 2.15" Diameter Single Hole

	1-gang Standard	1-gang Mid size	2-gang Standard	2-gang Mid size
Ivory	NP724I	NPJ724I	NP703I	NPJ703I
White	NP724W	NPJ724W	NP703W	NPJ703W
Chrome	SCH723	—	—	—
Stainless Steel	SS723	—	SS703	—


RR430WIPCN


RR430FW


RR450


RR430PM


RR435P

NP724W


NP703W

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SPECIAL USE PRODUCTS


RR151CHW


RJ650BK


RJ600


RDS50


RS100W


RS101W

Special Use Products

Description	Colour	Tamper Resistant (15A 125V NEMA 5-15R UL/CSA)	Standard (15A 125V NEMA 5-15R UL/CSA)	Tamper Resistant (20A 125V NEMA 5-20R UL/CSA)	Standard (20A 125V NEMA 5-20R UL/CSA)
Clock Hanger/Recessed Receptacle, 2 Pole, 3 Wire, Grounding, Side Wire Terminations	Brass Stainless Steel Ivory (Nylon) White (Nylon)	**RR151CHBSTR** **RR151CHSSTR** **RR151CHITR** **RR151CHWTR**	**RR151CHBS** **RR151CHSS** **RR151CHI** **RR151CHW**	**RR201CHBSTR** **RR201CHSSTR** **RR201CHITR** **RR201CHWTR**	**RR201CHBS** **RR201CHSS** **RR201CHI** **RR201CHW**
JLOAD® Multimedia Outlet Provides power, Cat. 5e and coaxial in a single gang box. Requires RJ600 Box. Includes decorator frame, one Cat. 5e, one F-connector and one power receptacle 125V with voltage divider.	Almond Black Gray Ivory Light Almond White	**RJ650ALTR** **RJ650BKTR** **RJ650GYTR** **RJ650ITR** **RJ650LATR** **RJ650WTR**	**RJ650AL** **RJ650BK** **RJ650GY** **RJ650I** **RJ650LA** **RJ650W**	**RJ620ALTR** **RJ620BKTR** **RJ620GYTR** **RJ620ITR** **RJ620LATR** **RJ620WTR**	**RJ620AL** **RJ620BK** **RJ620GY** **RJ620I** **RJ620LA** **RJ620W**
JLOAD® Multimedia Outlet Includes decorator frame with two open ports for custom configuration and one power receptacle 125V with voltage divider.	Almond Black Gray Ivory Light Almond White	**RJ65ALTR** **RJ65BKTR** **RJ65GYTR** **RJ65ITR** **RJ65LATR** **RJ65WTR**	**RJ65AL** **RJ65BK** **RJ65GY** **RJ65I** **RJ65LA** **RJ65W**	**RJ62ALTR** **RJ62BKTR** **RJ62GYTR** **RJ62ITR** **RJ62LATR** **RJ62WTR**	**RJ62AL** **RJ62BK** **RJ62GY** **RJ62I** **RJ62LA** **RJ62W**
JLOAD® Multimedia Box 3 inches deep with seven ½-inch knockouts, non-metallic sheathed cable clamps on each side. Screw in mounting to stud.	Steel	**RJ600**	**RJ600**	**RJ600**	**RJ600**


Note: See pages F21 to F24 for floor and under cabinet box options.

Door Switch with Cover Plate and Box

Description	"ON" when Door is Open	"OFF" when Door is Open
Rating	3A 125V AC	3A 125V AC
Zinc Plated Steel	**RDS50****	**RDS30****

*Note: ** Not UL Listed.*

Product Dimensions

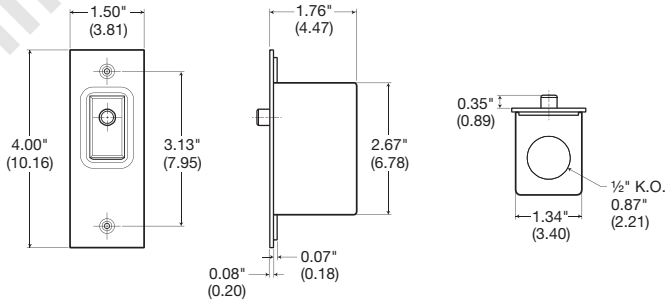

In-Line Cord Switches

Description	Mini For Use with Flat Lamp Cord	Heavy Duty
Rating	6A 125V AC	6A 125V AC 1⁄6 HP
Wire	#18 AWG SPT 1 and SPT 2	#18 to #16 AWG SPT 1 and SPT 2
Ivory **White**	— **RS100W**	**RS101I** **RS101W**

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

DIMMERS AND FAN SPEED CONTROLS

Rocker Decorator Dimmers, Preset with Night Light

Description	Side Slide Adjustment, Incandescent	Side Slide Adjustment, Incandescent	Side Slide Adjustment, Incandescent	Side Slide Adjustment, Incandescent
Termination	**Single Pole**	**Three Way**	**Single Pole**	**Three Way**
Rating	**1000W 120V AC**	**1000W 120V AC**	**600W 120V AC**	**600W 120V AC**
Almond	RDV10PAL	RDV103PAL	RDV600PAL	RDV603PAL
Ivory	RDV10PI	RDV103PI	RDV600PI	RDV603PI
Light Almond	RDV10PLA	RDV103PLA	RDV600PLA	RDV603PLA
White	RDV10PW	RDV103PW	RDV600PW	RDV603PW

Description	Magnetic Low Voltage	Magnetic Low Voltage	Electronic Low Voltage	Electronic Low Voltage Requires Neutral
Termination	**Single Pole**	**Three Way**	**Single Pole**	**Three Way**
Rating	**600VA (450W) 120V AC**	**600VA (450W) 120V AC**	**300W 120V AC**	**300W 120V AC**
Almond	RDVLV600PAL	RDVLV603PAL	RDVELV300PAL	RDVELV303PAL
Ivory	RDVLV600PI	RDVLV603PI	RDVELV300PI	RDVELV303PI
Light Almond	RDVLV600PLA	RDVLV603PLA	RDVELV300PLA	RDVELV303PLA
White	RDVLV600PW	RDVLV603PW	RDVELV300PW	RDVELV303PW


RDV600PW


RS600PW

Slide Dimmers, Preset with On/Off Switch

Description	Incandescent	Incandescent	Incandescent	Incandescent
Termination	**Single Pole**	**Three Way**	**Single Pole**	**Three Way**
Rating	**1000W 120V AC**	**1000W 120V AC**	**600W 120V AC**	**600W 120V AC**
Almond	RS10PAL	RS103PAL	RS600PAL	RS603PAL
Ivory	RS10PI	RS103PI	RS600PI	RS603PI
Light Almond	RS10PLA	RS103PLA	RS600PLA	RS603PLA
White	RS10PW	RS103PW	RS600PW	RS603PW

Description	Magnetic Low Voltage	Magnetic Low Voltage	Electronic Low Voltage	Electronic Low Voltage Requires Neutral
Termination	**Single Pole**	**Three Way**	**Single Pole**	**Three Way**
Rating	**600VA (450W) 120V AC**	**600VA (450W) 120V AC**	**300W 120V AC**	**300W 120V AC**
Almond	RSLV600PAL	RSLV603PAL	RSELV300PAL	RSELV303PAL
Ivory	RSLV600PI	RSLV603PI	RSELV300PI	RSELV303PI
Light Almond	RSLV600PLA	RSLV603PLA	RSELV300PLA	RSELV303PLA
White	RSLV600PW	RSLV603PW	RSELV300PW	RSELV303PW


RS613W


RS600W


Slide Dimmers, Specialty

Description	Incandescent Slide to Off	Incandescent Omni Slide Button
Termination	**Single Pole**	**Single Pole/Three Way**
Rating	**600W 120V AC**	**600W 120V AC**
Ivory	RS600I	RS613PI
Light Almond	RS600LA	RS613PLA
White	RS600W	RS613PW


RS2LFSQW

Fan Speed Controls, 3 Speed and Replacement Knobs

Description	Rocker Slide Adjustment	Slide Control Slide to Off	Combination Slide Dimmer, Incandescent	Replacement Knob
Termination	**Single Pole/Three Way**	**Single Pole**	**Single Pole**	**—**
Rating	**1.5A 120V AC**	**1.5A 120V AC**	**300W 1.5 A 120V AC**	**—**
Almond	RDVFSQFAL	RSFSQFAL	RS2LFSQAL	RSKAL
Ivory	RDVFSQFI	RSFSQFI	RS2LFSQI	RSKI
Light Almond	RDVFSQFLA	RSFSQFLA	RS2LFSQLA	RSKLA
White	RDVFSQFW	RSFSQFW	RS2LFSQW	RSKW


RSKW

RSKI

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

TOGGLE DIMMERS AND FAN SPEED CONTROLS



RAY600PW

Toggle Incandescent Preset Dimmers

Description	Side Slide Adjustment with Wire Leads	Side Slide Adjustment with Wire Leads	Side Slide Adjustment with Terminal Screws	Side Slide Adjustment with Terminal Screws
Termination	**Single Pole**	**Three Way**	**Single Pole**	**Three Way**
Rating	**1000W 120V AC**	**1000W 120V AC**	**600W 120V AC**	**600W 120V AC**
Almond	RAY10PAL	RAY103PAL	RAY600PAL	RAY603PAL
Ivory	RAY10PI	RAY103PI	RAY600PI	RAY603PI
Light Almond	RAY10PLA	RAY103PLA	RAY600PLA	RAY603PLA
White	RAY10PW	RAY103PW	RAY600PW	RAY603PW



RD600RW



RRKDK

Rotary Incandescent Dimmers and Replacement Knobs

Description	On/Off Dimmer	Push On/Off Dimmer Ivory and White Knobs Provided	Push On/Off Dimmer Ivory and White Knobs Provided	Replacement Knobs 2 Piece Kit
Termination	**Single Pole**	**Single Pole**	**Three Way**	**—**
Rating	**600W 120V AC**	**600W 120V AC**	**600W 120V AC**	**—**
Ivory	RD600RI	—	—	—
White	RD600RW	—	—	—
Ivory/White	—	RD600PDK	RD603PDK	RRKDK



RAY2LFSQW



RFSQ2FDK

Fan Speed Controls

Description	Toggle 3-Speed	Combination Toggle 3-Speed/Dimmer	Rotary On/Off 3-Speed includes Ivory and White knobs	Rotary Variable Speed	Rotary Fan Control Replacement Knobs
Termination	**Single Pole or Three Way**	**Single Pole**	**Single Pole**	**Single Pole**	**—**
Rating	**1.5A 120V AC**	**300W 1.5A 120V AC**	**1.5A 120V AC**	**5A 120V AC**	**—**
Almond	RAYFSQFAL	RAY2LFSQAL	—	—	—
Ivory	RAYFSQFI	RAY2LFSQI	—	RFS5I	R28032406
Light Almond	RAYFSQFLA	RAY2LFSQLA	—	RFS5LA	—
White	RAYFSQFW	RAY2LFSQW	—	—	R28032401
Ivory/White	—	—	RFSQ2FDK	RFS5W	—



R28032401

R28032406

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

OCCUPANCY AND VACANCY SENSORS

Occupancy Sensors

Auto-on occupancy sensors turn on the load when motion is detected in an area. The device turns lights off when motion ceases and the time delay has expired.

Description	Occupancy Sensor Basic On/Off Control 150° View Standard	Occupancy Sensor Basic On/Off Control 150° View With Nightlight	Occupancy Sensor Dimming Control 150° View Standard	Occupancy Sensor Dimming Control 150° View With Nightlight
Termination	**Single Pole Switch**	**Single Pole Switch**	**Single Pole Switch**	**Single Pole Switch**
Rating	**500W 120V AC Incandescent Only**	**500W 120V AC Incandescent Only**	**500W 120V AC Incandescent Only**	**500W 120V AC Incandescent Only**
Almond	**RMS101AL**	**RMS101ILAL**	**RMS121AL**	**RMS121ILAL**
Ivory	**RMS101I**	**RMS101ILI**	**RMS121I**	**RMS121ILI**
Light Almond	**RMS101LA**	**RMS101ILLA**	**RMS121LA**	**RMS121ILLA**
White	**RMS101W**	**RMS101ILW**	**RMS121W**	**RMS121ILW**



RMS101W
RMS100W

Vacancy Sensors

Vacancy sensor switches are specifically designed for California Title 24 compliance. When a person enters an area, the manual switch must be pressed to turn on the light. The device turns lights off when motion ceases and the time delay has expired.

Description	Vacancy Sensor Basic On/Off Control 150° View Standard	Vacancy Sensor Basic On/Off Control 150° View With Nightlight	Vacancy Sensor Dimming Control 150° View Standard	Vacancy Sensor Dimming Control 150° View With Nightlight
Termination	**Single Pole Switch**	**Single Pole Switch**	**Single Pole Switch**	**Single Pole Switch**
Rating	**500W 120V AC Incandescent Only**	**500W 120V AC Incandescent Only**	**500W 120V AC Incandescent Only**	**500W 120V AC Incandescent Only**
Almond	**RMS100AL**	**RMS100ILAL**	**RMS120AL**	**RMS120ILAL**
Ivory	**RMS100I**	**RMS100ILI**	**RMS120I**	**RMS120ILI**
Light Almond	**RMS100LA**	**RMS100ILLA**	**RMS120LA**	**RMS120ILLA**
White	**RMS100W**	**RMS100ILW**	**RMS120W**	**RMS120ILW**



RMS121ILW
RMS120ILW

Heavy Duty Occupancy and Vacancy Sensors


Description	Occupancy Sensor 180° View	Vacancy Sensor 180° View
Termination	**Single Pole**	**Single Pole**
Rating	**800W Inc., 1000W Fluor., 120V AC 1800W Fluor., 277V AC 1/6 HP 120V AC**	**800W Inc., 1000W Fluor., 120V AC 1800W Fluor., 277V AC 1/6 HP 120V AC**
Almond	**RMS141AL**	**RMS140AL**
Ivory	**RMS141I**	**RMS140I**
White	**RMS141W**	**RMS140W**




RMS141W
RMS140W

onlinecomponents.com

Coverage for Occupancy and Vacancy Sensors

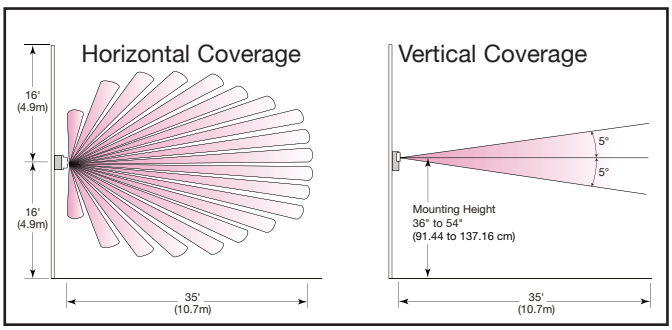


Coverage for Heavy Duty Occupancy and Vacancy Sensors

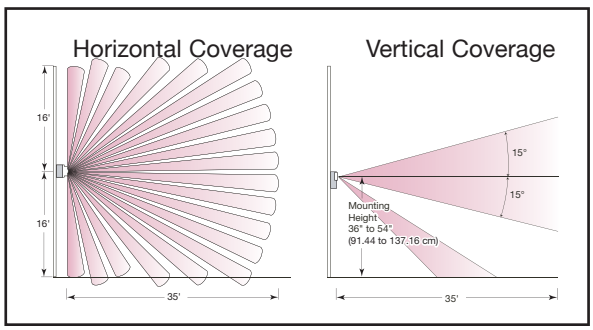

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

FLOOR BOXES FOR WOOD FLOORS

Hubbell Wood Floor Boxes allow for the placement of electrical power or a combination of power and voice/data devices. Boxes easily mount into the floor and are height adjustable (up to ¾ inch) for optimal alignment and fit.

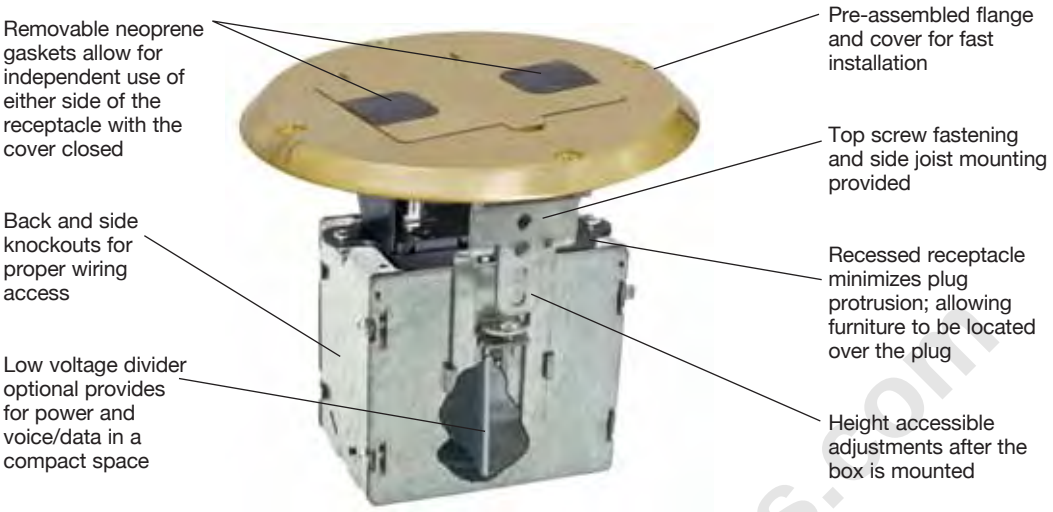

Note: Template cutout provided with instructions for proper installation.

The Right Choice For That Perfect Finishing Touch!



Solid Brass | Brass Plated | Chrome Plated | Copper Plated | Nickel Plated | Stainless Finish | Almond | Black | Chestnut Brown

Note: Not all configurations are available in all colours. See below for details.

Floor Boxes For Structural Wood Floors

Description	Material	Finish	Cat. Number	Material	Finish	Cat. Number
Decorator duplex receptacle floor box kit; includes steel box, flange and hinged door cover assembly with 15A 125V tamper-resistant duplex receptacle; designed for installation in wood floors; mounts to sub-floor or joists.	Solid Brass Aluminum Aluminum Aluminum Aluminum	Clear Lacquer Stainless Paint Almond Paint Black Paint Chestnut Brown Paint	**RF515BR** **RF515SS** **RF515AL** **RF515BK** **RF515BN**	Aluminum Aluminum Aluminum Aluminum	Brass Plated Chrome Plated Copper Plated Nickel Plated	**RF515BP** **RF515CH** **RF515CU** **RF515NI**
Flush fit (same as above).	Solid Brass	Clear Lacquer	**RF509BR**			
Flange and hinged door cover assembly; includes tamper-resistant duplex receptacle; neoprene gaskets; for use with steel box RF500.	Solid Brass Aluminum Aluminum Aluminum Aluminum	Clear Lacquer Stainless Paint Almond Paint Black Paint Chestnut Brown Paint	**RF506BR** **RF506SS** **RF506AL** **RF506BK** **RF506BN**	Aluminum Aluminum Aluminum Aluminum	Brass Plated Chrome Plated Copper Plated Nickel Plated	**RF506BP** **RF506CH** **RF506CU** **RF506NI**
Adjustable floor box; 3 inch deep; three (3) ½ inch knockouts: one on bottom; one on each side; non-metallic sheathed cable clamps on each side.				Steel	—	**RF500**
Hinged Door Cover Only Replacement door for RF515, RF509 and RF506 series.	Solid Brass Aluminum Aluminum Aluminum Aluminum	Solid Brass Stainless Finish Almond Black Chestnut Brown Paint	**RF507BR** **RF507SS** **RF507AL** **RF507BK** **RF507BN**	Aluminum Aluminum Aluminum Aluminum	Brass Plated Chrome Plated Copper Plated Nickel Plated	**RF507BP** **RF507CH** **RF507CU** **RF507NI**


RF515BR


RF506BR


RF500


RF507BR

HUBBELL®

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

FLOOR BOXES FOR WOOD FLOORS

Duplex floor receptacles provide ample connections to service lighting, entertainment equipment and computers for family rooms and offices. Single receptacle configurations available for minimum requirements.

- Metal covers feature electrostatic powder coating that resists wear and provides a distinctive finish.
- Recessed GFCI/Decorator opening.
- Cut out template provided to assure proper sub-flooring preparation.

Floor Boxes For Wood Floors

Description	Material	15A 125V NEMA 5-15R UL/CSA: Tamper Resistant	15A 125V NEMA 5-15R UL/CSA: Standard	20A 125V NEMA 5-20R UL/CSA: Tamper Resistant	20A 125V NEMA 5-20R UL/CSA: Standard
Duplex Receptacle Floor Box Rated Includes steel box, duplex TR receptacle and cover.		**RF6500BR**	**–**	—	—
Single Receptacle Floor Box Rated Includes steel box, single receptacle and cover.	Brass	**RF151TR**	**RF151**	—	—
Single Receptacle Display Rated Receptacle and cover only, excludes box.	Brass	**–**	**RF151D**	—	—




RF151



RF151D

Product Dimensions Inches (mm)

Wood Floor Boxes

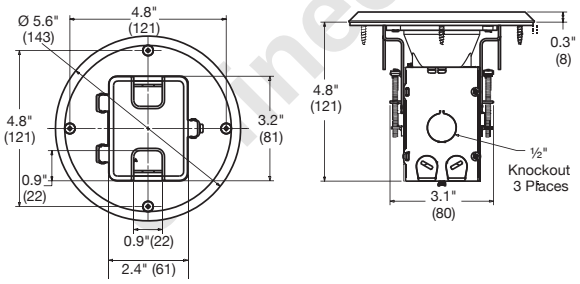

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

UNDER CABINET/COUNTER POWER DISTRIBUTION

These boxes comply with the NEC® for kitchen receptacles, with placement not more than 20 inches above the counter surface. They can also be placed under counter islands, not lower than 15 inches from the surface.

- Available with nylon or metal cover.
- Custom configurable, accepts any decorator style device.
- Mounting hardware included.
- UL Listed E31999 and CSA Certified under cabinet boxes.




Under Cabinet/Counter Power Distribution

Description	Slim Box Catalogue Number	GFCI Fit Box Catalogue Number
Stainless Steel	**RU100SS**	**RU200SS**
White Metal	**RU100W**	**RU200W**
White Nylon	**RU170W***	**RU270W***




RU100W

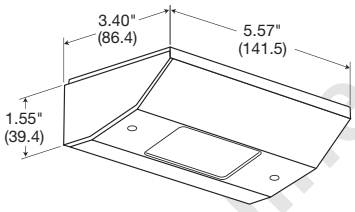




RU200SS




*Note: * Steel box with nylon cover.*

Vertical Mount

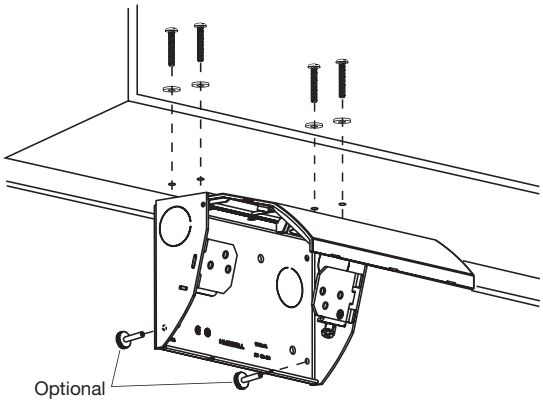

Horizontal Mount

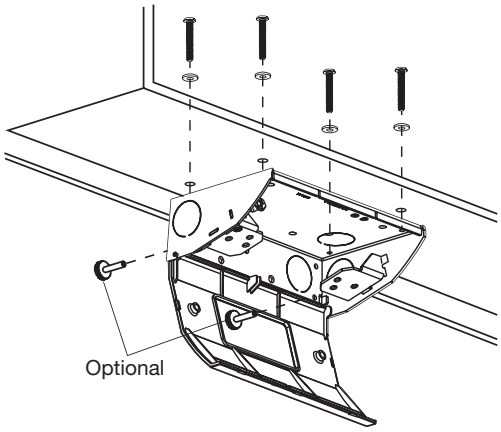

NEC® is a registered trademark of the National Fire Protection Association (NFPA).


onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

JLOAD® MULTIMEDIA OUTLET

MAKE THE MOST OF A PERFECT LOCATION.

Install receptacles and voice/data devices exactly where they are needed, in the smallest space possible.

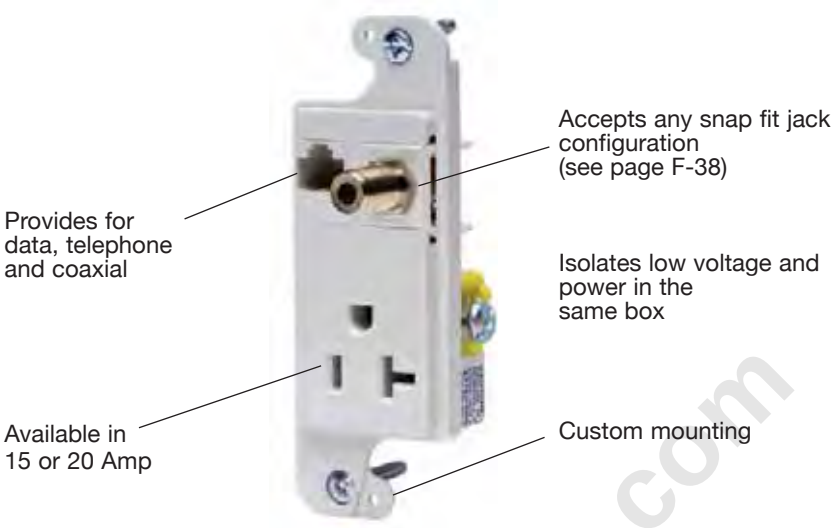

Note: Requires unique box shown below.



15A 125V NEMA 5-15R UL/CSA



20A 125V NEMA 5-20R UL/CSA

JLOAD® Multimedia Outlet

Description	Colour	15A 125V NEMA 5-15R UL/CSA Tamper Resistant	15A 125V NEMA 5-15R UL/CSA Standard	20A 125V NEMA 5-20R UL/CSA Tamper Resistant	20A 125V NEMA 5-20R UL/CSA Standard
JLOAD® Multimedia Outlet, specifically designed to provide power, Cat. 5e and coaxial in a single gang box. Requires JLOAD® Multimedia Box RJ600. Perfect for HDTV and computer use where a combination of power and data are needed. Includes decorator frame, one Cat. 5e, one F-connector and one power receptacle 125V with voltage divider.	Almond Black Gray Ivory Light Almond White	RJ650ALTR RJ650BKTR RJ650GYTR RJ650ITR RJ650LATR RJ650WTR	RJ650AL RJ650BK RJ650GY RJ650I RJ650LA RJ650W	RJ620ALTR RJ620BKTR RJ620GYTR RJ620ITR RJ620LATR RJ620WTR	RJ620AL RJ620BK RJ620GY RJ620I RJ620LA RJ620W
JLOAD® Multimedia Outlet, includes decorator frame with two open ports for custom configuration and one power receptacle 125V with voltage divider.	Almond Black Gray Ivory Light Almond White	RJ65ALTR RJ65BKTR RJ65GYTR RJ65ITR RJ65LATR RJ65WTR	RJ65AL RJ65BK RJ65GY RJ65I RJ65LA RJ65W	RJ62ALTR RJ62BKTR RJ62GYTR RJ62ITR RJ62LATR RJ62WTR	RJ62AL RJ62BK RJ62GY RJ62I RJ62LA RJ62W
JLOAD® Multimedia Box, 3 inches deep with seven ½-inch knockouts, non-metallic sheathed cable clamps on each side. Screw in mounting to stud.	Steel	RJ600	RJ600	RJ600	RJ600



RJ620W




RJ62W



RJ600

JLOAD® Dimensions Inches (mm)

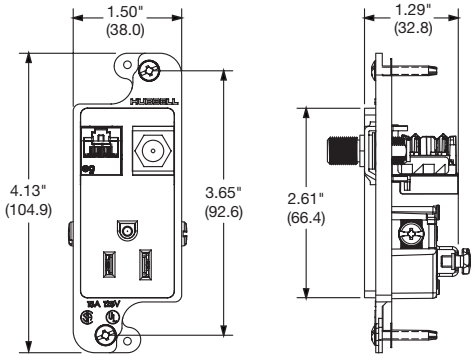

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS


DECORATOR SWITCHES

- Smooth, quiet rocker action
- Self-grounding feature standard
- Ultrasonically welded cover and base provides maximum strength
- Push, back and side wiring
- Available colours: Almond, Black, Brown, Gray, Ivory, Light Almond and White



RSD115W

Product Dimensions Inches (mm)

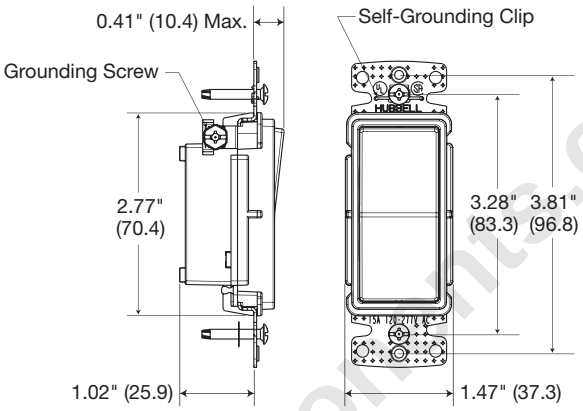

Single-Pole Decorator Switch

Specifications

Switches

Typical Specification — Catalogue Number RSD115*
Description — Decorator series rocker switch
Type — Single Pole
Rating — 15A, 120-277V AC

*Note: * Designates colour: AL = Almond, BK = Black, Blank = Brown, GY = Gray, I = Ivory, LA = Light Almond, W = White*

Certification

- Listed to UL Standard 20
- CSA Certified

Components	Materials
Base and body	PVC
Rocker	Polycarbonate
Terminals	Brass
Mounting strap	Galvanized steel
Contacts	Silver alloy
Movable contact arm	Copper alloy
Terminal screws	Steel

Performance

Electrical	
Dielectric voltage	Withstands 1,500V AC minimum for 1 minute
Max. working voltage	120V
Overload	1.5 times rating
Endurance	30,000 cycles minimum

Mechanical	
Terminal accommodation	Back and side wire: #14 AWG min. - #12 AWG max. solid and stranded copper wire only; push wire: #14 AWG solid copper wire only

Environmental	
Flammability	UL V0
Operating temperatures	Maximum continuous 60°C; minimum -20°C (without impact)


onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

IN-WALL A/V DELIVERY

Hubbell's netSELECT® Flat Panel Television (FPTV) connection enclosure delivers high-density connectivity and power in the wall. This allows flat panel displays and interactive "smart" boards to sit flush against walls with no dangling cords. It quickly installs to studs or drywall without additional components or hardware.

- 18 Gauge white powder coated rugged steel base.
- 2-gang enclosure with 2 additional 3-Unit Hubbell iSTATION mounting locations
- Stud or sheetrock mounting integrated.
- Supplied ABS trim ring quickly cleans up drywall rough-in.
- Optional screw on cover reduces tampering
- cULus 1863 Listed.

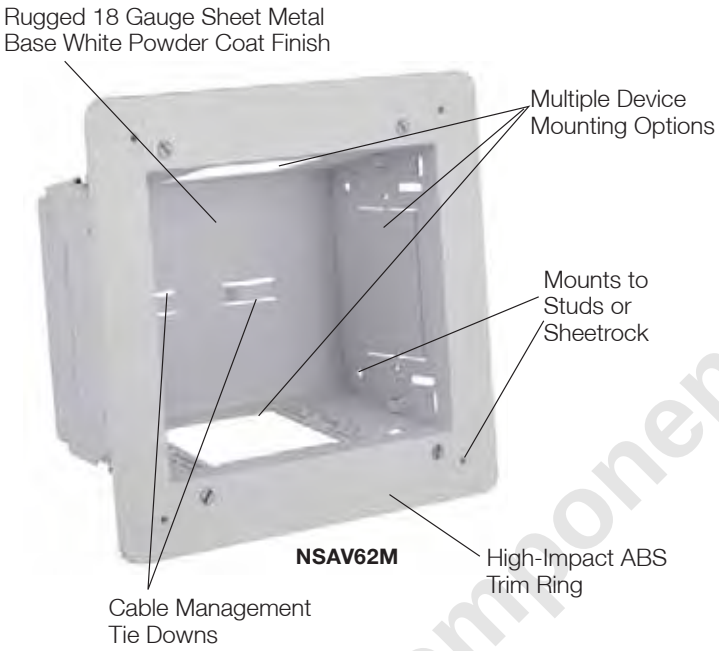

NSAV62M



NSAV6C



NS0KPS



NS801W



NSJ6W

FPTV Connection Enclosure

Description	Colour	Catalogue Number
2-gang In-Wall Enclosure	White	**NSAV62M**
Steel Cover for NSAV6 series	White	**NSAV6C**

Power Kits

Description	Colour	Catalogue Number
Standard Power Kit	White	**NSOKP**
Surge Protected Power Kit	White	**NSOKPS**
1-G Decorator Plate	White	**NP26W**
1-G Hubbell iSTATION Plate	White	**IMF1W**
1-G 4-Port Keystone Plate	White	**NSP14W**

A/V Connectors and Plates


Description	Colour	Catalogue Number
1-Port HDMI Frame	White	**NS801W**
2-Port HDMI Frame	White	**NS802W**
HDMI Snap Fit	Black	**SFHCBK**
F-Connector Snap Fit	White	**NSF70W**
USB A-to-B Snap Fit	White	**SFUSBABW**
Cat 6 Snap Fit Jack	White	**NSJ6W**

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

HDMI PRODUCTS

netSELECT® HDMI Decorator Frames deliver uncompromising digital audio and video wherever you need it. Unleash the full potential of your high definition display and audio installations.

- Third party tested for 1080p resolutions.
- UL Listed - Communications Circuit Accessory and CSA Certified.

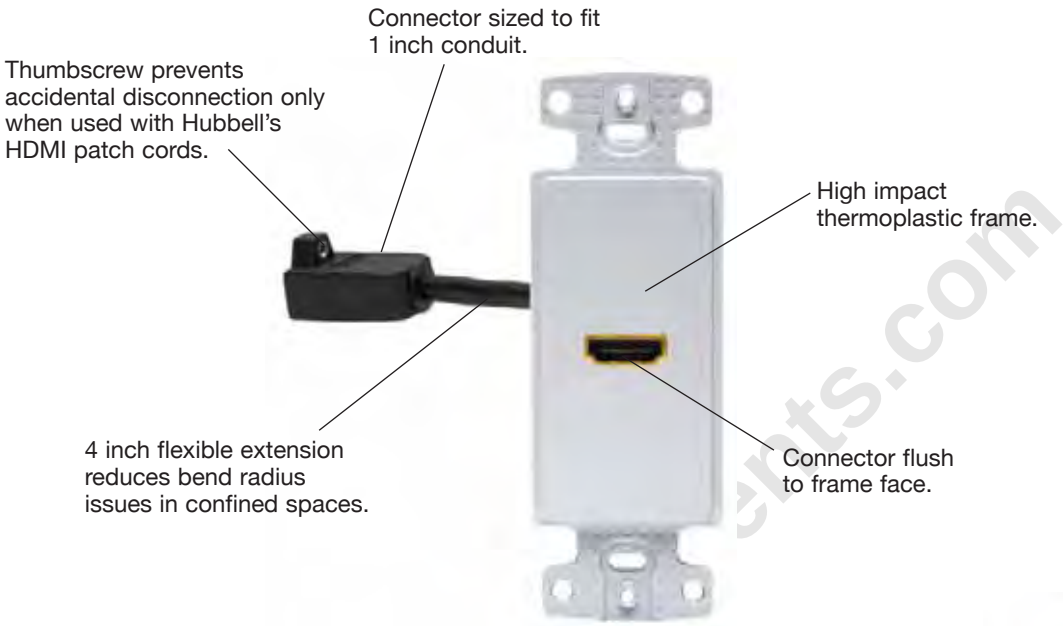

HDMI Products

Description	Colour	Catalogue Number
1-gang, 1-Port HDMI, Decorator Frame, Female to Female	Almond	**NS801AL**
	Black	**NS801BK**
	Gray	**NS801GY**
	Ivory	**NS801I**
	Light Almond	**NS801LA**
	White	**NS801W**
1-gang, 2-Port HDMI, Decorator Frame, Female to Female	Almond	**NS802AL**
	Black	**NS802BK**
	Gray	**NS802GY**
	Ivory	**NS802I**
	Light Almond	**NS802LA**
	White	**NS802W**


NS801W


NS802W

HDMI Cords

HDMI Device Patch Cords

HDMI (24 AWG)	Catalogue Number
3 ft.	**HDPC03BK**
6 ft.	**HDPC06BK**

Horizontal Cords (Connector to Connector)

HDMI (24 AWG)	Catalogue Number
XX ft.	**HDHXXBK**


HDPC06BK

Link Cords (Connector to Device)

HDMI (24 AWG)	Catalogue Number
XX ft.	**HDLXXBK**

Coupler Cords (Coupler to Device)

HDMI (24 AWG)	Catalogue Number
XX ft.	**HDCXXBK**

Note: XX = Length in feet. '10' = 10 ft., '15' = 15 ft., '20' = 20 ft., '25' = 25 ft., '30' = 30 ft., Black and Non-Plenum only.

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

STRUCTURED WIRING

Advantages and Wiring Layout


- Share single analog, cable or DSL internet connection.
- Local file access.
- Shared peripherals.
- Multiple telephone distribution.
- Call handling (PBX).
- Video distribution.
- Play games that allow multi-users.
- Control home automation systems.

Connect Your Home to Internet, Voice And Video Services.



netSELECT® is an innovative network solution that's perfect for any home or small office. Specifically positioned as the voice/data segment for the Residential brand, the netSELECT® System satisfies the need for a dependable, flexible system that can accommodate all of today's fast-changing voice, data and video requirements. This cost-effective solution incorporates all the quality you'd expect from Hubbell. Built-in flexibility makes it easy to upgrade and keep pace with evolving technologies.

Today's Communications Entail A Lot More Than Just Talking.
netSELECT® Keeps You Connected—Internet, Voice, Data and Entertainment

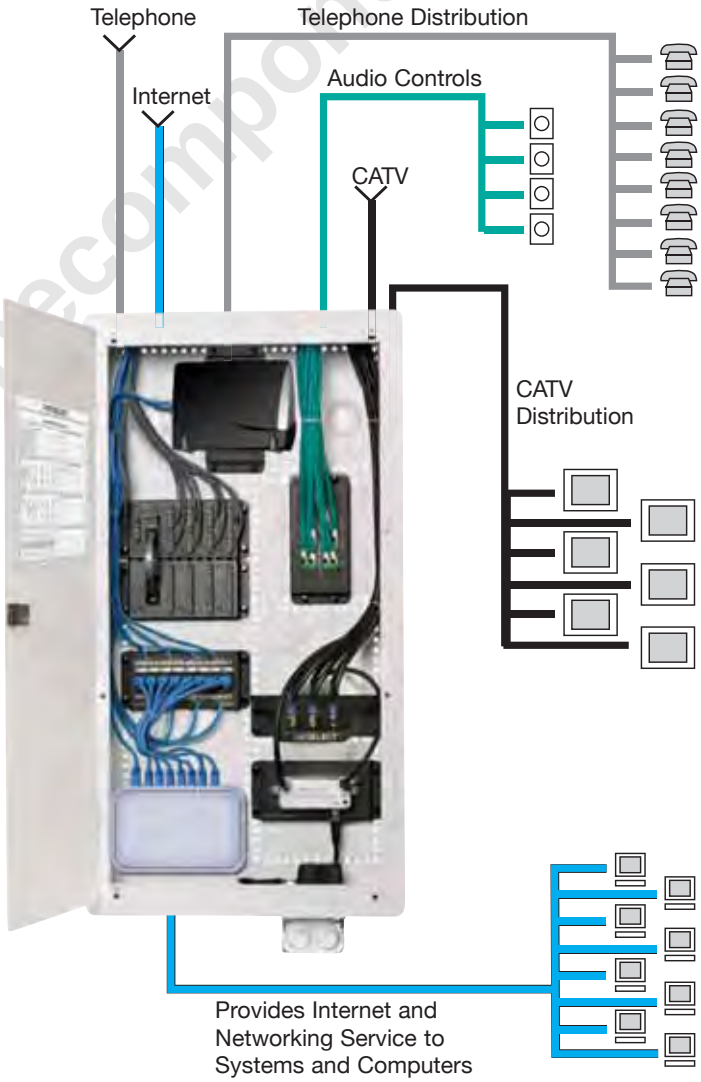

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

NETWORK ENCLOSURES

FEATURES

- Flush or surface mount enclosure (hardware provided).
- Hinged cover can be mounted to swing from either side.
- Integral trim ring hides rough-in hole in except NSOBOX48.
  sheet rock providing a finished appearance.
- Horizontal and vertical module mounting holes for maximum flexibility.
- Unique 89D bracket mounting holes allow easy mounting of 66 blocks and peripherals.
- Provisions to mount optional duplex power and lock kit available.
- Integral cable management slots and tie-wraps provided to help dress cable runs.
- Additional nylon push pins provided to assist module mounting.
- Material: 20-18 gauge steel.
- Finish: white, powder coat.
- UL and cULus Listed 1863.

Network Enclosures

Description		Number of Module Placement	Cat. Number
Pre-configured Network System Basic home network kit includes: One box with hinged cover NSOBOX14, One primary 8-port telephone module NSOPTM8, One four-way coaxial splitter module NSOVDM4		—	**NSOBNK14**
10 Inch Network Enclosure for MDU and Modular Applications **Dimensions**: 14.38 in. W x 10.0 in. H x 3.96 in. D **Knock-outs:** Top: four 1½ in. N.P.T. or completely open combo; Bottom: four 1½ in. N.P.T. or completely open combo; Back: none	with Hinged Cover with Panel Cover 10”H Box only Hinged Door Panel Cover	3	**NSOBX10** **NSOBX10BC** **NSOBX10B** **NSOBX10D** **NSOBX10C**
14 Inch Network Enclosure **Dimensions:** 14.38 in. W x 14 in. H x 3.96 in. D **Knock-outs:** Top: two 1 in. Dia. and three 1½ in. N.P.T. combo; Bottom: one 1 in. Dia. and one 1½ in. N.P.T. combo; Back: two ¾ in. N.P.T.	with Hinged Cover with Panel Cover 14"H Box only Hinged Door Vertical Door Panel Cover 2"D Extension Bracket with ventilation and WiFi KOs	5	**NSOBOX14** **NSOBOX14BC** **NSOBOX14B** **NSOBOX14D** **NSOBOX14DL** **NSOBOX14C** **NSOBOX14X2**
28 Inch Network Enclosure **Dimensions:** 14.38 in. W x 28 in. H x 3.96 in. D **Knock-outs:** Top: five 1½ in. N.P.T.; Bottom: two power kit knockouts; Back: four ¾ in. N.P.T.	with Hinged Cover with Panel Cover 28"H Box only Hinged Door Vertical Door* Panel Cover 2"D Extension Bracket with ventilation and WiFi KOs	11	**NSOBOX28** **NSOBOX28BC** **NSOBOX28B** **NSOBOX28D** **NSOBOX28DL** **NSOBOX28C** **NSOBOX28X2**
48 Inch Network Enclosure **Dimensions:** 14.38 in. W x 48 in. H x 3.96 in. D **Knock-outs:** Top: five 1½ in. N.P.T.; Bottom: two power kit knockouts; Back: none	with Hinged Cover	21	**NSOBOX48**

Note: For custom installs, REKHS is also available.
** Door covers rough-in, no trim ring provided.*



NSOBX10



NSOBOX14



NSOBOX28

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

NETWORK MODULES

FEATURES

netSELECT® Modular Components enable the designer to select performance requirements specifically for the application. Modules snap horizontally or vertically into the enclosures for maximum flexibility and optimum space usage.

- Dimensions: 6.47 inch W x 2.95 inch H, except NSOMTM24 6.47 inch W x 6.00 inch H.
- Meets FCC Part 68 standard.
- Finish: black, powder coat.
- Material: 18 gauge steel or high impact plastic.
- UL and cULus Listed 1863
- All data and phone modules 568A wired.

Network Modules



NSOTVM6


NSOPTM8


NSOETM8


NSODM8


NSOMTM24


NSO6P1DM

Description	Units	Catalogue Number
Combo Module Complete Home Network Combo Module 6-Port Telephone Panel and 6-Port Coaxial Splitter with Optional 6-Port Cat. 5e Panel Provides voice, video, and data distribution in a space efficient package. Perfect for use with NSOBOX10 and NS790xx plates to quickly establish a comprehensive home network.	3	
6-Port Telephone and Video 6-Port Telephone, Video and Category 5e 6-Port Category 5e Data Upgrade Kit		**NSOTVM6** **NSOTVDM6** **NSODK6**
Primary Telephone Module, 8-Port Supports 8 phone outlets with up to 4 incoming lines for voice, fax or modem applications in a protected PCB module. Pre-mounted push pins snap the module quickly into place. RJ31X interface jack included for security system connection. RJ45 jack interfaces with optional NSOETM8 Telephone Expansion module for additional extensions.	1	**NSOPTM8**
Expansion Telephone Module, 8-Port Adds an additional 8 phone outlets with up to 4 incoming lines when used with the primary telephone module. Pre-mounted push pins snap the module quickly into place. Includes RJ45 jumper cord to connect with NSOPTM8 Primary Telephone module.	1	**NSOETM8**
Category 5e Data Module, 8-Port Supports Gigabit Ethernet for up to 8 Category 5e data lines with front 110 Punch-Down terminations in a protected PCB module. Pre-mounted push pins snap the module quickly into place.	1	**NSODM8**
Category 6 Data Module, 8-Port Supports enhanced transmission speeds beyond gigabit ethernet. Future proof for tomorrows applications.		**NSODM8C6**
Multiport Patchable Telecom Module Terminates lines via modular plug to accommodate flexibility, by changing plug locations. Reconfigure where phone lines go at the panel level. Allows data lines to be converted to voice, with the move of a patch cord. Includes nine RJ45 jumper cords.	2	**NSOMTM24**
Combination Module 6–Port Telephone and 1–Port Data Provides basic telephone and data delivery in a small package. Allows data lines to be converted to voice, with the move of a patch cord.	1	**NSO6P1DM**

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

AUDIO/VIDEO MODULES

FEATURES

netSELECT® Video Modules support bidirectional signal by splitting to 4, 6, or 8 separate work areas. Pre-mounted push pins snap the module quickly into place.

- Dimensions for VAMP, AM8 and BM: 6.47 in. W x 2.95 in. H.
- Dimensions for video splitters: 6.47 in. W x 2.09 in. H x 3.20 in. D.
- Finish: black, powder coat.
- UL and cULus Listed 1863.

Audio/Video Modules

Description	Units	Catalogue Number	
4-Way Coaxial Splitter Modules, One Incoming Line, Four Outgoing 1 Ghz, Basic Unit 2.3 Ghz, Enhanced Capability	1	**NSOVM4** **NSOVM42G**	 NSOVM4
6-Way Coaxial Splitter Modules, One Incoming Line, Six Outgoing 1 Ghz, Basic Unit 2.3 Ghz, Enhanced Capability	1	**NSOVM6** **NSOVM62G**	 NSOVM6
8-Way Coaxial Splitter Modules, One Incoming Line, Eight Outgoing 1 Ghz, Basic Unit 2.3 Ghz, Enhanced Capability	1	**NSOVM8** **NSOVM82G**	 NSOVM8
Fixed Video Amplifier Module, 10dB 120 volt rated. 240 volt rated. Provides video signal amplification for incoming cable feeds recommended for use when more than four outputs are installed or when signal level is low. Provides 10dB forward path gain and supports current digital cable systems and modems with a passive return. Pre-mounted push pins snap the module quickly into place. Includes RG-59 cable jumper to connect amplifier to passive video splitter.	1	**NSOVAMP** **NSOVAMP240**	 NSOVAMP
8 Room Audio Module Distributes audio from an amplifier to matching volume controllers. Supports up to eight rooms of audio. Power handling - 200W RMS@20° C. Requires impedance matching volume controls.	1	**NSOAM8**	 NSOAM8
Blank Module Plate Allows mounting of active components (i.e. switches, routers) or other devices (66 blocks, audio components) onto a modular platform. Can be custom drilled or used with two self-adhesive VELCRO® strips included to mount components onto module. Pre-mounted push pins snap the module quickly into place.	1	**NSOBM**	 NSOBM

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

UNIVERSAL CONSOLIDATION BLOCKS, PATCH PANELS AND PATCH CORDS

FEATURES

netSELECT® Patch Panels are excellent for designing rack systems for telephone, data and AV systems. Consolidation Blocks are ideal for small user count configurations that mount in or on the wall.

- Meets ANSI/TIA - Category 6 and Category 5e standards.
- cULus Listed.



NS5E12U



NS612U



NS5E24U



NS5E48U



NS624U



NS648U

Universal Consolidation Blocks and Patch Panels

Description	Catalogue Number
Category 5e 12-Port Universal Consolidation Block, 89D Bracket Mount	NS5E12U
Category 6 12-Port Universal Consolidation Block, 89D Bracket Mount	NS612U
Category 5e Universal Patch Panel 24-port, 1.75 inch H, 1 Rack Unit 48-port, 3.50 inch H, 2 Rack Units	 NS5E24U NS5E48U
Category 6 Universal Patch Panel 24-port, 1.75 inch H, 1 Rack Unit 48-port, 3.50 inch H, 2 Rack Units	 NS624U NS648U

netSELECT® Patch Cords allow for quick change of voice/data lines with insertion of modular plugs.

- Meets and exceeds ANSI/TIA - Category 6 and Category 5e standards.
- UL and cUL Listed.

Universal Patch Cords, Category 6 and Category 5e

Description	Colour	1-Foot	3-Foot	5-Foot	7-Foot	10-Foot	15-Foot	20-Foot	25-Foot
Cat. 5e Patch Cord	Blue	HC5EB01	HC5EB03	HC5EB05	HC5EB07	HC5EB10	HC5EB15	HC5EB20	HC5EB25
	Gray	HC5EGY01	HC5EGY03	HC5EGY05	HC5EGY07	HC5EGY10	HC5EGY15	HC5EGY20	HC5EGY25
	Yellow	HC5EY01	HC5EY03	HC5EY05	HC5EY07	HC5EY10	HC5EY15	HC5EY20	HC5EY25
	Red	HC5ER01	HC5ER03	HC5ER05	HC5ER07	HC5ER10	HC5ER15	HC5ER20	HC5ER25
Cat. 6 Patch Cord	Blue	HC6B01	HC6B03	HC6B05	HC6B07	HC6B10	HC6B15	HC6B20	HC6B25
	Gray	HC6GY01	HC6GY03	HC6GY05	HC6GY07	HC6GY10	HC6GY15	HC6GY20	HC6GY25
	Yellow	HC6Y01	HC6Y03	HC6Y05	HC6Y07	HC6Y10	HC6Y15	HC6Y20	HC6Y25
	Red	HC6R01	HC6R03	HC6R05	HC6R07	HC6R10	HC6R15	HC6R20	HC6R25

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

ACCESSORIES

FEATURES

netSELECT® Accessories enhance system capabilities. Volume controls expand home audio applications. Cabinet mounted receptacle kits provide convenience power to the enclosure.

- Audio controls available in slide or rotary.
- Receptacles available in surge and standard kits.

Accessories

Description	Colour	Catalogue Number
Slide Audio Volume Controller, Decorator Styling, Power handling - 70W RMS@20° C. Impedance matching for up to 8 pairs of speakers. Includes both ivory and white slides and frames.	Ivory/White	**NSOSAVC**
Rotary Audio Volume Controller Power handling - 70W RMS@20° C. Impedance matching for up to 8 pairs of speakers. Includes both ivory and white knobs and frames.	Ivory/White	**NSORAVC**
Standard Power Kit, Includes duplex receptacle 15A 125V NEMA 5-15R, electrical steel box and wallplate.		**NSOKP**
Surge Suppression Power Kit, Includes surge receptacle 15A 125V NEMA 5-15R, 240 Joules/15,000A protection per mode, electrical steel box and wallplate.		**NSOKPS**
Chromed Steel Lock Kit, Includes two keys. Eliminates unwanted tampering.		**FLOCK1**
Panel Bracket Adapter, For use with Adapter Panels shown below, and FSP series modules in section P, page 16. Snap mounts into structured cabling enclosures.		**NSOFSB**
F-Connector Adapter Panel, with Six Populated Coaxial Connectors.		**FSPFP6X**
Keystone Adapter Panel, with Six Blank Openings for jacks and snap fits.		**FSPHD6X**
Antenna Kit.		**NSOKA**


NSOSAVC


NSORAVC


NSOKPS


FLOCK1


NSOFSB


FSPFP6X


FSPHD6X


NSOKA

onlinecomponents.com

MODULAR SNAP FIT JACKS

Customize the jack selections and look.



Molded-In Voice/Low-Speed Data

Description	Modular Snap Fit Cat. 6 Jack	Modular Snap Fit Cat. 5e Jack	Modular Snap Fit USOC Jack
Colour			
Almond	NSJ6AL	NSJ5EAL	NSJUAL
Black	NSJ6BK	NSJ5EBK	NSJUBK
Blue	NSJ6B	NSJ5EB	NSJUB
Gray	NSJ6GY	NSJ5EGY	NSJUGY
Green	NSJ6GN	NSJ5EGN	NSJUGN
Ivory	NSJ6I	NSJ5EI	NSJUI
Light Almond	NSJ6LA	NSJ5ELA	NSJULA
Orange	NSJ6OR	NSJ5EOR	NSJUOR
Red	NSJ6R	NSJ5ER	NSJUR
White	NSJ6W	NSJ5EW	NSJUW
Yellow	NSJ6Y	NSJ5EY	NSJUY

Blank Insert	
	
Almond	SFSBAL10*
Black	SFsBBK10*
Gray	SFSFSBGY10*
Ivory	SFSBEI10*
Light Almond	SFSBLA10*
White	SFSBW10*

*Note: *Sold in a package of 10. Order 1 to receive a bag of 10 blanks.*

Audio/Video Connectors - Standard Bulkhead

Description	Gold F-Type Coupler Bulkhead, Female to Female	Nickel F-Type Coupler Bulkhead, Female to Female	RCA Gold Pass Through, Female to Female, Red Interior	RCA Gold Pass Through, Female to Female, White Interior	RCA Gold Pass Through, Female to Female, Yellow Interior	RCA Gold Pass Through, Female to Female, Blue Interior	RCA Gold Pass Through, Female to Female, Green Interior
Colour							
Almond	SFFGAL	NSF70AL	SFRCRFFAL	SFRCWFFAL	SFRCYFFAL	SFRCBFFAL	SFRCGNFFAL
Black	SFFGBK	NSF70BK	SFRCRFFBK	SFRCWFFBK	SFRCYFFBK	SFRCBFFBK	SFRCGNFFBK
Gray	SFFGGY	NSF70GY	SFRCRFFGY	SFRCWFFGY	SFRCYFFGY	SFRCBFFGY	SFRCGNFFGY
Ivory	SFFGEI	NSF70I	SFRCRFFEI	SFRCWFFEI	SFRCYFFEI	SFRCBFFEI	SFRCGNFFEI
Light Almond	SFFGLA	NSF70LA	SFRCRFFLA	SFRCWFFLA	SFRCYFFLA	SFRCBFFLA	SFRCGNFFLA
White	SFFGW	NSF70W	SFRCRFFW	SFRCWFFW	SFRCYFFW	SFRCBFFW	SFRCGNFFW

Audio/Video Connectors - Recessed

Description	Gold F-Type Coupler Bulkhead, Female to Female	RCA Gold Pass Through, Female to Female, Red Interior	RCA Gold Pass Through, Female to Female, White Interior	RCA Gold Pass Through, Female to Female, Yellow Interior	RCA Gold Pass Through, Female to Female, Blue Interior	RCA Gold Pass Through, Female to Female, Green Interior
Colour						
Almond	SFGRFAL	SFRCRRAL	SFRCWRAL	SFRCYRAL	SFRCBRAL	SFRCGNRAL
Black	SFGRFBK	SFRCRRBK	SFRCWRBK	SFRCYRBK	SFRCBRBK	SFRCGNRBK
Gray	SFGRFGY	SFRCRRGY	SFRCWRGY	SFRCYRGY	SFRCBRGY	SFRCGNRGY
Ivory	SFGRFEI	SFRCRREI	SFRCWREI	SFRCYREI	SFRCBREI	SFRCGNREI
Light Almond	SFGRFLA	SFRCRRLA	SFRCWRLA	SFRCYRLA	SFRCBRLA	SFRCGNRLA
White	SFGRFW	SFRCRRW	SFRCWRW	SFRCYRW	SFRCBRW	SFRCGNRW

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

DECORATOR FRAMES

FEATURES

Decorator frames provide a stylized look for that finishing touch. This allows all devices to match. Multimedia jacks insert into frame for custom configuration.

- Elongated strap for better wall box mounting.
- High impact-resistant thermoplastic frame.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

Decorator Frames



Colour	1-gang, 2-Port	1-gang, 3-Port	1-gang, 4-Port	1-gang, 6-Port	1-gang, Adapter .406" (10.30) Dia. Hole*	1-gang, Adapter Blank**
Almond	NS612AL	NS613AL	NS614AL	NS616AL	NS621AL	NS620AL
Black	NS612BK	NS613BK	NS614BK	NS616BK	—	—
Gray	NS612GY	NS613GY	NS614GY	NS616GY	—	—
Ivory	NS612I	NS613I	NS614I	NS616I	NS621I	NS620I
Light Almond	NS612LA	NS613LA	NS614LA	NS616LA	NS621LA	NS620LA
White	NS612W	NS613W	NS614W	NS616W	NS621W	NS620W

*Note: * For use with rotary dimmers or to pull through AV or telephone cable.*
*** To fill an extra decorator opening or to create customized openings.*

Multimedia Face Plates



Description	1-gang, 1-Port Plate		1-gang, 2-Port Plate		1-gang, 3-Port Plate	
Colour	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")
Almond	NSP11AL	NSP101AL	NSP12AL	NSP102AL	NSP13AL	NSP103AL
Black	NSP11BK	NSP101BK	NSP12BK	NSP102BK	NSP13BK	NSP103BK
Gray	NSP11GY	NSP101GY	NSP12GY	NSP102GY	NSP13GY	NSP103GY
Ivory	NSP11I	NSP101I	NSP12I	NSP102I	NSP13I	NSP103I
Light Almond	NSP11LA	NSP101LA	NSP12LA	NSP102LA	NSP13LA	NSP103LA
White	NSP11W	NSP101W	NSP12W	NSP102W	NSP13W	NSP103W



Description	1-gang, 4-Port Plate		1-gang, 6-Port Plate		2-gang, 4-Port Plate	2-gang, 6-Port Plate
Colour	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")	Standard (4.63" x 2.88")	Mid-Size (4.88" x 3.13")	Standard (4.63" x 4.69")	Standard (4.63" x 4.69")
Almond	NSP14AL	NSP104AL	NSP16AL	NSP106AL	NSP24AL	NSP26AL
Black	NSP14BK	NSP104BK	NSP16BK	NSP106BK	NSP24BK	NSP26BK
Gray	NSP14GY	NSP104GY	NSP16GY	NSP106GY	NSP24GY	NSP26GY
Ivory	NSP14I	NSP104I	NSP16I	NSP106I	NSP24I	NSP26I
Light Almond	NSP14LA	NSP104LA	NSP16LA	NSP106LA	NSP24LA	NSP26LA
White	NSP14W	NSP104W	NSP16W	NSP106W	NSP24W	NSP26W

onlinecomponents.com

HUBBELL®

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

MOLDED-IN VOICE/DATA/VIDEO

FEATURES

Designed to complement decorator styling, these jacks offer voice and Cat. 5e devices to fit within a decorator wallplate.

- High impact-resistant thermoplastic frame.
- Meets FCC part 68.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

Molded-In Voice/Low-Speed Data

Description	Decorator Frame, One RJ11 Jack, 6-Position, 4-Conductor	Decorator Frame, One RJ11 Jack, 6-Position, 6-Conductor	Decorator Frame, Duplex RJ11 Jacks, 6-Position, 6-Conductor	Decorator Frame, One Cat. 5e 110 Punch-Down, One RJ11 Jack, 6-Position, 4-Conductor
Termination	**Screw Terminations**	**Screw Terminations**	**Screw Terminations**	**Screw Terminations**
				
Colour				
Almond	**NS770AL**	**NS771AL**	**NS772AL**	**NS784AL**
Black	**NS770BK**	**—**	**—**	**NS784BK**
Brown	**NS770**	**NS771**	**—**	**NS784**
Gray	**NS770GY**	**—**	**—**	**NS784GY**
Ivory	**NS770I**	**NS771I**	**NS772I**	**NS784I**
Light Almond	**NS770LA**	**NS771LA**	**NS772LA**	**NS784LA**
White	**NS770W**	**NS771W**	**NS772W**	**NS784W**

FEATURES

Coaxial video and combination jacks complement multimedia needs in a 1-gang decorator opening.

- High impact-resistant thermoplastic frame.
- Jacks meet FCC part 68.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

Molded-In Voice/Low-Speed Data

Description	Decorator Frame, Single F-Type Coupler Bulkhead, Female to Female	Decorator Frame, Duplex F-Type Coupler Bulkhead, Female to Female	Decorator Frame, One RJ11 Jack, 6-Position, 4-Conductor, One F-Type Coupler Bulkhead, Female to Female	Decorator Frame, One Cat. 5e 110 Punch-Down, One F-Type Coupler Bulkhead, Female to Female
Termination	**Screw Terminations**	**Screw Terminations**	**Screw Terminations**	**Screw Terminations**
				
Colour				
Almond	**NS780AL**	**NS782AL**	**NS783AL**	**NS785AL**
Black	**—**	**—**	**—**	**NS785BK**
Brown	**—**	**—**	**—**	**NS785**
Gray	**—**	**—**	**—**	**NS785GY**
Ivory	**NS780I**	**NS782I**	**NS783I**	**NS785I**
Light Almond	**NS780LA**	**NS782LA**	**NS783LA**	**NS785LA**
White	**NS780W**	**NS782W**	**NS783W**	**NS785W**

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

MOLDED-IN PLATES

FEATURES

Designed for voice, these devices provide an economical alternative to wall phone outlet placement.

- High impact-resistant thermoplastic plate.
- Convenient screw down terminals.
- Meets FCC part 68.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

Molded-In Plates for Voice

Description	1-Gang Plate, One Rj11 Jack, 6-Position, 4-Conductor, Screw Terminations		1-Gang Plate, One Rj11 Jack, 6-Position, 6-Conductor, Screw Terminations	1-Gang Plate, Duplex Rj11 Jacks, 6-Position, 4-Conductor, Screw Terminations		1-Gang Plate, Duplex Rj11 Jacks, 6-Position, 6-Conductor, Screw Terminations
						
Colour	**Standard**	**Mid-Size**	**Standard**	**Standard**	**Mid-Size**	**Standard**
Almond	NS730AL	NS735AL	NS732AL	NS742AL	—	NS744AL
Brown	NS730	NS735	NS732	—	—	—
Ivory	NS730I	NS735I	NS732I	NS742I	NS745I	NS744I
Light Almond	NS730LA	NS735LA	NS732LA	NS742LA	—	—
White	NS730W	NS735W	NS732W	NS742W	NS745W	NS744W

Molded-In Plates for Voice and CATV/Satellite

Description	1-gang Plate, One F-Type Coupler Bulkhead, Female to Female, One RJ11 Jack, 6-Position, 6-Conductor		1-gang Plate, One F-Type Coupler Bulkhead, Female to Female, One RJ11 Jack, 6-Position, 4-Conductor	1-gang Plate, One F-Type Coupler Bulkhead, Female to Female		1-gang Plate, Duplex F-Type Coupler Bulkhead, Female to Female
						
Colour	**Standard**	**Mid-Size**	**Standard**	**Standard**	**Mid-Size**	**Standard**
Almond	NS748AL	NS755AL	NS747AL	NS750AL	NS751AL	NS752AL
Ivory	NS748I	NS755I	NS747I	NS750I	NS751I	NS752I
Light Almond	NS748LA	NS755LA	NS747LA	NS750LA	NS751LA	NS752LA
White	NS748W	NS755W	NS747W	NS750W	NS751W	NS752W

Description	1-gang Plate, One Cat. 5e 110 Punch-Down One RJ11 Jack, 6-Position, 4-Conductor One F-Type Coupler Bulkhead, Female to Female
	
Colour	**Standard**
Almond	NS790AL
Black	NS790BK
Brown	NS790
Gray	NS790GY
Ivory	NS790I
Light Almond	NS790LA
White	NS790W

onlinecomponents.com

HUBBELL®

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

TELEPHONE WALL JACKS

FEATURES

Designed for voice applications, these jacks provide an economical alternative to basic wall mount and performance needs.

- Available in high impact-resistant thermoplastic or stainless steel.
- Meets FCC part 68.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

Telephone Wall Jacks

Description	Wall Phone Jack Quick Connect, 6-Position, 4-Conductor, Punch-Down Termination Tool Included	Wall Phone Jack, 6-Position, 4-Conductor, Screw Terminations	Wall Phone Jack, 6-Position, 6-Conductor, Screw Terminations
			
Colour			
Almond	**NS721AL**	**NS722AL**	**NS725AL**
Ivory	**NS721I**	**NS722I**	**NS725I**
Light Almond	**—**	**—**	**NS725LA**
White	**NS721W**	**NS722W**	**NS725W**

Description	Wall Phone Jack Quick Connect, 6-Position, 4-Conductor, Punch-Down Termination Tool Included	Wall Phone Jack, 6-Position, 4-Conductor, Screw Terminations
		
Stainless Steel	**NS723SS**	**NS726SS**

FEATURES

Telephone surface mount jacks are available in 4- or 6-conductor configurations for voice. Alternatively, multimedia surface mount boxes can be custom loaded for computer and media use.

- High impact-resistant thermoplastic.
- Mounts using screws or double sided tape (both included).
- Meets FCC part 68.
- UL Listed 1863 - Communication Circuit Accessory and CSA Certified.

Telephone Wall Jacks

Description	Telephone Surface Mount Jack, 6-Position, 4-Conductor, Screw Terminations	Telephone Surface Mount Jack, 6-Position, 6-Conductor, Screw Terminations	Multimedia 1-Port Surface Mount Box, Jack Not Included	Multimedia 2-Port Surface Mount Box, Jacks Not Included
				
Ivory	**NS760I**	**NS761I**	**ISM1EI***	**ISM2EI***
White	**NS760W**	**NS761W**	**ISM1W***	**ISM2W***

*Note: * cULus Listed 1863 - Communication Circuit Accessory.*
Use multimedia jacks and AV connectors.

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

347V SWITCHES

PRODUCT FEATURES

- Silver cadmium oxide contacts
- Tri-drive mounting and termination screws
- One piece rivetless spring arm and terminal plate
- User ready termination with screws backed out
- Back and side wired
- Accepts #14 to #10 AWG



StyleLine® Switches - Specification Grade			
15A, 347V	**Single Pole**	**3 Way**	**4 Way**
White	**HBL2101347W**	**HBL2103347W**	-
Ivory	**HBL2101347I**	**HBL2103347I**	-
20A, 347V	**Single Pole**	**3 Way**	**4 Way**
White	**HBL2121347W**	**HBL2123347W**	**HBL2124347W**
Ivory	**HBL2121347I**	**HBL2123347I**	-
Black*	**HBL2121347BK**	**HBL2123347BK**	-
Red*	**HBL2121347RD**	**HBL2123347RD**	-

** Minimum order quantities may apply.*



Toggle Switches - Industrial Grade			
15A, 347V	**Single Pole**	**3 Way**	**4 Way**
Brown	**HBL18201CN**	**HBL18203CN**	-
Ivory	**HBL201ICN**	**HBL18203ICN**	**HBL18204ICN**
Locking	**HBL18201LCN**	**HBL18203LCN**	-
Key for locking switch	**HBL1209***		
20A, 347V	**Single Pole**	**3 Way**	**4 Way**
Brown	**HBL18221CN**	**HBL18223CN**	-
Ivory	**HBL18221ICN**	**HBL18223ICN**	-

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

HMOSS™ 347V WALL SWITCHES

PRODUCT FEATURES

- Dual 120/277V AC operation 50/60 Hz
- Auto or manual "On" operating modes
- No minimum load requirements
- Hard lens (dual technology, passive infrared)
- Zero arc point switching
- Built in photocell with manual super saver mode for daylight harvesting
- Two relays for two level switching or dual load control (AD, AP AU1277x2, 2N series)
- C-UL US Listed

Adaptive Technology, Dual (Ultrasonic and Passive Infrared)
1000 sq. ft. coverage with photocell, 3470W Fluorescent at 347V AC

Circuit	Button	Colour	347V
Single	1 Button for manual/auto control	Ivory	**AD347I1**
		White	**AD347W1**
Single	Auto control with no button	Ivory	**AD347I1N**
		White	**AD347W1N**
Dual	2 Buttons for manual/auto control	Ivory	**AD347I2**
		White	**AD347W2**
Dual	Auto control with no button	Ivory	**AD347I2N**
		White	**AD347W2N**

Sensors are available in three special order colours. To order special order colours, replace "I" or "W" with the following: LA (Light Almond), GY (Gray) or BK (Black). Note: Ultrasonic output is 40kHz.


AD347W1


AD347W1N
AD347W2N


AD347W2

Adaptive Technology, Ultrasonic
400 sq. ft. coverage with photocell, 3470W Fluorescent at 347V AC

Circuit	Button	Colour	347V
Single	1 Button for manual/auto control	Ivory	**AU347I1**
		White	**AU347W1**
Single	Auto control with no button	Ivory	**AU347I1N**
		White	**AU347W1N**
Dual	2 Buttons for manual/auto control	Ivory	**AU347I2**
		White	**AU347W2**
Dual	Auto control with no button	Ivory	**AU347I2N**
		White	**AU347W2N**

Sensors are available in three special order colours. To order special order colours, replace "I" or "W" with the following: LA (Light Almond), GY (Gray) or BK (Black). Note: Ultrasonic output is 40kHz.


AU347W1N
AU347W2N


AU347W1


AU347W2

Adaptive Technology, Passive Infrared
1000 sq. ft. coverage with photocell, 3470W Fluorescent at 347V AC

Circuit	Button	Colour	347V
Single	1 Button for manual/auto control	Ivory	**AP347I1**
		White	**AP347W1**
Single	Auto control with no button	Ivory	**AP347I1N**
		White	**AP347W1N**
Dual	2 Buttons for manual/auto control	Ivory	**AP347I2**
		White	**AP347W2**
Dual	Auto control with no button	Ivory	**AP347I2N**
		White	**AP347W2N**

Sensors are available in three special order colours. To order special order colours, replace "I" or "W" with the following: LA (Light Almond), GY (Gray) or BK (Black).


AP347W1


AP347W1N
AP347W2N


AP347W2


~ For additional sensors, please refer to our full-line Wiring Device-Kellems Catalogue ~

347V WALLPLATES

onlinecomponents.com


1–Gang


2–Gang


3–Gang

Nylon 347V Wallplates

Nylon - Style Line®			
Colour	**1 Gang**	**2 Gang**	**3 Gang**
White	**HPS1347W**	**HPS2347W**	**HPS3347W**
Ivory	**HPS1347I**	**HPS2347I**	**HPS3347I**
Red*	**HPS1347R**	-	-
Black*	**HPS1347BK**	-	-

** Minimum order quantities may apply.*


97071HV


97074HV



97077HV


97151HV


97154HV


97401KSHV


97402KSHV


97404KSHV

Stainless Steel Grade 403, 347V Wallplates

347V Wall Plates		
Description	**For Use With 1204 Boxes**	**For Use With 347V MBD OR MBS**
1-gang, Toggle Switch 347V	**97071HV**	**97071HV**
2-gang, Toggle Switch 347V	**97072HV**	**97072HVR**
3-gang, Toggle Switch 347V	**97073HV**	**97073HVR**
4-gang, Toggle Switch 347V	**97074HV**	**97074HVR**
5-gang, Toggle Switch 347V	**97075HV**	**97075HVR**
6-gang, Toggle Switch 347V	**97076HV**	**97076HVR**
7-gang, Toggle Switch 347V	**97077HV**	**97077HVR**
1-gang, blank 347V box mount 3.531"	**97151HV**	**97151HV**
2-gang, blank 347V box mount 3.531"	**97152HV**	**97152HVR**
3-gang, blank 347V box mount 3.531"	**97153HV**	**97153HVR**
4-gang, blank 347V box mount 3.531"	**97154HV**	**97154HVR**
1-gang, toggle switch 347V king-size plate	**97071KSHV**	**97071KSHV**
1-gang, Decora 347V king-size plate	**97401KSHV**	**97401KSHV**
2-gang, Decora 347V box mount 3.531" king-size plate	**97402KSHV**	**97402KSHVR**
3-gang, Decora 347V box mount 3.531" king-size plate	**97403KSHV**	**97403KSHVR**
4-gang, Decora 347V box mount 3.531" king-size plate	**97404KSHV**	**97404KSHVR**

~ For additional 347V stainless steel wallplates, see Section C ~

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SINGLE-GANG BOXES

APPLICATIONS

For use in branch circuit wiring in wet, damp, or dry locations. May be used as a weatherproof junction box, or as a housing for receptacles, switches, and GFCI's.

PRODUCT FEATURES

- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with detachable lugs provided
- Two closure plugs included
- Ground screw installed
- Multi-lingual instructions in each package
- Internal threads on hubs comply with NEMA requirements. Hubs accept all threaded fittings and threaded conduit
- die cast aluminum construction

COMPLIANCES

- UL – Standard 514A
- CSA – C22.2 No. 18
- NEMA 3R Rated



5320–0 to 5320–2, 5324–0



5321–0 to 5321–2, 5330–0



5322–0, 5331–0



5323–0, 5332–0



5385–0 to 5387–0


CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
2" Deep, With Lugs – Three Threaded Outlets – 4-1/2" x 2-3/4"					
5320-0	18.3	Gray	3-1/2"	Shrink	20
5320-1	18.3	White	3-1/2"	Shrink	20
5320-2	18.3	Bronze	3-1/2"	Shrink	20
5324-0	18.3	Gray	3-3/4"	Shrink	20

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
2" Deep, With Lugs – Four Threaded Outlets – 4-1/2" x 2-3/4"					
5321-0	18.3	Gray	4-1/2"	Shrink	20
5321-1	18.3	White	4-1/2"	Shrink	20
5321-2	18.3	Bronze	4-1/2"	Shrink	20
5330-0	18.3	Gray	4-3/4"	Shrink	20

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
2" Deep, With Lugs – Five Threaded Outlets – 4-1/2" x 2-3/4"					
5322-0	18.3	Gray	5-1/2"	Shrink	20
5331-0	18.3	Gray	5-3/4"	Shrink	20
5323-0	18.3	Gray	5-1/2"	Shrink	20
5332-0	18.3	Gray	5-3/4"	Shrink	20

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
2-5/8" Deep, With Lugs – Three Threaded Outlets – 4-1/2" x 2-3/4"					
5385-0	22.5	Gray	3-1/2"	Shrink	15
5386-0	22.5	Gray	3-3/4"	Shrink	15
5387-0	22.5	Gray	3-1"	Shrink	15

SINGLE–GANG BOXES: GENERAL DIMENSIONS

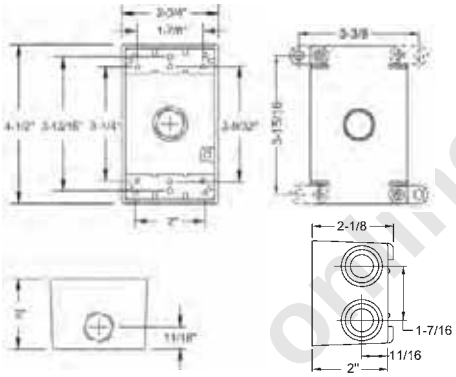

END VIEW ONE OUTLET

END VIEW TWO OUTLET

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SINGLE-GANG EXTENSIONS AND ADAPTERS

APPLICATIONS

Used to provide additional capacity needed for NEC box fill requirements.

Adapters allow installer to add “take-offs" to new boxes/devices.

PRODUCT FEATURES

- Installation hardware, gasket, and ground screw provided
- Closure plugs provided for two and six outlet styles
- Internal threads and hubs comply with NEMA requirements. Hubs accept all threaded fittings and threaded conduit
- die cast aluminum construction

COMPLIANCES

- (UL) – Standard 514A
- (CSA) – C22.2 No. 18
- NEMA 3R Rated



5406–0



5399–0, 5403–0



5400–0 to 5400–5
5405–0

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
Single-Gang Extension – 4-1/2" x 2-3/4" x 1" Deep					
5406-0	9.5	Gray	–	Shrink	25

ogo d c o id d


CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
Single-Gang – Extension Adapters – 5-1/4" x 3-1/2" x 1-1/2" Deep – Two Threaded Outlets					
5399-0	9.5	Gray	2-1/2"	Shrink	20
5403-0	11.0	Gray	2-3/4"	Shrink	20

c d o co g


CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
Single-Gang – Extension Adapters – 5-1/4" x 3-1/2" x 1-1/2" Deep – Six Threaded Outlets					
5400-0	9.5	Gray	6-1/2"	Shrink	20
5400-5	9.5	Gray	6-1/2"	Carded	6
5405-0	11.0	Gray	6-3/4"	Shrink	20

c d t co g


EXTENSIONS
CAT. NO. 5406–0

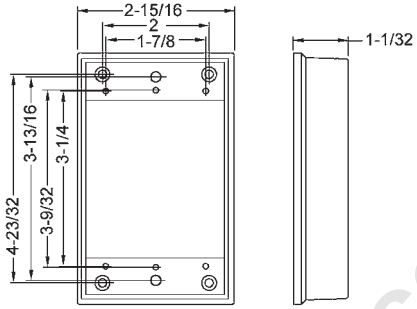

CAT. NO's. 5399–0, 5403–0

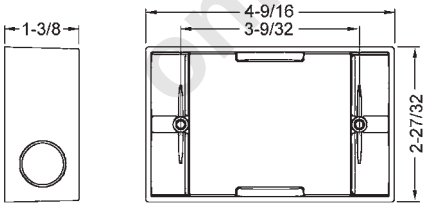

5400–0 SERIES

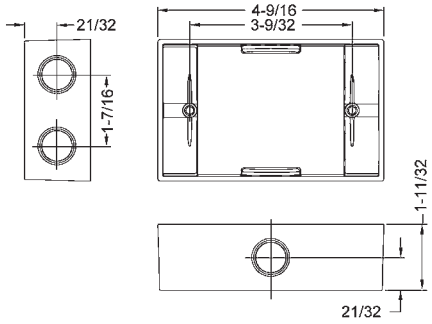

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SINGLE-GANG EXTENSION ADAPTERS

APPLICATIONS

Used to provide additional capacity needed for NEC box fill requirements.

Allows installer to add “take-offs" to new boxes/devices.

PRODUCT FEATURES

- Unique swing-arm design speeds installation by allowing the installer better visibility when lining up and threading fasteners
- Rugged die cast construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Installation hardware, ground screw and gasket provided
- Multi-lingual instructions in each package
- Internal threads and hubs comply with NEMA requirements. Hubs accept all threaded fittings and threaded conduit
- die cast aluminum construction

COMPLIANCES

- (UL) – Standard 514A
- (SP) – C22.2 No. 18
- NEMA 3R Rated



5412–0, 5413–0



5414–0, 5415–0


CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
Swing-Arm – Extension Adapters – 5-1/4" x 3-1/2" x 1-1/2" Deep – Two Threaded Outlets					
5412-0	13.8	Gray	2-1/2"	Shrink	10
5413-0	13.8	Gray	2-3/4"	Shrink	10

c d o co g

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
Swing-Arm – Extension Adapters – 5-1/4" x 3-1/2" x 1-1/2" Deep – Six Threaded Outlets					
5414-0	12.8	Gray	6-1/2"	Shrink	10
5415-0	12.8	Gray	6-3/4"	Shrink	10

c d t co g

SWING ARM EXTENSION ADAPTERS
CAT. NOs. 5412–0 TO 5415–0

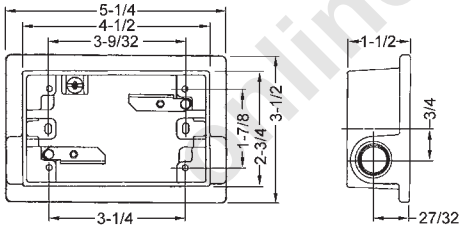

onlinecomponents.com

BELL HUBBELL

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

TWO-GANG BOXES

APPLICATIONS

For use in branch circuit wiring in wet, damp, or dry locations.

Can be used as a weatherproof junction box, or as a housing for receptacles, switches, and GFCI's.

PRODUCT FEATURES

- Seamless die cast aluminum construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with detachable lugs provided
- Two closure plugs included
- Ground screws installed
- Multi-lingual instructions in each package
- Internal threads on hubs comply with NEMA requirements. Hubs accept all threaded fittings and threaded conduit

COMPLIANCES

- (UL) – Standard 514A
- (CSA) – C22.2 No. 18
- NEMA 3R Rated



5333–0, 5341–0



5335–0, 5343–0



5337–0 TO 5337–2, 5345–0




5334–0, 5342–0

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
2" Deep, With Lugs – Three Threaded Outlets – 4-1/2" x 4-1/2"					
5333-0			/ "	i	
5341-0			/4"	i	


CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
2" Deep, With Lugs – Four Threaded Outlets – 4-1/2" x 4-1/2"					
5335-0			4 / "	i	
5343-0			4 /4"	i	

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
2" Deep, With Lugs - Five Threaded Outlets - 4-1/2" x 4-1/2"					
5337-0	31.0	Gray	5-1/2"	Shrink	12
5337-1	31.0	White	5-1/2"	Shrink	12
5345-0	31.0	Gray	5-3/4"	Shrink	12
5334-0	32.0	Gray	5-1/2"	Shrink	12
5342-0	32.0	Gray	5-3/4"	Shrink	12

TWO–GANG BOXES GENERAL DIMENSIONS

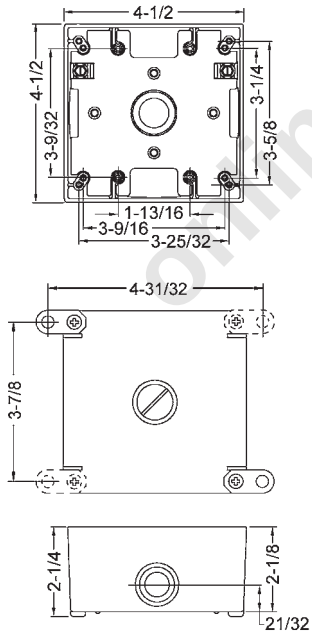

END VIEW FOR STYLES WITH TWO OUTLETS ON ONE END



onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

TWO-GANG BOXES

APPLICATIONS

For use in branch circuit wiring in wet, damp, or dry locations.

Can be used as a weatherproof junction box, or as a housing for receptacles, switches, and GFCI's.

PRODUCT FEATURES

- Seamless die cast aluminum construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with de-tachable plugs provided
- Two closure plugs included
- Ground screws installed
- Multi-lingual instructions in each package
- Internal threads and hubs comply with NEMA requirements. Hubs accept all threaded fittings and threaded conduit

COMPLIANCES

- (UL) – Standard 514A
- (CSA) – C22.2 No. 18
- NEMA 3R Rated



5340–0, 5348–0



5338–0, 5346–0



5388–0, 5389–0


CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
2" Deep, With Lugs – Seven Threaded Outlets – 4-1/2" x 4-1/2"					
5340-0			/ "	i	
5348-0			/4"	i	
5338-0			/ "	i	
5346-0			/4"	i	

c d t oco g


CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
2-5/8" Deep, With Lugs – Five Threaded Outlets – 4-1/2" x 4-1/2"					
5388-0			/4"	i	
5389-0			"	i	

c d t oco g


TWO–GANG BOXES WITH 7 OUTLETS
CAT. NOs. 5340–0, 5348–0

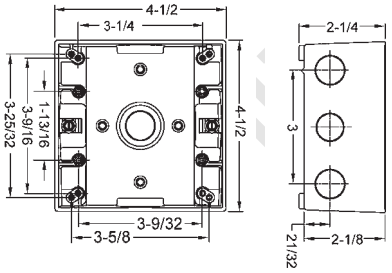

CAT. NOs. 5338–0, 5346–0

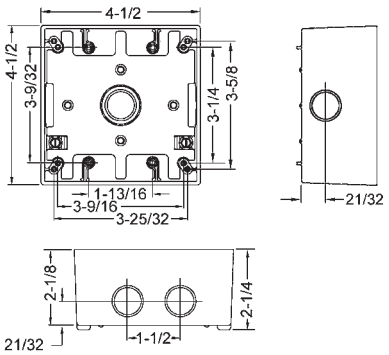

TWO–GANG BOXES WITH 5 OUTLETS
CAT. NOs. 5388–0, 5389–0

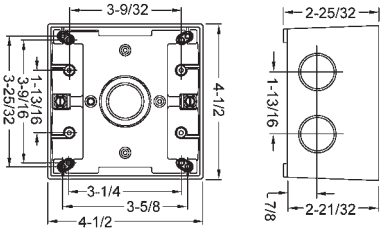

BELL
HUBBELL

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

MULTI-GANG BOXES AND EXTENSIONS

TWO-GANG EXTENSION APPLICATION

Used to provide additional capacity needed for NEC box fill requirements.

TWO-GANG EXTENSION PRODUCT FEATURES

- Seamless die cast aluminum construction
- State-of-the-art powder coat finish
- Installation hardware and gasket provided
- Multi-lingual instructions in each package

TWO-GANG EXTENSION COMPLIANCES

- UL – Standard 514A
- CSA – C22.2 No. 18
- NEMA 3R Rated

THREE-GANG BOX APPLICATIONS

For use in branch circuit wiring in wet, damp, or dry locations.

Can be used as a weatherproof junction box, or as a housing for receptacles, switches, and GFCI's.

THREE-GANG BOX PRODUCT FEATURES

- Seamless die cast aluminum construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with detachable lugs provided
- Four closure plugs included
- Ground screws installed
- Multi-lingual instructions in each package
- Internal threads and hubs comply with NEMA requirements. Hubs accept all threaded fittings and threaded conduit

THREE-GANG BOX COMPLIANCES

- UL – Standard 514A
- CSA – C22.2 No. 18
- NEMA 3R Rated



5407–0




5390–0

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
Two-Gang Extension – 4-21/32" x 4-21/32" x 1-1/32" Deep					
5407-0	16.0	Gray	—	Shrink	10


CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
Three-Gang Box – 2-5/8" Deep, With Lugs – Seven Threaded Outlets – 4-1/2" X 6-3/8"					
5390-0	55.0	Gray	7-3/4"	Boxed	1

c d o co g

TWO–GANG EXTENSION

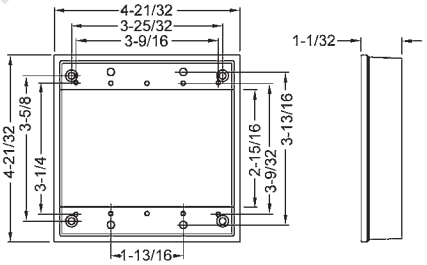

THREE–GANG BOX

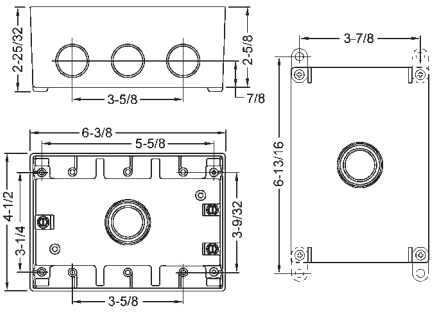

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

ROUND SPLICE BOXES, EXTENSION ADAPTERS AND COVERS

4" ROUND SPLICE BOXES APPLICATIONS

For use in branch circuit wiring in wet, damp, or dry locations.

Designed for use as a weatherproof junction box, and may be used with Bell® round cluster covers and round lampholder combinations.

4" ROUND SPLICE BOXES PRODUCT FEATURES

- Rugged die cast construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Cast-in mounting lugs provide fast, secure installation
- Includes four closure plugs, installed ground screw, and multi-lingual instructions

4" ROUND SPLICE BOXES COMPLIANCES

- (UL) – Standard 514A
- (CSA) – C22.2 No. 18
- NEMA 3R Rated

4" ROUND EXTENSION ADAPTERS APPLICATIONS

For use with 4" round splice boxes.

Extension adapters are used to in-crease box capacity and allow the installer to add “take-offs" to new boxes/devices.

4" ROUND EXTENSION ADAPTERS PRODUCT FEATURES

- Rugged die cast construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Includes installation hardware, closure plugs, gasket, and multi-lingual instructions

4" ROUND EXTENSION ADAPTERS COMPLIANCES

- (UL) – Standard 514A
- (CSA) – C22.2 No. 18
- NEMA 3R Rated



5361–0 to 5361–7, 5372–0



5363–0



5374–0


CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
4" Round Splice Box – Five Threaded Outlets – 1-1/2" Deep					
5361-0	16.0	Gray	5-1/2"	Shrink	16
5361-1	16.0	White	5-1/2"	Shrink	16
5361-2	16.0	Bronze	5-1/2"	Shrink	16
5372-0	16.0	Gray	5-3/4"	Shrink	16

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
4" Round Extension Adapter – Four Threaded Outlets – 1-1/2" Deep					
5363-0	16.3	Gray	4-1/2"	Shrink	16


CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.
		COLOUR	OUTLETS		
4" Round Splice Box & Cover – Five Threaded Outlets – 1-1/2" Deep					
5365-0	16.0	Gray	5-1/2"	Shrink	16
5375-0	16.0	Gray	5-3/4"	Shrink	16

CATALOGUE NUMBER	DESCRIPTION		PKG. TYPE	STD. PKG.
	COLOUR	OUTLETS		
4" Round Cover				
5374-0	Gray	Blank	Shrink	30


4" ROUND SPLICE BOXES



4" ROUND EXTENSION ADAPTERs



4" ROUND COVER



onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SPECIALTY COVERS

MINI SNAP COVER AND RECEPTACLE APPLICATION

For use when a convenience outlet is required in a small space.

MINI SNAP COVER AND RECEPTACLE PRODUCT FEATURES


- State-of-the-art powder coat finish provides for maximum weather-ability and scratch resistance
- Self-closing lid assures weatherproof protection when the receptacle is not in use



5185–0

CATALOGUE NUMBER	CUBIC IN.	DESCRIPTION		PKG TYPE	STD. PKG.
		COLOUR	OUTLETS		
Mini Snap Cover And Receptacle – 3" x 2" x 1-1/8" Deep					
5185-0	-	Gray	Cover & 125V 15A receptacle	Polybag	10

cover cat. no. 5185–0

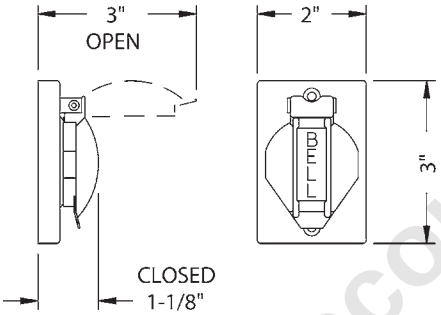

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

RAYNTITE® SINGLE-GANG WEATHERPROOF-WHILE-IN-USE COVERS

APPLICATION

Rayntite® covers are designed for use whenever weatherproof protection is required while an outlet is in use.

PRODUCT FEATURES

- Modularity: 6 SKU's cover almost every application — no need to tie-up money and shelf space stocking multiple SKU's
- Unique snap fit design speeds installation. No more fumbling with open covers
- High-impact polycarbonate construction: Virtually indestructible
- No need to worry about rust and corrosion
- Tinted lid: Hides dust, dirt, and scratches
- Padlockable design: Prevents tampering and accidental disconnects
- Tri-lingual instructions: One product for all North American markets
- Covers can be either device or box mounted — allows for installation flexibility
- Meets NEC 406.8 (B) requirements — no need to worry about code compliances

COMPLIANCES

- UL
- NEMA 3R Rated
- Meets NEC 406.8 (B) Requirements

REFERENCE DATA

- Canadian Patent 2,092, 516
- United States Patents
  5,981, 875
  5,533, 637
  5,456, 377
  5,228, 584




5730–0




5740–0

CATALOGUE NUMBER	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
Single-Gang – Standard Depth			
5730-0	Single gang vertical cover with 4 plates included -for duplex, GFCI, toggle and single round receptacles 1.344, 1.406, 1.468, 1.593, 1.655, 1.719, 2.032 and 2.156 Dia.	Shrink	10
5740-0	Single gang horizontal cover with 4 plates included - for duplex, GFCI, toggle and single round receptacles 1.344, 1.406, 1.468, 1.593, 1.655, 1.719, 2.032 and 2.156 Dia.	Shrink	10

CAT. NOs. 5730–0, 5740–0

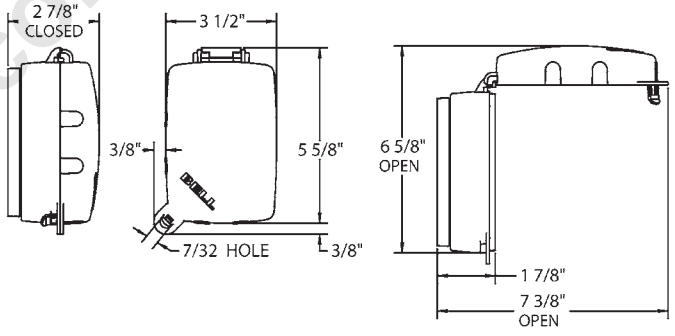

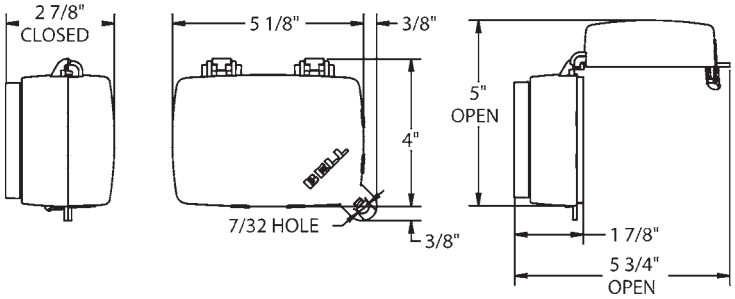

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

RAYNTITE® SINGLE-GANG WEATHERPROOF-WHILE-IN-USE COVERS

APPLICATION

Rayntite® covers are designed for use whenever weatherproof protection is required while an outlet is in use.

PRODUCT FEATURES

- Modularity: 6 SKU's cover almost every application — no need to tie- up money and shelf space stocking multiple SKU's
- Unique snap fit design speeds installation. No more fumbling with open covers
- High-impact polycarbonate construction: Virtually indestructible
- No need to worry about rust and corrosion
- Tinted lid: Hides dust, dirt, and scratches
- Padlockable design: Prevents tampering and accidental disconnects
- Tri-lingual instructions: One product for all North American markets
- Covers can be either device or box mounted — allows for installation flexibility
- Meets NEC 406.8 (B) requirements — no need to worry about code compliances

COMPLIANCES

-
- NEMA 3R Rated
- Meets NEC 406.8 (B) Requirements

REFERENCE DATA


- Canadian Patent 2,092, 516
- United States Patents
  5,981, 875
  5,533, 637
  5,456, 377
  5,228, 584



5735–0

CATALOGUE NUMBER	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
Single-Gang – Deep			
5735-0	Single gang vertical cover- Deep with 4 plates included - for duplex, GFCI, toggle and single round receptacles 1.344, 1.406, 1.468, 1.593, 1.655, 1.719, 2.032 and 2.156 Dia.	Shrink	6

CAT. NO. 5735–0

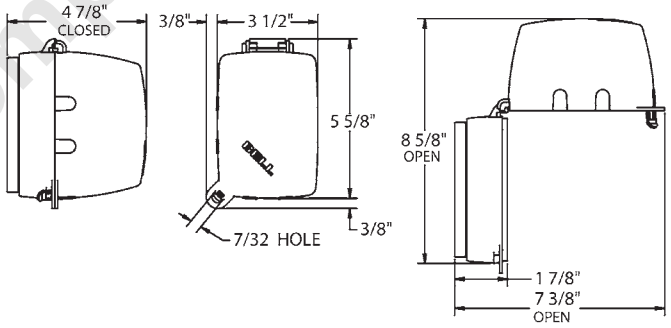

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

RAYNTITE® TWO-GANG WEATHERPROOF-WHILE-IN-USE COVERS

APPLICATION

Rayntite® covers are designed for use whenever weatherproof protection is required while an outlet is in use.

PRODUCT FEATURES

- Modularity: 6 SKU's cover almost every application — no need to tie- up money and shelf space stocking multiple SKU's
- Unique snap fit design speeds installation. No more fumbling with open covers
- Two-gang plates can be mounted vertically or horizontally
- High-impact polycarbonate construction: Virtually indestructible
- No need to worry about rust and corrosion
- Tinted lid: Hides dust, dirt, and scratches
- Padlockable design: Prevents tampering and accidental disconnects
- Tri-lingual instructions: One product for all North American markets
- Covers can be either device or box mounted — allows for installation flexibility
- Meets NEC 406.8 (B) requirements — no need to worry about code compliances

COMPLIANCES

- cULus
- NEMA 3R Rated
- Meets NEC 406.8 (B) Requirements

REFERENCE DATA

- Canadian Patent 2,092, 516
- United States Patents
  5,981, 875
  5,533, 637
  5,456, 377
  5,228, 584



5775–0





5790–0

CATALOGUE NUMBER	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
Two-Gang – Standard Depth			
5775-0	Two-gang vertical cover- with 4 plates included - for duplex, and single round receptacles 1.344, 1.406, 1.468, 1.593, 1.655, 1.719, 2.033 and 2.156 Dia.	Shrink	5

CATALOGUE NUMBER	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
Two-Gang – Deep			
5790-0	Two-gang vertical cover- Deep with 4 plates included - for duplex, and single round receptacles 1.344, 1.406, 1.468, 1.593, 1.655, 1.719, 2.032 and 2.156 Dia.	Shrink	3

CAT. NOs. 5775–0, 5790–0

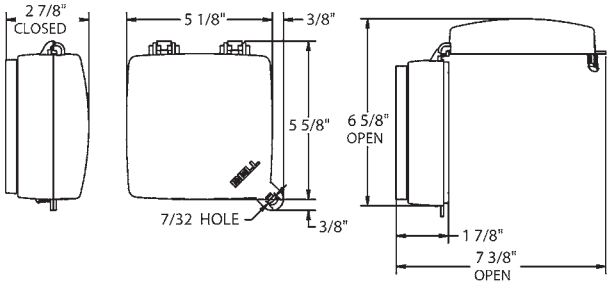

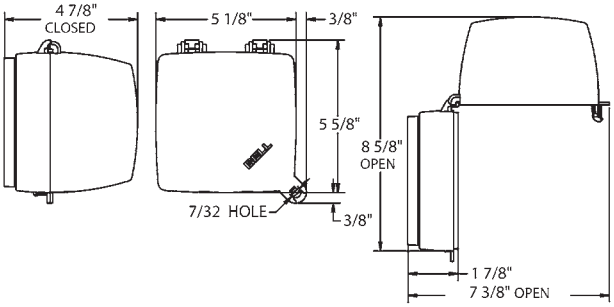

onlinecomponents.com

BELL® HUBBELL®

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

RAYNTITE® TWO-GANG WEATHERPROOF-WHILE-IN-USE COVERS

APPLICATION

Rayntite® covers are designed for use whenever weatherproof protection is required while an outlet is in use.

PRODUCT FEATURES

- Modularity: 6 SKU's cover almost every application — no need to tie-up money and shelf space stocking multiple SKU's
- Unique snap fit design speeds installation. No more fumbling with open covers
- Two-gang plates can be mounted vertically or horizontally
- High-impact polycarbonate construction: Virtually indestructible
- No need to worry about rust and corrosion
- Tinted lid: Hides dust, dirt, and scratches
- Padlockable design: Prevents tampering and accidental disconnects
- Tri-lingual instructions: One product for all North American markets
- Covers can be either device or box mounted — allows for installation flexibility
- Meets NEC 406.8 (B) requirements — no need to worry about code compliances

COMPLIANCES

-
- NEMA 3R Rated
- Meets NEC 406.8 (B) Requirements

REFERENCE DATA

- Canadian Patent 2,092, 516
- United States Patents

  5,981, 875

  5,533, 637

  5,456, 377


  5,228, 584



5795–0

CATALOGUE NUMBER	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
Two-Gang – Deep			
5795-0	Two-gang vertical cover- Deep with 2 plates included - for single round receptacles 1.344, 1.406, 1.468, 1.593, 1.655, 1.719, 2.032 and 2.156 Dia.	Shrink	3

CAT. NOs. 5795–0

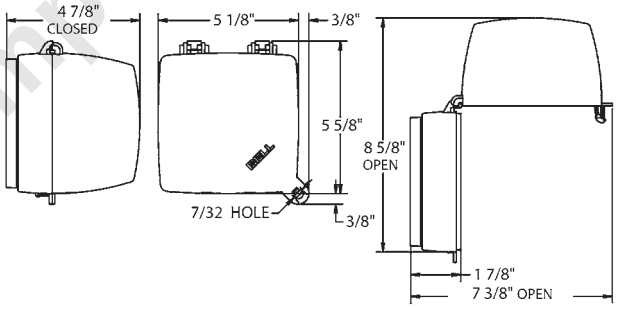

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

RAYNTITE® SINGLE-GANG DEVICE COVERS

APPLICATION

For use whenever weatherproof protection is required for an outdoor receptacle.

PRODUCT FEATURES

- Rugged die cast aluminum construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Vertical mount covers are padlockable
- May be mounted to box or device
- Includes installation hardware, gasket, and multi-lingual instructions

COMPLIANCES

- UL – Standard 514A
- CSA – C22.2 No. 18
- NEMA 3R Rated



5001–0



5002–0



5026–0



5027–0



5028–0 to 5028–6



5029–0, 5030–0




5031–0


CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
Horizontal Mount				
5001-0	Gray	Duplex	Shrink	24
5002-0	Gray	GFCI	Shrink	24

CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
Vertical Mount – Padlockable				
5026-0	Gray	Single, 1.593" diameter	Shrink	24
5027-0	Gray	Duplex	Shrink	24
5028-0	Gray	GFCI	Shrink	24
5028-6	White	GFCI	Carded	6
5029-0	Gray	20A, 1.710" diameter	Shrink	12
5030-0	Gray	30-50A, 2.150" diameter	Shrink	12
5031-0	Gray	Single, 1.406" diameter	Shrink	12

HORIZONTAL MOUNT COVERS

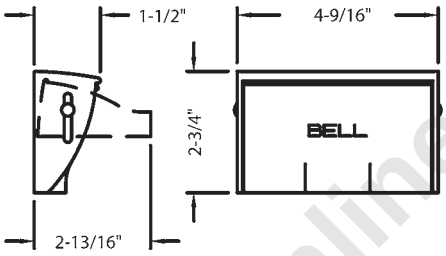

VERTICAL MOUNT COVERS

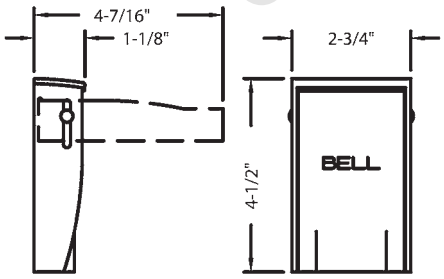

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

RAYNTITE® TWO-GANG DEVICE COVERS

APPLICATION

For use whenever weatherproof protection is required for an outdoor receptacle.

PRODUCT FEATURES

- Rugged die cast aluminum construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Covers are padlockable, 1/4" dia. hole
- May be mounted to box or device
- Includes installation hardware, gasket, and multi-lingual instructions

COMPLIANCES

- (UL) – Standard 514A
- (CSA) – C22.2 No. 18
- NEMA 3R Rated



5032–0



5033–0



5034–0



5036–0



5038–0



5040–0



5041–0



5042–0




5043–0



5045–0

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Vertical Mount – Padlockable				
5032-0	Gray	(2) Duplex	Shrink	6
5033-0	Gray	(1) Duplex & (1) GFCI	Shrink	6
5034-0	Gray	(1) 30-50A Receptacle 2.625" diameter	Shrink	6
5036-0	Gray	(1) 30-50A Receptacle 2.156" diameter	Shrink	6
5038-0	Gray	(2) Receptacles, 1.406" diameter	Shrink	6
5040-0	Gray	(1) Single Receptacle, 1.406" diameter & (1) GFCI	Shrink	6
5041-0	Gray	(2) Toggle	Shrink	6
5042-0	Gray	(1) Toggle & (1) Duplex	Shrink	6
5043-0	Gray	(1) Toggle & (1) GFCI	Shrink	6
5045-0	Gray	(2) GFCI	Shrink	6

TWO–GANG DEVICE COVERS

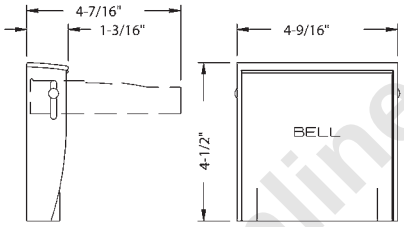

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SINGLE-GANG DEVICE COVERS

APPLICATION

For use whenever weatherproof protection is required for an outdoor receptacle.

PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Includes installation hardware, gasket, and multi-lingual instructions

COMPLIANCES

- (UL) – Standard 514A
- (CSA) – C22.2 No. 18
- NEMA 3R Rated



5180–0 to 5180–2



5181–0



5101–0 to 5101–2



5102–0



5152–0



5153–0



5712–5




5094–0

CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
Horizontal – Device Mount				
5180-0	Gray	Duplex	Shrink	24
5180-1	White	Duplex	Shrink	24
5180-2	Bronze	Duplex	Shrink	24
5181-0	Gray	Duplex	Shrink	24
5101-0	Gray	GFCI	Shrink	24
5101-1	White	GFCI	Shrink	24
5101-2	Bronze	GFCI	Shrink	24
5102-0	Gray	GFCI	Shrink	24
5152-0	Gray	Single, 1.406" diameter	Shrink	24
5153-0	Gray	Motor plug base, 1.600" diameter, 125V, 15A wiring device included	Shrink	12
5712-5	Gray	125V, 15A Duplex receptacle included	Carded	6


/ i t d

CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
Horizontal – Box Mount				
5094-0	Gray	Duplex	Shrink	24


CAT. NOs. 5180–0 SERIES, 5712–5, 5094–0

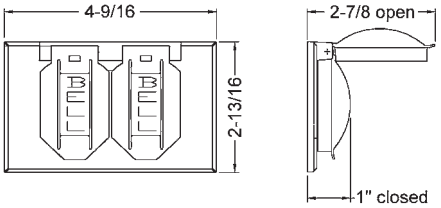


CAT. NO. 5101–0 SERIES

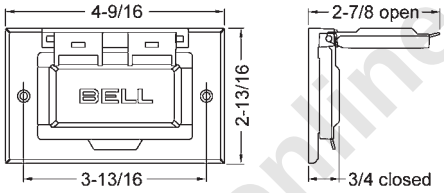


CAT. NO. 5152–0

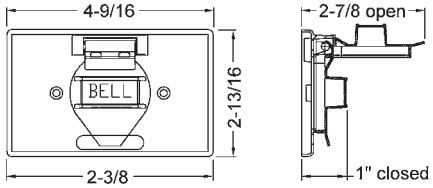


CAT. NO. 5102–0



CAT. NO. 5181–0



CAT. NO. 5153–0

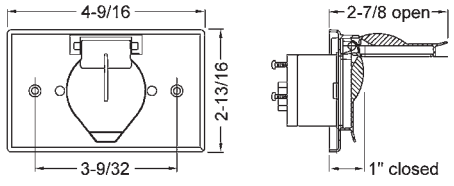

onlinecomponents.com

BELL HUBBELL

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

GENERATOR KITS

APPLICATIONS

For temporary power back-ups following storms, on construction sites, with RV's or anywhere temporary power is needed.

PRODUCT FEATURES

- Extra-deep weatherproof box gives installers the room needed to wire the box efficiently.
- State-of-the-art powder-coated finish provides years of protection against the elements.
- Installation hardware, gasket, and ground screw is provided. No need to search for additional components.



COMPLIANCES

- – C22.2 NO. 18
- NEMA 3R RATED

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
58405	Gray	Generator Hook-up Box with 3-pole, 4 wire, 30A, 125/250V NEMA L14-30 male receptacle	Boxed	4
58355KIT	Gray	Generator Hook-up Box with 3 pole, 4 wire, 20A, 125/250V NEMA L14-20 male receptacle	Boxed	4

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SINGLE-GANG DEVICE COVERS

APPLICATION

For use whenever weatherproof protection is required for an outdoor receptacle.

PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Includes installation hardware, gasket, and multi-lingual instructions

COMPLIANCES

- c UL us
- NEMA 3R Rated



5146–0 to 5146–1



5103–0 to 5103–2



5104–0



5147–0



5155–0 to 5155–2




5095–0




5091–0

GFCI STYLE COVERS

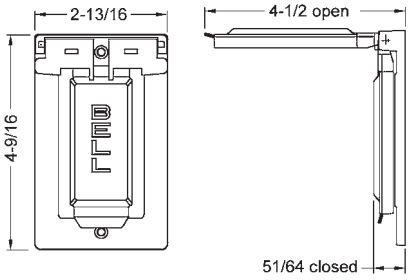


SINGLE RECEPTACLE STYLE COVERS

NOTE: DIMENSIONS FOR DEVICE-MOUNT AND BOX-MOUNT COVERS ARE THE SAME

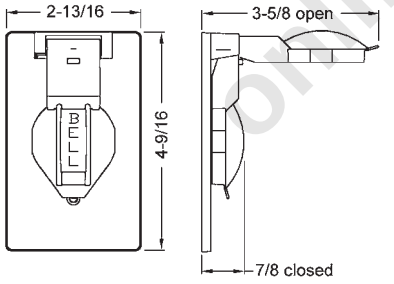


DUPLEX STYLE COVER

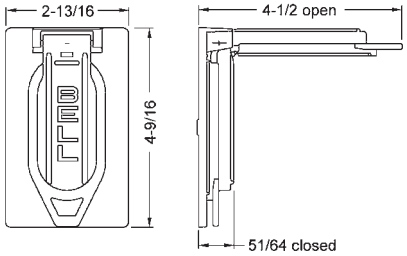

CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
Vertical – Device Mount				
5146-0	Gray	Duplex	Shrink	24
5146-1	White	Duplex	Shrink	24
5103-0	Gray	GFCI	Shrink	24
5103-1	White	GFCI	Shrink	24
5103-2	Bronze	GFCI	Shrink	24
5104-0	Gray	GFCI	Shrink	24
5155-0	Gray	Single, 1.406" diameter	Shrink	24
5155-1	White	Single, 1.406" diameter	Shrink	24
5155-2	Bronze	Single, 1.406" diameter	Shrink	24

CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
Vertical – Box Mount				
5095-0	Gray	Duplex	Shrink	24
5091-0	Gray	Single, 1.406" diameter	Shrink	24
5147-0	Gray	Duplex	Shrink	24

CAT. NO. 5104–0, 5147–0



onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SINGLE-GANG BLANK COVERS AND MINI-PLATE

BLANK COVERS APPLICATION

For use whenever weatherproof protection is required for a single-gang box.

BLANK COVERS PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance

BLANK COVERS COMPLIANCES

-
- NEMA 3R Rated

MINI-PLATE APPLICATIONS

For use with light poles. Provides a safe and convenient means of accessing power for holiday lighting, power tools, and the like.

MINI-PLATE PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lid assures weatherproof protection when receptacle is not in use
- Includes installation hardware and receptacle



5173–0 to 5173–7



5174–0



5183–0


CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Blank Covers – Device Mount				
5173-0	Gray	Blank Cover	Shrink	50
5173-1	White	Blank Cover	Shrink	50
5173-7	Bronze	Blank Cover	Carded	12

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Blank Covers – Box Mount				
5174-0	Gray	Blank Cover	Shrink	50


CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Mini-Plate				
5183-0	Black	Curved back, 1-1/2" radius - for 3" dia. pole mounting	Shrink	48

c d i c t c

BLANK COVERS

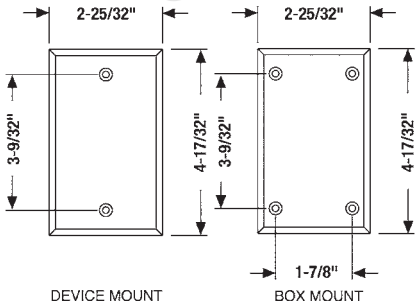

MINI–PLATE

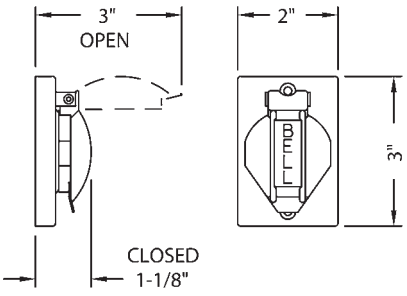

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

TWO-GANG DEVICE COVERS

APPLICATION

For use whenever weatherproof protection is required for an outdoor receptacle.

PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Includes installation hardware, gasket, and multi-lingual instructions

COMPLIANCES

-
- – Standard 514A (5132 - 5145)
- – C22.2 (5132 - 5145)
- NEMA 3R Rated



5148–0



5157–0



5132–0



5133–0



5160–0



5138–0



5145–0



5092–0



5096–0




5098–0


CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
Device Mount				
5132-0	Gray	(2) Duplex	Shrink	10
5138-0	Gray	(2) Round, 1.406" Dia.	Shrink	10
5148-0	Gray	(2) Duplex	Shrink	18
5157-0	Gray	(2) Single, 1.406" dia.	Shrink	18
5160-0	Gray	(1) Duplex & (1) Single, 1.406" dia.	Shrink	12

CATALOGUE NUMBER	COLOUR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.
Box Mount				
5096-0	Gray	(2) Duplex	Shrink	12
5092-0	Gray	(2) Single, 1.406" dia.	Shrink	12
5098-0	Gray	(1) Duplex & (1) Single, 1.406" dia.	Shrink	12
5133-0	Gray	(1) Duplex, (1) GFCI	Shrink	10
5145-0	Gray	(2) GFCI	Shrink	10


5157–0, 5092–0

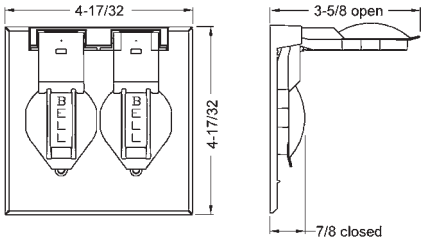


TWO–GANG DEVICE COVERS
5148–0 SERIES, 5096–0, 5160–0, 5098–0

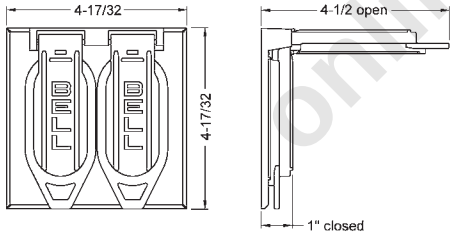


5132–0




5133–0



5138–0



5145–0



NOTE: DIMENSIONS ARE THE SAME FOR DEVICE MOUNT AND BOX MOUNT STYLES SHOWN. 5157–0 SERIES, 5092–0

BELL
HUBBELL

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

TWO AND THREE-GANG DEVICE COVERS

APPLICATIONS

For use whenever weatherproof protection is required for an outdoor receptacle. Blank covers for use whenever weatherproof protection is required for a multi-gang box.

PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Includes installation hardware, gasket, and multi-lingual instructions

COMPLIANCES

-
- NEMA 3R Rated



5097–0



5093–0



5175–0 to 5175–2




5177–0

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Three-Gang Device Cover – Box Mount				
5097-0	Gray	(3) Duplex	Boxed	1
5093-0	Gray	(3) Single, 1.406" dia.	Boxed	1


CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Three-Gang Blank Cover – Box Mount				
5177-0	Gray	Blank Cover	Boxed	10

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Two-Gang Blank Cover – Device Mount				
5175-0	Gray	Blank Cover	Shrink	25
5175-1	White	Blank Cover	Shrink	25
5175-2	Bronze	Blank Cover	Shrink	25

THREE–GANG DEVICE COVERS
5097–0 AND 5093–0

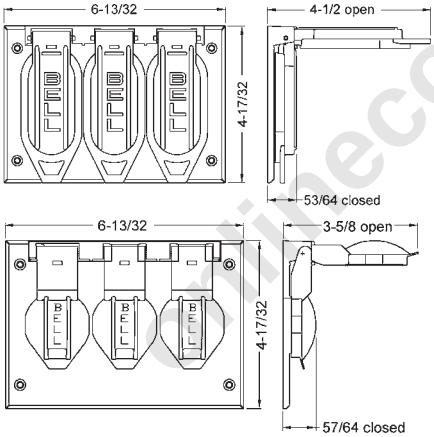

BLANK COVERS
5177–0, 5175 SERIES



NOTE: DIMENSIONS ARE THE SAME FOR DEVICE MOUNT AND BOX MOUNT STYLES SHOWN.

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SINGLE-GANG LEVER SWITCH COVERS

APPLICATION

For use whenever weatherproof protection is required for an “on-off" type switch.

PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Includes installation hardware and multi-lingual instructions
- Single-gang covers are supplied with a switch — no need to purchase separate components
- Switch/cover units are supplied with the switch unassembled to the cover

COMPLIANCES


- (UL) – Standard 514A
- (SA) – Certified
- NEMA 3R Rated



5121–0 to 5121–2
5141–0, 5128–0, 5137–0

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Single-Gang Switch Covers – Vertical – Device Mounted				
5121-0	Gray	SP 125V, 10A	Shrink	24
5121-1	White	SP 125V, 10A	Shrink	24
5121-2	Bronze	SP 125V, 10A	Shrink	24
5141-0	Gray	3-Way 125V, 6A or 250V, 3A	Shrink	8
5128-0	Gray	SP 120-277VAC, 20A	Shrink	20
5137-0	Gray	DP 120-277VAC, 20A	Shrink	20

SINGLE–GANG
5121 SERIES
5141 SERIES
CAT. NOs. 5128–0, 5137–0

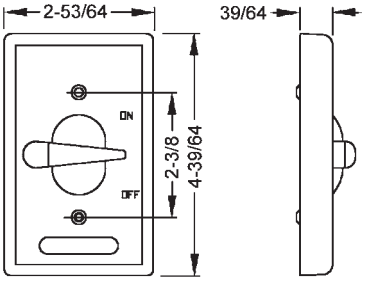

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

TWO-GANG LEVER SWITCH COVERS

APPLICATION

For use whenever weatherproof protection is required for an “on-off" type switch.

PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Includes installation hardware and multi-lingual instructions
- Most units supplied with a switch — no need to purchase separate components
- Switch/cover units are supplied with the switch unassembled to the cover

COMPLIANCES

- (UL) – Standard 514A
- (CSA) – Certified
- NEMA 3R Rated



5124–0



5166–0




5125–0




5167–0

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Two-Gang Switch Covers – Device Mounted				
5124-0	Gray	(2) SP 125V, 10A	Shrink	8
5125-0	Gray	Cover only	Shrink	8
5166-0	Gray	(1) SP 125V, 10A & (1) Duplex receptacle	Shrink	8
5167-0	Gray	2 Gang, Switch/GFCI Cover box mount	Shrink	8


TWO–GANG
CAT. NO. 5124–0, 5125 SERIES



TWO–GANG 5167 SERIES



TWO–GANG 5166 SERIES



onlinecomponents.com

onlinecomponents.com

THREE-GANG LEVER SWITCH COVER & REPLACEMENT SWITCH

THREE-GANG LEVER SWITCH COVER APPLICATION

For use whenever weatherproof protection is required for an “on-off" type switch.

THREE-GANG LEVER SWITCH COVER PRODUCT FEATURES


- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Includes installation hardware and multi-lingual instructions
- Three-gang cover is supplied with switches — no need to purchase separate components
- Switch/cover units are supplied with the switch unassembled to the cover

THREE-GANG LEVER SWITCH COVER COMPLIANCES

- c UL us
- NEMA 3R Rated (5126-0 only)


THREE–GANG

CAT. NO. 5126–0

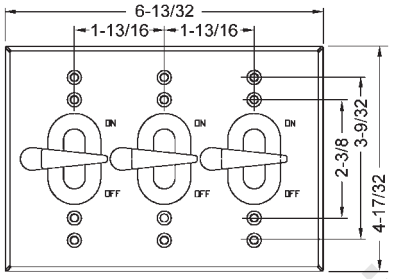


TOGGLE SWITCH

CAT. NOs. 5201–0





5126–0



5201–0

THREE-GANG SWITCH COVER – DEVICE MOUNT				
CAT. NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.
5126-0	Gray	(3) SP 125V, 10A	Boxed	1

LEVER SWITCH COVER – ACCESSORIES				
CAT. NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.
5201-0	—	SP 125V, 10A Toggle switch	Polybag	10

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

CLUSTER COVERS

APPLICATIONS

For use with Bell® single-gang rectangular or round weather-proof boxes. Cluster covers provide an easy means of mounting Bell® lampholders and other accessories.

PRODUCT FEATURES

- Rugged die cast construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Includes installation hardware, gasket, and multi-lingual instructions
- Three-hole covers are supplied with two closure plugs

COMPLIANCES

- – Standard 514A
- – Certified - C22.2 #18



5186–0 to 5186–2



5193–0 to 5193–2




5189–0 to 5189–2




5197–0 to 5197–2

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Rectangular Cluster – Covers				
5186-0	Gray	1-1/2" Outlet	Shrink	20
5186-1	White	1-1/2" Outlet	Shrink	20
5186-2	Bronze	1-1/2" Outlet	Shrink	20
5189-0	Gray	3-1/2" Outlets	Shrink	20
5189-1	White	3-1/2" Outlets	Shrink	20
5189-2	Bronze	3-1/2" Outlets	Shrink	20


RECTANGULAR CLUSTER COVERS 5186 SERIES, 5189 SERIES






CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
4" Round Cluster – Covers				
5193-0	Gray	1-1/2" Outlet	Shrink	20
5193-1	White	1-1/2" Outlet	Shrink	20
5193-2	Bronze	1-1/2" Outlet	Shrink	20
5197-0	Gray	3-1/2" Outlets	Shrink	20
5197-1	White	3-1/2" Outlets	Shrink	20
5197-2	Bronze	3-1/2" Outlets	Shrink	20

ROUND CLUSTER COVERS 5193 SERIES, 5197 SERIES





onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

LAMPHOLDERS

APPLICATIONS.

For outdoor or indoor lighting use. May be used with Bell® cluster covers and boxes.

PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Locking swivel knuckle assures positive lamp positioning and provides pin-point directional aiming
- Extra long wire leads for easy hook-up
- Each lampholder supplied with a porcelain socket, inside gasket, 1/2" locknut and multi-lingual instructions

COMPLIANCES

- (UL) – Standard 1598
- (SA) – Certified C22.2 No. 18



5606–0



5612–0



5611–0




5615–0



5613–0 to 5613–2


CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Lampholders And Accessories For 75-150 Watt Par 38 Lamps				
5606-0	Gray	Lampholder	Shrink	30
5606-1	White	Lampholder	Shrink	30
5606-2	Bronze	Lampholder	Shrink	30
5612-0	Gray	Lampholder w/gasket	Shrink	30
5611-0	—	Outer gasket only, replacement gasket for 5612-0	Polybag	30
5615-0	—	Wire guard only	Shrink	5

5613 SERIES

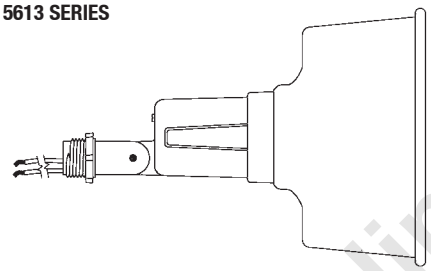


CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Architectural Lampholders For 75-150 Watt Par 38 Lamps				
5613-0	Gray	Lampholder	Shrink	4
5613-1	White	Lampholder	Shrink	4
5613-2	Bronze	Lampholder	Shrink	4


LAMPHOLDERS
5606 SERIES, 5612–0

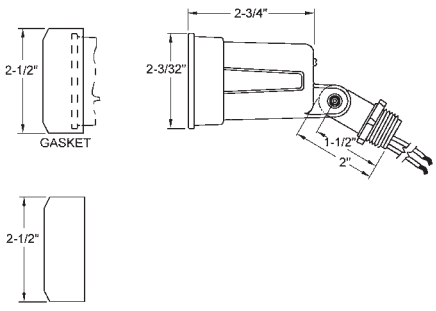

CAT. NO. 5611–0



CAT. NO. 5615–0

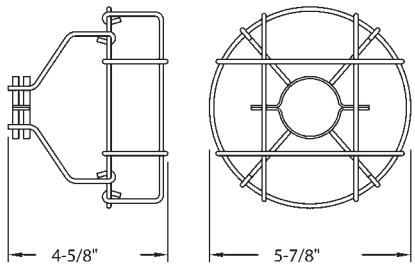

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

LAMPHOLDERS

PORTABLE LAMPHOLDER APPLICATION

For general outdoor lighting use.

PORTABLE LAMPHOLDER PRODUCT FEATURES

- Rugged die-cast construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Locking swivel knuckle assures positive lamp positioning and provides pin-point directional aiming

PORTABLE LAMPHOLDER COMPLIANCES

-

BULLET LAMPHOLDER APPLICATION

For general outdoor lighting use. May be used with BELL cluster covers and boxes

BULLET LAMPHOLDER PRODUCT FEATURES

- Rugged die cast
- Locking swivel knuckle
- Assure positive lamp positioning and provides pinpoint directional aming
- Includes installation hardware and multilingual instructions

BULLET LAMPHOLDER COMPLIANCES

-



5792–0




5820–8


CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Portable Lampholder Assembly				
5792-0	Gray	Spike, 6 ft. cord & plug	Polybag	12

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Bullet Lampholders - For 75-150 Watt Par 38 And R-40 Lamps				
5820-8	Green	Lampholder	Boxed	2

PORTABLE LAMPHOLDER ASSEMBLY 5792–0

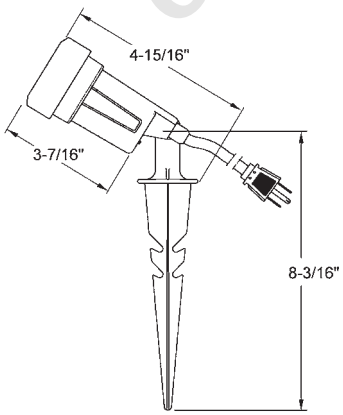

BULLET LAMPHOLDER ASSEMBLY 5820–8

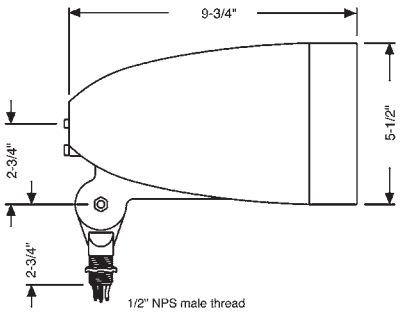

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

LAMPHOLDER COMBINATIONS

APPLICATION

For use with Bell® single-gang rectangular or round weatherproof boxes.

PRODUCT FEATURES

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Each combination kit is a complete weatherproof installation — no need to purchase separate components
- Includes installation hardware, gasket, and multi-lingual instructions

COMPLIANCES

- UL – Standard 1598
- CSA – Certified C22.2 No. 18



5620–0



5624–0 to 5624–2



5621–0 to 5621–6




5625–0 to 5625–2

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Rectangular Cover – Combinations For 75-150 Watt Par 38 Lamps				
5620-0	Gray	(1) Lampholder	Shrink	8
5621-0	Gray	(2) Lampholders	Shrink	8
5621-6	White	(2) Lampholders	Carded	4


CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
4" Round Cover – Combinations For 75-150 Watt Par 38 Lamps				
5624-0	Gray	(1) Lampholder	Shrink	8
5624-1	White	(1) Lampholder	Shrink	8
5624-2	Bronze	(1) Lampholder	Shrink	8
5625-0	Gray	(2) Lampholders	Shrink	8
5625-1	White	(2) Lampholders	Shrink	8
5625-2	Bronze	(2) Lampholders	Shrink	8

5620 SERIES




5621 SERIES

5624 SERIES



5625 SERIES

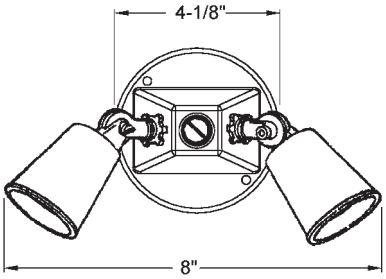

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

LIGHT KITS

APPLICATION

For general use in wet, damp, or dry locations.

PRODUCT FEATURES

- Each kit is a complete weatherproof installation — no need to purchase separate components
- Each kit includes easy-to-follow multi-lingual instructions
- All kit components are described in the preceding pages

COMPLIANCES

- UL – Standard 1598
- CSA – Certified C22.2 No.18



5883–5 to 5883–6



5818–5 to 5818–6

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD PKG.
Rectangular Light Kits For 75-150 Watt Par 38 Lamps				
5883-5	Gray	Box, cover, photocell & (2) lampholders	Boxed	4
5883-6	White	Box, cover, photocell & (2) lampholders	Boxed	4
5818-5	Gray	Box, cover & (2) lampholders	Boxed	4
5818-6	White	Box, cover & (2) lampholders	Boxed	4

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

LIGHT KITS

APPLICATION

For general use in wet, damp, or dry locations.

PRODUCT FEATURES

- Each kit is a complete weatherproof installation — no need to purchase separate components
- Each kit includes easy-to-follow multi-lingual instructions
- All kit components are described in the preceding pages

COMPLIANCES

- UL – Standard 1598
- CSA – Certified C22.2 No. 18



5829–5 to 5829–6



5876–5 to 5876–6

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
4" Round Light Kits For 75-150 Watt Par 38 Lamps				
5829-5	Gray	Box, cover & (2) lampholders	Boxed	4
5829-6	White	Box, cover & (2) lampholders	Boxed	4
5876-5	Gray	Box, cover & (2) architectural lampholders	Boxed	4
5876-6	White	Box, cover & (2) architectural lampholders	Boxed	4

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

GARDEN LIGHTS

APPLICATION

For accent lighting along walkways, driveways, terraces, porches and garden areas.

PRODUCT FEATURES

- Rugged die cast construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Includes screw-in clear glass globe, wire connectors, gasket, and multi-lingual instructions
- Three-tier lights accept 40W maximum lamps
- Four-tier lights accept 60W maximum lamps

COMPLIANCES

-




5884–8



5893–8

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Incandescent Type Threaded 1/2" Npt - 18" Leads				
5884-8	Green	3-Tier	Box	2
5893-8	Green	4-Tier	Box	2

CAT. NO. 5884–8

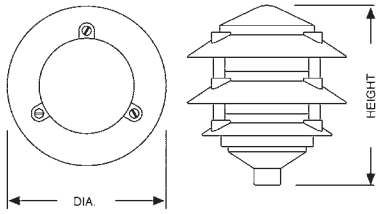


CATALOGUE NUMBER	DIA.	HEIGHT
5884-8	6"	7"
5893-8	6"	8-3/4"

REPLACEMENT GLOBES

REPLACEMENT GLOBES APPLICATION

For use with Bell® garden lights.

REPLACEMENT GLOBE

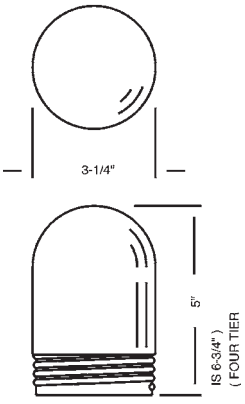



5694–0



5695–0

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Replacement Globes For Garden Lights				
5694-0	Clear	For 3-tier	Carton	4
5695-0	Clear	For 4-tier	Carton	4

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

ACCESSORIES
Closure Plugs

CLOSURE PLUGS APPLICATION

For use with Bell® weatherproof boxes, extension adapters, cluster covers and round splice boxes to seal off unused outlets

CLOSURE PLUGS PRODUCT FEATURES

- Gray closure plugs are zinc die cast
- White and bronze closure plugs are nonmetallic



5269–0 to 5269–9
5270–0 to 5270–9, 5271–0

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Closure Plugs				
5269-0	Gray	1/2" NPT	75 Polybags of 4	75 bags
5269-1	White	1/2" NPT	75 Polybags of 4	75 bags
5269-2	Bronze	1/2" NPT	75 Polybags of 4	75 bags
5269-5	Gray	1/2" NPT	12 Cards of 3	12 cards
5269-6	White	1/2" NPT	12 Cards of 3	12 cards
5269-7	Bronze	1/2" NPT	12 Cards of 3	12 cards
5269-9	Gray	1/2" NPT	Bulk	1000
5270-0	Gray	3/4" NPT	75 Polybags of 4	75 bags
5270-5	Gray	3/4" NPT	12 Cards of 3	12 cards
5270-9	Gray	3/4" NPT	Bulk	1000
5271-0	Gray	1" NPT	75 Polybags of 4	75 bags

d i t d d c g g titi o ot i c
d i t d d c g c d titi o ot i c


onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS


ACCESSORIES
Replacement Gaskets

APPLICATION
Replacement gaskets for Bell® weatherproof covers and lampholders.


PRODUCT FEATURES
- Each gasket has cut outs for a toggle switch, duplex receptacle and 1.406" dia. round receptacle
- Remove the cut outs for the duplex and round receptacles for a GFCI receptacle opening



5019–0

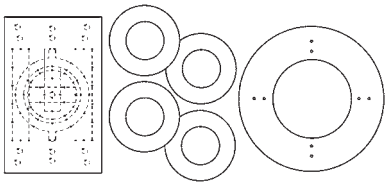


5017–0




5020–0

CATALOGUE NUMBER	COLOUR	DESCRIPTION	PKG. TYPE	STD. PKG.
Rectangular Box/Cover Gaskets				
5019-0	Black	1-Gang	20 Cello bags of 2	20
5020-0	Black	2-Gang	20 Cello bags of 2	20
5017-0	Black	1 Gang cover gasket, 4 Lampholder gaskets & 1 Round cover gasket	20 Cello bags	20


CAT. NO. 5019–0



CAT. NO. 5020–0



CAT. NO. 5017–0

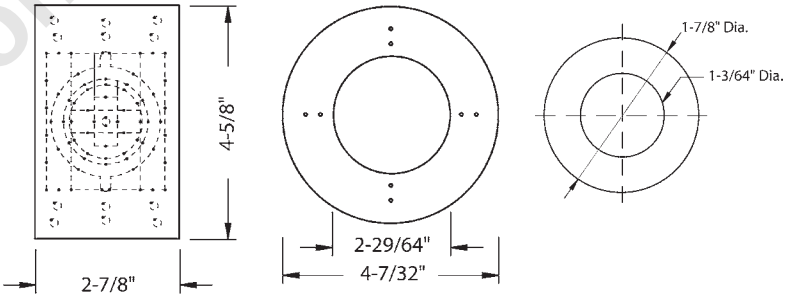

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SPECIALTY TYPE SWITCHES

APPLICATIONS

- Industrial
- Electronic instruments
- Automotive/marine equipment
- Power tools
- Home appliances
- Emergency lighting
- Vending machines

PULL-CHAIN SWITCH PRODUCT FEATURES

- Plastic body and nipple
- Nipple 3/8" – UNS 27 x 5/16" long
- Aluminum knurled nut, brass or nickel finish

VARIABLE-SPEED PULL-CHAIN SWITCH PRODUCT FEATURES

- Plastic body and nipple
- Brass knurled nut
- Nipple 3/8" – UNS 27 x 3/8" long

ALL-ANGLE PULL-CHAIN PRODUCT FEATURES

- Plastic body and metal nipple
- Nipple 15/32" – UNS 32
- Steel lockout

PULL-CHAIN AND VARIABLE-SPEED PULL-CHAIN SWITCHES AND ALL-ANGLE PULL-CHAIN SWITCHES COMPLIANCES

- UL
- CSA

SNAP-IN ROCKER SWITCHES PRODUCT FEATURES

- Nylon body and rocker
- Polycarbonate rocker (#6437)
- Contacts – silver-plated copper-alloy
- .250 quick connect tabs
- Fits cutout 17/32" x 1-1/8"

SNAP IN ROCKER SWITCHES COMPLIANCES

- UL
- CSA



6401, 6354



6402, 6355



6403, 6404



6405



6436



6437

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Pull-Chain Switches – For Lamps And Ceiling Fixtures			
6401	SPST, on-off 6" leads, brass finish Carded	6 amp, 125V AC 3 amp, 250V AC 6 amp, 125V L	5
6354	SPST, on-off 6" leads, brass finish Bulk Poly Bag	6 amp, 125V AC 3 amp, 250V AC 6 amp, 125V L	25
6402	SPST, on-off 6" leads, nickel finish Carded	6 amp, 125V AC 3 amp, 250V AC 6 amp, 125V L	5
6355	SPST, on-off 6" leads, nickel finish Bulk Poly Bag	6 amp, 125V AC 3 amp, 250V AC 6 amp, 125V L	25

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Variable-Speed Pull-Chain Switches – For Ceiling Fans			
6403	2-speed, off-on-on Stab connections, brass finish Carded	6 amp, 125V AC 3 amp, 250V AC 6 amp, 125V L	5
6404	3-speed, off-on-on-on, Stab connections, brass finish, Carded	6 amp, 125V AC 3 amp, 250V AC	5

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
All-Angle Pull-Chain – For Ceiling Fixtures			
6405	All angle, on-off 3"leads, SPST, Carded	6 amp, 125V AC 3 amp, 250V AC	5

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Snap-In Rocker Switches – For Range Hood And Appliances			
6436	Rocker, SPST, on-off Opening 17/32" x 1-1/8" Carded	16 amp, 250V AC 1 HP, 250V AC 1/2 HP, 125V AC	5
6437	Lighted rocker SPST, on-off Opening 17/32" x 1-1/8" Carded	110V Lamp 16 amp, 250V AC 15 amp, 1 HP, 250V AC 1/2 HP, 125V AC	5

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SPECIALTY TYPE SWITCHES

APPLICATIONS

- Industrial
- Electronic instruments
- Automotive/marine equipment
- Power tools
- Home appliances
- Emergency lighting
- Vending machines

CANOPY SWITCH COMPLIANCES

- UL
- CSA



6445



6446



6356, 6357



6447



6448RAC



6424, 6352



6425, 6353

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Rotary Canopy Switch - For Lamps And Appliances			
6445	Rotary, canopy, SPST, Off-on-on-on plastic knob Carded	2 amp, 250V AC 4 amp, 125V AC 1 amp, 125V DC	5
6446	Rotary, canopy, SPST, On-off, 6" leads, plastic knob Carded	1 amp, 250V AC 3 amp, 120V AC 1 amp, 125V ACL	5
6356	Rotary, canopy, SPST, On-off, 6" leads, plastic knob Bulk Poly Bag	1 amp, 250V AC 3 amp, 120V AC 1 amp, 125V ACL	25
6447	Rotary, canopy, SPST, On-off, 6" leads, brass knob Carded	1 amp, 250V AC 3 amp, 120V AC 1 amp, 125V ACL	5
6448RAC	Rotary, canopy, 2-circuit, Off-on-on-on, 6" leads Brass knob, Carded	1 amp, 250V AC 3 amp, 125V ACL	5
6357	Rotary, canopy, 2-circuit, Off-on-on-on, 6" leads Brass knob, Bullk Poly Bag	1 amp, 250V AC 3 amp, 125V ACL	25

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Maintained Contact Push-Button Canopy Switch – For Lamps And Appliances			
6424	c o o d d d		
6352	c o o d B o B g		
6425	c o o d ic d d		
6353	c o o d ic B o B g		

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SPECIALTY TYPE SWITCHES

PUSH-BUTTON SWITCH PRODUCT FEATURES

- Plastic case
- Nickel-plated brass nipple, knurled nut, hex nut
- Nipple 15/32" – 32 x 1/2" long

COMPLIANCES

- UL
- CSA



6431



6426



6428



6427



6358

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Maintained Contact Slide Switch – For Lamps And Appliances			
6431	id o o i g / x / d d		

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Momentary Contact Push-Button Switches – For Bells And Buzzers			
6426	o t co t ct o o o o B c c t i d d	4	
6428	o t co t ct o o o o R d c t i d d		
6427	tto o o d d d	4 /	

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Push Button Switch - For Lamps And Appliances			
6358	o t d o o i d B o B g		

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SPECIALTY TYPE SWITCHES

PRODUCT FEATURES

- Impact-resistant thermoplastic body
- Silver cadmium oxide contacts
- Knurled nut, hex and strap all nickel-plated
- Keyed brass bushing
- #6-32 screw-type terminals
- Nickel-plated brass toggle
- Suitable for 12V DC use at rated amperage

COMPLIANCES

- UL
- CSA



6415



6419



6416



6410RAC



6413



6411



6420



6417



6418



6414

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Extra Heavy-Duty Bat Handle Toggle Switch			
6415	DPST, on-off, Screw terminals, Carded	10 amp, 277V AC, 20 amp, 125V AC 1-1/2 HP, 125V/250V AC	5
6419	DPDT, on-on, Screw terminals, Carded	10 amp, 277V AC, 20 amp, 125V AC 1-1/2 HP, 125V/250V AC	5
6416	DPDT, on-off-on, Screw terminals, Carded	20 amp, 125V AC 1-1/2 HP, 125V/250V AC	5

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Heavy-Duty Bat Handle Toggle Switch			
6410RAC	SPST, on-off Screw terminals Carded	12 amp, 250V AC 20 amp, 125V AC 1 HP, 120V/240V AC	5
6413	SPDT, on-on Screw terminals Carded	10 amp, 250V AC 20 amp, 125V AC 3/4 HP, 125V/250V AC	5
6411	SPDT, on-off-on Screw terminals	10 amp, 250V AC 20 amp, 125V AC 3/4 HP, 125V AC	5
6420	SPST, on-off Screw terminals Carded	10 amp, 250V AC 20 amp, 125V AC 3/4 HP, 125V/250V AC	5

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Extra Heavy-Duty Bat Handle Toggle Switch			
6417	SPST, on-off Screw terminals Nonmetallic, Carded	20 amp, 125V/277V AC 1-1/2 HP, 125V AC 2 HP, 250V AC	5
6418	DPDT, on-off-on Screw terminals Nonmetallic, Carded	20 amp, 125V/277V AC 2 HP, 250V AC 1-1/2 HP, 125V AC	5

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Medium-Duty Bat Handle Toggle Switch			
6414	SPST, on-off Screw terminals Carded	15 amp, 120V AC 10 amp, 240V AC	5

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SPECIALTY TYPE SWITCHES

PRODUCT FEATURES

- Impact-resistant thermoplastic body
- Silver cadmium oxide contacts
- Knurled nut, hex and strap all nickel-plated
- Keyed brass bushing
- #6-32 screw-type terminals
- Nickel-plated brass toggle
- Suitable for 12V DC use at rated amperage

TOGGLE BOOT PRODUCT FEATURES

- Fits standard bat handle toggle switches
- Made of silicone rubber
- Fits nipples with 15/32" – 32 thread
- Packed two per card

COMPLIANCES

- UL
- CSA



6412



6351



6409RAC



6441

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Medium-Duty Bat Handle Toggle Switch With Wire Leads			
6412	o o d d d	4 /	

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Medium-Duty Ball Handle Toggle Switch With Wire Leads			
6351	o o B d ogg o o too i c o t ic it i d B o B g		

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Medium-Duty Ball Toggle			
6409RAC	o o c t i d d	4	

CATALOGUE NUMBER	DESCRIPTION	ELECTRICAL RATINGS	STD. PKG.
Toggle Boot			
6441	R co t o togg itc d d		

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

WIRED-IN SURGE PROTECTIVE DEVICES

APPLICATION

Single phase wired-in surge protective devices feature a compact design making them idealy suited for residential installations where space around the electrical panel may be limited. They can be mounted directly to the panel through a chase nipple connection to reduce lead length and impedance.

PRODUCT FEATURES

- 50,000 and 100,000 Peak Amperage Capacity
- up to 200kA Short Circuit Current Rated

COMPLIANCES

- UL 1449 3rd edition
- NEMA 4X housing
- cUL



HBL3W100C



HBL3W50

CATALOGUE NUMBER	CONFIGURATION	PEAK AMP CAPACITY	MOUNTING METHOD
120/240VAC Single Phase Wired-In Surge Protective Devices (Type 1 / Type 2 SPD)			
HBL3W100C	1Phase 3-Wire + Ground	100kA	Bottom Nipple Mount
HBL3W50	1Phase 3-Wire + Ground	50kA	Side Nipple Mount

WHOLE HOUSE SURGE PROTECTION

APPLICATION

Hubbell's Whole Home Surge panel offers home owners the ability to protect their entire house with one unit! The HBLWH80 offers power, telephone, and COAX protection in one location and can be flush or surface mounted to suit the application.

PRODUCT FEATURES

- Power module provides 80kA Peak Amperage Capacity
- Telephone module protects up to 4 phone lines
- Two independent COAX modules

COMPLIANCES

- UL 1449 3rd edition
- NEMA 1 enclosure



HBLWH80

CATALOGUE NUMBER	SERVICE VOLTAGE	CONFIGURATION	PEAK AMP CAPACITY
Whole House Surge Protection (Type 2 Spd – HBLWH80 Only)			
HBLWH80	120/240 Single Phase	1Phase 3-Wire + Ground	80Ka

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

NON-METALLIC SURGE STRIPS

PRODUCT FEATURES

- Transformer spaced outlet(s)
- 15A resetable push on/off circuit breaker switch
- Power and ground indicating LED's
- Available with Fax/Modem, Fax/Modem/CATV and Fax/Modem/CATV/DSS protection



CATALOGUE NUMBER	DESCRIPTION	# OF OUTLETS	JOULE RATING	PEAK AMP RATING	CORD LENGTH	COLOUR	DOWN LINE WARRANTY*
HBL6PPS	Power Strip (No surge protection)	6	N/A	N/A	6'	Office White	N/A
HBL6PS350A	SPD	6	350	6.5 kA	6'	Office White	$2,500
HBL6PS35015A	SPD	6	350	6.5 kA	15'	Office White	$2,500
HBL6PS1050MA	SPD w/Fax/Modem	6	1,050	19.5 kA	6'	Office White	$2,500
HBL7PS1050A	SPD	7	1,050	19.5 kA	6'	Office White	$10,000
HBL7PS1050MA	SPD w/Fax/Modem	7	1,050	19.5 kA	6'	Office White	$10,000
HBL7PS105015A	SPD	7	1,050	19.5 kA	15'	Office White	$10,000
HBL8PS2100MA	SPD w/Fax/Modem/CATV	8	2,100	39 kA	6'	Office White	$25,000
HBL8PS2100DA	SPD w/Fax/Modem/CATV/DSS	8	2,100	39 kA	6'	Office White	$25,000

**See warranty information inside product box for details.*



HBL6PS350A



HBL8PS2100MA

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

SPECIALTY SURGE STRIPS

ENERGY SAVING SURGE STRIP PRODUCT FEATURES

- Shuts down power to peripherals when the item plugged into the master is turned off
- Three uncontrolled transformer spaced outlets
- Six foot power cord
- 1050 joules / 19.5 kA rating
- $10,000 down line protection warranty*



SURGE STRIP WITH USB PORTS PRODUCT FEATURES

- Two USB ports for charging cameras, GPS, or MP3 players
- Four transformer spaced outlets
- Black non-metallic housing with six foot cord and lighted power on switch
- Power and ground indicating LED's
- 1050 joules/19.5kA rating
- $10,000 down line protection warranty*



SURGE STRIP WITH REMOTE PRODUCT FEATURES

- Four outlets controlled by transmitter
- Remote switch operated with keychain transmitter
- Two transformer spaced outlets
- Power and ground indicating LED's
- 2100 joules/39kA rating
- $25,000 down line protection warranty*



CATALOGUE NUMBER	DESCRIPTION	# OF OUTLETS	JOULE RATING	PEAK AMP RATING	CORD LENGTH	COLOUR	DOWN LINE WARRANTY*
Surge Strip with USB Port							
HBL4PS1050USB	Non-metallic SPD with two USB ports	4	1,050	19.5 kA	6'	Black	$10,000
Surge Strip with Remote Switch							
HBL6RSPS2100	Non-metallic remote switch SPD with one keychain control	6	2,100	39 kA	6'	Office White	$25,000
Energy Saving Surge Strip							
HBL8ESPS1050M	Energy Saving SPD with master/slave design with fax/ modem	8	1,050	19.5 kA	6'	Office White	$10,000
HBL8ESPS1050C	Energy Saving SPD master/slave design with CATV protection	8	1,050	19.5 kA	6'	Office White	$10,000
Cable TV Protection Cube							
HBLCATC	Cable TV protection cube	N/A	N/A	N/A	N/A	Office White	N/A



HBL4PS1050USB



HBL6RSPS2100



HBL8ESPS1050M



HBLCATC

See warranty information inside product box for details.

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

onlinecomponents.com

CATALOGUE NO.	PAGE
66	A27
1050	A27
1060	A27
1111	A14
2018	A13
2402	D18
2403	D18
2404	D18
2405	D18
2406	D18
2408	D18
2410	D18
2412	D18
2414	D18
2416	D18
6351	I5
6352	I2
6353	I2
6354	I1
6355	I1
6356	I2
6357	I2
6358	I3
6401	I1
6402	I1
6403	I1
6404	I1
6405	I1
6411	I4
6412	I5
6413	I4
6414	I4
6417	I4
6418	I4
6420	I4
6424	I2
6425	I2
6426	I3
6427	I3
6428	I3
6431	I3
6436	I1
6437	I1
6441	I5
6445	I2
6446	I2
6447	I2
7902	A27
8361	A10
8362	A10
8363	A10
8364	A10
8365	A10
8366	A10
8367	A10
8368	A10
8371	A10
8372	A10
8375	A10
9008	A27
54521	A24
54531	A24
54541	A24
54551	A24
54560	A24
54561	A24
54571	A24
54581	A24
54591	A24
58405	H16
20509001	E8
20509002	E8
20509003	E8
20509004	E8
20509005	E8
20509006	E8
20509007	E8
20509008	E8
LNM12BPK100	E7
LNM16BPK100	E7
LNM20BPK100	E7
LNM25BPK100	E7
LNM32BPK100	E7
LNM40BPK100	E7
LNP11BPK100	E7
LNP13BPK100	E7
LNP16BPK100	E7
LNP21BPK100	E7
LNP29BPK25	E7
LNP36BPK25	E7
LNP7BPK100	E7
LNP9BPK100	E7
1004-H	A4
1004-LBU	A4
1004-LHU	A4
1004-LUBAR	A4
1041BAR	A27
1042BAR	A27
1100-LLEUBAR	A1
1100-LREU	A1
1100-LUBAR	A1
1102BAR	A1
1102-LHUBAR	A1
1102-LREU	A1
1102-LUBAR	A1
1102-MSB	A1
1102-MSB	A17
1102-MSBU	A1
1102-MSBU	A17
1102-SB	A1
1104-K	A2
1104-LBUBAR	A2
1104-LE	A2
1104-LHU	A2
1104-LMSU	A2
1104-LRWUBAR	A2
1104-LUBAR	A2
1104-LUDBAR	A2
1104-MSB	A2
1104-MSB	A17
1104-MSBUBAR	A2
1104-MSBUBAR	A17
1104-P	A2
1104-P	A5
1104-P	A17
1104-P	A19
1104-P	A18
1104-SB	A2
1110-BAR	A14
1110-HV	A14
1110-HV	A21
1110-MSB	A14
1110-RBAR	A14
1110-SB	A14
1151BAR	A14
1198H	A14
1199H	A14
11-C-4-HV	A21
11-C-5-HV	A21
1204-1-HV	A21
1204-2-HV	A21
1204-HVP	A21
1204-MSB-HV	A17
1204-MSB-HV	A21
1304-LHU	A2
1504-LLEUBAR	A3
1504-MSBUBAR	A3
1504-MSBUBAR	A17
1804-LHU	A3
2001R	B2
2002F	B3
2002FBAR	B3
2002R	B2
2003F	B3
2003FBAR	B3
2003R	B2
2006F	B3
2006FBAR	B3
2006R	B2
2011F	B3
2011FBAR	B3
2014R	B2
2016R	B2
2018-SB	A13
2020-BAR	A13
2020-RBAR	A13
2020-SB	A13
2021R	B2
2027F	B3
2027FBAR	B3
2027R	B2
2104-LLEU-2	A5
2104-LLEU-3BAR	A5
2104-LLEU-4BAR	A5
2104-LLEUBAR	A3
2104-LNU	A3
2104-LU	A3
2104-LU-2	A5
2104-MSBU	A3
2104-MSBU	A19
2104-MSBU-2	A5
2104-MSBU-2	A19
2104-MSBU-3	A5
2104-MSBU-3	A19
2104-MSBU-4	A5
2104-MSBU-4	A19
2304-LLEU	A3
2304-LLEU-2	A5
2304-LLEU-3	A5
2304-LLEU-4	A5
2304-MSBKU	A19
2304-MSBKU-2	A19
2304-MSBKU-3	A19
2304-MSBKU-4	A19
3004-LHU	A4
3004-MSB	A4
3004-MSB	A18
3004-MSB-1	A4
3004-MSBU	A4
3004-MSBU	A18
3004-MSBU-1	A4
3004-MSBU-1	A18
3102-LHU	A2
3102-MSB	A2
3102-MSB	A17
3102-MSBU	A2
3102-MSBU	A17
3104-LHU	A3
3104-MSB	A3
3104-MSB	A18
3104-MSB-1	A3
3104-MSB-1	A18
3104-MSBU	A3
3104-MSBU	A18
3104-MSBU-1	A3
3104-MSBU-1	A18
31622001LPK50	E8
31622002LPK50	E7,E8
31622003LPK50	E7,E8

onlinecomponents.com

INDEX

CATALOGUE NO.	PAGE
31622007LPK50	E7,E8
31622008LPK50	E7,E8
4204-MSB	A5
4204-MSB	A17
4204-MSBU	A5
4204-MSBU	A17
5001-0	H13
5002-0	H13
5017-0	H32
5019-0	H32
5020-0	H32
5026-0	H13
5027-0	H13
5028-0	H13
5028-6	H13
5029-0	H13
5030-0	H13
5031-0	H13
5032-0	H14
5033-0	H14
5034-0	H14
5036-0	H14
5038-0	H14
5040-0	H14
5041-0	H14
5042-0	H14
5043-0	H14
5045-0	H14
5091-0	H17
5092-0	H19
5093-0	H20
5094-0	H15
5095-0	H17
5096-0	H19
5097-0	H20
5098-0	H19
5101-0	H15
5101-1	H15
5101-2	H15
5102-0	H15
5103-0	H17
5103-1	H17
5103-2	H17
5104-0	H17
5121-0	H21
5121-1	H21
5121-2	H21
5124-0	H22
5125-0	H22
5126-0	H23
5128-0	H21
5132-0	H19
5133-0	H19
5137-0	H21
5138-0	H19
5141-0	H21
5145-0	H19
5146-0	H17
5146-1	H17
5147-0	H17
5148-0	H19
5152-0	H15
5153-0	H15
5155-0	H17
5155-1	H17
5155-2	H17
5157-0	H19
5160-0	H19
5166-0	H22
5167-0	H22
5173-0	H18
5173-1	H18
5173-7	H18
5174-0	H18
5175-0	H20
5175-1	H20
5175-2	H20
5177-0	H20
5180-0	H15
5180-1	H15
5180-2	H15
5181-0	H15
5183-0	H18
5185-0	H8
5186-0	H24
5186-1	H24
5186-2	H24
5189-0	H24
5189-1	H24
5189-2	H24
5193-0	H24
5193-1	H24
5193-2	H24
5197-0	H24
5197-1	H24
5197-2	H24
5201-0	H23
52151-KBAR	A8
52151-KSB	A8
52151-MSB	A8
52151-MSB	A20
52151-MSBS	A8
52151-MSBS	A20
52171-1	A8
521711-MSB	A8
521711-MSB	A20
52171-KBAR	A8
52171-KSB	A8
52171-MSB	A8
52171-MSB	A20
5269-0	H31
5269-1	H31
5269-2	H31
5269-5	H31
5269-6	H31
5269-7	H31
5269-9	H31
5270-0	H31
5270-5	H31
5270-9	H31
5271-0	H31
52-C-0	A9
52-C-00BAR	A9
52-C-1	A9
52-C-10	A9
52-C-13	A9
52-C-14	A9
52-C-14-5/8	A9
52-C-15	A9
52-C-16	A9
52-C-17	A9
52-C-18	A9
52-C-18-5/8	A9
52-C-3	A9
52-C-49-1	A10
52-C-49-1/2	A10
52-C-49-1-1/4	A10
52-C-49-3/4	A10
52-C-50-1-1/2	A10
52-C-51-2	A10
52-C-52-1	A10
52-C-52-1/2	A10
52-C-52-1-1/4	A10
52-C-52-3/4	A10
52-C-52-5/8	A10
52-C-53-1-1/2	A10
52-C-54-2	A10
52-C-6214	A9
52-C-6BAR	A9
53151-K	A8
53171-ER	A24
53171-K	A8
5320-0	H1
5320-1	H1
5320-2	H1
5321-0	H1
5321-1	H1
5321-2	H1
5322-0	H1
5323-0	H1
5324-0	H1
5330-0	H1
5331-0	H1
5332-0	H1
5333-0	H4
5334-0	H4
5335-0	H4
5337-0	H4
5337-1	H4
5338-0	H5
5340-0	H5
5341-0	H4
5342-0	H4
5343-0	H4
5345-0	H4
5346-0	H5
5348-0	H5
5361-0	H7
5361-1	H7
5361-2	H7
5363-0	H7
5365-0	H7
5372-0	H7
5374-0	H7
5375-0	H7
5385-0	H1
5386-0	H1
5387-0	H1
5388-0	H5
5389-0	H5
5390-0	H6
5399-0	H2
5400-0	H2
5400-5	H2
5403-0	H2
5405-0	H2
5406-0	H2
5407-0	H6
5412-0	H3
5413-0	H3
5414-0	H3
5415-0	H3
54151-KBAR	A6
54151-LABAR	A6
54151-LB	A6
54151-LBAR	A6
54151-LDBAR	A6
54151-LHB	A6
54151-MSB	A6
54151-MSB	A20
54151-MSBABAR	A6
54151-MSBABAR	A20
54151-MSBL	A6
54151-MSBL	A20
54171-K	A6
54171-L	A6
54171-LB	A6
54171-LFBAR	A6
54171-LHB	A6

onlinecomponents.com

CATALOGUE NO.	PAGE
54171-MSB	A6
54171-MSB	A20
54171-MSB-1	A20
54171-MSB-1	A6
54561-1/2	A24
54-C-1	A7
54-C-6	A7
54-C-62	A7
54-C-64	A7
54C-65BAR	A7
54-C-94	A7
55151-KBAR	A6
55171-K	A6
5606-0	H25
5606-1	H25
5606-2	H25
5611-0	H25
5612-0	H25
5613-0	H25
5613-1	H25
5613-2	H25
5615-0	H25
5620-0	H27
5621-0	H27
5621-6	H27
5624-0	H27
5624-1	H27
5624-2	H27
5625-0	H27
5625-1	H27
5625-2	H27
5694-0	H30
5695-0	H30
5712-5	H15
5730-0	H9
5735-0	H10
5740-0	H9
5775-0	H11
5790-0	H11
5792-0	H26
5795-0	H12
5818-5	H28
5818-6	H28
5820-8	H26
5829-5	H29
5829-6	H29
58355KIT	H16
5876-5	H29
5876-6	H29
5883-5	H28
5883-6	H28
5884-8	H30
5884-8	H30
5893-8	H30
5893-8	H30
6300H	C7
6409RAC	I5
6410RAC	I4
6448RAC	I2
66SS	A27
6851RF	C7
72151-K	A11
72171-1	A11
72171-KBAR	A11
72171-KSB	A11
72171-MSB	A11
72171-MSB	A20
72-C-1	A12
72-C-10	A12
72-C-13	A12
72-C-14	A12
72-C-15	A12
72-C-17	A12
72-C-18	A12
72-C-6-K	A12
73151-KBAR	A11
73171-KBAR	A11
7901RW	A27
7902	A17
7902	A19
7902	A20
7902	A20
7902	A18
820D	A27
97001SS	C2
97002SS	C2
97071HV	C6
97071HV	C6
97071HV	G3
97071HV	G3
97071KS	C7
97071KSHV	C6
97071KSHV	C6
97071KSHV	G3
97071KSHV	G3
97071SS	C2
97072HV	C6
97072HV	G3
97072HVR	C6
97072HVR	G3
97072KS	C7
97072SS	C2
97073HV	C6
97073HV	G3
97073HVR	C6
97073HVR	G3
97073KS	C7
97073SS	C2
97074HV	C6
97074HV	G3
97074HVR	C6
97074HVR	G3
97074KS	C7
97074SS	C2
97075HV	C6
97075HV	G3
97075HVR	C6
97075HVR	G3
97075SS	C2
97076HV	C6
97076HV	G3
97076HVR	C6
97076HVR	G3
97076SS	C2
97077HV	C6
97077HV	G3
97077HVR	C6
97077HVR	G3
97077SS	C2
97078SS	C2
97079SS	C2
97080SS	C2
97091SS	C4
97092SS	C4
97101KS	C7
97101SS	C3
97102KS	C7
97102SS	C3
97103KS	C7
97103SS	C3
97104KS	C7
97104SS	C3
97105SS	C3
97111SS	C4
97121KS	C7
97121SS	C3
97122KS	C7
97122SS	C3
97123KS	C7
97123SS	C3
97124KS	C7
97124SS	C3
97125SS	C3
97151HV	C6
97151HV	C6
97151HV	G3
97151KS	C7
97151SS	C3
97152HV	C6
97152HV	G3
97152HVR	C6
97152HVR	G3
97152KS	C7
97152SS	C3
97153HV	C6
97153HV	G3
97153HVR	C6
97153HVR	G3
97153KS	C7
97153SS	C3
97154HV	C6
97154HV	G3
97154HVR	C6
97154HVR	G3
97154KS	C7
97154SS	C3
97155SS	C3
97181SS	C4
97182SS	C4
97191SS	C4
97201SS	C4
97202SS	C4
97211SS	C4
97213SS	C5
97223SS	C5
97233SS	C5
97242SS	C5
97322SS	C5
97323SS	C5
97342SS	C5
97352SS	C5
97353SS	C5
97392SS	C5
97401KSHV	C6
97401KSHV	C6
97401KSHV	G3
97401SS	C2
97402KSHV	C6
97402KSHV	G3
97402KSHVR	C6
97402KSHVR	G3
97402SS	C2
97403KSHV	C6
97403KSHV	G3
97403KSHVR	C6
97403KSHVR	G3
97403SS	C2
97404KSHV	C6
97404KSHV	G3
97404KSHVR	C6
97404KSHVR	G3
97404SS	C2
97405SS	C2
97406SS	C2
97411SS	C4
97421SS	C4
97502SS	C5
97512SS	C5
97521SS	C4

onlinecomponents.com

onlinecomponents.com INDEX

CATALOGUE NO.	PAGE
97532SS	C5
97543SS	C5
97553SS	C5
97563SS	C5
97573SS	C5
97630SS	C4
97631SS	C4
97730SS	C4
97731SS	C4
AD347I1	G2
AD347I1N	G2
AD347I2	G2
AD347I2N	G2
AD347W1	G2
AD347W1N	G2
AD347W2	G2
AD347W2N	G2
AP347I1	G2
AP347I1N	G2
AP347I2	G2
AP347I2N	G2
AP347W1	G2
AP347W1N	G2
AP347W2	G2
AP347W2N	G2
AU347I1	G2
AU347I1N	G2
AU347I2	G2
AU347I2N	G2
AU347W1	G2
AU347W1N	G2
AU347W2	G2
AU347W2N	G2
B2025	E11
B2038	E11
B2050	E11
B2075	E11
B2100	E11
B2125	E11
B2150	E11
B2200	E11
BIG050	D13
BIG075	D13
BIG100	D13
BIG125	D13
BIG150	D13
BIG200	D13
BIG250	D13
BIG300	D13
BIG350	D13
BIG400	D13
BMI050	D14
BMI075	D14
BMI100	D14
BMI125	D14
BMI150	D14
BMI200	D14
BMI250	D14
BMI300	D14
BMI350	D14
BMI400	D14
BP050	D13
BP075	D13
BP100	D13
BP125	D13
BP150	D13
BP200	D13
BP250	D13
BP300	D13
BP350	D13
BP400	D13
BP500	D13
BP600	D13
BZI050	D14
BZI075	D14
BZI100	D14
BZI125	D14
BZI150	D14
BZI200	D14
BZI250	D14
BZI300	D14
BZI350	D14
BZI400	D14
CBA	A24
CBC100COM	D10
CBC125COM	D10
CBC150COM	D10
CBC200COM	D10
CBC50COM	D10
CBC75COM	D10
CBLB100COM	D10
CBLB125COM	D10
CBLB150COM	D10
CBLB200COM	D10
CBLB250RIG	D10
CBLB300RIG	D10
CBLB400RIG	D10
CBLB50COM	D10
CBLB75COM	D10
CBLRL100COM	D10
CBLRL125COM	D10
CBLRL150COM	D10
CBLRL200COM	D10
CBLRL50COM	D10
CBLRL75COM	D10
CBT100COM	D10
CBT125COM	D10
CBT150COM	D10
CBT200COM	D10
CBT50COM	D10
CBT75COM	D10
CCS050	D7
CCS075	D7
CCS100	D7
CCS125	D7
CCS150	D7
CCS200	D7
CCS250	D7
CCS300	D7
CCS400	D7
CCSI050	D7
CCSI075	D7
CCSI100	D7
CCSI125	D7
CCSI150	D7
CCSI200	D7
CCSI250	D7
CCSI300	D7
CCSI400	D7
CCZ050	D7
CCZ075	D7
CCZ100	D7
CCZ125	D7
CCZ150	D7
CCZ200	D7
CCZ250	D7
CCZ300	D7
CCZ400	D7
CCZI050	D7
CCZI075	D7
CCZI100	D7
CCZI125	D7
CCZI150	D7
CCZI200	D7
CCZI250	D7
CCZI300	D7
CCZI400	D7
CH050	D17
CH075	D17
CH100	D17
CH125	D17
CH150	D17
CH150R	D17
CH200	D17
CH250	D17
CH300	D17
CH400	D17
CKS050	D8
CKS075	D8
CKS100	D8
CKS125	D8
CKS150	D8
CKS200	D8
CKS250	D8
CKS300	D8
CKS400	D8
CKZ050	D8
CKZ075	D8
CKZ100	D8
CKZ125	D8
CKZ150	D8
CKZ200	D8
CKZ250	D8
CKZ300	D8
CKZ400	D8
CN050	D11
CN075	D11
CN100	D11
CN125	D11
CN150	D11
CN200	D11
CN250	D11
CN300	D11
CN400	D11
CS1	D2
CS10	D2
CS11	D2
CS21	D2
CS3	D2
CS4	D2
CS50	D2
CSC10	D2
DS-30	A26
DS-55	A26
DS-BO	A26
DS-PL	A26
DUP038	D1
DUP038	D3
DUP038SF	D1
DUP038SF	D3
E1S050	D9
E1S075	D9
E1S100	D9
E1S125	D9
E1S150	D9
E1S200	D9
E2S050	D9
E2S075	D9
E2S100	D9
E2S125	D9
E2S150	D9
E2S200	D9
E2S250	D9
E2S300	D9
E2S400	D9
EFK5038	D3
EFK5050	D3
EFK7575	D3
EK050	D12

onlinecomponents.com

CATALOGUE NO.	PAGE
EK075	D12
EK100	D12
EK125	D12
EK150	D12
EK200	D12
EK250	D12
EK300	D12
EK350	D12
EK400	D12
EK500	D12
EK600	D12
EZ-101BAR	A3
F2025	E12
F20259	E12
FHC1022	E6
FHC1023	E6
FHC1033	E6
FHC1034	E6
FHC1042	E6
FHC1043	E6
FLOCK1	F33
FSPFP6X	F33
FSPHD6X	F33
G1038	E10
G1050	E10
G1075	E10
G1100	E10
G1125	E10
G1150	E10
G1200	E10
GCB0510	D17
GCB1220	D17
GCZ0510	D17
GF15ALLA	F15
GF15BKLA	F15
GF15GYLA	F15
GF15ILA	F15
GF15LA	F15
GF15LALA	F15
GF15RLA	F15
GF15WLA	F15
GF20ALLA	F15
GF20BKLA	F15
GF20GYLA	F15
GF20ILA	F15
GF20LA	F15
GF20LALA	F15
GF20RLA	F15
GF20WLA	F15
GFBF20ALLA	F15
GFBF20BKLA	F15
GFBF20GYLA	F15
GFBF20ILA	F15
GFBF20LA	F15
GFBF20LALA	F15
GFBF20RLA	F15
GFBF20WLA	F15
GFTR15	F15
GFTR15AL	F15
GFTR15BK	F15
GFTR15GY	F15
GFTR15I	F15
GFTR15LA	F15
GFTR15R	F15
GFTR15W	F15
GFTR20	F15
GFTR20AL	F15
GFTR20BK	F15
GFTR20GY	F15
GFTR20I	F15
GFTR20LA	F15
GFTR20R	F15
GFTR20W	F15

CATALOGUE NO.	PAGE
GSB-2	A25
GSB-3	A25
GSB-4	A25
GSB-5	A25
GSB-6	A25
HBL1209	G1
HBL18201CN	G1
HBL18201LCN	G1
HBL18203CN	G1
HBL18203ICN	G1
HBL18203LCN	G1
HBL18204ICN	G1
HBL18221CN	G1
HBL18221ICN	G1
HBL18223CN	G1
HBL18223ICN	G1
HBL201ICN	G1
HBL2101347I	G1
HBL2101347W	G1
HBL2103347I	G1
HBL2103347W	G1
HBL2121347BK	G1
HBL2121347I	G1
HBL2121347RD	G1
HBL2121347W	G1
HBL2123347BK	G1
HBL2123347I	G1
HBL2123347RD	G1
HBL2123347W	G1
HBL2124347W	G1
HBL3W100C	J1
HBL3W50	J1
HBL4PS1050USB	J3
HBL6PPS	J2
HBL6PS1050MA	J2
HBL6PS35015A	J2
HBL6PS350A	J2
HBL6RSPS2100	J3
HBL7PS105015A	J2
HBL7PS1050A	J2
HBL7PS1050MA	J2
HBL8ESPS1050C	J3
HBL8ESPS1050M	J3
HBL8PS2100DA	J2
HBL8PS2100MA	J2
HBLCATC	J3
HBLWH80	J1
HC5EB01	F32
HC5EB03	F32
HC5EB05	F32
HC5EB07	F32
HC5EB10	F32
HC5EB15	F32
HC5EB20	F32
HC5EB25	F32
HC5EGY01	F32
HC5EGY03	F32
HC5EGY05	F32
HC5EGY07	F32
HC5EGY10	F32
HC5EGY15	F32
HC5EGY20	F32
HC5EGY25	F32
HC5ER01	F32
HC5ER03	F32
HC5ER05	F32
HC5ER07	F32
HC5ER10	F32
HC5ER15	F32
HC5ER20	F32
HC5ER25	F32
HC5EY01	F32
HC5EY03	F32

CATALOGUE NO.	PAGE
HC5EY05	F32
HC5EY07	F32
HC5EY10	F32
HC5EY15	F32
HC5EY20	F32
HC5EY25	F32
HC6B01	F32
HC6B03	F32
HC6B05	F32
HC6B07	F32
HC6B10	F32
HC6B15	F32
HC6B20	F32
HC6B25	F32
HC6GY01	F32
HC6GY03	F32
HC6GY05	F32
HC6GY07	F32
HC6GY10	F32
HC6GY15	F32
HC6GY20	F32
HC6GY25	F32
HC6R01	F32
HC6R03	F32
HC6R05	F32
HC6R07	F32
HC6R10	F32
HC6R15	F32
HC6R20	F32
HC6R25	F32
HC6Y01	F32
HC6Y03	F32
HC6Y05	F32
HC6Y07	F32
HC6Y10	F32
HC6Y15	F32
HC6Y20	F32
HC6Y25	F32
HDPC03BK	F27
HDPC06BK	F27
HJ1001BPK25	E9
HJ1001GPK25	E9
HJ1002BPK25	E9
HJ1002GPK25	E9
HJ1003BPK25	E9
HJ1003GPK25	E9
HJ1004BPK25	E9
HJ1004GPK25	E9
HJ1005BPK25	E9
HJ1005GPK25	E9
HJ1006BPK25	E9
HJ1006GPK25	E9
HJ1010BPK25	E9
HJ1010GPK25	E9
HJ1011BPK25	E9
HJ1011GPK25	E9
HJ1012BPK25	E9
HJ1012GPK25	E9
HJ1013BPK25	E9
HJ1013GPK25	E9
HJ1014BPK25	E9
HJ1014GPK25	E9
HJ1015BPK25	E9
HJ1015GPK25	E9
HJ1038BPK25	E9
HJ1038GPK25	E9
HJ1039BPK25	E9
HJ1039GPK25	E9
HJ1040BPK25	E9
HJ1040GPK25	E9
HJ1041BPK25	E9
HJ1041GPK25	E9
HJ1042BPK25	E9

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTION OF ELECTRONIC COMPONENTS

INDEX

CATALOGUE NO.	PAGE
HJ1042GPK25	E9
HJ1043BPK25	E9
HJ1043GPK25	E9
HJ1044BPK25	E9
HJ1044GPK25	E9
HJ1055BPK25	E9
HJ1055GPK25	E9
HJ1056BPK25	E9
HJ1056GPK25	E9
HJ1057BPK25	E9
HJ1057GPK25	E9
HJ1058BPK25	E9
HJ1058GPK25	E9
HJ1059BPK25	E9
HJ1059GPK25	E9
HJ1060BPK25	E9
HJ1060GPK25	E9
HPS1347BK	G3
HPS1347I	G3
HPS1347R	G3
HPS1347W	G3
HPS2347I	G3
HPS2347W	G3
HPS3347I	G3
HPS3347W	G3
HS1001BPK25	E9
HS1001GPK25	E9
HS1002BPK25	E9
HS1002GPK25	E9
HS1003BPK25	E9
HS1003GPK25	E9
HS1004BPK25	E9
HS1004GPK25	E9
HVB1BAR	A26
HVB2BAR	A26
HVB3BAR	A26
HVBCBAR	A26
HVBSDBAR	A26
IMF1W	F26
ISM1EI	F38
ISM1W	F38
ISM2EI	F38
ISM2W	F38
JC10	D17
JC10B	D17
KIT-201	A3
KO050	D16
KO075	D16
KO100	D16
KO125	D16
KO150	D16
KO200	D16
LC3	D17
LC3B	D17
LNS050	D15
LNS075	D15
LNS100	D15
LNS125	D15
LNS150	D15
LNS200	D15
LNS250	D15
LNS300	D15
LNS350	D15
LNS400	D15
LNS500	D15
LNS600	D15
LRW	A27
LTM038	D5
LTM050	D5
LTM075	D5
LTM100	D5
LTM125	D5
LTM150	D5
LTM200	D5
LTM250	D5
LTM300	D5
LTM400	D5
LTM45038	D5
LTM45050	D5
LTM45075	D5
LTM45100	D5
LTM45125	D5
LTM45150	D5
LTM45200	D5
LTM90038	D5
LTM90050	D5
LTM90075	D5
LTM90100	D5
LTM90125	D5
LTM90150	D5
LTM90200	D5
LTM90250	D5
LTM90300	D5
LTM90400	D5
LTMI038	D5
LTMI050	D5
LTMI075	D5
LTMI100	D5
LTMI125	D5
LTMI150	D5
LTMI200	D5
LTMI250	D5
LTMI300	D5
LTMI400	D5
LTMI45038	D5
LTMI45050	D5
LTMI45075	D5
LTMI45100	D5
LTMI45125	D5
LTMI45150	D5
LTMI45200	D5
LTMI90038	D5
LTMI90050	D5
LTMI90075	D5
LTMI90100	D5
LTMI90125	D5
LTMI90150	D5
LTMI90200	D5
LTMI90250	D5
LTMI90300	D5
LTMI90400	D5
LTZ038	D6
LTZ050	D6
LTZ075	D6
LTZ100	D6
LTZ125	D6
LTZ150	D6
LTZ200	D6
LTZ250	D6
LTZ300	D6
LTZ400	D6
LTZ90038	D6
LTZ90050	D6
LTZ90075	D6
LTZ90100	D6
LTZ90125	D6
LTZ90150	D6
LTZ90200	D6
LTZ90250	D6
LTZ90300	D6
LTZ90400	D6
LTZI038	D6
LTZI050	D6
LTZI075	D6
LTZI100	D6
LTZI125	D6
LTZI150	D6
LTZI200	D6
LTZI250	D6
LTZI300	D6
LTZI400	D6
LTZI90038	D6
LTZI90050	D6
LTZI90075	D6
LTZI90100	D6
LTZI90125	D6
LTZI90150	D6
LTZI90200	D6
LTZI90250	D6
LTZI90300	D6
LTZI90400	D6
LVP	A25
MBD-1-HV	A22
MBD-1-K	A23
MBD-2-HV	A22
MBD-2-K	A23
MBD-3-HV	A22
MBD-3-K	A23
MBD-4-HV	A22
MBD-4-K	A23
MBD-5-K	A23
MBD-6-K	A23
MBD-P	A23
MBS-1-HV	A22
MBS-1-K	A23
MBS-2-HV	A22
MBS-2-K	A23
MBS-3-HV	A22
MBS-3-K	A23
MBS-4-HV	A22
MBS-4-K	A23
MBS-5-K	A23
MBS-6-K	A23
MBS-P	A23
NHC1010	E5
NHC1011	E5
NHC1012	E5
NHC1020	E5
NHC1020CR	E5
NHC1021	E5
NHC1021CR	E5
NHC1021ZP	E5
NHC1022	E5
NHC1022CR	E5
NHC1022ZP	E5
NHC1023	E5
NHC1023CR	E5
NHC1023ZP	E5
NHC1024	E5
NHC1024CR	E5
NHC1024ZP	E5
NHC1035	E5
NHC1035CR	E5
NHC1035ZP	E5
NHC1036	E5
NHC1036CR	E5
NHC1036ZP	E5
NHC1037	E5
NHC1037CR	E5
NHC1037ZP	E5
NHC1038	E5
NHC1038CR	E5
NHC1038ZP	E5
NHC1040	E5
NHC1041	E5
NHC1041CR	E5
NHC1041ZP	E5
NHC1042	E5
NHC1042CR	E5

onlinecomponents.com

CATALOGUE NO.	PAGE
NHC1043	E5
NHC1043CR	E5
NHC1044	E5
NHC1051	E5
NHC1052	E5
NHC1053	E5
NHC1054	E5
NHC1057	E5
NHC1059	E5
NHC1066	E5
NHC2022CR	E5
NHC2023CR	E5
NHC2024CR	E5
NHC2041CR	E5
NHC2042CR	E5
NHC2043CR	E5
NMB038	D1
NMB075	D1
NMC038	D1
NMC075	D1
NMC100	D1
NMC125	D1
NMC150	D1
NMC200	D1
NMPI050	D1
NMPI050B(BUCKET)	D1
NMPI075	D1
NMPI075B(BUCKET)	D1
NMS038	D1
NMS038SF	D1
NMS050	D1
NMS075	D1
NMS100	D1
NMSI050	D1
NMSQ038	D1
NP126	F6
NP1262	F6
NP1262AL	F6
NP1262BK	F6
NP1262GY	F6
NP1262I	F6
NP1262LA	F6
NP1262W	F6
NP126AL	F6
NP126BK	F6
NP126GY	F6
NP126I	F6
NP126LA	F6
NP126W	F6
NP1326	F6
NP1326AL	F6
NP1326BK	F6
NP1326GY	F6
NP1326I	F6
NP1326LA	F6
NP1326W	F6
NP226	F6
NP2262	F6
NP2262AL	F6
NP2262BK	F6
NP2262GY	F6
NP2262I	F6
NP2262LA	F6
NP2262W	F6
NP226AL	F6
NP226BK	F6
NP226GY	F6
NP226I	F6
NP226LA	F6
NP226W	F6
NP26	F5
NP262	F5
NP262AL	F5
NP262BK	F5
NP262GY	F5
NP262I	F5
NP262LA	F5
NP262W	F5
NP263	F5
NP263AL	F5
NP263BK	F5
NP263GY	F5
NP263I	F5
NP263LA	F5
NP263W	F5
NP264	F5
NP264AL	F5
NP264BK	F5
NP264GY	F5
NP264I	F5
NP264LA	F5
NP264W	F5
NP265	F5
NP265AL	F5
NP265BK	F5
NP265GY	F5
NP265I	F5
NP265LA	F5
NP265W	F5
NP266	F5
NP266AL	F5
NP266BK	F5
NP266GY	F5
NP266I	F5
NP266LA	F5
NP266W	F5
NP26AL	F5
NP26BK	F5
NP26GY	F5
NP26I	F5
NP26LA	F5
NP26W	F5
NP26W	F26
NP326	F6
NP326AL	F6
NP326BK	F6
NP326GY	F6
NP326I	F6
NP326LA	F6
NP326W	F6
NP703I	F16
NP703W	F16
NP724I	F16
NP724W	F16
NP826	F6
NP826AL	F6
NP826BK	F6
NP826GY	F6
NP826I	F6
NP826LA	F6
NP826W	F6
NPJ126	F6
NPJ126AL	F6
NPJ126BK	F6
NPJ126GY	F6
NPJ126I	F6
NPJ126LA	F6
NPJ126W	F6
NPJ1326	F6
NPJ1326AL	F6
NPJ1326I	F6
NPJ1326LA	F6
NPJ1326W	F6
NPJ226	F6
NPJ226AL	F6
NPJ226BK	F6
NPJ226GY	F6
NPJ226I	F6
NPJ226LA	F6
NPJ226W	F6
NPJ26	F5
NPJ262	F5
NPJ262AL	F5
NPJ262BK	F5
NPJ262GY	F5
NPJ262I	F5
NPJ262LA	F5
NPJ262W	F5
NPJ263	F5
NPJ263AL	F5
NPJ263BK	F5
NPJ263GY	F5
NPJ263I	F5
NPJ263LA	F5
NPJ263W	F5
NPJ264	F5
NPJ264AL	F5
NPJ264BK	F5
NPJ264GY	F5
NPJ264I	F5
NPJ264LA	F5
NPJ264W	F5
NPJ26AL	F5
NPJ26BK	F5
NPJ26GY	F5
NPJ26I	F5
NPJ26LA	F5
NPJ26W	F5
NPJ703I	F16
NPJ703W	F16
NPJ724I	F16
NPJ724W	F16
NPJ826	F6
NPJ826AL	F6
NPJ826BK	F6
NPJ826GY	F6
NPJ826I	F6
NPJ826LA	F6
NPJ826W	F6
NS5E12U	F32
NS5E24U	F32
NS5E48U	F32
NS612AL	F7
NS612AL	F35
NS612BK	F7
NS612BK	F35
NS612GY	F7
NS612GY	F35
NS612I	F7
NS612I	F35
NS612LA	F7
NS612LA	F35
NS612U	F32
NS612W	F7
NS612W	F35
NS613AL	F7
NS613AL	F35
NS613BK	F7
NS613BK	F35
NS613GY	F7
NS613GY	F35
NS613I	F7
NS613I	F35
NS613LA	F7
NS613LA	F35
NS613W	F7
NS613W	F35
NS614AL	F7
NS614AL	F35

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTION OF ELECTRONIC COMPONENTS

INDEX

CATALOGUE NO.	PAGE
NS614BK	F7
NS614BK	F35
NS614GY	F7
NS614GY	F35
NS614I	F7
NS614I	F35
NS614LA	F7
NS614LA	F35
NS614W	F7
NS614W	F35
NS616AL	F7
NS616AL	F35
NS616BK	F7
NS616BK	F35
NS616GY	F7
NS616GY	F35
NS616I	F7
NS616I	F35
NS616LA	F7
NS616LA	F35
NS616W	F7
NS616W	F35
NS620AL	F7
NS620AL	F35
NS620I	F7
NS620I	F35
NS620LA	F7
NS620LA	F35
NS620W	F7
NS620W	F35
NS621AL	F7
NS621AL	F35
NS621I	F7
NS621I	F35
NS621LA	F7
NS621LA	F35
NS621W	F7
NS621W	F35
NS624U	F32
NS648U	F32
NS721AL	F38
NS721I	F38
NS721W	F38
NS722AL	F38
NS722I	F38
NS722W	F38
NS723SS	F38
NS725AL	F38
NS725I	F38
NS725LA	F38
NS725W	F38
NS726SS	F38
NS730	F37
NS730AL	F37
NS730I	F37
NS730LA	F37
NS730W	F37
NS732	F37
NS732AL	F37
NS732I	F37
NS732LA	F37
NS732W	F37
NS735	F37
NS735AL	F37
NS735I	F37
NS735LA	F37
NS735W	F37
NS742AL	F37
NS742I	F37
NS742LA	F37
NS742W	F37
NS744AL	F37
NS744I	F37
NS744W	F37
NS745I	F37
NS745W	F37
NS747AL	F37
NS747I	F37
NS747LA	F37
NS747W	F37
NS748AL	F37
NS748I	F37
NS748LA	F37
NS748W	F37
NS750AL	F37
NS750I	F37
NS750LA	F37
NS750W	F37
NS751AL	F37
NS751I	F37
NS751LA	F37
NS751W	F37
NS752AL	F37
NS752I	F37
NS752LA	F37
NS752W	F37
NS755AL	F37
NS755I	F37
NS755LA	F37
NS755W	F37
NS760I	F38
NS760W	F38
NS761I	F38
NS761W	F38
NS770	F9
NS770	F36
NS770AL	F9
NS770AL	F36
NS770BK	F9
NS770BK	F36
NS770GY	F9
NS770GY	F36
NS770I	F9
NS770I	F36
NS770LA	F9
NS770LA	F36
NS770W	F9
NS770W	F36
NS771	F9
NS771	F36
NS771AL	F9
NS771AL	F36
NS771I	F9
NS771I	F36
NS771LA	F9
NS771LA	F36
NS771W	F9
NS771W	F36
NS772AL	F9
NS772AL	F36
NS772I	F9
NS772I	F36
NS772LA	F9
NS772LA	F36
NS772W	F9
NS772W	F36
NS780AL	F9
NS780AL	F36
NS780I	F9
NS780I	F36
NS780LA	F9
NS780LA	F36
NS780W	F9
NS780W	F36
NS782AL	F9
NS782AL	F36
NS782I	F9
NS782I	F36
NS782LA	F9
NS782LA	F36
NS782W	F9
NS782W	F36
NS783AL	F9
NS783AL	F36
NS783I	F9
NS783I	F36
NS783LA	F9
NS783LA	F36
NS783W	F9
NS783W	F36
NS784	F9
NS784	F36
NS784AL	F9
NS784AL	F36
NS784BK	F9
NS784BK	F36
NS784GY	F9
NS784GY	F36
NS784I	F9
NS784I	F36
NS784LA	F9
NS784LA	F36
NS784W	F9
NS784W	F36
NS785	F9
NS785	F36
NS785AL	F9
NS785AL	F36
NS785BK	F9
NS785BK	F36
NS785GY	F9
NS785GY	F36
NS785I	F9
NS785I	F36
NS785LA	F9
NS785LA	F36
NS785W	F9
NS785W	F36
NS790	F37
NS790AL	F37
NS790BK	F37
NS790GY	F37
NS790I	F37
NS790LA	F37
NS790W	F37
NS801AL	F27
NS801BK	F27
NS801GY	F27
NS801I	F27
NS801LA	F27
NS801W	F26
NS801W	F27
NS802AL	F27
NS802BK	F27
NS802GY	F27
NS802I	F27
NS802LA	F27
NS802W	F26
NS802W	F27
NSAV62M	F26
NSAV6C	F26
NSF70AL	F8
NSF70AL	F34
NSF70BK	F8
NSF70BK	F34
NSF70GY	F8
NSF70GY	F34
NSF70I	F8
NSF70I	F34

onlinecomponents.com

CATALOGUE NO.	PAGE
NSF70LA	F8
NSF70LA	F34
NSF70W	F8
NSF70W	F26
NSF70W	F34
NSJ5EAL	F8
NSJ5EAL	F34
NSJ5EB	F8
NSJ5EB	F34
NSJ5EBK	F8
NSJ5EBK	F34
NSJ5EGN	F8
NSJ5EGN	F34
NSJ5EGY	F8
NSJ5EGY	F34
NSJ5EI	F8
NSJ5EI	F34
NSJ5ELA	F8
NSJ5ELA	F34
NSJ5EOR	F8
NSJ5EOR	F34
NSJ5ER	F8
NSJ5ER	F34
NSJ5EW	F8
NSJ5EW	F34
NSJ5EY	F8
NSJ5EY	F34
NSJ6AL	F8
NSJ6AL	F34
NSJ6B	F8
NSJ6B	F34
NSJ6BK	F8
NSJ6BK	F34
NSJ6GN	F8
NSJ6GN	F34
NSJ6GY	F8
NSJ6GY	F34
NSJ6I	F8
NSJ6I	F34
NSJ6LA	F8
NSJ6LA	F34
NSJ6OR	F8
NSJ6OR	F34
NSJ6R	F8
NSJ6R	F34
NSJ6W	F8
NSJ6W	F26
NSJ6W	F34
NSJ6Y	F8
NSJ6Y	F34
NSJUAL	F8
NSJUAL	F34
NSJUB	F8
NSJUB	F34
NSJUBK	F8
NSJUBK	F34
NSJUGN	F8
NSJUGN	F34
NSJUGY	F8
NSJUGY	F34
NSJUI	F8
NSJUI	F34
NSJULA	F8
NSJULA	F34
NSJUOR	F8
NSJUOR	F34
NSJUR	F8
NSJUR	F34
NSJUW	F8
NSJUW	F34
NSJUY	F8
NSJUY	F34
NSO6P1DM	F30

CATALOGUE NO.	PAGE
NSOAM8	F31
NSOBM	F31
NSOBNK14	F29
NSOBOX14	F29
NSOBOX14B	F29
NSOBOX14BC	F29
NSOBOX14C	F29
NSOBOX14D	F29
NSOBOX14DL	F29
NSOBOX14X2	F29
NSOBOX28	F29
NSOBOX28B	F29
NSOBOX28BC	F29
NSOBOX28C	F29
NSOBOX28D	F29
NSOBOX28DL	F29
NSOBOX28X2	F29
NSOBOX48	F29
NSOBX10	F29
NSOBX10B	F29
NSOBX10BC	F29
NSOBX10C	F29
NSOBX10D	F29
NSODK6	F30
NSODM8	F30
NSODM8C6	F30
NSOETM8	F30
NSOFSB	F33
NSOKA	F33
NSOKP	F33
NSOKP	F26
NSOKPS	F26
NSOKPS	F33
NSOMTM24	F30
NSOPTM8	F30
NSORAVC	F33
NSOSAVC	F33
NSOTVDM6	F30
NSOTVM6	F30
NSOVAMP	F31
NSOVAMP240	F31
NSOVM4	F31
NSOVM42G	F31
NSOVM6	F31
NSOVM62G	F31
NSOVM8	F31
NSOVM82G	F31
NSP050B(BUCKET)	D2
NSP050P	D2
NSP075B(BUCKET)	D2
NSP075P	D2
NSP101AL	F35
NSP101BK	F35
NSP101GY	F35
NSP101I	F35
NSP101LA	F35
NSP101W	F35
NSP102AL	F35
NSP102BK	F35
NSP102GY	F35
NSP102I	F35
NSP102LA	F35
NSP102W	F35
NSP103AL	F35
NSP103BK	F35
NSP103GY	F35
NSP103I	F35
NSP103LA	F35
NSP103W	F35
NSP104AL	F35
NSP104BK	F35
NSP104GY	F35
NSP104I	F35

CATALOGUE NO.	PAGE
NSP104LA	F35
NSP104W	F35
NSP106AL	F35
NSP106BK	F35
NSP106GY	F35
NSP106I	F35
NSP106LA	F35
NSP106W	F35
NSP11AL	F35
NSP11BK	F35
NSP11GY	F35
NSP11I	F35
NSP11LA	F35
NSP11W	F35
NSP12AL	F35
NSP12BK	F35
NSP12GY	F35
NSP12I	F35
NSP12LA	F35
NSP12W	F35
NSP13AL	F35
NSP13BK	F35
NSP13GY	F35
NSP13I	F35
NSP13LA	F35
NSP13W	F35
NSP14AL	F35
NSP14BK	F35
NSP14GY	F35
NSP14I	F35
NSP14LA	F35
NSP14W	F26
NSP14W	F35
NSP16AL	F35
NSP16BK	F35
NSP16GY	F35
NSP16I	F35
NSP16LA	F35
NSP16W	F35
NSP24AL	F35
NSP24BK	F35
NSP24GY	F35
NSP24I	F35
NSP24LA	F35
NSP24W	F35
NSP26AL	F35
NSP26BK	F35
NSP26GY	F35
NSP26I	F35
NSP26LA	F35
NSP26W	F35
OBEXBAR	A6
ON050	D11
ON075	D11
ON100	D11
ON125	D11
ON150	D11
ON200	D11
P0389NBK	E12
P0389NGY	E12
P038NBKA	E12
P038NGYA	E12
P0509NBK	E12
P0509NGY	E12
P050NBKA	E12
P050NGYA	E12
P0759NBK	E12
P0759NGY	E12
P075NBKA	E12
P075NGYA	E12
P1009NBK	E12
P1009NGY	E12
P100NBKA	E12

onlinecomponents.com

INDEX

CATALOGUE NO.	PAGE
P100NGYA	E12
P1259NBK	E12
P1259NGY	E12
P125NBK	E12
P125NGY	E12
P150NBK	E12
P150NGY	E12
P200NBK	E12
P200NGY	E12
PB001	C2
PB002	C2
PB071	C2
PB072	C2
PB073	C2
PB074	C2
PB075	C2
PB076	C2
PB077	C2
PB078	C2
PB079	C2
PB080	C2
PB091	C4
PB092	C4
PB101	C3
PB102	C3
PB103	C3
PB104	C3
PB111	C4
PB121	C3
PB122	C3
PB123	C3
PB124	C3
PB151	C3
PB152	C3
PB153	C3
PB154	C3
PB181	C4
PB182	C4
PB191	C4
PB201	C4
PB202	C4
PB211	C4
PB401	C2
PB402	C2
PB403	C2
PB404	C2
PB404	C2
PB406	C2
PB411	C4
PB411	C4
PB502	C5
PB512	C5
PB521	C4
PB532	C5
PB543	C5
PB553	C5
PB563	C5
PB630	C4
PB631	C4
PB730	C4
PB731	C4
PEEB050	D9
PEEB075	D9
PEEB100	D9
PEEE050	D9
PEEE075	D9
PEEE100	D9
PERB050	D15
PERB075	D15
PERB100	D15
PERR050	D15
PERR075	D15
PERR100	D15
PERR125	D15
PS0389NBK	E12
PS0389NGY	E12
PS0509NBK	E12
PS0509NGY	E12
PS05GYKIT	E12
PS0759NBK	E12
PS0759NGY	E12
PS07GYKIT	E12
PS1009NBK	E12
PS1009NGY	E12
R1S050	D12
R1S075	D12
R1S100	D12
R1S125	D12
R1S150	D12
R1S200	D12
R1S250	D12
R1S300	D12
R1S350	D12
R1S400	D12
R28032401	F19
R28032406	F19
R2S050	D12
R2S075	D12
R2S100	D12
R2S125	D12
R2S150	D12
R2S200	D12
R2S250	D12
R2S300	D12
R2S350	D12
R2S400	D12
RAY103PAL	F19
RAY103PI	F19
RAY103PLA	F19
RAY103PW	F19
RAY10PAL	F19
RAY10PI	F19
RAY10PLA	F19
RAY10PW	F19
RAY2LFSQAL	F19
RAY2LFSQI	F19
RAY2LFSQLA	F19
RAY2LFSQW	F19
RAY600PAL	F19
RAY600PI	F19
RAY600PLA	F19
RAY600PW	F19
RAY603PAL	F19
RAY603PI	F19
RAY603PLA	F19
RAY603PW	F19
RAYFSQFAL	F19
RAYFSQFI	F19
RAYFSQFLA	F19
RAYFSQFW	F19
RB0705	D11
RB1005	D11
RB1007	D11
RB1205	D11
RB1207	D11
RB1210	D11
RB1505	D11
RB1507	D11
RB1510	D11
RB1512	D11
RB2005	D11
RB2007	D11
RB2010	D11
RB2012	D11
RB2015	D11
RC101	F12
RC101AL	F12
RC101I	F12
RC101LA	F12
RC101W	F12
RC103	F12
RC103AL	F12
RC103I	F12
RC103LA	F12
RC103W	F12
RC108	F12
RC108AL	F12
RC108ALTR	F12
RC108I	F12
RC108ITR	F12
RC108LA	F12
RC108LATR	F12
RC108TR	F12
RC108W	F12
RC108WTR	F12
RC109	F12
RC109AL	F12
RC109I	F12
RC109LA	F12
RC109W	F12
RC303	F12
RC303AL	F12
RC303I	F12
RC303LA	F12
RC303W	F12
RC308	F12
RC308AL	F12
RC308ALTR	F12
RC308I	F12
RC308ITR	F12
RC308TR	F12
RC308W	F12
RC308WTR	F12
RC309	F12
RC309AL	F12
RC309I	F12
RC309W	F12
RCD101AL	F3
RCD101BK	F3
RCD101GY	F3
RCD101I	F3
RCD101LA	F3
RCD101W	F3
RCD103AL	F3
RCD103BK	F3
RCD103GY	F3
RCD103I	F3
RCD103LA	F3
RCD103W	F3
RCD108AL	F3
RCD108ALTR	F3
RCD108BK	F3
RCD108BKTR	F3
RCD108GY	F3
RCD108GYTR	F3
RCD108I	F3
RCD108ITR	F3
RCD108LA	F3
RCD108LATR	F3
RCD108W	F3
RCD108WTR	F3
RCD109AL	F3
RCD109I	F3
RCD109LA	F3
RCD109W	F3
RCD111AL	F3
RCD111BK	F3
RCD111I	F3
RCD111LA	F3

onlinecomponents.com

CATALOGUE NO.	PAGE
RCD111W	F3
RCD303AL	F3
RCD303BK	F3
RCD303GY	F3
RCD303I	F3
RCD303LA	F3
RCD303W	F3
RCD308AL	F3
RCD308ALTR	F3
RCD308BK	F3
RCD308BKTR	F3
RCD308GY	F3
RCD308GYTR	F3
RCD308I	F3
RCD308ITR	F3
RCD308LA	F3
RCD308LATR	F3
RCD308W	F3
RCD308WTR	F3
RCD309AL	F3
RCD309I	F3
RCD309LA	F3
RCD309W	F3
RCW1AL	F5
RCW1I	F5
RCW1LA	F5
RCW1W	F5
RCW2AL	F5
RCW2I	F5
RCW2LA	F5
RCW2W	F5
RCW3AL	F5
RCW3I	F5
RCW3LA	F5
RCW3W	F5
RCW4AL	F5
RCW4I	F5
RCW4LA	F5
RCW4W	F5
RCW5AL	F5
RCW5I	F5
RCW5LA	F5
RCW5W	F5
RCW6AL	F5
RCW6I	F5
RCW6LA	F5
RCW6W	F5
RD600PDK	F19
RD600RI	F19
RD600RW	F19
RD603PDK	F19
RDS30	F17
RDS50	F17
RDV103PAL	F18
RDV103PI	F18
RDV103PLA	F18
RDV103PW	F18
RDV10PAL	F18
RDV10PI	F18
RDV10PLA	F18
RDV10PW	F18
RDV600PAL	F18
RDV600PI	F18
RDV600PLA	F18
RDV600PW	F18
RDV603PAL	F18
RDV603PI	F18
RDV603PLA	F18
RDV603PW	F18
RDVELV300PAL	F18
RDVELV300PI	F18
RDVELV300PLA	F18
RDVELV300PW	F18
RDVELV303PAL	F18
RDVELV303PI	F18
RDVELV303PLA	F18
RDVELV303PW	F18
RDVFSQFAL	F18
RDVFSQFI	F18
RDVFSQFLA	F18
RDVFSQFW	F18
RDVLV600PAL	F18
RDVLV600PI	F18
RDVLV600PLA	F18
RDVLV600PW	F18
RDVLV603PAL	F18
RDVLV603PI	F18
RDVLV603PLA	F18
RDVLV603PW	F18
REK050	D15
REK075	D15
REK100	D15
RF151	F22
RF151D	F22
RF151TR	F22
RF500	F21
RF506AL	F21
RF506BK	F21
RF506BN	F21
RF506BP	F21
RF506BR	F21
RF506CH	F21
RF506CU	F21
RF506NI	F21
RF506SS	F21
RF507AL	F21
RF507BK	F21
RF507BN	F21
RF507BP	F21
RF507BR	F21
RF507CH	F21
RF507CU	F21
RF507NI	F21
RF507SS	F21
RF509BR	F21
RF515AL	F21
RF515BK	F21
RF515BN	F21
RF515BP	F21
RF515BR	F21
RF515CH	F21
RF515CU	F21
RF515NI	F21
RF515SS	F21
RF6500BR	F22
RFS5I	F19
RFS5LA	F19
RFS5W	F19
RFSQ2FDK	F19
RJ600	F17
RJ600	F17
RJ600	F17
RJ600	F17
RJ600	F24
RJ600	F24
RJ600	F24
RJ600	F24
RJ620AL	F17
RJ620AL	F24
RJ620ALTR	F17
RJ620ALTR	F24
RJ620BK	F17
RJ620BK	F24
RJ620BKTR	F17
RJ620BKTR	F24
RJ620GY	F17
RJ620GY	F24
RJ620GYTR	F17
RJ620GYTR	F24
RJ620I	F17
RJ620I	F24
RJ620ITR	F17
RJ620ITR	F24
RJ620LA	F17
RJ620LA	F24
RJ620LATR	F17
RJ620LATR	F24
RJ620W	F17
RJ620W	F24
RJ620WTR	F17
RJ620WTR	F24
RJ62AL	F17
RJ62AL	F24
RJ62ALTR	F17
RJ62ALTR	F24
RJ62BK	F17
RJ62BK	F24
RJ62BKTR	F17
RJ62BKTR	F24
RJ62GY	F17
RJ62GY	F24
RJ62GYTR	F17
RJ62GYTR	F24
RJ62I	F17
RJ62I	F24
RJ62ITR	F17
RJ62ITR	F24
RJ62LA	F17
RJ62LA	F24
RJ62LATR	F17
RJ62LATR	F24
RJ62W	F17
RJ62W	F24
RJ62WTR	F17
RJ62WTR	F24
RJ650AL	F17
RJ650AL	F24
RJ650ALTR	F17
RJ650ALTR	F24
RJ650BK	F17
RJ650BK	F24
RJ650BKTR	F17
RJ650BKTR	F24
RJ650GY	F17
RJ650GY	F24
RJ650GYTR	F17
RJ650GYTR	F24
RJ650I	F17
RJ650I	F24
RJ650ITR	F17
RJ650ITR	F24
RJ650LA	F17
RJ650LA	F24
RJ650LATR	F17
RJ650LATR	F24
RJ650W	F17
RJ650W	F24
RJ650WTR	F17
RJ650WTR	F24
RJ65AL	F17
RJ65AL	F24
RJ65ALTR	F17
RJ65ALTR	F24
RJ65BK	F17
RJ65BK	F24
RJ65BKTR	F17
RJ65BKTR	F24
RJ65GY	F17
RJ65GY	F24

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTION OF ELECTRONIC COMPONENTS

INDEX

CATALOGUE NO.	PAGE
RJ65GYTR	F17
RJ65GYTR	F24
RJ65I	F17
RJ65I	F24
RJ65ITR	F17
RJ65ITR	F24
RJ65LA	F17
RJ65LA	F24
RJ65LATR	F17
RJ65LATR	F24
RJ65W	F17
RJ65W	F24
RJ65WTR	F17
RJ65WTR	F24
RMS100AL	F20
RMS100I	F20
RMS100ILAL	F20
RMS100ILI	F20
RMS100ILLA	F20
RMS100ILW	F20
RMS100LA	F20
RMS100W	F20
RMS101AL	F20
RMS101I	F20
RMS101ILAL	F20
RMS101ILI	F20
RMS101ILLA	F20
RMS101ILW	F20
RMS101LA	F20
RMS101W	F20
RMS120AL	F20
RMS120I	F20
RMS120ILAL	F20
RMS120ILI	F20
RMS120ILLA	F20
RMS120ILW	F20
RMS120LA	F20
RMS120W	F20
RMS121AL	F20
RMS121I	F20
RMS121ILAL	F20
RMS121ILI	F20
RMS121ILLA	F20
RMS121ILW	F20
RMS121LA	F20
RMS121W	F20
RMS140AL	F20
RMS140I	F20
RMS140W	F20
RMS141AL	F20
RMS141I	F20
RMS141W	F20
RR15	F14
RR151	F14
RR151AL	F14
RR151ALTR	F14
RR151ALWRTR	F14
RR151BK	F14
RR151BKTR	F14
RR151BKWRTR	F14
RR151CHBS	F17
RR151CHBSTR	F17
RR151CHI	F17
RR151CHITR	F17
RR151CHSS	F17
RR151CHSSTR	F17
RR151CHW	F17
RR151CHWTR	F17
RR151GY	F14
RR151GYTR	F14
RR151GYWRTR	F14
RR151I	F14
RR151ITR	F14
RR151IWRTR	F14
RR151LA	F14
RR151LATR	F14
RR151LAWRTR	F14
RR151TR	F14
RR151W	F14
RR151WRTR	F14
RR151WTR	F14
RR151WWRTR	F14
RR155	F14
RR155AL	F14
RR155ALWR	F14
RR155BK	F14
RR155BKWR	F14
RR155GY	F14
RR155GYWR	F14
RR155I	F14
RR155IWR	F14
RR155LA	F14
RR155LAWR	F14
RR155W	F14
RR155WR	F14
RR155WWR	F14
RR15AL	F14
RR15BK	F14
RR15E	F14
RR15EAL	F14
RR15EALTR	F14
RR15EBK	F14
RR15EBKTR	F14
RR15EGY	F14
RR15EGYTR	F14
RR15EI	F14
RR15EITR	F14
RR15ELA	F14
RR15ELATR	F14
RR15EQ	F13
RR15EQAL	F13
RR15EQALTR	F13
RR15EQBK	F13
RR15EQBKTR	F13
RR15EQI	F13
RR15EQITR	F13
RR15EQLA	F13
RR15EQLATR	F13
RR15EQTR	F13
RR15EQW	F13
RR15EQWTR	F13
RR15ETR	F14
RR15EW	F14
RR15EWTR	F14
RR15I	F14
RR15K	F14
RR15KAL	F14
RR15KALTR	F14
RR15KI	F14
RR15KITR	F14
RR15KLA	F14
RR15KLATR	F14
RR15KTR	F14
RR15KW	F14
RR15KWTR	F14
RR15LA	F14
RR15Q	F13
RR15QAL	F13
RR15QALTR	F13
RR15QBK	F13
RR15QBKTR	F13
RR15QI	F13
RR15QITR	F13
RR15QLA	F13
RR15QLATR	F13
RR15QTR	F13
RR15QW	F13
RR15QWTR	F13
RR15S	F14
RR15SAL	F14
RR15SALTR	F14
RR15SALWRTR	F14
RR15SBK	F14
RR15SBKTR	F14
RR15SBKWRTR	F14
RR15SI	F14
RR15SITR	F14
RR15SIWRTR	F14
RR15SLA	F14
RR15SLATR	F14
RR15SLAWRTR	F14
RR15STR	F14
RR15SW	F14
RR15SWRTR	F14
RR15SWTR	F14
RR15SWWRTR	F14
RR15W	F14
RR201	F14
RR201AL	F14
RR201ALTR	F14
RR201ALWRTR	F14
RR201BK	F14
RR201BKTR	F14
RR201BKWRTR	F14
RR201CHBS	F17
RR201CHBSTR	F17
RR201CHI	F17
RR201CHITR	F17
RR201CHSS	F17
RR201CHSSTR	F17
RR201CHW	F17
RR201CHWTR	F17
RR201GY	F14
RR201GYTR	F14
RR201GYWRTR	F14
RR201I	F14
RR201ITR	F14
RR201IWRTR	F14
RR201LA	F14
RR201LATR	F14
RR201LAWRTR	F14
RR201TR	F14
RR201W	F14
RR201WRTR	F14
RR201WTR	F14
RR201WWRTR	F14
RR205	F14
RR205AL	F14
RR205ALWR	F14
RR205BK	F14
RR205BKWR	F14
RR205GY	F14
RR205GYWR	F14
RR205I	F14
RR205IWR	F14
RR205LA	F14
RR205LAWR	F14
RR205W	F14
RR205WR	F14
RR205WWR	F14
RR330	F16
RR330F	F16
RR335P	F16
RR350	F16
RR350F	F16
RR430	F16
RR430F	F16
RR430FW	F16
RR430PM	F16

onlinecomponents.com

CATALOGUE NO.	PAGE
RR430WIPCN	F16
RR435P	F16
RR450	F16
RR450F	F16
RR450FW	F16
RR450PM	F16
RR450WIPCN	F16
RRD15	F4
RRD151	F4
RRD151AL	F4
RRD151ALTR	F4
RRD151BK	F4
RRD151BKTR	F4
RRD151GY	F4
RRD151GYTR	F4
RRD151I	F4
RRD151ITR	F4
RRD151LA	F4
RRD151LATR	F4
RRD151TR	F4
RRD151W	F4
RRD151WTR	F4
RRD155	F4
RRD155AL	F4
RRD155BK	F4
RRD155GY	F4
RRD155I	F4
RRD155LA	F4
RRD155W	F4
RRD15AL	F4
RRD15BK	F4
RRD15E	F4
RRD15EAL	F4
RRD15EALTR	F4
RRD15EBK	F4
RRD15EBKTR	F4
RRD15EGY	F4
RRD15EGYTR	F4
RRD15EI	F4
RRD15EITR	F4
RRD15ELA	F4
RRD15ELATR	F4
RRD15ETR	F4
RRD15EW	F4
RRD15EWTR	F4
RRD15GY	F4
RRD15I	F4
RRD15K	F4
RRD15KAL	F4
RRD15KALTR	F4
RRD15KBK	F4
RRD15KBKTR	F4
RRD15KGY	F4
RRD15KGYTR	F4
RRD15KI	F4
RRD15KITR	F4
RRD15KLA	F4
RRD15KLATR	F4
RRD15KTR	F4
RRD15KW	F4
RRD15KWTR	F4
RRD15LA	F4
RRD15S	F4
RRD15SAL	F4
RRD15SALTR	F4
RRD15SALWRTR	F4
RRD15SBK	F4
RRD15SBKTR	F4
RRD15SBKWRTR	F4
RRD15SGY	F4
RRD15SGYTR	F4
RRD15SGYWRTR	F4
RRD15SI	F4
RRD15SITR	F4
RRD15SIWRTR	F4
RRD15SLA	F4
RRD15SLATR	F4
RRD15SLAWRTR	F4
RRD15STR	F4
RRD15SW	F4
RRD15SWRTR	F4
RRD15SWTR	F4
RRD15SWWRTR	F4
RRD15W	F4
RRD201	F4
RRD201AL	F4
RRD201ALTR	F4
RRD201BK	F4
RRD201BKTR	F4
RRD201GY	F4
RRD201GYTR	F4
RRD201I	F4
RRD201ITR	F4
RRD201LA	F4
RRD201LATR	F4
RRD201TR	F4
RRD201W	F4
RRD201WTR	F4
RRD205	F4
RRD205AL	F4
RRD205BK	F4
RRD205GY	F4
RRD205I	F4
RRD205LA	F4
RRD205W	F4
RRKDK	F19
RS100W	F17
RS101I	F17
RS101W	F17
RS103PAL	F18
RS103PI	F18
RS103PLA	F18
RS103PW	F18
RS10PAL	F18
RS10PI	F18
RS10PLA	F18
RS10PW	F18
RS115	F11
RS115AL	F11
RS115BK	F11
RS115I	F11
RS115ILAL	F11
RS115ILC	F11
RS115ILI	F11
RS115ILLA	F11
RS115ILW	F11
RS115KAL	F11
RS115KI	F11
RS115KLA	F11
RS115KW	F11
RS115LA	F11
RS115S	F11
RS115SAL	F11
RS115SI	F11
RS115SLA	F11
RS115SW	F11
RS115W	F11
RS2LFSQAL	F18
RS2LFSQI	F18
RS2LFSQLA	F18
RS2LFSQW	F18
RS315	F11
RS315AL	F11
RS315BK	F11
RS315I	F11
RS315ILAL	F11
RS315ILC	F11
RS315ILI	F11
RS315ILLA	F11
RS315ILW	F11
RS315KAL	F11
RS315KI	F11
RS315KLA	F11
RS315KW	F11
RS315LA	F11
RS315S	F11
RS315SAL	F11
RS315SI	F11
RS315SLA	F11
RS315SW	F11
RS315W	F11
RS415	F11
RS415AL	F11
RS415BK	F11
RS415I	F11
RS415LA	F11
RS415W	F11
RS600I	F18
RS600LA	F18
RS600PAL	F18
RS600PI	F18
RS600PLA	F18
RS600PW	F18
RS600W	F18
RS603PAL	F18
RS603PI	F18
RS603PLA	F18
RS603PW	F18
RS613PI	F18
RS613PLA	F18
RS613PW	F18
RSD115	F2
RSD115AL	F2
RSD115BK	F2
RSD115GY	F2
RSD115I	F2
RSD115ILAL	F2
RSD115ILI	F2
RSD115ILLA	F2
RSD115ILW	F2
RSD115IM	F2
RSD115LA	F2
RSD115LAM	F2
RSD115PLAL	F2
RSD115PLI	F2
RSD115PLLA	F2
RSD115PLW	F2
RSD115W	F2
RSD115WM	F2
RSD215	F2
RSD215AL	F2
RSD215BK	F2
RSD215GY	F2
RSD215I	F2
RSD215LA	F2
RSD215W	F2
RSD315	F2
RSD315AL	F2
RSD315BK	F2
RSD315GY	F2
RSD315I	F2
RSD315ILAL	F2
RSD315ILI	F2
RSD315ILLA	F2
RSD315ILW	F2
RSD315LA	F2
RSD315W	F2
RSD415	F2
RSD415AL	F2

onlinecomponents.com

INDEX

CATALOGUE NO.	PAGE
RSD415BK	F2
RSD415GY	F2
RSD415I	F2
RSD415LA	F2
RSD415W	F2
RSELV300PAL	F18
RSELV300PI	F18
RSELV300PLA	F18
RSELV300PW	F18
RSELV303PAL	F18
RSELV303PI	F18
RSELV303PLA	F18
RSELV303PW	F18
RSFSQFAL	F18
RSFSQFI	F18
RSFSQFLA	F18
RSFSQFW	F18
RSKAL	F18
RSKI	F18
RSKLA	F18
RSKW	F18
RSLV600PAL	F18
RSLV600PI	F18
RSLV600PLA	F18
RSLV600PW	F18
RSLV603PAL	F18
RSLV603PI	F18
RSLV603PLA	F18
RSLV603PW	F18
RU100SS	F23
RU100W	F23
RU170W	F23
RU200SS	F23
RU200W	F23
RU270W	F23
RW0705	D16
RW1005	D16
RW1007	D16
RW1205	D16
RW1207	D16
RW1210	D16
RW1505	D16
RW1507	D16
RW1510	D16
RW1512	D16
RW2005	D16
RW2007	D16
RW2010	D16
RW2012	D16
RW2015	D16
RW2505	D16
RW2507	D16
RW2510	D16
RW2512	D16
RW2515	D16
RW2520	D16
RW3010	D16
RW3020	D16
RW3025	D16
S105	D17
S1F038	D4
S-30	A26
S-55	A26
SB126	F6
SB26	F5
SB262	F5
SB826	F6
SBEXBAR	A27
SBP126	F6
SBP26	F5
SBP262	F5
SBP263	F5
SCH26	F5
SCH262	F5
SCH723	F16
SCS050	D7
SCS075	D7
SCS100	D7
SCS125	D7
SCS150	D7
SCS200	D7
SCS250	D7
SCS300	D7
SCS400	D7
SCSI050	D7
SCSI075	D7
SCSI100	D7
SCSI125	D7
SCSI150	D7
SCSI200	D7
SCSI250	D7
SCSI300	D7
SCSI400	D7
SCZ050	D7
SCZ075	D7
SCZ100	D7
SCZ125	D7
SCZ150	D7
SCZ200	D7
SCZ250	D7
SCZ300	D7
SCZ400	D7
SCZI050	D7
SCZI075	D7
SCZI100	D7
SCZI125	D7
SCZI150	D7
SCZI200	D7
SCZI250	D7
SCZI300	D7
SCZI400	D7
SEC100BA	E7
SEC100GA	E7
SEC38BA	E7
SEC38GA	E7
SEC50BA	E7
SEC50GA	E7
SEC75BA	E7
SEC75GA	E7
SECM12B	E7
SECM12G	E7
SECM16B	E7
SECM16G	E7
SECM20B	E7
SECM20G	E7
SECM25B	E7
SECM25G	E7
SECM32B	E7
SECM32G	E7
SECM40B	E7
SECM40G	E7
SECP11BA	E7
SECP11GA	E7
SECP13BA	E7
SECP13GA	E7
SECP16BA	E7
SECP16GA	E7
SECP21BA	E7
SECP21GA	E7
SECP29BA	E7
SECP29GA	E7
SECP36BA	E7
SECP36GA	E7
SECP7BA	E7
SECP7GA	E7
SECP9BA	E7
SECP9GA	E7
SF038	D3
SF038SF	D3
SF050	D3
SF050SF	D3
SFFGAL	F8
SFFGAL	F34
SFFGBK	F8
SFFGBK	F34
SFFGEI	F8
SFFGEI	F34
SFFGGY	F8
SFFGGY	F34
SFFGLA	F8
SFFGLA	F34
SFFGW	F8
SFFGW	F34
SFGRFAL	F8
SFGRFAL	F34
SFGRFBK	F8
SFGRFBK	F34
SFGRFEI	F8
SFGRFEI	F34
SFGRFGY	F8
SFGRFGY	F34
SFGRFLA	F8
SFGRFLA	F34
SFGRFW	F8
SFGRFW	F34
SFHCBK	F26
SFK050	D3
SFRCBFFAL	F8
SFRCBFFAL	F34
SFRCBFFBK	F8
SFRCBFFBK	F34
SFRCBFFEI	F8
SFRCBFFEI	F34
SFRCBFFGY	F8
SFRCBFFGY	F34
SFRCBFFLA	F8
SFRCBFFLA	F34
SFRCBFFW	F8
SFRCBFFW	F34
SFRCBRAL	F8
SFRCBRAL	F34
SFRCBRBK	F8
SFRCBRBK	F34
SFRCBREI	F8
SFRCBREI	F34
SFRCBRGY	F8
SFRCBRGY	F34
SFRCBRLA	F8
SFRCBRLA	F34
SFRCBRW	F8
SFRCBRW	F34
SFRCGNFFAL	F8
SFRCGNFFAL	F34
SFRCGNFFBK	F8
SFRCGNFFBK	F34
SFRCGNFFEI	F8
SFRCGNFFEI	F34
SFRCGNFFGY	F8
SFRCGNFFGY	F34
SFRCGNFFLA	F8
SFRCGNFFLA	F34
SFRCGNFFW	F8
SFRCGNFFW	F34
SFRCGNRAL	F8
SFRCGNRAL	F34
SFRCGNRBK	F8
SFRCGNRBK	F34
SFRCGNREI	F8
SFRCGNREI	F34

onlinecomponents.com

CATALOGUE NO.	PAGE
SFRCGNRGY	F8
SFRCGNRGY	F34
SFRCGNRLA	F8
SFRCGNRLA	F34
SFRCGNRW	F8
SFRCGNRW	F34
SFRCRFFAL	F8
SFRCRFFAL	F34
SFRCRFFBK	F8
SFRCRFFBK	F34
SFRCRFFEI	F8
SFRCRFFEI	F34
SFRCRFFGY	F8
SFRCRFFGY	F34
SFRCRFFLA	F8
SFRCRFFLA	F34
SFRCRFFW	F8
SFRCRFFW	F34
SFRCRRAL	F8
SFRCRRAL	F34
SFRCRRBK	F8
SFRCRRBK	F34
SFRCRREI	F8
SFRCRREI	F34
SFRCRRGY	F8
SFRCRRGY	F34
SFRCRRLA	F8
SFRCRRLA	F34
SFRCRRW	F8
SFRCRRW	F34
SFRCWFFAL	F8
SFRCWFFAL	F34
SFRCWFFBK	F8
SFRCWFFBK	F34
SFRCWFFEI	F8
SFRCWFFEI	F34
SFRCWFFGY	F8
SFRCWFFGY	F34
SFRCWFFLA	F8
SFRCWFFLA	F34
SFRCWFFW	F8
SFRCWFFW	F34
SFRCWRAL	F8
SFRCWRAL	F34
SFRCWRBK	F8
SFRCWRBK	F34
SFRCWREI	F8
SFRCWREI	F34
SFRCWRGY	F8
SFRCWRGY	F34
SFRCWRLA	F8
SFRCWRLA	F34
SFRCWRW	F8
SFRCWRW	F34
SFRCYFFAL	F8
SFRCYFFAL	F34
SFRCYFFBK	F8
SFRCYFFBK	F34
SFRCYFFEI	F8
SFRCYFFEI	F34
SFRCYFFGY	F8
SFRCYFFGY	F34
SFRCYFFLA	F8
SFRCYFFLA	F34
SFRCYFFW	F8
SFRCYFFW	F34
SFRCYRAL	F8
SFRCYRAL	F34
SFRCYRBK	F8
SFRCYRBK	F34
SFRCYREI	F8
SFRCYREI	F34
SFRCYRGY	F8
SFRCYRGY	F34
SFRCYRLA	F8
SFRCYRLA	F34
SFRCYRW	F8
SFRCYRW	F34
SFSBAL10	F34
SFSBBK10	F34
SFSBEI10	F34
SFSBLA10	F34
SFSBW10	F34
SFSFSBGY10	F34
SFUSBABW	F26
SHC1001CR	E1
SHC1002	E1
SHC1002CR	E1
SHC1003	E1
SHC1003CR	E1
SHC1003SS	E1
SHC1004	E1
SHC1004CR	E1
SHC1004SS	E1
SHC1005	E1
SHC1005CR	E1
SHC1006CR	E1
SHC1007	E1
SHC1008	E1
SHC1008CR	E1
SHC1008ZP	E1
SHC1009	E1
SHC1009CR	E1
SHC1009SS	E1
SHC1010	E1
SHC1010CR	E1
SHC1010ZP	E1
SHC1011	E1
SHC1011CR	E1
SHC1011SS	E1
SHC1012	E1
SHC1012CR	E1
SHC1012SS	E1
SHC1012ZP	E1
SHC1015	E1
SHC1016	E1
SHC1017	E1
SHC1018	E1
SHC1019	E1
SHC1019CR	E1
SHC1020	E1
SHC1020CR	E1
SHC1020SS	E1
SHC1020ZP	E1
SHC1021	E1
SHC1021CR	E1
SHC1021SS	E1
SHC1021ZP	E1
SHC1022	E1
SHC1022CR	E1
SHC1022SS	E1
SHC1022ZP	E1
SHC1023	E1
SHC1023CR	E1
SHC1023SS	E1
SHC1023ZP	E1
SHC1024	E1
SHC1024CR	E1
SHC1024SS	E1
SHC1024ZP	E1
SHC1025	E1
SHC1026	E1
SHC1027	E1
SHC1027ZP	E1
SHC1028	E1
SHC1028ZP	E1
SHC1029	E2
SHC1030	E2
SHC1030ZP	E2
SHC1031	E2
SHC1031ZP	E2
SHC1032	E2
SHC1032ZP	E2
SHC1033	E2
SHC1033ZP	E2
SHC1034	E2
SHC1034ZP	E2
SHC1035CR	E2
SHC1035SS	E2
SHC1035ZP	E2
SHC1036	E2
SHC1036CR	E2
SHC1036SS	E2
SHC1037	E2
SHC1037CR	E2
SHC1037SS	E2
SHC1037ZP	E2
SHC1038	E2
SHC1038CR	E2
SHC1038SS	E2
SHC1038ZP	E2
SHC1039	E2
SHC1039CR	E2
SHC1040	E2
SHC1040CR	E2
SHC1041	E2
SHC1041CR	E2
SHC1041SS	E2
SHC1042	E2
SHC1042CR	E2
SHC1042SS	E2
SHC1043	E2
SHC1043CR	E2
SHC1043ZP	E2
SHC1044	E2
SHC1044CR	E2
SHC1044SS	E2
SHC1046	E3
SHC1047	E3
SHC1048	E3
SHC1049	E3
SHC1050	E3
SHC1051	E3
SHC1052	E3
SHC1052ZP	E3
SHC1053	E3
SHC1053ZP	E3
SHC1054	E3
SHC1054ZP	E3
SHC1055	E3
SHC1056	E3
SHC1057	E3
SHC1057ZP	E3
SHC1058	E3
SHC1058ZP	E3
SHC1059	E3
SHC1059ZP	E3
SHC1061	E3
SHC1062	E3
SHC1063	E3
SHC1064	E3
SHC1065	E3
SHC1066	E3
SHC1067	E3
SHC1068	E3
SHC1069	E3
SHC1070	E3
SHC1071	E3
SHC1072	E3

onlinecomponents.com

INDEX

CATALOGUE NO.	PAGE
SHC1073	E3
SHC1074	E3
SHC1076	E3
SHC1077	E3
SHC1078	E3
SHC1079	E3
SHC1080	E3
SHC1081	E3
SHC1086	E3
SHC1088	E3
SHC1089	E3
SHC1090	E3
SHC1091	E3
SHC1092	E3
SHC1093	E3
SHC1094	E3
SHC1095	E3
SHC1097ZP	E2
SHC1098ZP	E2
SHC1099ZP	E2
SHC2005CR	E1
SHC2008CR	E1
SHC2010CR	E1
SHC2011CR	E1
SHC2012CR	E1
SHC2021CR	E1
SHC2022CR	E1
SHC2023CR	E1
SHC2024CR	E1
SHC2035CR	E2
SHC2036CR	E2
SHC2037CR	E2
SHC2038CR	E2
SHC2040CR	E2
SHC2041CR	E2
SHC2042CR	E2
SHC2043CR	E2
SHC2044CR	E2
SHCM161011	E6
SHCM201017	E6
SHCM201022	E6
SHCM201023	E6
SHCM201024	E6
SHCM251033	E6
SHCM251034	E6
SHCM301037	E6
SKS050	D8
SKS075	D8
SKS100	D8
SKS125	D8
SKS150	D8
SKS200	D8
SKS250	D8
SKS300	D8
SKS400	D8
SKZ050	D8
SKZ075	D8
SKZ100	D8
SKZ125	D8
SKZ150	D8
SKZ200	D8
SKZ250	D8
SKZ300	D8
SKZ400	D8
SQ038	D4
SQ050	D4
SQ075	D4
SQ100	D4
SQ125	D4
SQ150	D4
SQ200	D4
SQ250	D4
SQ300	D4

CATALOGUE NO.	PAGE
SQ350	D4
SQ400	D4
SQ90038	D3
SQ90038SF	D3
SQ90050	D3
SQ90050SF	D3
SQ90075	D3
SQ90100	D3
SQ90125	D3
SQ90150	D3
SQ90200	D3
SQ90250	D3
SQ90300	D3
SQ90350	D3
SQ90400	D3
SS126	F6
SS126L	F6
SS1426	F6
SS226	F6
SS26	F5
SS262	F5
SS262L	F5
SS263	F5
SS264	F5
SS265	F5
SS266	F5
SS26L	F5
SS326	F6
SS703	F16
SS723	F16
SS826	F6
SU573	C5
SW001	C2
SW002	C2
SW071	C2
SW072	C2
SW091	C4
SW092	C4
SW101	C3
SW102	C3
SW111	C4
SW121	C3
SW122	C3
SW151	C3
SW152	C3
SW181	C4
SW182	C4
SW191	C4
SW201	C4
SW202	C4
SW211	C4
SW401	C2
SW402	C2
SW411	C4
SW421	C4
SW502	C5
SW512	C5
SW521	C4
SW532	C5
SW731	C4
TES1	D2
TES1B(BUCKET)	D2
TES2	D2
TES2B(BUCKET)	D2
TES3	D2
TES4	D2
THI050	D15
THI075	D15
THI100	D15
THI125	D15
THI150	D15
THI200	D15
THI250	D15

CATALOGUE NO.	PAGE
THI300	D15
THI350	D15
THI400	D15
UFC0001	E6
UFC0001CR	E6
UFC0001ZP	E6
UFC0002	E6
UFC0003	E6
UFC0003CR	E6
UFC2001CR	E6
UFC2003CR	E6
VHC1021	E4
VHC1022	E4
VHC1022ZP	E4
VHC1023	E4
VHC1023ZP	E4
VHC1024	E4
VHC1024ZP	E4
VHC1035	E4
VHC1036	E4
VHC1037	E4
VHC1041	E4
VHC1042	E4
VHC1052	E4
VHC1053	E4
WPS2	C7
WPS3	C7
X-CUBE	A2

onlinecomponents.com

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

onlinecomponents.com

tradeSELECT™

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

HUBBELL®

tradeSELECT™

Hubbell Canada LP • 870 Brock Road South • Pickering, ON L1W 1Z8
Tel: (905) 839-1138 • Fax: (905) 839-9108 • www.HubbellOnline.com

H2832
09/2011