

CNP系列防水连接器
CNP SERIES WATERPROOF CONNECTORS

Material of connectors shell: Polyamide Pa66
Material of contact: Copper
Rated voltage(V): 250-450V AC
Rated current(A): 16A
Working temperature: -40℃ to 85℃
Protection degree: IP68

Applications:



Product Code	Connector type	No.of circuits	Volt (V)	Ampere (A)	Connection wire mm^2	Into the scope of line
CNP20-3P		3P	250-450V	16A	0.5→1.5	Φ6→Φ11mm
CNP20-4P		4P	250-450V	16A		
CNP25-3P		3P	250-450V	16A	0.5→2.5	Φ6→Φ11mm
CNP25-4P		4P	250-450V	16A		
CNP25-5P		5P	250-450V	16A		
CNP25T-3P		3P	250-450V	16A	0.5→2.5	Φ6→Φ11mm
CNP25T-4P		4P	250-450V	16A		
CNP25T-5P		5P	250-450V	16A		
CNP25Y-3P		3P	250-450V	16A	0.5→2.5	Φ6→Φ11mm
CNP25Y-4P		4P	250-450V	16A		
CNP25Y-5P		5P	250-450V	16A		



CNP20



CNP25



CNP25T



CNP25Y



CNP系列防水连接器
CNP SERIES WATERPROOF CONNECTORS

Material of connectors shell: Polyamide Pa66
Material of contact: Copper
Rated voltage(V): 250-450V AC
Rated current(A): 16A
Working temperature: -40°C to 85°C
Protection degree: IP68

Applications:



Product Code	Connector type	No.of circuits	Volt (V)	Ampere (A)	Connection wire mm^2	Into the scope of line
CNP273-2P		2P	250-450V	16A	0.5→2.5	Φ5→Φ10mm
CNP273-3P		3P	250-450V	16A		
CNP275-3P		3P	250-450V	16A	0.5→2.5	Φ5→Φ10mm
CNP275-4P		4P	250-450V	16A		
CNP275-5P		5P	250-450V	16A		
CNP373-2P		2P	250-450V	16A	0.3→1.5	Φ5→Φ10mm
CNP373-3P		3P	250-450V	16A		
CNP373-4P		4P	250-450V	16A		
CNP374-2P		2P	250-450V	16A	0.3→1.5	Φ5→Φ10mm
CNP374-3P		3P	250-450V	16A		
CNP374-4P		4P	250-450V	16A		
CNP3732-2P		2P	250-450V	16A	0.3→2.5	Φ6→Φ11mm
CNP3732-3P		3P	250-450V	16A		
CNP3732-4P		4P	250-450V	16A		
CNP3742-2P		2P	250-450V	16A	0.3→2.5	Φ6→Φ11mm
CNP3742-3P		3P	250-450V	16A		
CNP3742-4P		4P	250-450V	16A		



CNP系列防水连接器
CNP SERIES WATERPROOF CONNECTORS

Material of connectors shell: Polyamide Pa66
Material of contact: Copper
Rated voltage(V): 250-450V AC
Rated current(A): 16A
Working temperature: -40°C to 85°C
Protection degree: IP68
Type of connection: Screwless


Applications:




Product Code	Connector type	No.of circuits	Volt (V)	Ampere (A)	Connection wire mm^2	Into the scope of line
CNP293		3P	250-450V	16A	0.5→1.5	Φ6→Φ11mm
CNP295		5P	250-450V	16A		
CNP293N		3P	250-450V	16A		
CNP295N		5P	250-450V	16A		










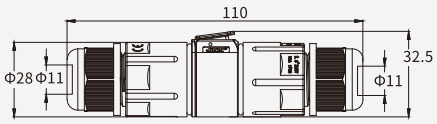

CNP293

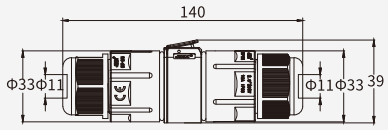

CNP295



CNP系列防水连接器
CNP SERIES WATERPROOF CONNECTORS


Material of connectors shell: Polyamide Pa66
Material of contact: Copper
Rated voltage(V): 250-450V AC
Rated current(A): 16A
Working temperature: -40°C to 85°C
Protection degree: IP68
Type of connection: Screwless

Applications:




Product Code	Connector type	No.of circuits	Volt (V)	Ampere (A)	Connection wire mm^2	Into the scope of line
CNP293X		3P	250-450V	16A	0.5→1.5	Φ6→Φ11mm
CNP295X		5P	250-450V	16A		



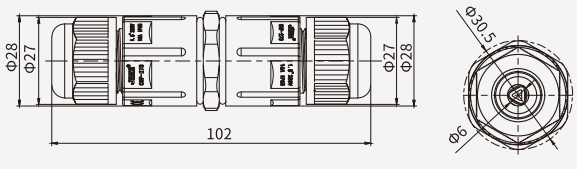

CNP293X

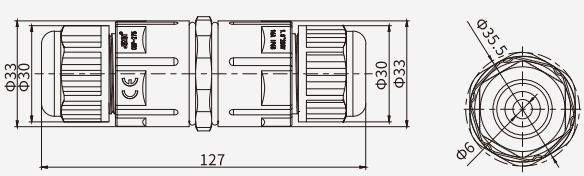

CNP295X



CNP系列防水连接器
CNP SERIES WATERPROOF CONNECTORS

Material of connectors shell: Polyamide Pa66
Material of contact: Copper
Rated voltage(V): 250-450V AC
Rated current(A): 16A
Working temperature: -40°C to 85°C
Protection degree: IP68
Type of connection: Screwless

Applications:



Product Code	Connector type	No.of circuits	Volt (V)	Ampere (A)	Connection wire mm^2	Into the scope of line
CNP-263		2P	250-450V	16A	0.5-1.5	Φ5-Φ10mm
CNP-263		3P				
CNP-265		4P				Φ6-Φ11mm
CNP-265		5P				



CNP-263



CNP-265