

Available in four options:

- **XPERT Energy Series**
  - Available in five BCI groups: 24, 26, 31, 4D, and 8D
- **XCELL Energy Series**
  - Available in seven BCI groups: 24, 26, 31, 34, 51, 4D, and 8D
- **XTREME Energy Series**
  - Available in six BCI groups: 24, 31, 34, 51, 4D, and 8D
- **XTREME Energy Series – AGM**
  - Available in four BCI groups: 24, 31, 4D, and 8D

Applicable to the following:

Industrial
Marine
Mobile/Towable
Residential/Commercial

Battery Features:

- Maintenance-free battery design eliminates routine electrolyte maintenance; however, periodic inspection of terminals, cables, battery condition, mounting hardware, and charging system performance remains necessary.
- Plate construction utilizes uniform wire thickness across the grid structure to hold and retain active material for more starts and better reliability.
- Heavy-duty terminals resist corrosion and optimize durability and efficiency in tough operating environments.

Not all battery models are approved for all applications. Verify battery selection using the applicable generator set model and accessory documentation.

© 2026 Discovery Energy, LLC - All rights reserved.

Aftermarket Part Number	BCI Group	Model Description	Electrical Capacity			Dimensions			Weight kg (lbs.)	Post Styles
			Volts	CCA Rating	RC Minutes	Length mm (in.)	Width mm (in.)	Height mm (in.)		
XPERT ENERGY SERIES—12 MONTH WARRANTY										
GM106368-S	24	24-SD	12	550	100	260 (10.2)	173 (6.8)	225 (8.8)	16.8 (37)	D/1
GM106369-S	26	26-SD	12	500	75	208 (8.2)	173 (6.8)	197 (7.8)	11.8 (26)	D/1
GM106698-S	31	31A-SD	12	750	155	330 (13.0)	173 (6.8)	240 (9.4)	21.8 (48)	C/1
GM106370-S	31	31S-SD	12	750	155	330 (13.0)	173 (6.8)	240 (9.4)	21.8 (48)	C/3
GM106371-S	4D	4D-SD	12	1000	300	527 (20.8)	219 (8.6)	254 (10.0)	45.4 (100)	A/1
GM106372-S	8D	8D-SD	12	1100	325	527 (20.8)	283 (11.0)	249 (9.8)	52.2 (115)	A/1
GM123599-S	51	51-SD	12	500	85	238 (9.4)	129 (5.0)	222 (8.8)	12.2 (27)	D/1
GM121727-S	26R	26R-SD	12	500	75	208 (8.2)	173 (6.8)	197 (7.8)	11.8 (26)	D/1
XCELL ENERGY SERIES—18 MONTH WARRANTY										
GM106373-S	24	24-OD	12	650	125	260 (10.2)	173 (6.8)	226 (8.8)	18.1 (40)	D/1
GM106680-S	26	26-OD	12	550	100	208 (8.2)	173 (6.8)	197 (7.8)	13.6 (30)	D/1
GM106699-S* GM106375-S	31	31A-OD 31S-OD	12	925	180	330 (13.0)	173 (6.8)	240 (9.4)	24.5 (54)	C/1 C/3
GM106681-S	34	34-OD	12	690	130	260 (10.2)	173 (6.8)	200 (7.8)	16.1 (35)	D/1
GM106374-S	51	51-OD	12	500	85	237 (9.2)	125 (4.8)	220 (8.6)	12.5 (27)	D/1
GM106376-S	4D	4D-OD	12	1300	340	527 (20.8)	219 (8.6)	254 (10.0)	47.6 (105)	A/1
GM106377-S	8D	8D-OD	12	1400	380	527 (20.8)	279 (11.0)	254 (10.0)	56.7 (125)	A/1
GM121580-S	26R	26R-OD	12	550	100	208 (8.2)	173 (6.8)	197 (7.8)	13.6 (30)	D/1
XTREME ENERGY SERIES—24 MONTH WARRANTY										
GM106378-S	24	24-HD	12	800	125	260 (10.2)	171 (6.8)	229 (9.0)	21.8 (48)	D/1
GM106700-S* GM106380-S	31	31A-HD 31S-HD	12	960	190	330 (13.0)	171 (6.8)	238 (9.4)	25.9 (57)	C/1 C/3
GM106682-S	34	34-HD	12	770	115	260 (10.2)	171 (6.8)	208 (8.2)	15.9 (35)	D/1
GM106379-S	51	51-HD	12	510	90	237 (9.2)	125 (5.0)	220 (8.6)	12.5 (27)	D/1
GM106381-S	4D	4D-HD	12	1300	315	527 (20.75)	219 (8.6)	254 (10.0)	47.6 (105)	A/1
GM106382-S	8D	8D-HD	12	1425	400	527 (20.75)	279 (11.0)	254 (10.0)	56.7 (125)	A/1
XTREME ENERGY AGM SERIES—36 MONTH WARRANTY										
GM117040-S	24	24-AGM	12	750	140	286 (11.2)	171 (6.8)	238 (9.4)	23.6 (52)	D/1 D/3
GM121078-S	31	31-AGM	12	950	190	330 (13.0)	172 (6.8)	238 (9.4)	31.8 (70)	C/1 C/3
GM125206-S	4D	4D-AGM	12	1250	380	513 (20.2)	222 (8.8)	216 (9)	50.3 (111)	A/1
GM125286-S	8D	8D-AGM	12	1450	520	525 (20.6)	279 (11)	251 (9.8)	87.3 (192)	A/1


* Automotive Post Style - Service Only

Note: For installed and corresponding aftermarket battery replacement options, please refer to the rehlko aftermarket batteries, PB-159. Warranty coverage is subject to the applicable battery warranty terms and conditions. Consult current warranty documentation for complete coverage details.

© 2026 Discovery Energy, LLC - All rights reserved.

Terminal Styles

All batteries are 12 volt, charger type: wet, and lead-calcium construction. Flooded batteries are lead-calcium construction, while AGM models utilize absorbed glass mat technology.

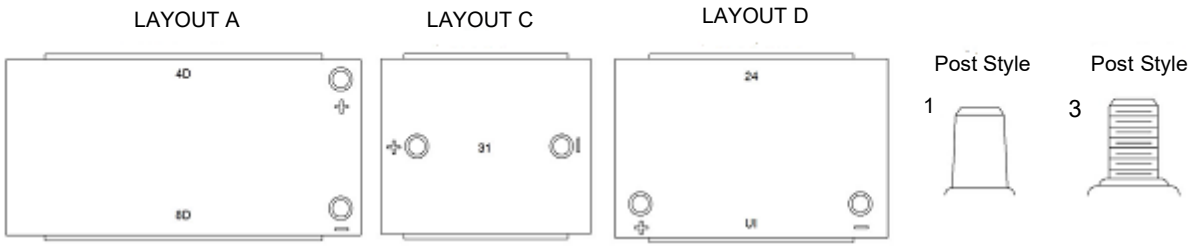

Verify terminal polarity and cable reach before installation. Incorrect terminal orientation may result in cable damage, electrical shorts, or inability to install the battery.

⚠ **WARNING**	Batteries may exceed safe manual lifting limits. Use appropriate lifting equipment and follow applicable lifting and handling procedures.

© 2026 Discovery Energy, LLC - All rights reserved.

Availability is subject to change without notice. Discovery Energy, LLC reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Rehlko generator set distributor for availability.

© 2026 Discovery Energy, LLC - All rights reserved.