LED
PANEL LIGHT SERIES

PRODUCT FEATURES

Designed for modern drop ceilings, our LED panel lights, frame lights, and slim panel lights offer sleek, efficient, and reliable lighting solutions for commercial spaces. With high lumen output, uniform light distribution, and flicker-free performance, these fixtures are ideal for offices, schools, retail, and more. Made with durable aluminum housings and long-lasting PMMA lenses, they ensure excellent heat dissipation and resistance to yellowing over time. Many models offer adjustable wattage and color temperature, allowing easy adaptation to different environments. Backed by a 5-year warranty and rated for up to 50,000 hours of use, these drop ceiling lights reduce maintenance costs while delivering consistent, high-quality illumination.

LED PANEL LIGHTS

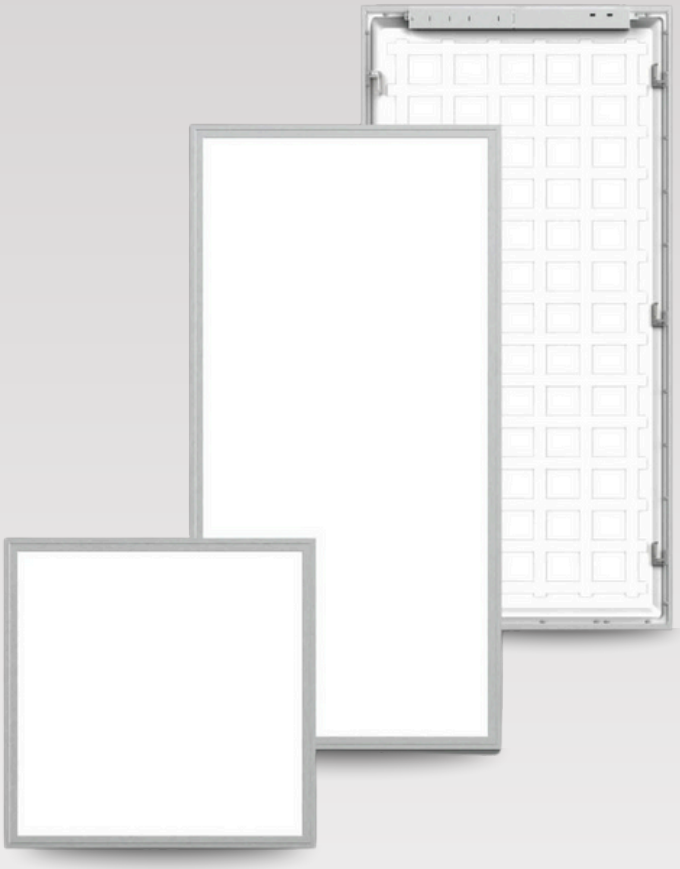

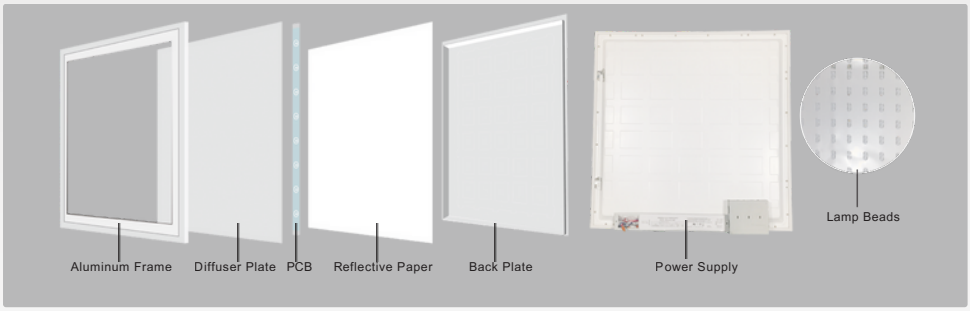

1x4 TLL-PLB-35W14-28DDML-01

2x2 TLL-PLB-40W22-28DDML-01

2x4 TLL-PLB-60W24-28DDML-01

2x4 TLL-ALS-BL2X4-F72-60

2x4 TLL-PLB-XX-W24-28CDML-01

Size	Watt (w)	Lumen Output(lm)	Efficacy (lm/w)	Voltage (V)	CCT
1x4	35	5,000	≥125 lm/W	120-277	5000K
2x2	40	5000	≥125 lm/W	120-277	6500K
2x4	60	7,680	≥125 lm/W	120-277	4000k
2x4	72	9,000	≥125 lm/W	120-277	3000K / 3500K / 4000K / 5000K / 6000K
2x4	Tunable 30/40/50	5000	≥125 lm/W	120-277	3,500K/4,000K/5,000K

DIMENSIONS

Watt (w)	Size (ft)	W (inch / mm)	H (inch / mm)	L (inch / mm)	SKU
35	1x4	25 / 635	3.25 / 82.5	48.5 / 1232	TLL-PLB-35W14-28DDML-01
40	2x2	6.49 / 165	3.1 / 6.83	14.17 / 360	TLL-PLB-40W22-28DDML-01
60	2x4	6.49 / 165	3.0 / 6.61	16.54 / 420	TLLPLB-60W24-28DDML-01
72	2x4	6.49 / 165	3.0 / 6.61	16.54 / 420	TLL-ALS-BL2X4-F72-60
Tunable 30/40/50	2x4	6.49 / 165	3.0 / 6.61	16.54 / 420	TLL-PLB-XX-W24-28CDML-01

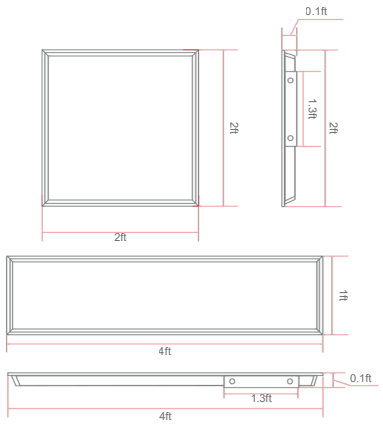

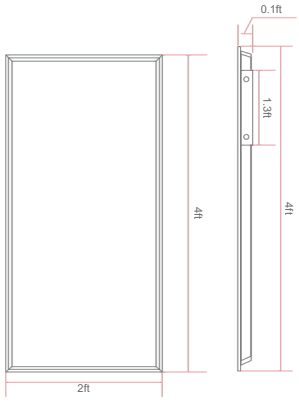

ACCESSORIES (Optional)



Hanging chain

Folding junction box

Surface mounted frame