DATA SHEET

AC Disconnects



01 Fusible and non-fusible AC disconnects



02 Non-fusible AC disconnects plus GFCI

Fusible and non-fusible AC disconnects

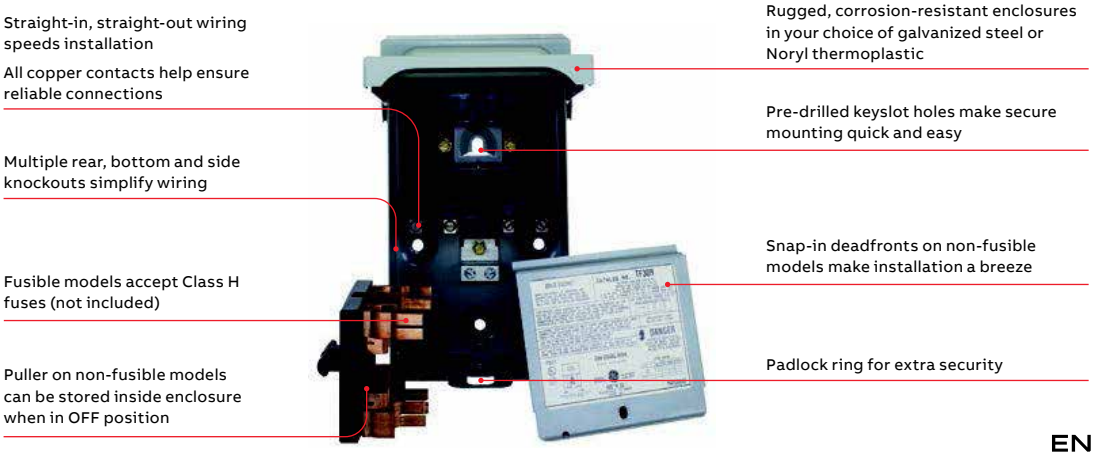
- Compact size
- Easy installation
- Fusible or non-fusible types
- Plastic or metal enclosures
- Puller or non-automatic switch type disconnections
- Fusible — UL 869 Service Equipment
- Non-Fusible — UL 1429 Enclosed Pullout Switch

c UL us LISTED

AC disconnects plus GFCI

- Offered in non-fusible or non-automatic styles
- 15 A or 20 A duplex GFCI receptacle included
- Disconnect switch positioned above GFCI receptacle allows easier access
- On pullout model, handle stores inside enclosure in OFF position
- Large, easy-to-read ON/OFF markings
- Cover conveniently stores in up position
- Padlock ring for extra security

c UL us LISTED



ENGINEERED
TO OUTRUN


U035F2


U065F1


U065NA1

Steel disconnects N3R outdoor enclosure

Type	Phase	Fusing	Amps	HP rating	Ordering code	Std. pkg.
Pullout	1	Fusible	30	3	U035F2	6
			60	10	U065F1	
	3		30	3–7.5	U0353F	1
			60	7.5–15	U0653F	
	1	Non-fusible	60	10	U065P[1]	6
	3			7.5–15	U0653P	1
				7.5–15	U0653P010	
Non-automatic	1	Non-fusible	60	10	U065NA1[2]	6

[1] Product is available in a palletized SKU, U065PPLT1. Pallet includes 360 units.
[2] Device does not have removable closing cap.


P065P1


P065P

Plastic disconnects N3R outdoor enclosure

Type	Phase	Fusing	Amps	HP rating	Ordering code	Std. pkg.
Pullout	1	Fusible	30	3	P035F2	6
			60	10	P065F	
		Non-fusible	60	10	P065P1[1]	
			60	10	P065P	
Non-automatic	1	Non-fusible	60	10	P065NA1	

[1] Device does not have removable closing cap.


U065P010



U065NA1010

Steel disconnects N3R outdoor enclosure with ground fault receptacle

Type	Phase	Fusing	Amps	HP rating	Factory-installed GFCI	Ordering code	Std. pkg.
Pullout	1	Non-fusible	60	10	15 A	U065P010	6
				10	20 A	U065PC2010	4
Non-automatic		Non-fusible	60	10	15 A	U065NA1010	6

Wire range

	Copper		Aluminum	
Connector	Solid	Strand	Solid	Strand
Line	14–8	14–2	12–8	12–2
Load	14–8	14–2	12–8	12–2
Neutral	–	–	–	–
Equipment ground	12–8	12–2	12–8	12–2



Dimensions (inches)

Ordering code	Height (A)	Width (B)	Depth (C)
U035F2	7.5	5.19	2.5
U065F1	9.25	5.19	2.5
U0353F	14.375	7.25	5.1875
U0653F	14.375	7.25	5.1875
U065P	7.5	5.19	2.5
U0653P	14.375	7.25	5.1875
U0653P010	14	7	5.1875
U065NA1	7.13	5.5	5.19

Ordering code	Height (A)	Width (B)	Depth (C)
P035F2	7.5	5.19	2.5
P065F	7.13	5.5	5.19
P065P1	7	5.75	3.13
P065P	7	5.75	3.13
P065NA1	8	5	3
U065P010	7.5	5.19	2.5
U065PC2010	7.1	5.5	5.2
U065NA1010	7	5.75	3.13

ABB Inc.
305 Gregson Drive
Cary, NC 27511

electrification.us.abb.com

The information contained in this document is for general information purposes only. While ABB strives to keep the information up to date and correct, it makes no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information, products, services, or related graphics contained in the document for any purpose. Any reliance placed on such information is therefore strictly at your own risk. ABB reserves the right to discontinue any product or service at any time.

© Copyright 2026 ABB. All rights reserved.

9AKK108472A6335 (formerly DEA-059F) 5.2026