Catalog No.:_____

Job/Title:_____

Notes: _____

SPECIFICATION & FEATURES

STEEL EMT COUPLINGS RAIN-TIGHT (1/2” ~ 4”)

DESCRIPTION:

Orbit Industries rain-tight steel EMT compression couplings are used in wet locations to connect the ends of two EMT thinwall conduits together to extend the raceway. The rain-tight steel EMT compression couplings have been designed to comply with the new rain tight test requirements along with the 2017 NEC 358.42 and 314.15 requirements. The steel construction ensures mechanical protection and the connection between one conduit to another. With Orbit Industries’ labor saving design, electrician can quickly tighten these couplings on EMT conduits.



CERTIFICATION:


UL File E310660, conforms to UL 514B
NEMA FB-1 Standard

FEATURES:

- Steel
- Electroplated Zinc
- Rain-Tight
- Concrete-Tight
- Suitable for applications above 600V
- Sizes 2-1/2" to 4" are also listed for RIGID and IMC Conduits

LINE DRAWINGS:

1/2” ~ 4”

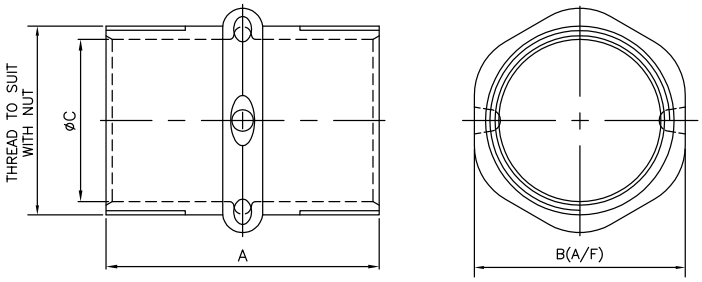

CONFIGURATION DATA:

Part No.	Trade Size	A (in)	B (in)	C (in)	Std.Pkg.	Master Ctn.
OF7611-W	1/2"	1.299	0.906	0.732	25	250
OF7612-W	3/4"	1.358	1.122	0.949	25	250
OF7613-W	1"	1.732	1.378	1.189	10	100
OF7614-W	1-1/4'	1.929	1.732	1.535	10	100
OF7615-W	1/12"	2.047	1.949	1.768	10	50
OF7616-W	2"	2.165	2.421	2.224	5	50
OF7617-W	2-1/2"	3.346	3.22	2.921	-	12
OF7618-W	3"	3.425	3.843	3.543	-	12
OF7619-W	3-1/2"	3.858	4.35	4.047	-	6
OF7620-W	4"	3.937	4.85	4.547	-	6