
OSTWIN

LED DOWNLIGHT SQUARE RETROFIT
LRK-1BS series

Our LED Retrofit Kit was designed as an energy-efficient lighting solution for remodeling or new construction projects. It is an ideal replacement for an incandescent lamp in the industry's most popular 4" and 6" applications. LED Retrofit Kits are dimmable and suitable for Wet locations. This product is great for residential and business purposes. It is widely used in offices, stores, hospitals, residential houses and hotels.

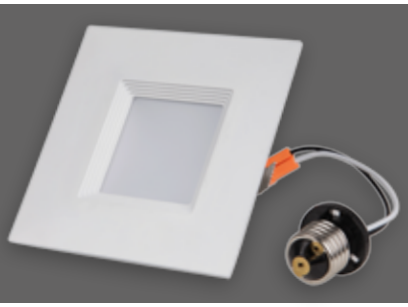

ORDERING MATRIX:

Family	Model	Trim	Shape	Size	Standard Dimming	Watts	CCT	Finish
OW-LDLRK	**X**	**B**	**S**	**X**	**D**	**XX**	**XX**	**W**
LED Downlight Square Retrofit Kit 1BS series	**1**	Baffle	Square	**4** = 4 inch **6** = 6 inch	Dimmable	**9** = 9 W **12** = 12 W	**30** = 3,000 K **40** = 4,000 K **50** = 5,000 K	White

LED DOWNLIGHT SQUARE RETROFIT ORDERING INFORMATION:

Model	Size	Watts	Dimming Compatible	Lumens	CCT	Dimensions (LxWxH)
OW-LDLRK-1BS-4D930W	4"	9 W	yes	650 lm	3,000 K	4 15/16" x 4 15/16" x 2"
OW-LDLRK-1BS-4D940W	4"	9 W	yes	650 lm	4,000 K	4 15/16" x 4 15/16" x 2"
OW-LDLRK-1BS-4D950W	4"	9 W	yes	650 lm	5,000 K	4 15/16" x 4 15/16" x 2"
OW-LDLRK-1BS-6D1230W	6"	12 W	yes	1,000 lm	3,000 K	7 5/16" x 7 5/16" x 2 3/8"
OW-LDLRK-1BS-6D1240W	6"	12 W	yes	1,000 lm	4,000 K	7 5/16" x 7 5/16" x 2 3/8"
OW-LDLRK-1BS-6D1250W	6"	12 W	yes	1,000 lm	5,000 K	7 5/16" x 7 5/16" x 2 3/8"

Model	UPC	Pcs in Middle box	GTIN for Middle box	Pcs in carton	GTIN 14 for carton
OW-LDLRK-1BS-4D930W	819951024313	4	10819951024310	12	20819951024317
OW-LDLRK-1BS-4D940W	819951024320	4	10819951024327	12	20819951024324
OW-LDLRK-1BS-4D950W	819951024337	4	10819951024334	12	20819951024331
OW-LDLRK-1BS-6D1230W	819951024139	4	10819951024136	12	20819951024133
OW-LDLRK-1BS-6D1240W	819951024146	4	10819951024143	12	20819951024140
OW-LDLRK-1BS-6D1250W	819951024153	4	10819951024150	12	20819951024157

OSTWIN LIGHTING, LLC
120 SHAWMUT RD SUITE 203 CANTON MA 02021 USA

E-mail: info@ostwin.com
Website: www.ostwin.com

Phone: (781) 562-4200

OSTWIN

LED DOWNLIGHT SQUARE RETROFIT
LRK-1BS series

PRODUCT SPECIFICATIONS:

Model		OW-LDLRK-1BS-4D930W OW-LDLRK-1BS-4D940W OW-LDLRK-1BS-4D950W	OW-LDLRK-1BS-6D1230W OW-LDLRK-1BS-6D1240W OW-LDLRK-1BS-6D1250W
Construction & Materials			
Diffuser		Acrylic	
Housing		PC	
Finish		White	
Weight		0.25 lbs (0.11 kg)	0.44 lbs (0.2 kg)
Environmental System			
Work Environment		Suitable for Wet Locations	
Operating Temperature		-31°F to 104°F (-35°C to 40°C)	
L-70 Life		> 54,000 hrs	
Optical System			
Luminous Flux	3,000 K	650 lm	1,000 lm
	4,000 K	650 lm	1,000 lm
	5,000 K	650 lm	1,000 lm
Color Temperature		3,000 K, 4,000 K, 5,000 K	
CRI		80	
Electrical System			
Input Voltage		120V AC 50/60 Hz	
Max input current		0.075 A	0.105 A
Off State Power		0 W	
Power Consumption		9 W	12 W
Power Factor		0.9	
Output voltage		132 V	
Max output current		60 mA	80 mA
Regular and Voluntary Certifications			
5-year limited warranty			
ETL certified			
Energy Star listed			

DIMMING COMPATIBLE CONTROLS

MFG	Model Number		MFG	Model Number	
Lutron	DVW-603PGH-WH	SLV-600P-WH	Leviton	0B33K1	6631
	MACL-153M-WH	DVLV-603P-IV		1E1205	6672
	DVCL-153P-WH	CTCL-153PDH		1F4205	
	CT-603PG	S-603P		6633-P	
	DV-600P	S-600P		6674	


OSTWIN LIGHTING, LLC
120 SHAWMUT RD SUITE 203 CANTON MA 02021 USA


E-mail: info@ostwin.com
Website: www.ostwin.com

Phone: (781) 562-4200


LED DOWNLIGHT SQUARE RETROFIT
LRK-1BS series


9 W 3000K / 4000K / 5000K

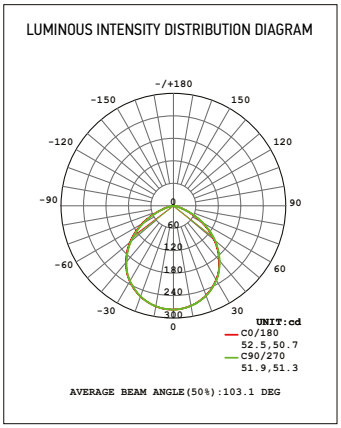

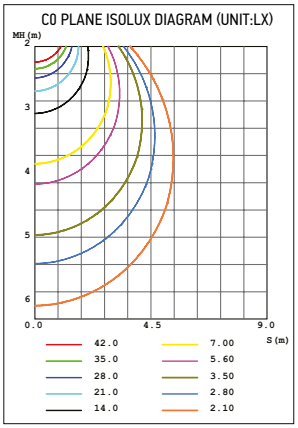

12 W 3000K / 4000K / 5000K

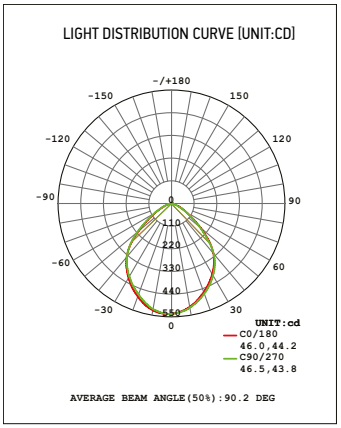

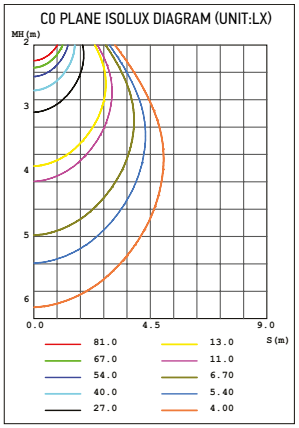

OSTWIN LIGHTING, LLC
120 SHAWMUT RD SUITE 203 CANTON MA 02021 USA

E-mail: info@ostwin.com
Website: www.ostwin.com

Phone: (781) 562-4200