
Split Bolt Connectors

Service Connectors With Spacer Bar

Applications	For copper to copper, copper to aluminum, aluminum to aluminum
Features	Electro tin-plated, high strength alloy with spacer
Standard Materials	Copper Alloy
Standard Finish	Tin Plated



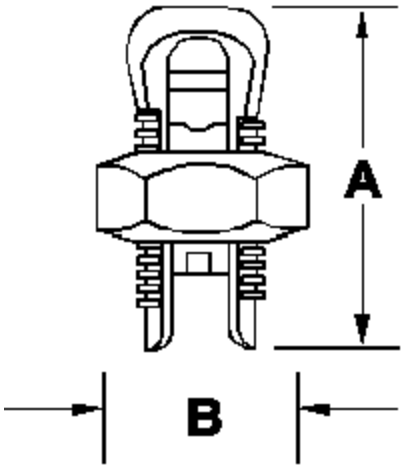

Catalog Number	Standard Pkg.	LBS. / 100 PCS	UPC	Dim. A	Dim. B	Wire Range
SB-10-SP	100	4	64042	0.71	0.50	16 Str. – 10 Str.
SB-8-SP	100	4	64044	0.99	0.68	16 Str. – 8 Str.
SB-6-SP	100	7	64046	1.12	0.70	14 Str. – 6 Sol.
SB-4-SP	100	8	64048	1.27	0.76	10 Str. – 4 Sol.
SB-2-SP	100	15	64052	1.55	0.92	8 Sol. – 2 Str.
SB-1/0-SP	50	20	64054	1.62	0.98	6 Sol. – 1/0 Str.
SB-2/0-SP	25	44	64056	1.74	1.13	6 Str. – 2/0 Str.
SB-3/0-SP	25	48	64058	1.97	1.28	4 Str. – 3/0 Str.

Catalog Number	Standard Pkg.	LBS. / 100 PCS	UPC	Dim. A	Dim. B	Wire Range
SB-4/0-250-SP	25	80	64060	2.37	1.49	4 Str. – 250 MCM
SB-350-SP	12	108	64062	2.64	1.82	3/0 Str. – 350 MCM
SB-500-SP	12	158	64064	3.19	2.37	3/0 Str. – 500 MCM

Compliance



Source: https://peco-electric.com/products/grounding-split-bolt-connectors-bronze-service-connectors-with-spacer-bar/