
Split Bolt Connectors

Service Connectors

Applications	For copper to copper connections including copper weld wire
Features	Resistant to corrosion and cracking
Standard Materials	Copper Alloy



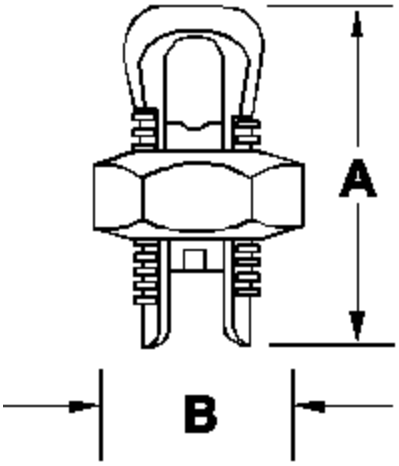

Catalog Number	Standard Pkg.	LBS. / 100 PCS	UPC	Dim. A	Dim. B	Wire Range
SB-10	100	2	64000	0.71	0.50	16 Str. – 10 Str.
SB-8	100	3	64002	0.99	0.68	12 Sol. – 8 Str.
SB-6	100	5	64004	1.12	0.70	10 Sol. – 6 Sol.
SB-4	100	8	64006	1.27	0.76	8 Sol. – 4 Sol.
SB-2	100	12	64010	1.55	0.92	6 Sol. – 2 Str.
SB-1/0	50	18	64012	1.62	0.98	4 Sol. – 1/0 Str.
SB-2/0	25	32	64014	1.74	1.13	2 Sol. – 2/0 Str.

Catalog Number	Standard Pkg.	LBS. / 100 PCS	UPC	Dim. A	Dim. B	Wire Range
SB-3/0	25	40	64016	1.97	1.28	2 Sol. – 3/0 Str.
SB-4/0-250	25	52	64018	2.37	1.49	1/0 Sol. – 250 MCM
SB-350	12	92	64020	2.64	1.82	4/0 Str. – 350 MCM
SB-500	12	133	64022	3.19	2.37	250 MCM – 500 MCM

Compliance



Source: https://peco-electric.com/products/grounding-split-bolt-connectors-bronze-service-connectors/