DSKFA-6R159CCT120WS/PIR



Color: White

Weight: 0.6 lbs

Project:	**Type:**
Prepared By:	**Date:**

Driver Info

Type	Constant Current
120V	0.14A
208V	N/A
240V	N/A
277V	N/A
Input Watts	15W

LED Info

Watts	15W
Color Temp	3000/4000/5000K
Color Accuracy	90 CRI
L70 Lifespan	50,000 Hours
Lumens	1,300 lm
Efficacy	86.7

Technical Specifications

Performance

Description:
3CCT Selectable Low-profile, surface-mount Disk for new construction and retrofit applications. Integrated passive infrared (PIR) sensor with a 30s timeout make this ideal for use in a variety of applications including hallways, bathrooms, stairways, closets, and canopies. Mounting kit for recessed housing sold separately.

Product Type:
Surface & Flush Mounts

Input Wattage:
15W

Lumens:
900lm

Efficacy:
60lm/W

L70 Lifespan:
50,000-Hour LED lifespan based on IES LM-70 results

Electrical

Dimming Driver:
TRIAC compatible dimmer

THD:
≤20%

Power Factor:
≥0.9

Flicker:
≤30%

Input Voltage:
120V

Operating Frequency:
60Hz

Construction

Material:
Metal

Trim Style:
Smooth Trim

Shape:
Round

Operating Temperature:
-4°F(-20°C) to 104°F (40°C)

Size:
6"

Installation

Mounting:
Surface and recessed mount

LED Characteristics

R9 Value:
High color performance with R9 greater than or equal to 50

Compliance

UL Classified:
Yes

UL Listed:
Yes

Energy Star Approved:
ENERGY STAR® Version 2.2 Certified

Energy Star ID:
3555647

Trade Agreements Act Compliant:
This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act


Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

Technical Specifications (continued)

Other

5-Year, No-Compromise Warranty:
RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Dimensions

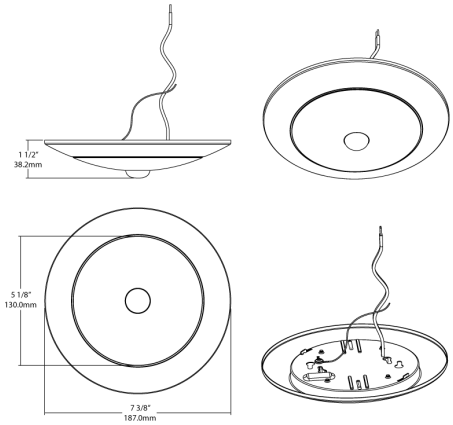

Features

- Low profile back-lit design made of durable thermoplastic housing with frosted lens
- New construction or retrofit applications
- Installs on standard junction boxes
- Suitable for indoor/outdoor use in dry, damp, and wet locations
- Suitable for use in closets when installed in accordance with NEC guidelines
- Integrated passive infrared (PIR) sensor with a 30s timeout

Ordering Matrix

Family		Size	Shape	Wattage	CRI/Color Temp	Driver	Finish	Trim	Sensor
DSKFA	–	6	R	15	9CCT	120	W	S	/PIR
		4 = 4" **6 =** 6"	**R =** Round	**10 =** 10W **15 =** 15W	**9CCT =** 90 CRI, CCT Adjustable	**120 =** 120V	**W =** White	**S =** Smooth	**/PIR =** PIR Sensor

Copyright © 2026 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice