PS25-32-E26-850-ND 120-277V

Project:	Type:	Prepared By:	Date:



UPC: 019813833989

Features and Benefits

UNIVERSAL BULBS - Replace 60W, 125W, 200W and 300W incandescent lamps operated on 120V or 277V

UNIVERSAL voltage bulbs have high lumen packages for industrial and commercial applications

ENERGY SAVINGS - Save up to 85% on energy

ENCLOSED FIXTURE RATED - May be used in both enclosed and open fixtures

DAMP RATED - Suitable for damp locations

SHATTERPROOF - Plastic constructed bulbs are ideal for rugged applications

Technical Specifications

Product Type	A-Line
Bulb Shape	PS25
Wattage	31.5W
Wattage Equivalency	300W Incandescent
Typical Lumen Output	4100
Efficacy	128 lm/W
Color Temperature	5000K Daylight
CRI	80
Base Type	E26
L70 Lifespan	40,000 hours
Operating Temperature	-20°C - 45°C
Dimmable	No
Beam Angle	230°
Warranty	5-Year, No-Compromise Warranty
For Use in Emergency Fixtures	No
For Use Outdoors in Open Fixtures	No

Electrical Characteristics

Input Voltage	120-277V
Power Factor	>0.9
Operating Frequency	60 Hz
Input Current @ 120V	330mA
Input Current @ 277V	143mA
THDi	≤25%

Listings

UL Listed	Yes
UL Classified	Yes
ENERGY STAR V2.0	This product is ENERGY STAR® Version 2.0 Certified
Energy Star ID	2356051
CEC Status	Not lawful for sale in California


Copyright © 2020 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice

PS25-32-E26-850-ND 120-277V

Case and Pallet Dimensions

	QTY	LENGTH	WIDTH	HEIGHT
CASE	12	10.8	8.3	14.4
PALLET	720	44.9	43.3	44.5

Dimension

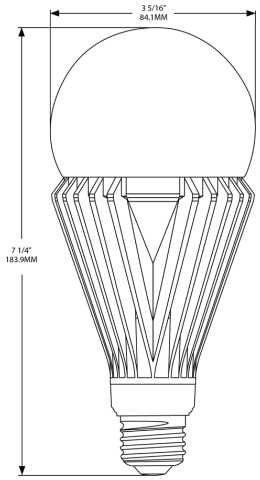

Copyright © 2020 RAB Lighting All Rights Reserved Note: Specifications are subject to change at any time without notice