PG230 | Parking Garage Canopy Series

30W / 50W / 75W / 100W









Specifications

Wattage	30W / 50W / 75W / 100W / Power Switch
LED Chip	SMD 2835,Samsung or other LED Chips
Driver Brand	ZHIHE / SOSEN/ Other Brand
CCT	3000K / 4000K / 5000K / 6000K CCT Switch
Efficiency	130lm/w-140lm/w
AC Input Voltage	AC100~277V / AC120-347V / AC277-480V
Light Distribution	160°
Dimming	0~10V
Exclusive Feature(1)	Emergency Battery Kit Available
Exclusive Feature(2)	Motion Sensor Available
Exclusive Feature(3)	Bluetooth Mesh + App for Smart Control Available
Exclusive Feature(4)	CCT/Power Tunable Optional
Lifetime	50,000H
IP Rating	IP65
Warranty	5 years

Features



Motion sensor



0-10V Dimming



ADC12 Die casting



CCT Select




Power Select




Bluetooth Device


160° light distribution angle, larger irradiation area

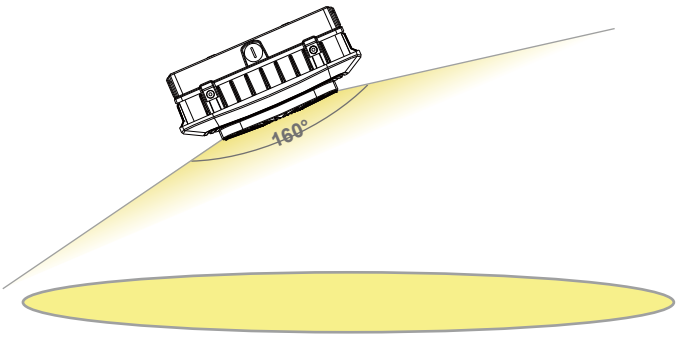

Anti-glare,reducing the light pollution and be friend to human eyes

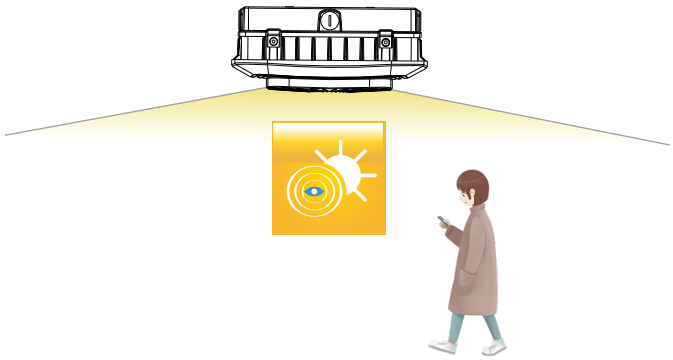

6030 aluminum die casting, fine heat dissipation

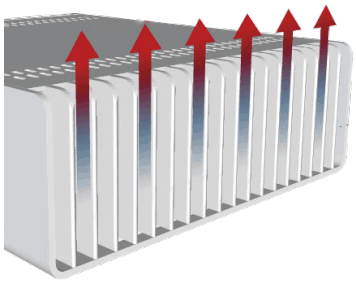

Applications



Gas Station



Parking Garage




Multi-Level Parking




Multi-Level Parking

Light Distribution


160 degree

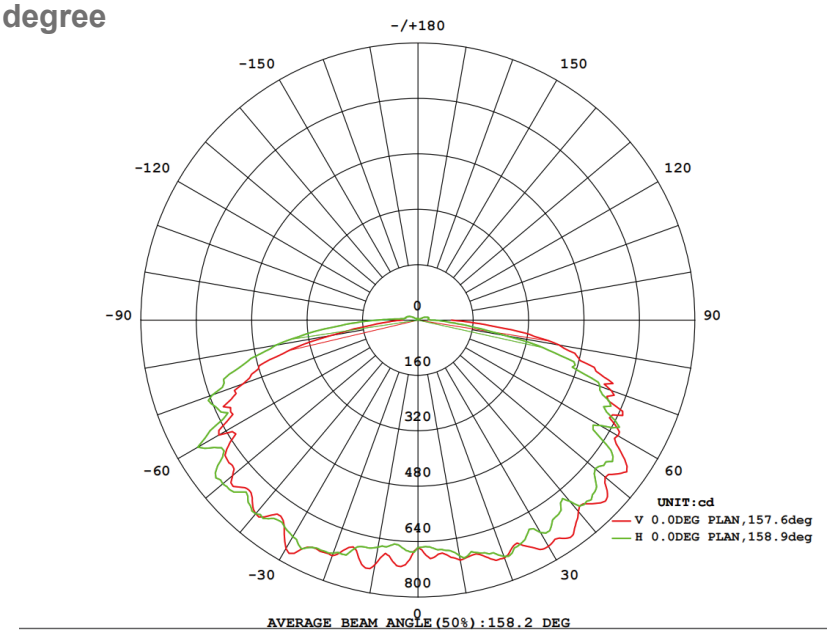

Product Size

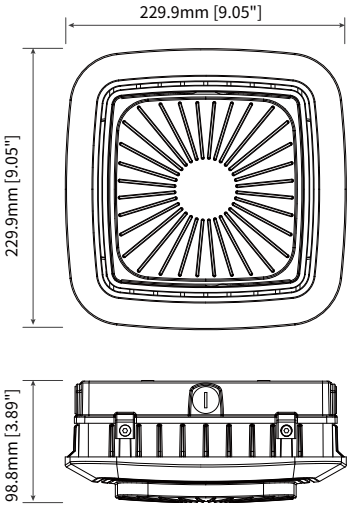


30W / 50W / 75W

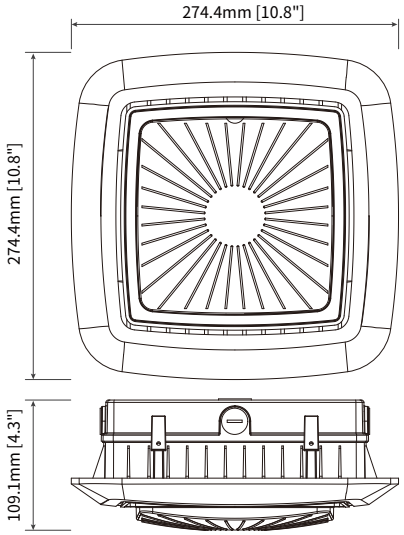


100W

Installation


Ceiling Mounting

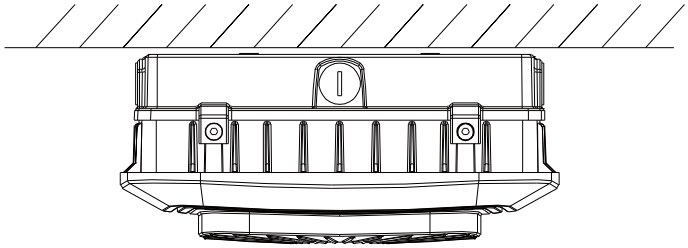


1. Open driver box, separate the back part (driver box cover) from the front part (lamp body) , loose 3/4 inch plug on the driver box cover with a screwdriver.

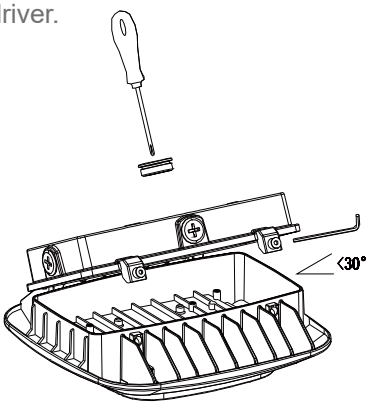


2. Get supply cord through the 3/4 inch hole, then attach driver box cover to ceiling and fix it with customer supplied hardware ,take relevant waterproof measures to make sure no water leakage.

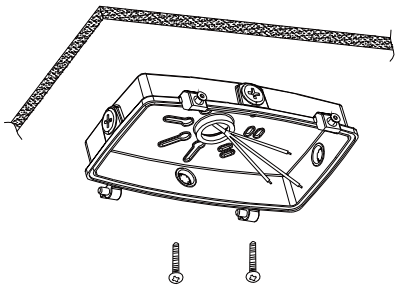


3. Hang the lamp to the driver box cover ,then let it fall naturally , connect the cord to the supply wiring . Set the dimming motion sensor if there is one.

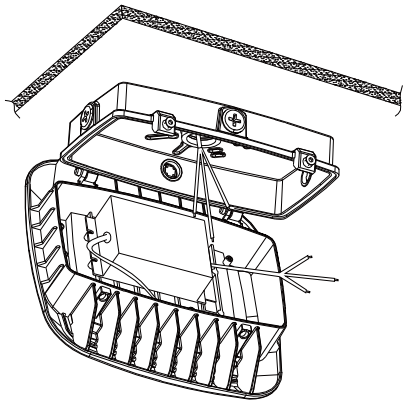


4. Close the fixture and fix the two parts with Allen wrench

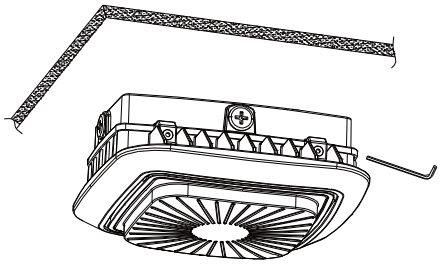


Pendant Mounting

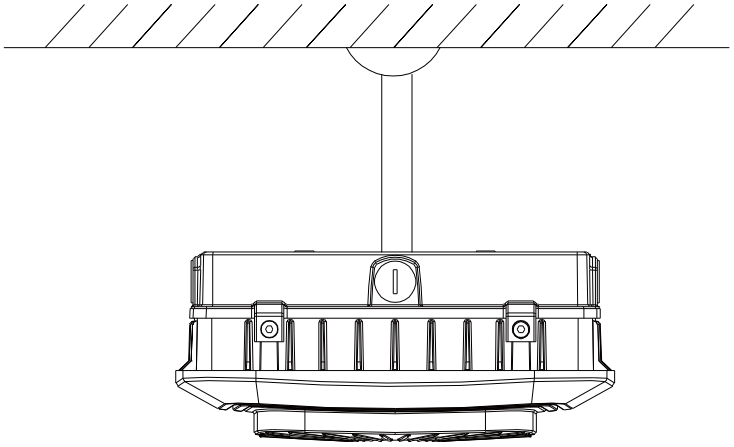

1. Open driver box, separate the back part (driver box cover) from the front part (lamp body) , loose 3/4 inch plug on the driver box cover with a screwdriver.

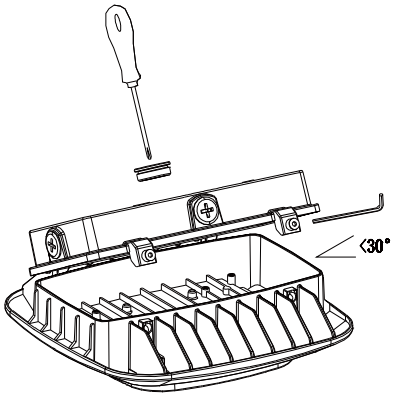



2. Feed power cord thru customer supplied pendant kit, then attach driver box cover to pendant kit , rotate the pendant kit unit it is tighten and locks securely

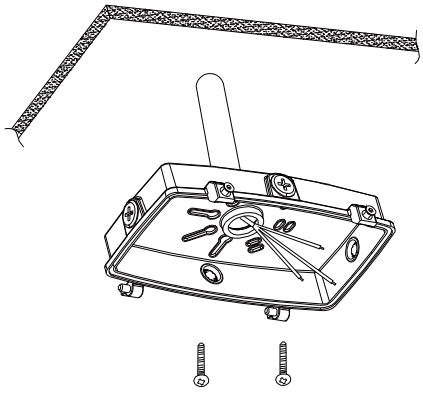

3. Hang the lamp to the driver box cover ,then let it fall naturally , connect the cord to the supply wiring. Set the dimming motion sensor if there is one.

4. Close the fixture and fix the two parts with Allen wrench

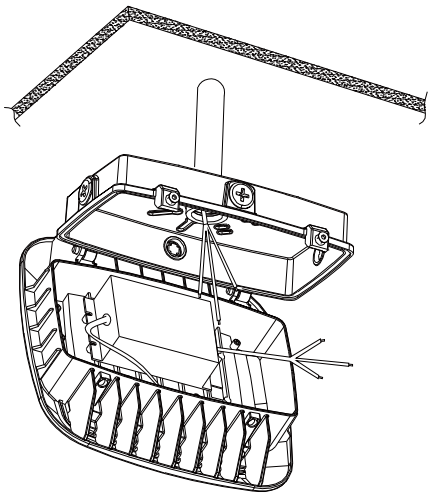

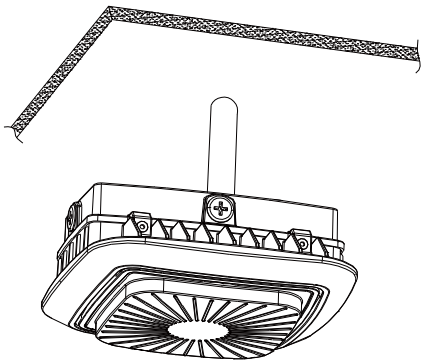

Packaging information

Wattage	Product Dimension(mm/in)	Carton Box Dimension	N.W (Kg/lb)	G.W (Kg/lb)	qty / ctn
30W	*230 x 230 x 98.5 mm 22.05 x 10.43 x 11.02 in*	*560 x 265 x 280 mm 22.05 x 10.43 x 11.02 in*	*10.5Kg(23.15lb)*	*11.2Kg(24.69lb)*	*4PCS*
50W	*230 x 230 x 98.5 mm 22.05 x 10.43 x 11.02 in*	*560 x 265 x 280 mm 22.05 x 10.43 x 11.02 in*	*10.9Kg(24.03lb)*	*11.7Kg(25.79lb)*	*4 PCS*
75W	*230 x 230 x 98.5 mm 22.05 x 10.43 x 11.02 in*	*560 x 265 x 280 mm 22.05 x 10.43 x 11.02 in*	*11.7Kg(25.79lb)*	*12.5Kg(27.56lb)*	*4 PCS*
100W	*275 x 275 x 110 mm 10.83x 10.83 x 4.33 in*	*320 x 320 x 190 mm 12.60 x 12.60 x 7.50 in*	*3.5Kg(7.72lb)*	*4.2Kg(9.26lb)*	*1 PCS*

