ShenZhen Lighting Inc.

TECHNICAL DATA SHEET

Features :

- Input Voltage:120-277VAC 50/60Hz.
- UL certified.
- 130lm/W high lumen efficacy, 80+ CRI.



- 0-10V Dimmable LED driver.

  Adjustable CCT: 4000K/5000K/6000K

  Adjustable Power: 40W/50W/60W.

- High efficiency LM80 SMD LEDs.
- Designed for 50,000 hours lifetime.



- Instant startup, soft light, no glare, no noise.
- Easy for installation.

Application:

- Factory, offices .
- Living room, clubs, lobbies.
- Supermarkets, school, hotel.




JS LED TECHNOLOGY CORP, DBA JS LED POWER INC

Tel: 001-626-338-8291

E-mail:jack@jsledpower.com

◆ Exhibitions, etc..

Product Dimension: Unit:mm

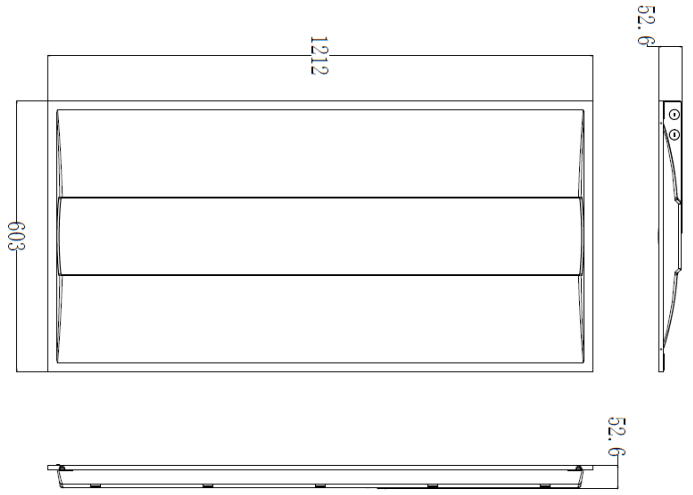

Specifications

LED Troffer Light

Model:	KIPA605N6031210 (TR-ACP)
Wattage:	40W/50W/60W
CCT:	4000K/5000K/6000K
Input Voltage:	120-277VAC 50/60hz
Power Factor:	>0.9
Efficacy:	130LM/W
CRI:	>80
THD:	<20
Dimmable:	Yes
Dimensions:	2*4FT 603*1212mm
Lifespan:	>50,000hours

JS LED TECHNOLOGY CORP, DBA JS LED POWER INC
Tel: 001-626-338-8291 E-mail:jack@jsledpower.com

Beam Angle:	120°
Operating Temperature:	-20℃ to 50℃
IP Grade:	IP20
Certification:	UL


Package

Size	Qty/Carton	Gross Weight	Net Weight
125.7*14*65.3cm	2	10.7Kg	8.6Kg


Installation instructions

Installation Guide


1.Unscrew the driver cover.

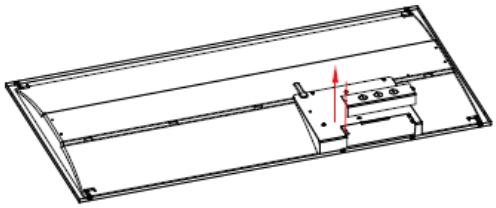


2.Connect the conduit to the driver box.

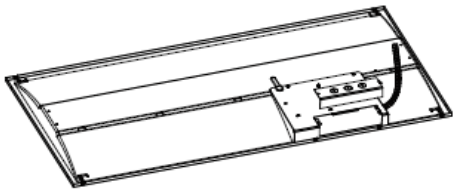

3.Connect other wires separately.

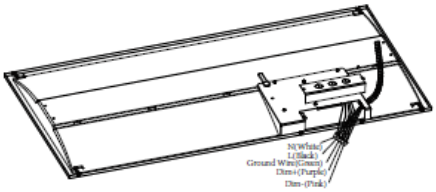

4.Put back the driver cover and fix it by screw.

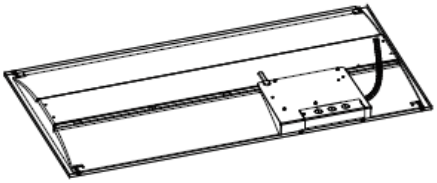


JS LED TECHNOLOGY CORP, DBA JS LED POWER INC


Tel: 001-626-338-8291 E-mail:jack@jsledpower.com

Recessed Installation


1.Replace existing lighting fixture from ceiling with LED Troffer.

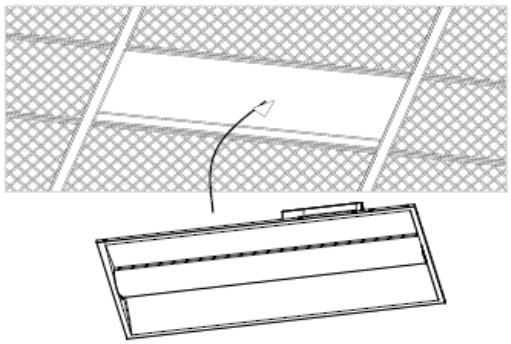


2.Replace existing lighting fixture from ceiling with LED Troffer.

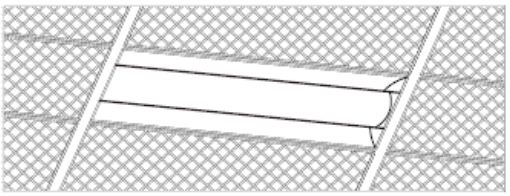

3. Use the protective brackets for the sake of safety.

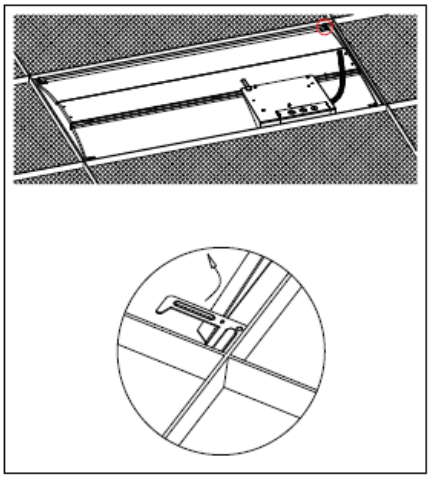

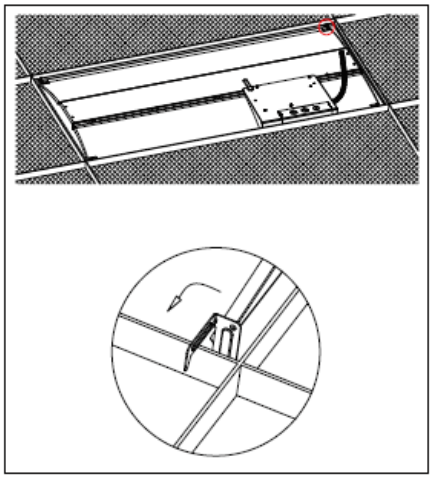

JS LED TECHNOLOGY CORP, DBA JS LED POWER INC

Tel: 001-626-338-8291 E-mail:jack@jsledpower.com