SIEMENS

Data sheet 8WA1011-1PG11

Through-type terminal thermoplast Screw terminal on both sides
Single terminal, green-yellow, 6.5mm, 4

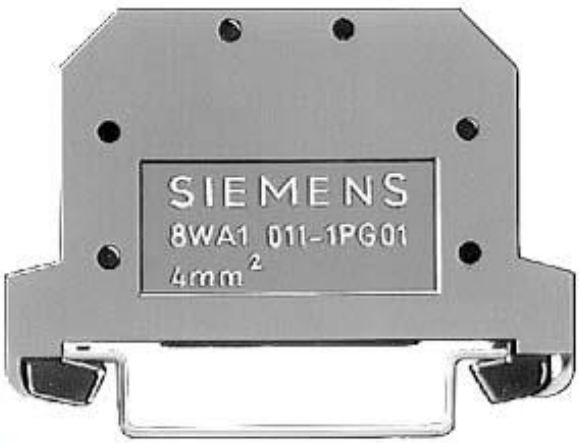


Figure similar

Model	
product brand name	ALPHA
product designation	ALPHA FIX terminal blocks
design of terminal / terminal levels internally linked	No
General technical data	
terminal contact spacing	6.5 mm
operating voltage / rated value	800 V
Protection class	
combustibility class acc. to UL 94	V2
Main circuit	
operational current / rated value	32 A
Appearance	
color	green-yellow
Product details	
product component / required / end cover plate	No

Subject to change without notice
© Copyright Siemens

Number	
number of terminal levels	1
number of terminal points / per terminal level	2

Connections	
stripped length	11 mm
connectable conductor cross-section / solid	
• minimum	4 mm²
• maximum	4 mm²
connectable conductor cross-section / stranded	
• minimum	4 mm²
• maximum	4 mm²
connectable conductor cross-section / finely stranded	
• with core end processing / minimum	4 mm²
• with core end processing / maximum	4 mm²
• without core end processing / minimum	4 mm²
• without core end processing / maximum	4 mm²
tightening torque / with screw-type terminals	
• minimum	0.5 N·m
• maximum	0.5 N·m
type of electrical connection	
• 1	screw-type terminal
• 2	screw-type terminal
position / of the terminal	lateral

Mechanical Design	
height / with lowest-profile installation	26 mm
length	51 mm
fastening method	DIN rail 35 mm
net weight	10 g
material / of the insulating body	Thermoplast

Environmental conditions	
ambient temperature / during operation	
• minimum	-25 °C
• maximum	55 °C
ambient temperature / during operation	(no derating)

Certificates	
design tested acc. to type of protection / EEx e	No

Subject to change without notice
© Copyright Siemens

General Product Approval		Declaration of Conformity	Test Certificates	Shipping Approval	other
CSA	UR	EG-Konf.	Miscellaneous	BUREAU VERITAS	Environmental Confirmations

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WA1011-1PG11

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/8WA1011-1PG11

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-1PG11

CAx-Online-Generator
http://www.siemens.com/cax

Tender specifications
http://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens